

{renderthis}

Render media to different formats

John Paul Helveston & Garrick Aden-Buie

2022-09-29



Installation

You can install the current version of renderthis from GitHub:

```
# install.packages("remotes")  
remotes::install_github("jhelvy/renderthis")
```

Installation

You can install the current version of renderthis from GitHub:

```
# install.packages("remotes")  
remotes::install_github("jhelvy/renderthis")
```

Supported output types:

- html
- pdf
- gif
- mp4
- pptx
- png
- social: png image of first slide
sized for social media sharing
(e.g. Twitter)

Installation


You can install the current version of renderthis from GitHub:

```
# install.packages("remotes")
remotes::install_github("jhelvy/renderthis")
```

Supported output types:

- html
- pdf
- gif
- mp4
- pptx
- png
- social: png image of first slide sized for social media sharing (e.g. Twitter)

Render hierarchy:

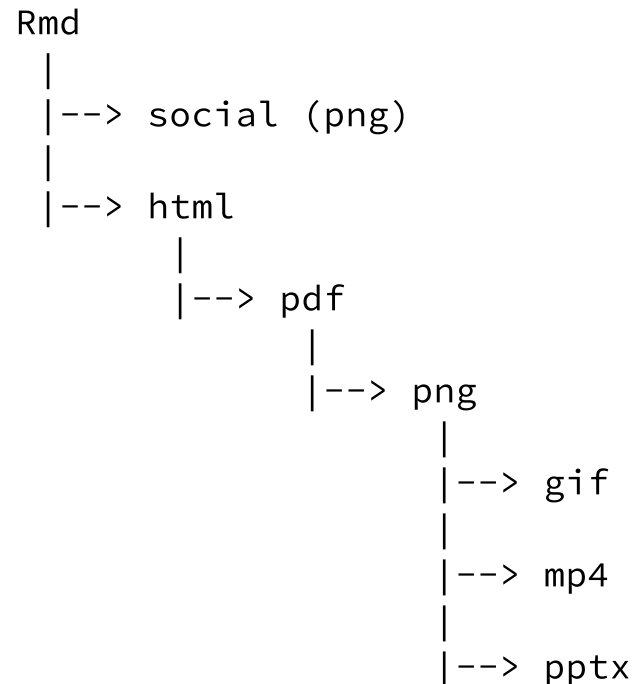

Partial / incremental slides

For pdf, png, gif, mp4, and pptx output types, if you want to render a new slide for each increment on **incremental slides**, set `partial_slides = TRUE` in any of the following render functions:

```
to_pdf()  
to_png()  
to_gif()  
to_mp4()  
to_pptx()
```

Partial / incremental slides

For pdf, png, gif, mp4, and pptx output types, if you want to render a new slide for each increment on **incremental slides**, set `partial_slides = TRUE` in any of the following render functions:

```
to_pdf()  
to_png()  
to_gif()  
to_mp4()  
to_pptx()
```

For example, the following code would render this slide as two slides in a pdf instead of one:

```
to_pdf("slides.Rmd", partial_slides = TRUE)  
to_pdf("slides.html", partial_slides = TRUE)
```

Note: This option requires the **chromote** and **pdftools** packages.

Complex slides

"Complex" slides are slides that contain **panelsets** (like the one on this slide) or other html widgets / advanced features that might not render well as a pdf. To render these on separate slides, set `complex_slides = TRUE` in `to_pdf()`, `to_png()`, `to_gif()`, `to_mp4()`, or `to_pptx()`.

Chunk	Output
<pre>head(mtcars)</pre>	

Complex slides

"Complex" slides are slides that contain **panelsets** (like the one on this slide) or other html widgets / advanced features that might not render well as a pdf. To render these on separate slides, set `complex_slides = TRUE` in `to_pdf()`, `to_png()`, `to_gif()`, `to_mp4()`, or `to_pptx()`.

Chunk	Output
-------	--------

##		mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
##	Mazda RX4	21.0	6	160	110	3.90	2.620	16.46	0	1	4	4
##	Mazda RX4 Wag	21.0	6	160	110	3.90	2.875	17.02	0	1	4	4
##	Datsun 710	22.8	4	108	93	3.85	2.320	18.61	1	1	4	1
##	Hornet 4 Drive	21.4	6	258	110	3.08	3.215	19.44	1	0	3	1
##	Hornet Sportabout	18.7	8	360	175	3.15	3.440	17.02	0	0	3	2
##	Valiant	18.1	6	225	105	2.76	3.460	20.22	1	0	3	1

Use the `slides` argument to control which slides get built

Examples rendering from PDF to PNG:

```
# Render the first or last slide only
to_png(from = "slides.pdf", to = "first_slide.png", slides = "first")
to_png(from = "slides.pdf", to = "last_slide.png", slides = "last")

# Choose subsets of slides
to_png(from = "slides.pdf", slides = c(1, 3, 5))
to_png(from = "slides.pdf", slides = -1) # Negative indices remove

# Render all slides
to_png(from = "slides.pdf", slides = "all")
```

Thanks!

Slides created via the R package **xaringan**.

Package documentation at <https://jhelvy.github.io/renderthis>



Visit **xaringan.club** for more {xaringan} tools!