


{renderthis}

Render media to different formats

John Paul Helveston & Garrick Aden-Buie

2026-08-27

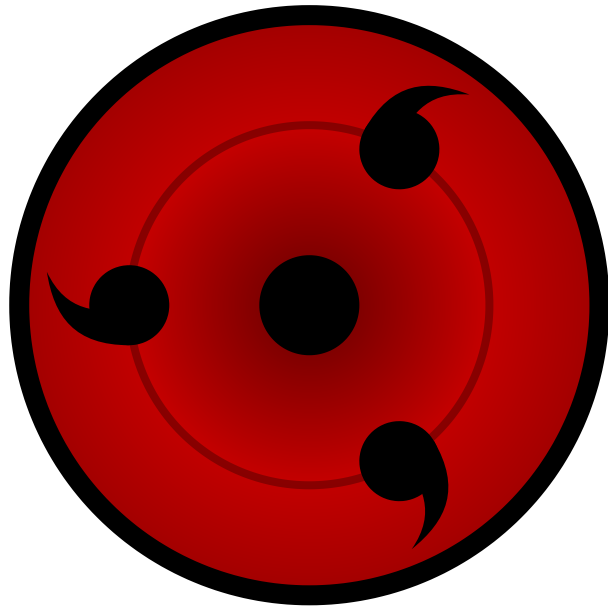

Installation

You can install the current version of renderthis from GitHub:

```
# install.packages("remotes")  
remotes::install_github("jhelvy/renderthis")
```

Installation

You can install the current version of renderthis from GitHub:

```
# install.packages("remotes")  
remotes::install_github("jhelvy/renderthis")
```

Supported output types:

- html
- pdf
- gif
- mp4
- pptx
- png
- social: png image of first slide
sized for social media sharing
(e.g. Twitter)

Installation


You can install the current version of renderthis from GitHub:

```
# install.packages("remotes")
remotes::install_github("jhelvy/renderthis")
```

Supported output types:

- html
- pdf
- gif
- mp4
- pptx
- png
- social: png image of first slide sized for social media sharing (e.g. Twitter)

Render hierarchy:

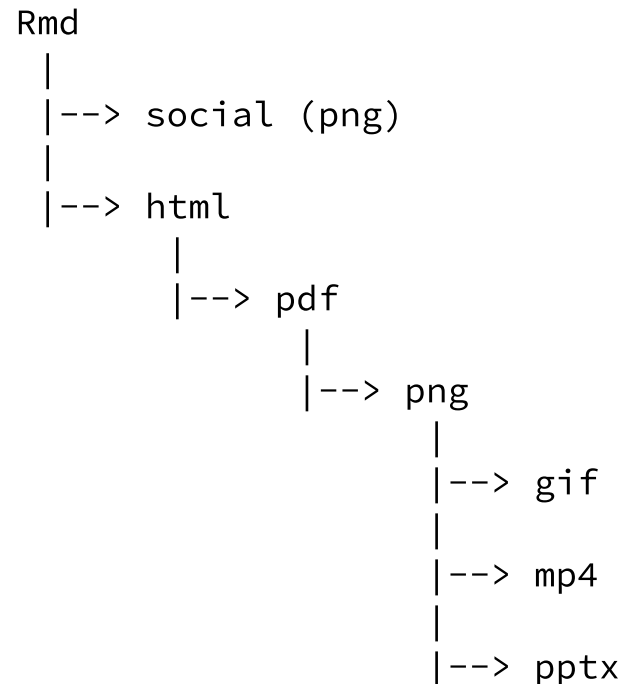

Partial / incremental slides

For pdf, png, gif, mp4, and pptx output types, if you want to render a new slide for each increment on **incremental slides**, set `partial_slides = TRUE` in any of the following render functions:

```
to_pdf()  
to_png()  
to_gif()  
to_mp4()  
to_pptx()
```

Partial / incremental slides

For pdf, png, gif, mp4, and pptx output types, if you want to render a new slide for each increment on **incremental slides**, set `partial_slides = TRUE` in any of the following render functions:

```
to_pdf()  
to_png()  
to_gif()  
to_mp4()  
to_pptx()
```

For example, the following code would render this slide as two slides in a pdf instead of one:

```
to_pdf("slides.Rmd", partial_slides = TRUE)  
to_pdf("slides.html", partial_slides = TRUE)
```

Note: This option requires the **chromote** and **pdftools** packages.

Complex slides

"Complex" slides are slides that contain **panelsets** (like the one on this slide) or other html widgets / advanced features that might not render well as a pdf. To render these on separate slides, set `complex_slides = TRUE` in `to_pdf()`, `to_png()`, `to_gif()`, `to_mp4()`, or `to_pptx()`.

Chunk	Output
-------	--------

<pre>head(mtcars)</pre>	
-------------------------	--

Complex slides

"Complex" slides are slides that contain **panelsets** (like the one on this slide) or other html widgets / advanced features that might not render well as a pdf. To render these on separate slides, set `complex_slides = TRUE` in `to_pdf()`, `to_png()`, `to_gif()`, `to_mp4()`, or `to_pptx()`.

Chunk	Output
##	mpg cyl disp hp drat wt qsec vs am gear carb
## Mazda RX4	21.0 6 160 110 3.90 2.620 16.46 0 1 4 4
## Mazda RX4 Wag	21.0 6 160 110 3.90 2.875 17.02 0 1 4 4
## Datsun 710	22.8 4 108 93 3.85 2.320 18.61 1 1 4 1
## Hornet 4 Drive	21.4 6 258 110 3.08 3.215 19.44 1 0 3 1
## Hornet Sportabout	18.7 8 360 175 3.15 3.440 17.02 0 0 3 2
## Valiant	18.1 6 225 105 2.76 3.460 20.22 1 0 3 1

Use the `slides` argument to control which slides get built

Examples rendering from PDF to PNG:

```
# Render the first or last slide only
to_png(from = "slides.pdf", to = "first_slide.png", slides = "first")
to_png(from = "slides.pdf", to = "last_slide.png", slides = "last")

# Choose subsets of slides
to_png(from = "slides.pdf", slides = c(1, 3, 5))
to_png(from = "slides.pdf", slides = -1) # Negative indices remove slides

# Render all slides
to_png(from = "slides.pdf", slides = "all")
```

Thanks!

Slides created via the R package **xaringan**.

Package documentation at <https://jhelvy.github.io/renderthis>



Visit **xaringan.club** for more {xaringan} tools!