

## Periodic Modeling

Developed by: Martin Modrak

<https://discourse.mc-stan.org/t/mathy-folks-thoughts-on-the-asymptotic-representation-of-this-k-hmm-model-for-periodic-signals/22038/24>

25 April 2021

Clear Out Console Script

```
cat("\014")
```

So we have a bounded periodic function  $f$  and I'll assume the period is  $2\pi$ , i.e. that  $f(x) = f(x + 2k\pi)$ ,  $-1 \leq f(x) \leq 1$  for all  $k \in \mathbb{Z}, x \in \mathbb{R}$ . We observe a scaled and shifted realization:  $y \sim \text{Normal}(f(\nu x + p), \sigma)$  and we want to determine  $\nu, p$ .

We'll pick two arbitrary numbers  $x_1, x_2$  as data. The only requirement is that those points are quite far from each other, but are surrounded by actually observed values. We'll parametrize our model in terms of the value of the function at those points:

$$\begin{aligned} -1 &< z_i < 1 \\ z_1 &= f(\nu x_1 + p) \\ z_2 &= f(\nu x_2 + p) \end{aligned}$$

The main advantage is that  $z_1, z_2 \in (-1, 1)$  will almost always be well constrained by data, so no multimodality problems here. But how do we get from  $z$  to  $\nu, p$ ?

We'll start by looking at preimages of  $z$  within a single period. We'll assume that each point has exactly  $s$  distinct preimages in each period (some care would be needed to handle cases where some values have more preimages than others, but it is IMHO possible). For the  $\sin$  function  $s = 2$  (we'll never have exactly  $z_i = \pm 1$ ).

$$\begin{aligned} 0 &\leq w_{i,j} < 2\pi \\ \{w_{1,1}, \dots, w_{1,s}\} &= f^{-1}(z_1) \\ \{w_{2,1}, \dots, w_{2,s}\} &= f^{-1}(z_2) \end{aligned}$$

We then introduce additional parameter  $k$  that says how many full periods of the function are between  $x_1$  and  $x_2$ . So we have a set of pairs of preimages and we can use those to find all solutions for  $\nu, p$  given  $z$ .

**\*\*EDIT: \*\*** There was previously a sign error in this equation.

$$\begin{aligned} \nu_{i,j,k} &= \frac{w_{2,i} + 2k\pi - w_{1,j}}{x_2 - x_1} \\ p_{i,j,k} &= w_{1,j} - \nu_{i,j,k}x_1 \end{aligned}$$

So beyond  $z_1, z_2$  we need 3 discrete parameters:  $i, j, k$ . If we can put an upper bound on  $k$  (which we IMHO always can as e.g. period shorter then distance between two consecutive points can be ruled out), we can marginalize all the discrete parameters out! This way, we sum out all the modes. The necessary background is at [7.2 Change point models | Stan User's Guide](#)

Figure 1: Description.

## Setting Work Directory

```
setwd("~/Dropbox/My Mac (Jonathan's MacBook Pro)/Desktop")
getwd()
```

```
## [1] "/Users/jonathan.h.morgan/Dropbox/My Mac (Jonathan's MacBook Pro)/Desktop"
```

## Options

```
options(stringsAsFactors = FALSE)
options(mc.cores = parallel::detectCores())
options(mc.cores = 4)
```

## PACKAGES

```
library(cmdstanr)      #Used to run cmdstan from R
```

```
## This is cmdstanr version 0.3.0
```

```
## - Online documentation and vignettes at mc-stan.org/cmdstanr
```

```
## - CmdStan path set to: /Users/jonathan.h.morgan/.cmdstanr/cmdstan-2.26.1
```

```
## - Use set_cmdstan_path() to change the path
```

```
library(tidyverse)
```

```
## -- Attaching packages ----- tidyverse 1.3.1 --
```

```
## v ggplot2 3.3.3      v purrr   0.3.4
```

```
## v tibble  3.1.1      v dplyr  1.0.5
```

```
## v tidyr   1.1.3      v stringr 1.4.0
```

```
## v readr   1.4.0      v forcats 0.5.1
```

```
## -- Conflicts ----- tidyverse_conflicts() --
```

```
## x dplyr::filter() masks stats::filter()
```

```
## x dplyr::lag()     masks stats::lag()
```

## Checking that I am pointing to cmdstan

```
set_cmdstan_path("/Users/jonathan.h.morgan/cmdstan")
```

```
## CmdStan path set to: /Users/jonathan.h.morgan/cmdstan
```

```
cmdstan_path()
```

```
## [1] "/Users/jonathan.h.morgan/cmdstan"
```

```
cmdstan_version()
```

```
## [1] "2.26.1"
```

## CREATING SYNTHETIC DATA

### Parameters

```
n <- 30
frequency <- 13
phase <- 0.3
noise <- 0.5
amplitude <- 1.4
```

### Constructing Data

```
x <- runif(n, max = 2 * pi)
f <- amplitude * sin(frequency * x + phase)
y <- rnorm(n, mean = f, sd = noise)
x_fixed = c(pi / 4, 7/4 * pi)
```

### Creating Input List

```
data <- list(
  n = n,
  y = y,
  x = x,
  x_fixed = x_fixed,
  max_k = 10
)
```

## ESTIMATING STAN MODEL & SAVING DATA OBJECTS

### Setting Seed

```
set.seed(10271998)
```

### Setting Temporary Directory

```
temp <- tempdir()
```

### Compiling Model

```
mod <- cmdstan_model("~/Dropbox/My Mac (Jonathan's MacBook Pro)/Desktop/periodic.stan")

## Model executable is up to date!
```

```
mod$print()
```

```
## // Example Periodic Function
## // Martin Modrak: https://discourse.mc-stan.org/t/mathy-folks-thoughts-on-the-asymptotic-representation-of-a-periodic-function
## // 25 April 2021
##
## data{
##   int n ;
##   vector[n] y ;
##   vector[n] x ;
##   int<lower=0> max_k;
##   real x_fixed[2];
## }
##
## transformed data {
##   real log_prior[max_k + 1] = rep_array(-log(max_k + 1.0), max_k + 1); //prior prob 1/(max_k + 1)
## }
##
## parameters{
##   real<lower=0> noise ;
##   real<lower=0> amplitude;
##   real<lower=-1, upper=1> z[2];
## }
##
## transformed parameters{
##   real frequency[2, 2, max_k + 1];
##   real phase[2, 2, max_k + 1];
##   real log_lik[2, 2, max_k + 1];
##   {
##     real asinz[2] = asin(z);
##     real w[2,2];
##     w[1,]= { asinz[1], pi() - asinz[1]};
##     w[2,]= { asinz[2], pi() - asinz[2]};
##     for(i in 1:2) {
##       for(j in 1:2) {
##         for(k in 1:(max_k + 1)) {
##           frequency[i, j, k] = (w[2, i] + 2 * (k-1) * pi() - w[1, j]) / (x_fixed[2] - x_fixed[1]);
##           phase[i, j, k] = w[1,i] - frequency[i, j, k] * x_fixed[1];
##           {
##             vector[n] f = amplitude * sin(frequency[i, j, k] * x + phase[i, j, k]);
##             log_lik[i, j, k] = normal_lpdf(y | f, noise)
##               + log_prior[k]
##               -log(2.0) //Uniform prior over the 2 options
##             ;
##           }
##         }
##       }
##     }
##   }
## }
##
## model{
```

```

##   noise ~ weibull(2,1) ; //peaked at ~.8, zero-at-zero, ~2% mass >2
##   amplitude ~ weibull(2,1) ; //ditto
##   target += log_sum_exp(to_array_1d(log_lik));
## }
##
## generated quantities {
##   // Discrete sampling is inefficient, directly computing weights
##   // And taking weighted expectation values would work better
##   int index = categorical_logit_rng(to_vector(to_array_1d(log_lik)));
##   real freq_chosen = to_array_1d(frequency)[index];
##   real phase_chosen = to_array_1d(phase)[index];
##   //Force phase to lie between -pi + pi the stupid way
##   while(phase_chosen < -pi()) {
##     phase_chosen += 2 * pi();
##   }
##   while(phase_chosen > pi()) {
##     phase_chosen -= 2 * pi();
##   }
## }

```

## Sampling

```

fit <- mod$sample(
  data = data,
  output_dir = temp,
  seed = 123,
  chains = 4,
  thin = 1,
  parallel_chains = 4,
  iter_warmup = 2000,
  iter_sampling = 2000,
  adapt_delta = 0.99,
  max_treedepth = 15,
  refresh = 500
)

```

```
## Running MCMC with 4 parallel chains...
```

```
##
```

```
## Chain 1 Iteration:    1 / 4000 [ 0%] (Warmup)
```

```
## Chain 2 Iteration:    1 / 4000 [ 0%] (Warmup)
```

```
## Chain 2 Informational Message: The current Metropolis proposal is about to be rejected because of the
```

```
## Chain 2 Exception: weibull_lpdf: Random variable is inf, but must be finite! (in '/var/folders/dl/_9
```

```
## Chain 2 If this warning occurs sporadically, such as for highly constrained variable types like cova
```

```
## Chain 2 but if this warning occurs often then your model may be either severely ill-conditioned or m
```

```
## Chain 2
```

```
## Chain 3 Iteration:    1 / 4000 [ 0%] (Warmup)
```

```
## Chain 3 Informational Message: The current Metropolis proposal is about to be rejected because of the
```

```
## Chain 3 Exception: normal_lpdf: Location parameter[1] is -inf, but must be finite! (in '/var/folders,
```

```
## Chain 3 If this warning occurs sporadically, such as for highly constrained variable types like cova
```

```

## Chain 3 but if this warning occurs often then your model may be either severely ill-conditioned or m
## Chain 3
## Chain 4 Iteration:      1 / 4000 [ 0%] (Warmup)
## Chain 4 Informational Message: The current Metropolis proposal is about to be rejected because of th
## Chain 4 Exception: weibull_lpdf: Random variable is inf, but must be finite! (in '/var/folders/dl/_9
## Chain 4 If this warning occurs sporadically, such as for highly constrained variable types like covar
## Chain 4 but if this warning occurs often then your model may be either severely ill-conditioned or m
## Chain 4
## Chain 4 Iteration:   500 / 4000 [ 12%] (Warmup)
## Chain 2 Iteration:   500 / 4000 [ 12%] (Warmup)
## Chain 3 Iteration:   500 / 4000 [ 12%] (Warmup)
## Chain 1 Iteration:   500 / 4000 [ 12%] (Warmup)
## Chain 1 Iteration:  1000 / 4000 [ 25%] (Warmup)
## Chain 3 Iteration:  1000 / 4000 [ 25%] (Warmup)
## Chain 4 Iteration:  1000 / 4000 [ 25%] (Warmup)
## Chain 2 Iteration:  1000 / 4000 [ 25%] (Warmup)
## Chain 1 Iteration:  1500 / 4000 [ 37%] (Warmup)
## Chain 4 Iteration:  1500 / 4000 [ 37%] (Warmup)
## Chain 3 Iteration:  1500 / 4000 [ 37%] (Warmup)
## Chain 2 Iteration:  1500 / 4000 [ 37%] (Warmup)
## Chain 1 Iteration:  2000 / 4000 [ 50%] (Warmup)
## Chain 1 Iteration:  2001 / 4000 [ 50%] (Sampling)
## Chain 4 Iteration:  2000 / 4000 [ 50%] (Warmup)
## Chain 4 Iteration:  2001 / 4000 [ 50%] (Sampling)
## Chain 3 Iteration:  2000 / 4000 [ 50%] (Warmup)
## Chain 3 Iteration:  2001 / 4000 [ 50%] (Sampling)
## Chain 2 Iteration:  2000 / 4000 [ 50%] (Warmup)
## Chain 2 Iteration:  2001 / 4000 [ 50%] (Sampling)
## Chain 1 Iteration:  2500 / 4000 [ 62%] (Sampling)
## Chain 4 Iteration:  2500 / 4000 [ 62%] (Sampling)
## Chain 3 Iteration:  2500 / 4000 [ 62%] (Sampling)
## Chain 1 Iteration:  3000 / 4000 [ 75%] (Sampling)
## Chain 4 Iteration:  3000 / 4000 [ 75%] (Sampling)
## Chain 3 Iteration:  3000 / 4000 [ 75%] (Sampling)
## Chain 2 Iteration:  2500 / 4000 [ 62%] (Sampling)
## Chain 1 Iteration:  3500 / 4000 [ 87%] (Sampling)
## Chain 4 Iteration:  3500 / 4000 [ 87%] (Sampling)
## Chain 3 Iteration:  3500 / 4000 [ 87%] (Sampling)
## Chain 2 Iteration:  3000 / 4000 [ 75%] (Sampling)
## Chain 1 Iteration:  4000 / 4000 [100%] (Sampling)
## Chain 1 finished in 12.6 seconds.
## Chain 3 Iteration:  4000 / 4000 [100%] (Sampling)
## Chain 4 Iteration:  4000 / 4000 [100%] (Sampling)
## Chain 3 finished in 12.9 seconds.
## Chain 4 finished in 12.8 seconds.
## Chain 2 Iteration:  3500 / 4000 [ 87%] (Sampling)
## Chain 2 Iteration:  4000 / 4000 [100%] (Sampling)
## Chain 2 finished in 17.7 seconds.
##
## All 4 chains finished successfully.

```

```
## Mean chain execution time: 14.0 seconds.
## Total execution time: 17.9 seconds.
```

## Checking that the Model Passes: E-BFMI, Treedepth, Sample Size, & R-Hat Cursory Checks

```
fit$cmdstan_diagnose()
```

```
## Processing csv files: /var/folders/dl/_9shwqkn19s9d3lvpyfcmkf00000gn/T/RtmpdljeNx/periodic-202104261
##
## Checking sampler transitions treedepth.
## Treedepth satisfactory for all transitions.
##
## Checking sampler transitions for divergences.
## No divergent transitions found.
##
## Checking E-BFMI - sampler transitions HMC potential energy.
## E-BFMI satisfactory for all transitions.
##
## Effective sample size satisfactory.
##
## The following parameters had split R-hat greater than 1.05:
##   z[2], frequency[1,1,1], frequency[2,1,1], frequency[1,2,1], frequency[2,2,1], frequency[1,1,2], fr
## Such high values indicate incomplete mixing and biased estimation.
## You should consider regularizing your model with additional prior information or a more effective p
##
## Processing complete.
```

## PLOTTING


### Creating Data Objects

```
fit$summary(c("noise", "z", "freq_chosen", "phase_chosen", "amplitude", "index"))
```

```
## # A tibble: 7 x 10
##   variable      mean  median    sd    mad    q5    q95  rhat  ess_bulk  ess_tail
##   <chr>         <dbl>   <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>   <dbl>   <dbl>
## 1 noise         0.516  0.508  0.0746 0.0711 0.409  0.648  1.00   3918.    3813.
## 2 z[1]        -0.822 -0.827  0.0694 0.0671 -0.926 -0.702  1.00   1533.    2839.
## 3 z[2]        -0.176  0.0846 0.496  0.403 -0.920  0.397  1.05    102.    1233.
## 4 freq_chosen  13.1   13.1   0.0410 0.0398 13.0   13.1   1.00   1353.    2509.
## 5 phase_chos~  0.132  0.129  0.149  0.145 -0.108  0.380  1.00   1397.    2968.
## 6 amplitude    1.45   1.45   0.142  0.141  1.22   1.69   1.00   3723.    3988.
## 7 index       39.0   44     5.91   0      32     44     1.08    64.1     NA
```

```
bayesplot::mcmc_pairs(fit$draws(), pars = c("z[1]", "z[2]", "amplitude", "noise"))
```



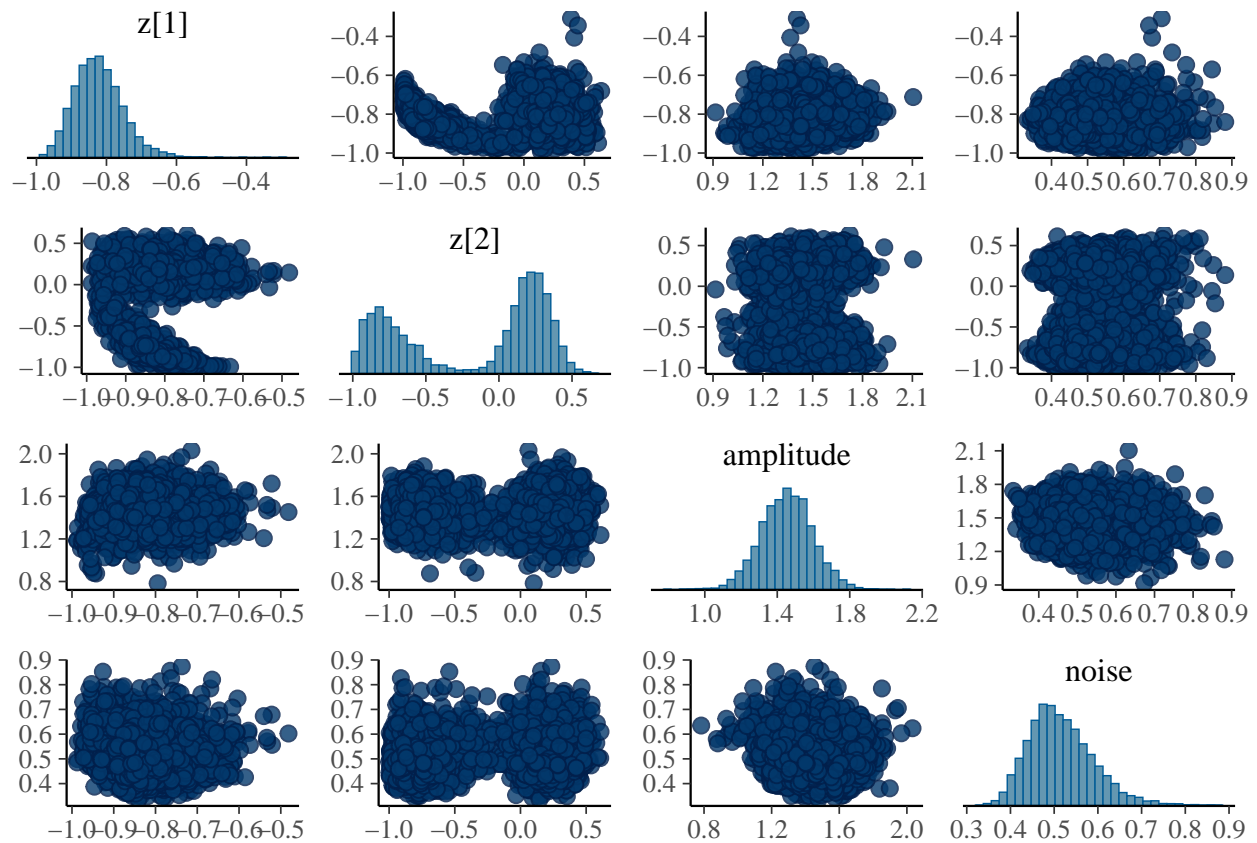


## Pulling Out Draws for Frequency, Phase, and Amplitude

```
draws <- as.data.frame(posterior::as_draws_matrix(fit$draws(c("freq_chosen", "phase_chosen", "amplitude_chosen"))))
```

## Checking the frequency

```
hist(draws$freq_chosen)
```

## Histogram of draws\$freq\_chosen

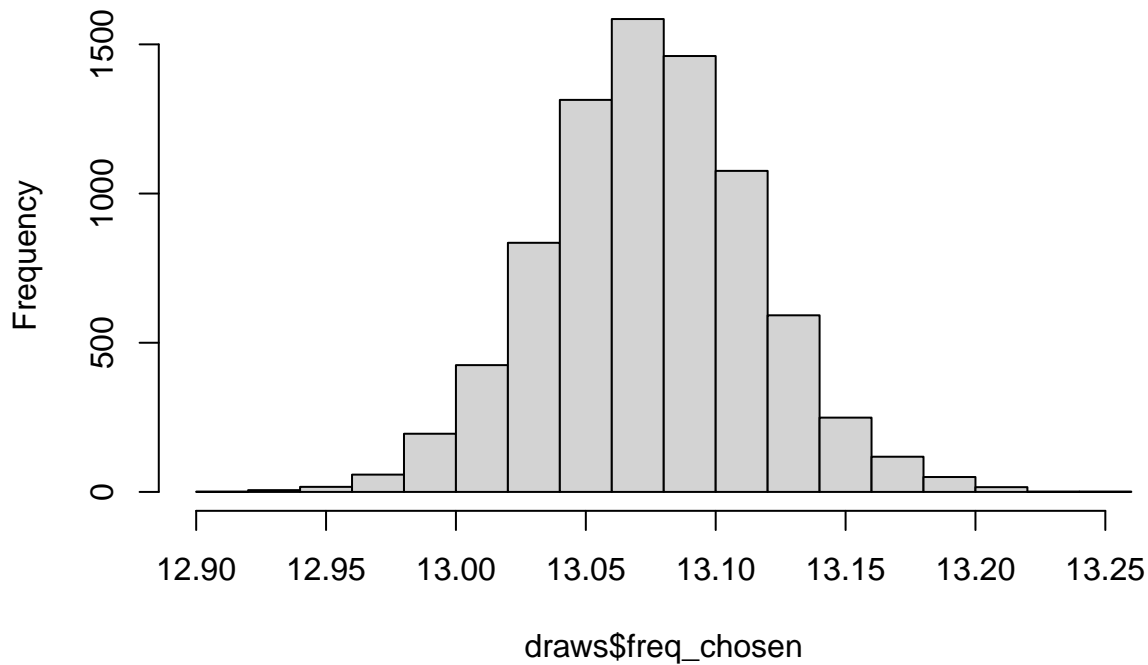

structuring True Model

```
x_adj <- seq(0, 2 * pi, length.out = 101)
y_adj <- amplitude * sin(frequency * x_adj + phase)
true <- as.data.frame(cbind(x_adj, y_adj))
colnames(true) <- c('x', 'y')
rm(x_adj, y_adj)
```

# Con-

## Observed Data

```
observed <- tibble(x = x, y = y)
```

## Constructing Draws

```
z <- tibble(x = seq(0, 2 * pi, length.out = 100)) %>% crossing(as_tibble(draws) %>% mutate(id = 1:dim(
  mutate(y = amplitude * sin(x * freq_chosen + phase_chosen)) %>%
  filter(id %in% sample(unique(id), 100))

rm(amplitude, f, frequency, n, noise, phase, temp, x, x_fixed, y)
```

## Plotting

```
x11(width=10.6806, height=7.30556)
periodic_visual <- function() {
  x_values <- pretty(z$x)
  y_values <- pretty(z$y)
```

```

x_fixed = c(pi / 4, 7/4 * pi)

plot(0, type='n', xlab=' ', ylab=' ', xlim=c(min(x_values), max(x_values)), ylim=c(min(y_values), max(y_values)),
     grid(lwd = 2))

ids <- sort(z$id)
for(i in seq_along(z$id)){
  iteration <- z[(z$id == ids[[i]]), ]
  lines(iteration$x, iteration$y, col="black")
}

lines(true, col="cyan")

abline(v=x_fixed[[1]],col='brown',lwd=2, lty=1)
abline(v=x_fixed[[2]],col='brown',lwd=2, lty=1)


points(observed, pch=21, bg="grey", col="blue")

mtext(side = 1, text = 'x', col = "black", line = 2.5, cex = 2, family='HersheySerif')
mtext(side = 2, text = 'y', col = "black", line = 2.5, cex = 2, family='HersheySerif')
}

g <- cowplot::as_grob(periodic_visual)
p_1 <- cowplot::ggdraw(g)

p_1

```

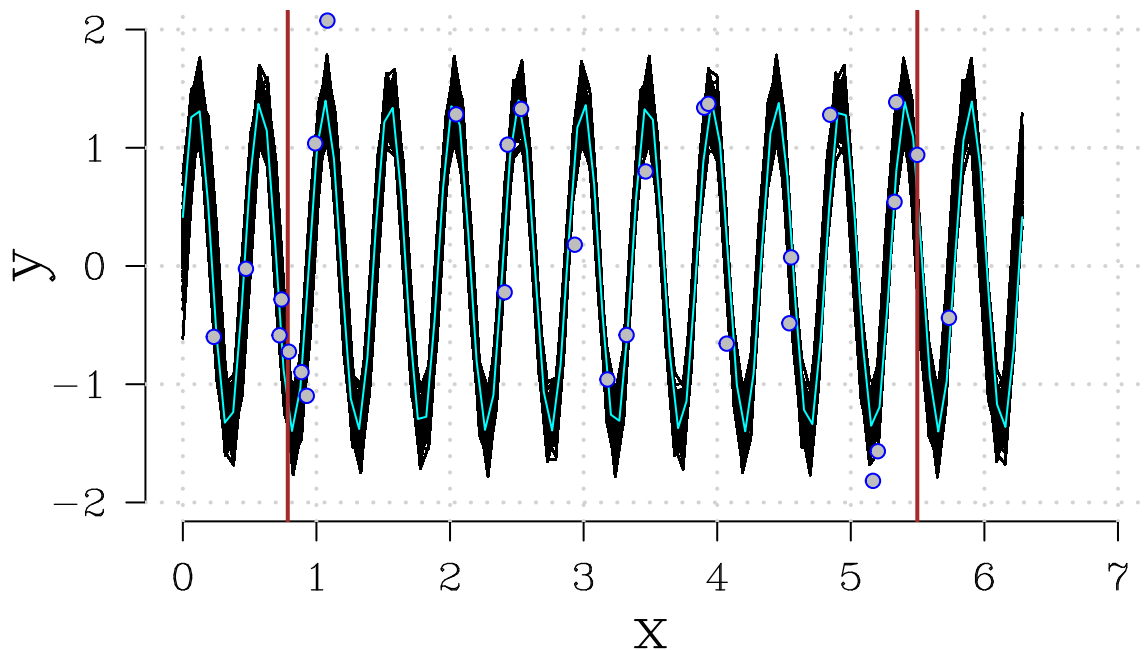

## NOTES

### Parameters where is not fully contrained

```
set.seed(24855)
n <- 8
frequency <- 4
phase <- -0.5
noise <- 0.5
amplitude <- 1.4
```

### Constructing Data

```
x <- runif(n, max = 2 * pi)
f <- amplitude * sin(frequency * x + phase)
y <- rnorm(n, mean = f, sd = noise)
x_fixed = c(pi / 4, 7/4 * pi)
```

### Creating Input List

```
data <- list(
  n = n,
  y = y,
  x = x,
  x_fixed = x_fixed,
  max_k = 10
)
```