

6: Data

John H Maindonald

September 2, 2015

```
doFigs <- TRUE

fig6.1 <- function(){
  ## ---- date-labs ----
  ## Labeling of graph: data frame jobs (DAAG)
  library(DAAG, quietly=TRUE); library(lattice)
  fromdate <- as.Date("1Jan1995", format="%d%b%Y")
  startofmonth <- seq(from=fromdate, by="1 month", length=24)
  atdates <- seq(from=fromdate, by="6 month", length=4)
  xyplot(BC ~ startofmonth, data=jobs,
         scale=list(x=list(at=atdates,
                           labels=format(atdates, "%b%y"))))
}
```

fig6.1()

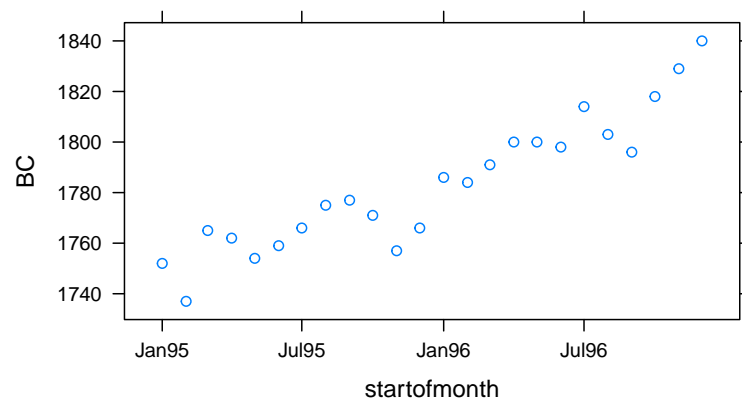


Figure 1: Dates are used to label the x -axis