

## Exercise 2.2 - Survey of ecological models, Part 2

Jelena H. Pantel

2023-11-09 18:42:05.067236

### Instructions

Create either an R script (.R file) or R Markdown document (.Rmd) to save all of your work for today.

### Exercise 1. Work with simulation of discrete-time logistic growth

In class, I discussed how making simulations of the models we learn in class can help us understand how our system works. Let's take a closer look at the *discrete-time model of logistic population growth*. The model formula is:

$$n_{t+1} = n_t + rn_t(1 - \frac{n_t}{K})$$

And the simulation works as follow:

```
# Parameter values to use for simulation
r <- 1.21
K <- 1400
NO <- 4
t <- 30
# model function
disc_log <- function(r, NO, K) {
  Nt1 <- NO + r * NO * (1 - NO/K)
  return(Nt1)
}
# Simulation of model for t time steps
N <- rep(NA, t)
for (i in 1:t) {
  N[i] <- disc_log(r, NO, K)
  NO <- N[i]
}
# Plot simulation: ggplot
dat <- as.data.frame(N)
dat$time <- as.numeric(rownames(dat))
ggplot2::ggplot(dat, aes(time, N)) + geom_point() + geom_hline(yintercept = K,
  linetype = "dashed", color = "gray")
```



```
# Plot simulation: base R
plot(N, xlab = "time", ylab = "N", pch = 19, col = "black")
abline(h = K, col = "grey", lty = "dashed")
```



**Question 1.** Please change the simulation to run with a growth rate of 2.2, and show me a plot of the population dynamics over time.

**Question 2.** A. Use R's index syntax `var[i]` - where *var* is the name of your variable and *[i]* is the *i*th position of that variable - to show me the value of population size *N* at time 5, 6, and 7.

B. Use the 'disc\_log' function to calculate the value of *N* at time 6 using the value of *N* at time 5 for *N*<sub>0</sub>

C. Use the 'disc\_log' function to calculate the value of *N* at time 7 using the value of *N* at time 6 for *N*<sub>0</sub>

D. Use the formula above for discrete-time logistic growth to calculate population size at time 7 using the value of *N* at time 6 for *N*<sub>0</sub>

E. Why is the population not going to its carrying capacity *K*? How many *periodic attractors* (values of *N* for which the system is stably drawn towards) are there in this system? In other words, how many values does *N* cycle between when  $r = 2.2$ , and what are those values of *N*?

**Question 3.** Look at the *bifurcation plot* for this discrete-time logistic growth system:



We see that as  $r$  increases the number of attractors continues to double, growing geometrically. Eventually, we reach a point when there becomes an infinite number of unique points, that are determined by  $r$ . This completely deterministic, non-repeating pattern in  $N$  is a property of *chaos*. *Chaos* is not a random phenomenon; rather it is the result of deterministic mechanisms generating non-repeating patterns.

A. How many periodic attractors are there at  $r = 2, 2.1, 2.2, 2.3, 2.4$ , and  $2.5$ ?

B. How many periodic attractors are there at  $r = 2.55$ ? I share the code below to produce a finer scale of  $r$  values:

```
# We read this directly from the graph: 8

dlogistic <- function(t, y, p) {
  N <- y[1]
  with(as.list(p), {
    N.diff <- rd * N * (1 - alpha * N)
    return(list(N.diff))
  })
}

rd.s <- seq(2.4, 2.7, by = 0.01) # the actual rd values
t <- 0:1000 # how long to run each population
N0 <- c(N = 99) # N-zero
## do all the dynamical simulations putting each run into a
## column of a matrix.
Ns <- sapply(rd.s, function(r) {
  p <- c(rd = r, alpha = 0.01)
```

```

    outd <- deSolve::ode(y = N0, times = t, func = dlogistic,
      parms = p, method = "euler")[, 2]
  })
  out <- data.frame(t = t, Ns) # put times to the front of the matrix
  names(out) <- c("t", paste("rd=", rd.s, sep = "")) # relabel columns
  out.last <- subset(out, t > 0.8 * max(t)) # keep only the last 20%
  ## put the data in the 'long format'
  out.l <- pivot_longer(out.last, cols = -1, names_to = "r.d",
    values_to = "N")
  out.l <- dplyr::arrange(out.l, r.d, t) # re-order the data
  ## extract text out of the 'r.d' label that is the numeric
  ## value
  text.values <- substr(out.l$r.d, regexpr("=", out.l$r.d) + 1,
    100)
  ## convert the characters of '1.5' to the number 1.5
  out.l$r.d <- as.numeric(text.values)

  ## plot the stable limits to show the bifurcations
  ggplot(out.l, aes(rd, N)) + geom_point(pch = ".") + theme_bw() +
    scale_x_continuous(breaks = seq(2.4, 2.7, by = 0.04))

```



C. Let's look closer at the chaotic portion of the graph, with a much finer range of  $r$  values. Convince yourself about chaos - that a TINY change in the parameter value  $r$  can lead to very different observed dynamics of  $N$ . You can read a bit more about chaos at this link: (<https://geoffboeing.com/2015/03/chaos-theory-logistic-map/>)

```

num.rd <- 1001 # the number of rd's you want
rd.s <- seq(1.5, 3, length = num.rd) # the actual rd values
t <- 0:1000 # how long to run each population
N0 <- c(N = 99) # N-zero
## do all the dynamical simulations putting each run into a
## column of a matrix.
Ns <- sapply(rd.s, function(r) {
  p <- c(rd = r, alpha = 0.01)
  outd <- deSolve::ode(y = N0, times = t, func = dlogistic,
    parms = p, method = "euler")[, 2]
})
out <- data.frame(t = t, Ns) # put times to the front of the matrix
names(out) <- c("t", paste("rd=", rd.s, sep = "")) # relabel columns


```

```

out.last <- subset(out, t > 0.8 * max(t)) # keep only the last 20%
## put the data in the 'long format'
out.l <- pivot_longer(out.last, cols = -1, names_to = "r.d",
  values_to = "N")
out.l <- dplyr::arrange(out.l, r.d, t) # re-order the data
## extract text out of the 'r.d' label that is the numeric
## value
text.values <- substr(out.l$r.d, regexpr("=", out.l$r.d) + 1,
  100)
## convert the characters of '1.5' to the number 1.5
out.l$rd <- as.numeric(text.values)

out.l.chaotic <- subset(out.l, rd > 2.6)
ggplot(out.l.chaotic, aes(rd, N)) + geom_point(pch = ".") + theme_bw()

```

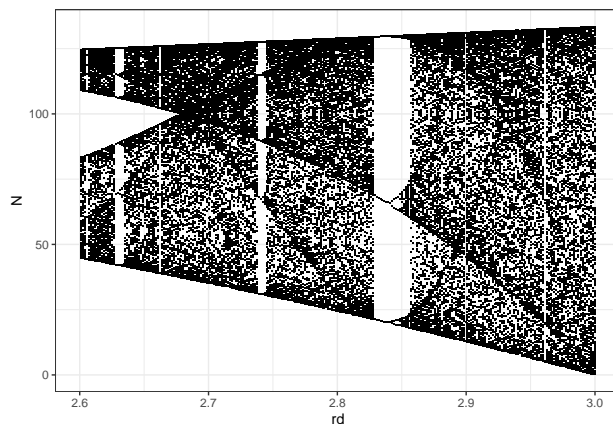

**Question 4.** Plot dynamics in the discrete-time logistic growth system.

In class, I showed a plot of population dynamics then ran the simulation for 8 different values of the population growth rate  $r$  :

```

# Parameter values to use for simulation
r_range <- c(0, 1, 1.3, 1.6, 1.9, 2.2, 2.5, 2.8)
K <- 1400
N0 <- 4
t <- 30
# Simulation of model for t time steps
N.g <- numeric()
plist <- list()
for (i in 1:length(r_range)) {
  N <- rep(NA, t)
  for (k in 1:t) {
    N[k] <- disc_log(r_range[i], N0, K)
    N0 <- N[k]
  }
  dat <- as.data.frame(N)
  dat$time <- as.numeric(rownames(dat))
  dat$r <- rep(r_range[i], t)
  N.g <- rbind(N.g, dat)
  N0 <- 4
  p <- ggplot(dat, aes(time, N)) + geom_point() + geom_line(color = "gray") +

```

```

    geom_hline(yintercept = K, linetype = "dashed", color = "orange")
  plist[[i]] <- p
}

gridExtra::grid.arrange(grobs = plist, nrow = round(length(r_range)/3))

```



Please use this plotting code to show dynamics for  $r = 2, 2.2, 2.4, 2.5, 2.55$ , and  $2.8$ , for 50 time steps. Please use RMarkdown to write an informative caption for this figure, explaining what the graphs show. You can use this link: (<https://uoepsy.github.io/scs/rmd-bootcamp/06-figs.html#captions>)

## Exercise 2. Create simulation of continuous-time Lotka-Volterra competition model

Here is code for a continuous-time logistic growth model:

The formula:

$$\frac{dn}{dt} = rn(1 - \frac{n}{K})$$

The code:

```

# Parameter values to use for simulation
parameters <- c(r = 1.21, K = 1400)
state <- c(N = 4)

```

```

times <- seq(0, 30, by = 0.01)
# model function
cont_log <- function(t, state, parameters) {
  with(as.list(c(state, parameters)), {
    dN <- r * N * (1 - N/K)
    return(list(dN))
  })
}
# Simulation of model for t time steps
out <- deSolve::ode(y = state, times = times, func = cont_log,
  parms = parameters)
# Plot simulation: ggplot
out.g <- as.data.frame(out)
ggplot2::ggplot(out.g, aes(time, N)) + geom_line() + geom_hline(yintercept = K,
  linetype = "dashed", color = "gray")


```



```

# Plot simulation: base R
plot(out.g$time, out.g$N, xlab = "time", ylab = "N", pch = 19,
  col = "black")
abline(h = K, col = "grey", lty = "dashed")

```

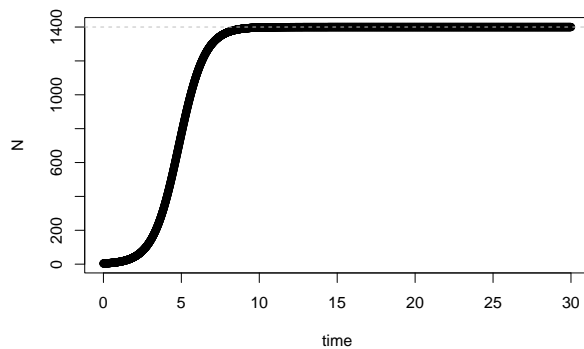

A. Please modify this to create a simulation of the continuous time Lotka-Volterra competition equations, seen as equations 3.15 in Otto & Day Chapter 3.

The formula:

$$\frac{dn_1}{dt} = r_1 n_1 \left(1 - \frac{n_1 t + \alpha_{12} n_2}{K_1}\right)$$

$$\frac{dn_2}{dt} = r_2 n_2 \left(1 - \frac{n_2 t + \alpha_{21} n_1}{K_2}\right)$$

The parameters you will need are:

r1, r2, K1, K1, alpha\_12, alpha\_21, n1\_0, n2\_0

Use these values:

r1 = 1.3, r2 = 1.5, K1 = 1,400, K2 = 1,000, alpha\_12 = 0.4, alpha\_21 = 0.6, N1\_0 = 5, N2\_0 = 5

*Note: be very careful with your parentheses*

Here I show with prompts what code you need to fill in. Then I show my code for running the continuous simulation and plotting.

```
# Parameter values to use for simulation
parameters <- 1 ## fill in param values where the 1 is
state <- 1 ## fill in initial values for state variables where the 1 is
times <- 1 ## fill in values for time intervals where the 1 is
# model function
cont_LV <- function(t, state, parameters) {
  with(as.list(c(state, parameters)), {
    ## fill in equation for N1 fill in equation for N2
    return(list(c(dN1, dN2)))
  })
}
```

```
# Simulation of model for t time steps
out <- deSolve::ode(y = state, times = times, func = cont_LV,
  parms = parameters)
# Plot simulation: ggplot
out.g <- as.data.frame(out)
out.melt <- reshape2::melt(out.g, id.var = "time")
ggplot2::ggplot(out.melt, aes(x = time, y = value, col = variable)) +
  geom_line()
# Plot simulation: base R
plot(out.g$time, out.g$N1, xlab = "time", ylab = "N", col = "black",
  type = "l")
lines(out.g$time, out.g$N2, col = "skyblue")
```