

SRT411A0

Jin Huang

2018-02-16

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean   : 42.98
##  3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.   :120.00
```

Including Plots

You can also embed plots, for example:

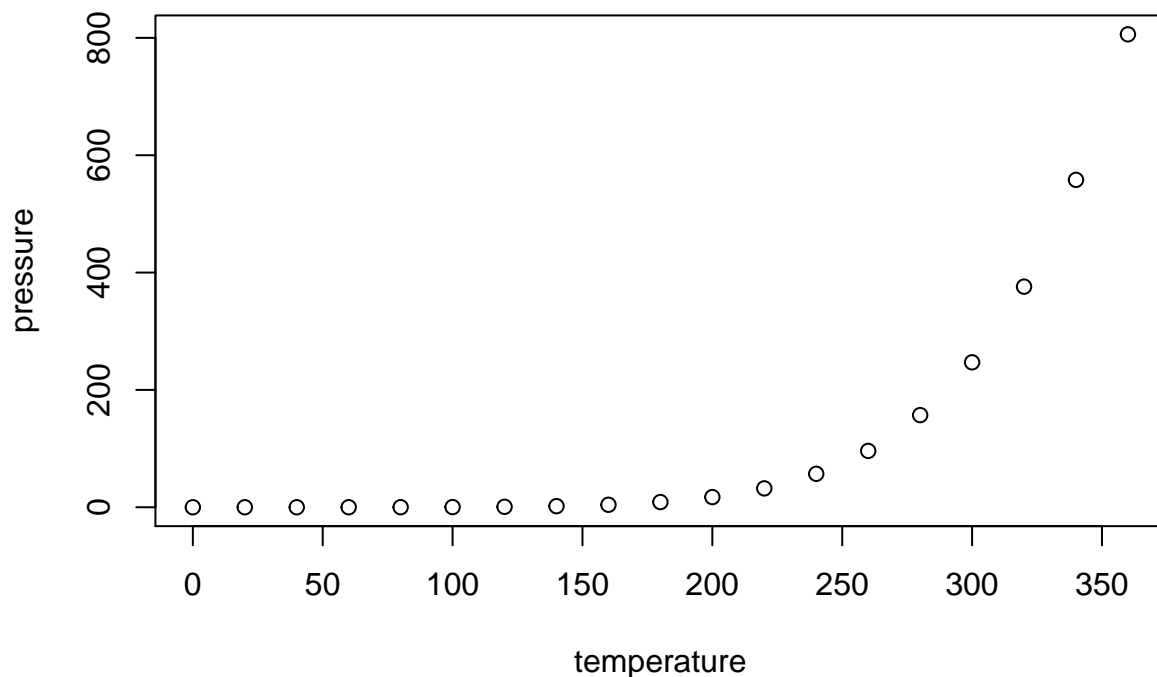

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

3.1 Calculator ToDo

Compute the difference between 2014 and the start year at this university; and divide this by; the difference between 2014 and the year you were born. Multiply this with 100 to get the percentage of your life you have spent at this university. Use brackets if you need them.

```
(2017-2014)/(2014-1995)*100
```

```
## [1] 15.78947
```

3.2 Workspace ToDo

Repeat the previous ToDo, but with several steps in between. You can give the variables any name you want, but the name has to start with a letter

```
a=2017-2014
b=2017-1995
(a)/(b)*100
```

```
## [1] 13.63636
```

3.4 Function ToDo


```
v=c(4,5,8,11)
sum(x=v)
```

```
## [1] 28
```

3.5 Plots ToDo

Plot 100 normal random numbers.

```
p=rnorm(100)
plot(p)
```

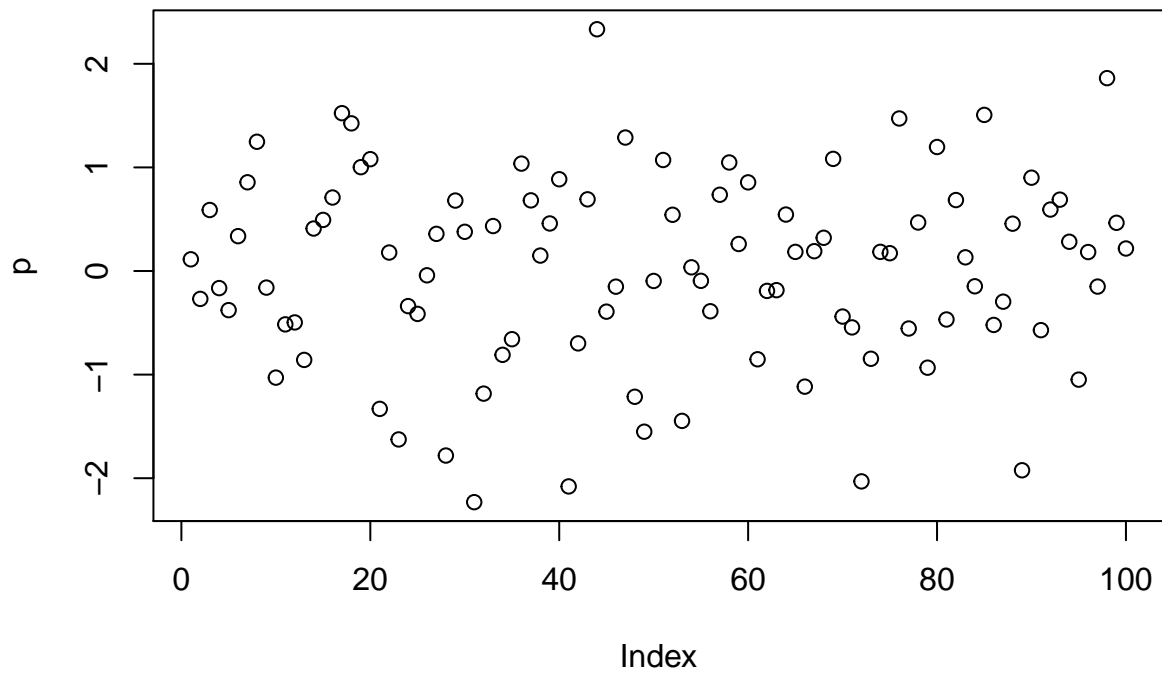

4 Help and documentation ToDo

Find help for the sqrt function.


```
help(sqrt)
```

```
## starting httpd help server ... done
```

5 Scripts ToDo

Make a file called `firstscript.R` containing Rcode that generates 100 random numbers and plots them, and run this script several times.

```
source("firstscript.R")
```

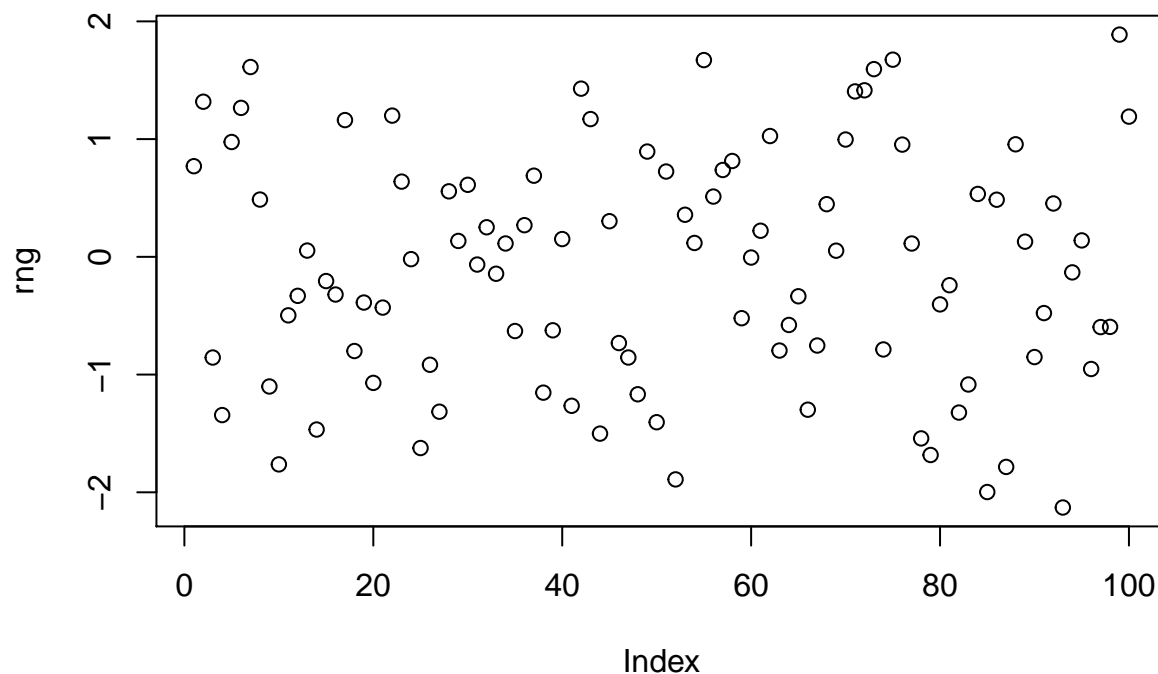

6.2 Matrices ToDo

Put the numbers 31 to 60 in a vector named `P` and in a matrix with 6 rows and 5 columns named `Q`. Tip: use the function `seq`. Look at the different ways scalars, vectors and matrices are denoted in the workspace window.


```
P=seq(from=31,to=60,by=1)
Q=matrix(data=c(31:60),ncol = 5,nrow = 6)
Q
```

```
##      [,1] [,2] [,3] [,4] [,5]
## [1,]  31  37  43  49  55
## [2,]  32  38  44  50  56
## [3,]  33  39  45  51  57
## [4,]  34  40  46  52  58
## [5,]  35  41  47  53  59
## [6,]  36  42  48  54  60
```

6.3 Data Frames ToDo


Make a script file which constructs three random normal vectors of length 100. Call these vectors `x1`, `x2` and `x3`. Make a data frame called `t` with three columns (called `a`, `b` and `c`) containing respectively `x1`, `x1+x2` and `x1+x2+x3`. Call the following functions for this data frame: `plot(t)` and `sd(t)`. Can you understand the results? Rerun this script a few times.

```
x1=rnorm(100)
x2=rnorm(100)
x3=rnorm(100)
t=data.frame(a=x1,b=x1+x2,c=x1+x2+x3)
plot(t)
```

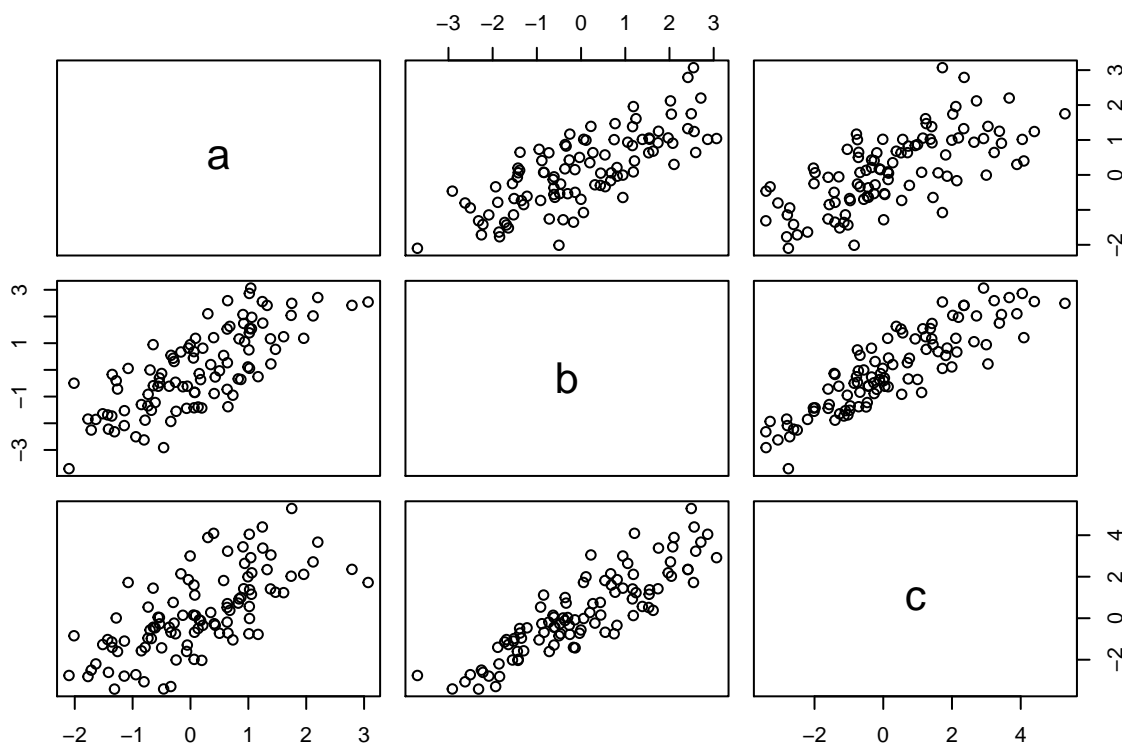

7 Graphics ToDo Add these lines to the script file of the previous section. Try to find out, either by experimenting or by using the help, what the meaning is of `rgb`, the last argument of `rgb`, `lwd`, `pch`, `cex`.

```
x1 = rnorm(100)
x2 = rnorm(100)
x3 = rnorm(100)
t = data.frame(x1,x1+x2,x1+x2+x3)
plot(t$x1, type="l", ylim=range(t), lwd=3, col=rgb(1,0,0,0.3))
lines(t$b, type="s", lwd=2, col=rgb(0.3,0.4,0.3,0.9))
points(t$c, pch=20, cex=4, col=rgb(0,0,1,0.3))
```

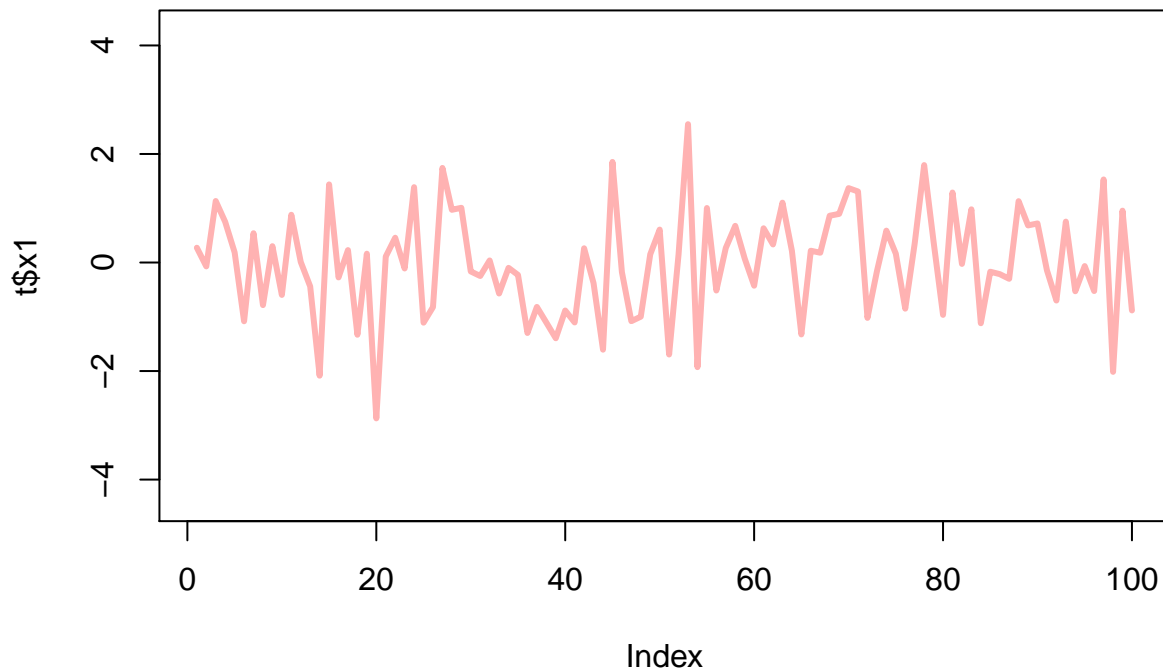

RGB: RGB Color Specification Pch: plotting 'character' cex: character (or symbol) expansion: a numerical vector. This works as a multiple of par("cex"). lwd: line width

8 Reading and writing data files ToDo

Make a file called `tst1.txt` in Notepad from the example in Figure 4 and store it in your working directory. Write a script to read it, to multiply the column called `g` by 5 and to store it as `tst2.txt`

```
d = read.table(file = "tst1.txt", header = TRUE)
d1 = data.frame(a = c(1,2,4,8,16,32), g = c(2,4,8,16,32,64), x = c(3,6,12,24,48,96))
d1
```

```
##      a  g  x
## 1    1  2  3
## 2    2  4  6
## 3    4  8 12
## 4    8 16 24
## 5   16 32 48
## 6   32 64 96
```

```
write.table(d1$g*5, file = "tst2.txt", row.names = FALSE)
d1$g*5
```

```
## [1] 10 20 40 80 160 320
```

9 Not Available data ToDo

Compute the mean of the square root of a vector of 100 random numbers. What happens?

```
v=c(rnorm(100))  
mean(sqrt(v))
```

```
## Warning in sqrt(v): NaNs produced
```

```
## [1] NaN
```

“NaNs produced” The issue is that a negative number was generated and used.


```
v=c(runif(n=100, min = 0))  
v1=sqrt(v)  
mean(v1)
```

```
## [1] 0.6827104
```

10.2 Dates ToDo

Make a graph with on the x-axis: today, Sinterklaas 2014 and your next birthday and on the y-axis the number of presents you expect on each of these days. Tip: make two vectors first

```
data1=strptime(c("20180211", "20141205", "20190120"),format = "%Y%m%d")  
data2=c(1,0,2)  
plot(data1,data2,xlab="date",ylab="presents",main="# of presents I expected")
```

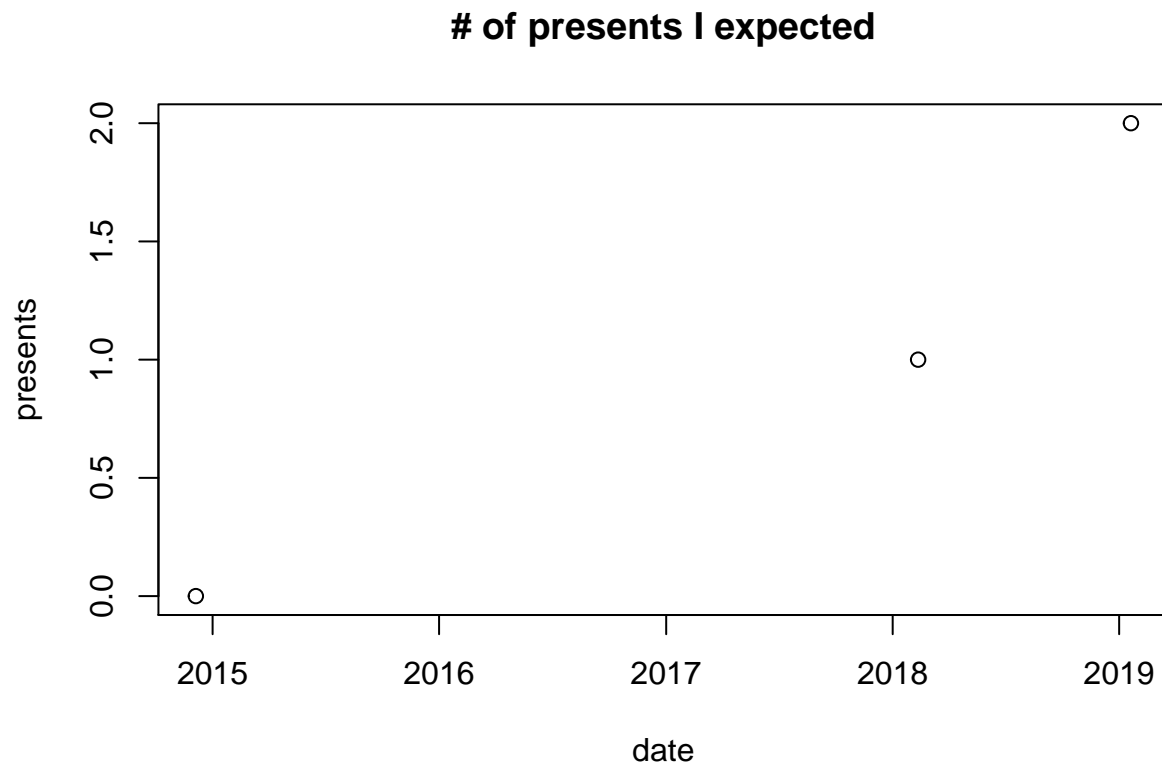

11.2 For-loop ToDo

Make a vector from 1 to 100. Make a for-loop which runs through the whole vector. Multiply the elements which are smaller than 5 and larger than 90 with 10 and the other elements with 0.1.

```
a=seq(from=1,to=100)
b=c()
for(i in 1:100)
{if (i<5 | i >90)
  {b[i]=a[i] * 10
  }
else{
  b[i]=a[i]*0.1
  }
}
b
```

```
##   [1]  10.0  20.0  30.0  40.0   0.5   0.6   0.7   0.8   0.9   1.0
##  [11]   1.1   1.2   1.3   1.4   1.5   1.6   1.7   1.8   1.9   2.0
##  [21]   2.1   2.2   2.3   2.4   2.5   2.6   2.7   2.8   2.9   3.0
##  [31]   3.1   3.2   3.3   3.4   3.5   3.6   3.7   3.8   3.9   4.0
##  [41]   4.1   4.2   4.3   4.4   4.5   4.6   4.7   4.8   4.9   5.0
##  [51]   5.1   5.2   5.3   5.4   5.5   5.6   5.7   5.8   5.9   6.0
##  [61]   6.1   6.2   6.3   6.4   6.5   6.6   6.7   6.8   6.9   7.0
##  [71]   7.1   7.2   7.3   7.4   7.5   7.6   7.7   7.8   7.9   8.0
##  [81]   8.1   8.2   8.3   8.4   8.5   8.6   8.7   8.8   8.9   9.0
##  [91]  910.0  920.0  930.0  940.0  950.0  960.0  970.0  980.0  990.0 1000.0
```

11.3 Writing your own function ToDo

Write a function for the previous ToDo, so that you can feed it any vector you like (as argument). Use a for-loop in the function to do the computation with each element. Use the standard R function length in the specification of the counter.

```
k=1:10
funct = function(arg1)
{
  l = length(arg1)
  for(i in 1:l)
  {
    if (arg1[i] < 5 | arg1[i] > 90)
    {
      arg1[i] = arg1[i] * 10
    } else
    {
      arg1[i] = arg1[i] * 0.1
    }
  }
  return (arg1)
}
funct(arg1=k)
```

```
##   [1] 10.0 20.0 30.0 40.0  0.5  0.6  0.7  0.8  0.9  1.0
```