

An Open, Auditable MIR Stack for Electronic Dance Music: Benchmark Calibration and Mix-to-MIDI Transcription

John Hurliman

Independent researcher

jhurliman@jhurliman.org

July 2026 (preprint)

Abstract

We present **jams**, an open-source MIR service for electronic dance music—key, tempo, beats, structure, separation, and per-stem MIDI—where every number regenerates from committed code. Four findings. (1) Calibration: the strongest published GiantSteps Key system gains +0.087 weighted on our $n=567$ usable-track subset—six times the field’s claimed progress—so only same-subset paired tests rank systems. Our pre-registered key CNN matches it ($\Delta = -0.001$) with no non-commercial license and the best exact accuracy (0.780). (2) Transcription: the full mix→MIDI system reaches 0.788 note-F on polyphonic accompaniment—*above a popular lightweight transcriber’s ground-truth-stem ceiling* (0.490)—and our MIT drum CNN beats the non-commercial port it replaces by +0.13/+0.17 macro onset-F (Slakh/E-GMD). (3) A +2.7 dB SI-SDR separation improvement *reduces* drum-transcription accuracy. (4) Three pre-registered structure-training variants failed their gates; the binding constraint is the training signal. All code and artifacts are public.

1 Introduction

DJ and music-production workflows need reliable, machine-readable answers to a small set of questions about any track: what key is it in, what tempo, where are the beats and downbeats, how is it structured (intro, buildup, drop, breakdown), and what are the constituent parts (stems, and ultimately notes). Electronic dance music is simultaneously the genre family where these questions are most operationally important—harmonic mixing, beat-matched transitions, and phrase-aligned mashups are core practice—and one where general-purpose MIR models underperform: EDM’s production conventions (half-time drum & bass, sustained pads with ambiguous modality, drops that function unlike pop choruses) sit in the tails of the distributions most models are trained on.

jams is an open-source analysis service built for this use case. It runs locally (macOS Apple-Silicon and Linux), exposes a single HTTP endpoint, and returns key, tempo, beat/downbeat grids, functional structure segments, separated stems, and per-stem MIDI for an arbitrary audio file. Every capability is backed by an evaluation harness in the same repository: committed acquisition scripts for each public dataset, committed scoring scripts using `mir_eval` [1], an

experiments ledger in which every quantitative claim traces to a script and commit, and a statistical-analysis script that regenerates every confidence interval in this paper.

We report four contributions:

1. **A subset-calibration finding** (§5.1): the strongest published GiantSteps Key system gains +0.087 weighted score when re-run on our usable-track subset—larger than the total claimed progress across recent published systems—so subset-measured numbers are not comparable to published full-set numbers. Only same-subset paired tests rank systems; under those, a small CNN we train on public data—pre-registered, evaluated once—statistically ties the strongest baseline with the best exact accuracy and no non-commercial license restriction.
2. **Stem-input and end-to-end transcription results** (§5.2): we quantify the cascade from mix to stems to MIDI at each stage on Slakh2100, including a full-system result that exceeds a popular transcriber’s ground-truth-stem ceiling.
3. **Metric divergence in separator selection** (§5.3): stem-level SI-SDR and downstream transcription accuracy can disagree in sign—separator selection should be scored on the task it feeds.
4. **A pre-registered negative result** (§5.4): three variants of class-rebalanced structure-model training, each gated before results were seen, all failed, with every per-class gain funded by an adjacent-class regression. The negative result is load-bearing for practitioners tempted by the same obvious interventions.

Throughout, we follow one measurement protocol (§4): anything learned is fit on training data only and evaluated once on the test set; all system comparisons are paired per-track bootstraps on identical track subsets; and structure experiments were gated by pass/fail criteria committed to the public experiments ledger before results existed. The same protocol surfaced and replaced a leaked refinement in our own earlier key detector (§5.1)—the harness audits us on the same terms as the baselines.

2 Related work

Key detection. Template (profile-matching) methods date to Krumhansl [2]; the `edma` profile of Faraldo et al. [3, 4], shipped in *Essentia* [5], is tuned for EDM. Convolutional approaches include the madmom key CNN of Korzeniowski & Widmer [6, 7] and later CNN variants [8, 9]. Self-supervised tonality estimation (STONE, then S-KEY) learns key structure from unlabeled audio [10, 11]; KeyMyna [12] applies masked-contrastive pretraining. The GiantSteps Key benchmark [13] and its training-purpose companion GiantSteps-MTG-Keys [4] are the standard EDM key datasets.

Transcription. `basic-pitch` [14] is a lightweight, instrument-agnostic note transcriber in wide production use. Transformer sequence models (MT3 [15]; YourMT3+ [16]) transcribe multi-instrument mixtures. Slakh2100 [17] provides synthesized multitracks with aligned per-stem MIDI; E-GMD [18] covers drums; ADTOF [19] provides large-scale non-synthetic drum annotations and an accompanying model family; MedleyDB [20] provides real-audio stems and pitch annotations.

Source separation. We evaluate Hybrid Transformer Demucs [21], BS-RoFormer [22], and SCNet [23], using checkpoints from the MSST model zoo [24].

Table 1: Shipped capabilities and their headline numbers under the protocol of §4. Each traces to the experiments ledger; §5 gives full context, CIs, and caveats. SI-SDR values are drums/other/bass.

capability	method	headline result
key	24-class key CNN (ours, MIT; §5.1)	0.832 MIREX / 0.780 exact
tempo	256-class tempo CNN (ours, MIT) + octave resolution	0.967 Acc1 (corrected labels)
beats / structure	All-In-One EDM ensemble (on-device)	0.978 beat-F / 0.755 HR@0.5
stems	SCNet XL	SI-SDR 14.3 / 11.8 / 6.0 dB
stems → MIDI	YourMT3+ (pitched), drum CNN (ours, MIT)	0.788 note-F (other); 0.767 drums

Structure analysis. All-In-One [25] jointly estimates beats, downbeats, boundaries, and functional labels with neighborhood attention on demixed audio, trained on the Harmonix Set [26]; Raveform [27] is the same group’s EDM structure corpus, with released EDM-trained per-fold models that our structure stack runs on-device (§5.4). Dedicated beat trackers form a parallel line, from multi-task TCNs with DBN decoding [28] to DBN-free transformers [29]; **jams** uses no separate tracker—its beats and downbeats come from the structure model’s beat head, so one ensemble supplies both the grid and the segments.

Evaluation hygiene. We rely on `mir_eval` [1] and `mirdata` [30] for metrics and dataset handling. Tempo ground-truth quality for EDM was examined by Schreiber & Müller [31], whose GiantSteps Tempo re-annotation we use for label corrections (§5.5); our subset-calibration finding (§5.1) is in the same spirit, quantifying how benchmark-*subset* selection alone moves scores by more than typical claimed improvements.

3 The **jams** system

jams is a Python service exposing `POST /v1/analyze`: audio in, JSON out, with optional stems and MIDI. Two architectural decisions matter for reproducibility:

Isolated model workers. The heavy model stacks (separation, structure, transcription) have mutually conflicting dependency sets, so each runs in a self-contained worker subprocess with an inline dependency manifest (PEP 723), communicating over line-delimited JSON with automatic respawn. Every worker pins its dependencies; environments are rebuilt deterministically by `uv`. This is what makes “the shipped system” a well-defined object of evaluation: the exact model weights, decode thresholds, and library versions that produced the numbers in this paper are pinned in the repository.

No silent fallbacks. A failure anywhere (missing model, incompatible platform, worker crash) raises an error; analysis quality never silently varies with environment. We adopted this contract after observing quality cliffs that would otherwise be invisible in production (e.g., a 6-stem separator silently dropping guitar/piano content cost -0.20 note-F downstream; §5.3).

Table 1 summarizes the shipped configuration. A companion web application (waveform + beat grid + segment editor + per-stem piano rolls) serves as the label inspection and correction tool behind our structure error analyses and as a demonstration client.

Tempo system. Tempo is a clean-room CNN in the Schreiber–Müller family [32] (2.9M parameters, MIT weights): 40-band mel input, short temporal filters, four multi-filter modules, and a 256-class softmax over 30–285 BPM with sliding-window averaging, trained on Raveform beat-derived BPM plus GiantSteps Tempo v2 minus the 42 tracks whose Beatport ids appear in GiantSteps Key. Like the key CNN it was gated by a pre-registered one-shot evaluation before

shipping: against the pretrained TempoCNN it is statistically indistinguishable—paired ΔAcc1 (corrected labels) -0.002 $[-0.015, +0.011]$, $n=458$, 449 exact ties—so the shipped stack replaces third-party tempo weights with our own at no measured cost. Genre-aware octave resolution is shared by both systems and sits outside the model.

Drum system. Drums are transcribed by our own convolutional-recurrent network (1.5M parameters, MIT weights): a 96-band log-mel front end, three convolutional blocks, a bidirectional GRU, five per-class onset heads (kick/snare/hi-hat/tom/cymbal), and a velocity regression head, trained on E-GMD plus Slakh oracle and separation-processed drum stems. It replaces a torch port of the ADTOF weights (CC BY-NC-SA 4.0 originals; the port itself declared no license). The pre-registered one-shot gate found the replacement *superior* on both protocols: Slakh-oracle macro onset-F 0.767 vs 0.638 (paired Δ $+0.129$ $[+0.106, +0.152]$, $n=151$) and E-GMD 0.818 vs 0.645 ($+0.173$ $[+0.155, +0.191]$, $n=500$). The claim is domain-bounded, not field-wide: on real acoustic-kit benchmarks the same frozen model *trails* the ADTOF family by 3–6 F points zero-shot (MDB-Drums pooled 5-class 0.768 through our full mix→separate→transcribe pipeline vs 0.78–0.81 published [33] and 0.792 for the paired port on identical tracks), while matching it at IDMT-SMT’s stricter 20 ms tolerance (0.883 vs 0.883) — e-kit-plus-synthetic training buys onset timing precision and electronic-domain accuracy, not acoustic-kit generality. The transcription and separation experiment tables later in the paper predate this swap and report ADTOF in the drum lane where marked.

Licensing posture. The learned components we ship carry no non-commercial terms: the key, tempo, and drum CNN weights are ours (MIT; 0.45 MB, 12 MB, and 6 MB, trained from public data; the legacy fusion heads likewise ship as MIT JSON), S-KEY weights are MIT, YourMT3+ weights Apache-2.0, and SCNet checkpoints come from the MIT-licensed MSST zoo. The one prior exception—the ADTOF drum port—was retired by the superiority gate above rather than relicensed around. The madmom key CNN (CC BY-NC-SA weights) is used for *evaluation only* and never shipped. The repository itself is MIT-licensed.

4 Evaluation protocol

Datasets. *Key:* GiantSteps Key [13] (test only; $n=567$ usable of 604 after dropping atonal/multi-key/unparseable labels—a documented subset, central to §5.1); for training, GiantSteps-MTG-Keys [4] (1,157 usable high-confidence tracks; used by the earlier learned refinements) and its revised-annotation superset `beatport_key` (1,486 tracks, 1,363 usable; used by the key CNN)—the two share one underlying Beatport corpus, verified to have zero track-id overlap with GiantSteps Key. *Transcription/separation:* the Slakh2100 test split [17] in its de-duplicated “redux” form ($n=151$ multitracks; stems regrouped to drums/bass/other; ground-truth stems are summed class stems, ground-truth notes merged class MIDI); a 500-track subset of E-GMD [18] (isolated electronic kits); a MedleyDB vocals smoke test ($n=1$; access-gated, full benchmark pending). *Structure:* Raveform [27], a 1,423-track EDM structure corpus from the All-In-One authors, with expert beats, downbeats, and functional segments over an 11-label vocabulary (intro, altintro, buildup, drop, breakdown, cooldown, bridge, outro, altoutro, plus start/end sentinels following the Harmonix convention [26]); audio is sourced per track from the annotated YouTube IDs, of which 1,332 remained retrievable for our evaluation. All structure scoring is held-out per fold: each track is scored by a fold model that did not train on it. *Tempo:* the GiantSteps Key tempo labels ($n=458$) with curated corrections from GiantSteps Tempo v2 [31] (§5.5).

Table 2: GiantSteps Key ($n=567$ usable subset), MIREX weighted and exact accuracy, with 95% bootstrap CIs. Published full-set reference numbers are *not* comparable to subset numbers (see calibration finding); the strongest published full-set numbers from systems trained without GiantSteps-Key exposure are 0.746–0.759 weighted [6, 9, 12]. The license column refers to the learned weights/coefficients; the template stage of the baseline rows runs on Essentia (AGPL), which the shipped system no longer links.

system	weighted [95% CI]	exact	license
edma template (no refinement)	0.759 [0.728, 0.789]	0.688	AGPL (Essentia)
mode retrain	0.810 [0.780, 0.837]	0.753	ours (MIT)
S-KEY [11]	0.817 [0.789, 0.843]	0.748	MIT
fusion (prior system)	0.812 [0.783, 0.840]	0.757	MIT
key CNN (ours; shipped)	0.832 [0.804, 0.859]	0.780	MIT
madmom CNN [6]	0.833 [0.806, 0.858]	0.773	CC BY-NC-SA

Metrics. Key: MIREX weighted score (1.0 exact, 0.5 fifth, 0.3 relative, 0.2 parallel) and exact accuracy. Tempo: Acc1 (estimate within $\pm 4\%$ of the reference tempo). Transcription: `mir_eval` onset+pitch note-F (50 ms / 50 cents, offsets ignored), instrument-agnostic per stem; drums scored as per-class onset-F (50 ms) over a 5-class vocabulary (kick/snare/hi-hats/toms/cymbals), macro-averaged. Separation: SI-SDR versus ground-truth stems, *plus* transcription-through-separation note-F—the metric that matters for the product. Structure: beat/downbeat F (70 ms), boundary hit-rate HR@0.5s and @3s, pairwise frame clustering F, V-measure; per-class label quality as GT-duration coverage.

Training protocol. Anything learned is fit on the training corpus only (for key: GS-MTG or its `beatport_key` superset, never GiantSteps Key), model-selected by cross-validation *within the training split*, then evaluated exactly once on the test set. For structure experiments, gates (pass/fail criteria and their metrics) were pre-registered in the experiments ledger before results were seen.

Statistics. All CIs are 95% percentile bootstrap (10^4 resamples, fixed seed). System comparisons are *paired*: per-track score differences on the same tracks, resampled at the track level. We report a difference as significant only when the paired CI excludes zero. Point comparisons against *published* numbers are explicitly out of scope as rankings (§5.1 shows why).

5 Results

5.1 Key detection: calibration first, then rankings

Systems. The template row is Essentia’s `edma` profile matcher, unmodified. *Mode retrain* and *fusion* are the project’s earlier learned refinements—small logistic heads over chroma cues and S-KEY posterior features, fit on GS-MTG with CV-selected thresholds (exact features and coefficients ship as JSON in the repository); they are retained in the table as context and as the systems the CNN superseded. *S-KEY* is the self-supervised tonality estimator of Kong et al. [11], run from its released MIT checkpoint. The madmom CNN baseline was run with its published weights and default processor settings. The *key CNN* is ours (pre-registered as experiment K10 in the public ledger): input is a log-magnitude CQT, 24 bins per octave over 8 octaves from C1 (hop 4096 at 22.05 kHz); three convolutional blocks (two 3×3 convolutions with batch normalization and ELU, then 2×2 max-pooling; 16/32/64 channels) feed a dropout layer, time-only average pooling—frequency structure reaches the readout, which absolute-pitch tasks require—and a

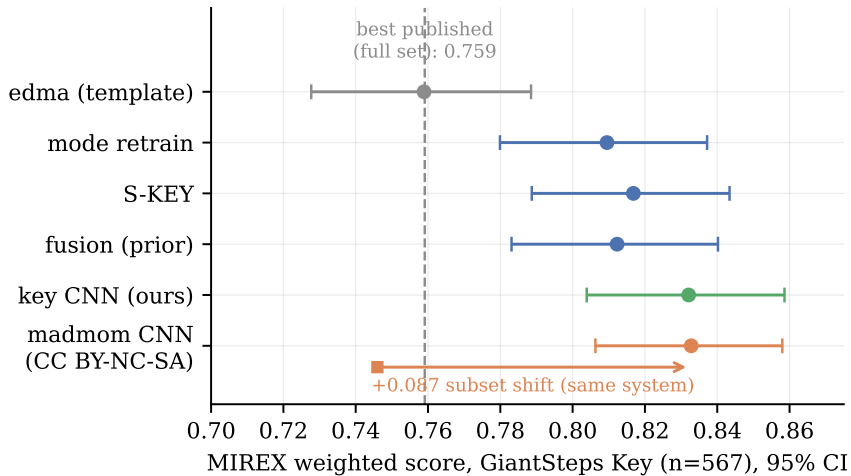


Figure 1: Key systems on the same $n=567$ subset with 95% CIs. The orange square/arrow shows the *same* madmom CNN’s published full-set number (0.746) versus its score on our subset (0.833): a +0.087 shift from subset selection alone, larger than the spread between the five strongest systems.

Table 3: Paired per-track deltas (MIREX weighted), 10k-resample bootstrap. A CI excluding zero (*) is significant. The full pairwise set regenerates via the repository’s statistics script.

comparison	Δ weighted [95% CI]
S-KEY – edma raw	+0.058 [+0.031, +0.086]*
retrain – edma raw	+0.051 [+0.030, +0.072]*
key CNN – fusion	+0.020 [-0.002, +0.043]
key CNN – S-KEY	+0.015 [-0.008, +0.039]
key CNN – madmom CNN	−0.001 [−0.019, +0.018]

linear 24-way softmax; 109k parameters, 0.45 MB, MIT. Training: `beatport_key` (1,363 usable tracks; zero test-set overlap, verified by track id), AdamW with a cosine schedule, ~ 60 -second random crops, ± 4 -semitone pitch-shift augmentation via CQT bin-roll with label transposition; the final model trains on the full corpus at the CV-selected epoch budget. Inference is a single forward pass over the full-track CQT; the shipped worker analyzes a two-minute track in under two seconds on Apple-Silicon CPU, including model load. The experiment was pre-registered with a fixed decision rule; all selection (architecture, capacity, and standalone-vs-fusion candidates) used training-corpus CV only, and the locked model received exactly one test evaluation.

The calibration finding. GiantSteps Key ships 604 annotations, of which 600 have retrievable preview audio in our pull; like prior work, we further drop atonal, multi-key, and unparseable labels, leaving $n=567$ for exact-label scoring. Such subsets are routine and rarely identical across papers. To measure what that does to scores, we re-ran the strongest published system—the madmom CNN, published at 0.746 weighted on the full set [6]—on our subset: it scores **0.833**, a +0.087 shift attributable to subset selection alone (Figure 1). For scale: the total claimed progress across published systems from 2018 to 2026 ($0.746 \rightarrow 0.759$ [12]) is 0.013—more than six times smaller. *Any* comparison of a subset-measured number against a published full-set number is therefore uninterpretable, including favorable comparisons of our own systems. The only valid rankings are same-subset paired tests.

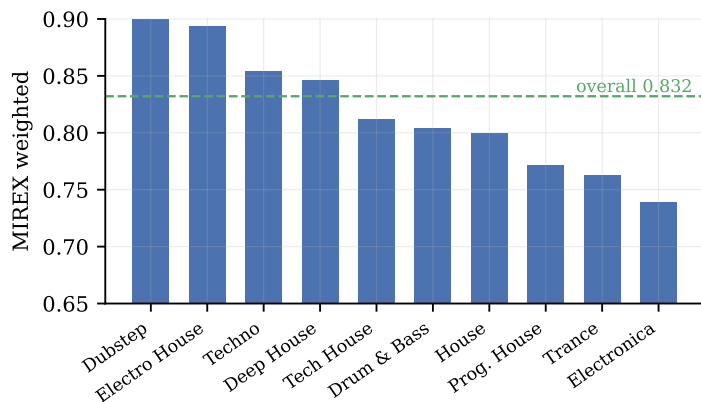


Figure 2: Shipped key CNN (K10), MIREX weighted by genre ($n \geq 15$ per genre shown).

Rankings under paired tests (Table 3): no pairwise difference among the learned systems reaches significance, and all significantly exceed the raw template. The sharpest comparison is our key CNN against the madmom CNN: $\Delta = -0.001$ $[-0.019, +0.018]$, with 486 of 567 tracks scored identically—a statistical dead heat with the strongest published system, from a model trained in two hours on public data. Under K10’s pre-registered rule this is reported as a failure to establish *superiority*; what it establishes instead is parity without the non-commercial restriction, plus the best exact accuracy measured (0.780 vs. madmom’s 0.773). Against the prior fusion system, the CNN gains $+0.020$ $[-0.002, +0.043]$ (58 wins / 38 losses) while being strictly simpler—a single small model replaces the template stage plus two learned heads—so it ships as the production key detector. All selection was made by training-split cross-validation only (the CNN over wider and fusion-composed variants by corpus CV), never by test scores.

A note on leakage. An earlier shipped version of the mode refinement had been fit on GiantSteps Key itself (0.801 weighted); the strict retrain reported here (0.810) replaced it before any comparison in this paper was run. The two scores happen to agree—leakage does not always inflate a number—but only the leakage-free protocol makes the number defensible.

Genre analysis. Per-genre weighted scores of the shipped CNN range from 0.900 (Dubstep) to 0.739 (Electronica/Downtempo), with Trance (0.763) also weak—sustained, modally ambiguous textures—and no genre collapses (Figure 2). Notably, Techno, the prior fusion system’s weakest genre (0.746), recovers to 0.854 under the CNN.

5.2 Transcription: stem-input transformers and the full mix-to-MIDI system

Table 4 reports the transcription story. On ground-truth stems, YourMT3+ [16] beats the widely used basic-pitch [14] by $+0.36$ note-F on polyphonic accompaniment (“other”), winning on *every one* of 151 tracks, and by $+0.06$ on bass (87% of tracks). Both systems were scored with identical scoring functions against identical ground truth, and basic-pitch’s onset/frame thresholds were tuned *in its favor* on a development subset (worth $+0.023$ note-F on accompaniment over defaults). basic-pitch is a deliberately lightweight real-time model; the comparison quantifies what a large transformer buys, not a like-for-like contest. Drums are routed to a dedicated drum transcriber (ADTOF) in every configuration—velocity measurement and GM-percussion mapping are drum-specific requirements—so the pitched-transcriber swap leaves the drum lane unchanged (hence the identical e2e drum scores and the “—” cells).

Table 4: Note-level transcription on Slakh2100-redux test ($n=151$; onset+pitch F, 50 ms/50 c). Oracle = ground-truth stems as input. Paired deltas: YourMT3+ – basic-pitch on the same stems. Drums use ADTOF in all configurations (macro onset-F).

input	system	bass	other	drums
oracle stems	basic-pitch (tuned)	0.789 [0.762, 0.813]	0.490 [0.474, 0.506]	0.638
oracle stems	YourMT3+	0.849 [0.794, 0.898]	0.849 [0.837, 0.861]	—
paired Δ (YourMT3+ – basic-pitch)		+0.060 [+0.003, +0.110]*	+0.359 [+0.347, +0.371]*	—
per-track win rate		87%	100%	—
mix (e2e)	SCNet + basic-pitch	0.645	0.473	0.574
mix (e2e)	SCNet + YourMT3+ (shipped)	0.661	0.788	0.574

Table 5: Separator A/B on Slakh test mixes ($n=151$ unless noted): SI-SDR and downstream (through-separation) transcription with the transcriber held fixed (basic-pitch pitched / ADTOF drums). Models: HT-Demucs [21], BS-RoFormer [22], SCNet XL [23]. HT-Demucs-ft was run on a 50-track subset; BS-RoFormer scored on its 47 matched tracks (tracks SCNet on that subset). Bold marks the best full-split ($n=151$) run per column.

model	SI-SDR (dB)			downstream F		
	drums	other	bass	bass	other	drums
HT-Demucs	11.6	10.1	4.6	0.596	0.459	0.585
HT-Demucs-ft ($n=50$)	11.0	10.9	4.8	0.607	0.455	0.605
BS-RoFormer ($n=47$)	13.1	8.6	5.7	0.628	0.468	0.596
SCNet XL	14.3	11.8	6.0	0.645	0.473	0.574

End-to-end. The shipped full system—mix $\rightarrow$ SCNet XL separation $\rightarrow$ YourMT3+ (pitched stems) + ADTOF (drums)—reaches 0.788 note-F on accompaniment and 0.661 on bass from the raw mixture, with zero pipeline failures on the test split. Two observations: (a) **the end-to-end system exceeds basic-pitch’s oracle ceiling on accompaniment** (0.788 from the mix vs. 0.490 from ground-truth stems)—upgrading the transcriber matters more than perfecting separation; (b) separation costs YourMT3+ -6.1 points on accompaniment but -18.7 points on bass, whose low-frequency content bleeds most in separation—yet e2e bass still edges the same separator feeding basic-pitch (0.661 vs. 0.645). SI-SDR measured in the e2e run reproduced the separation A/B’s numbers (14.3/11.8/6.0 dB) on independent hardware, an explicit cross-run consistency check.

Auxiliary results: ADTOF drums score 0.645 macro onset-F on E-GMD’s isolated electronic kits ($n=500$, out-of-domain for the model); a single-track MedleyDB vocals smoke test gives 0.582 note-F (full benchmark pending dataset access).

5.3 Separation: SI-SDR and downstream accuracy can disagree

SCNet XL wins SI-SDR on every stem and downstream note-F on both pitched stems (Table 5), and ships. But on drums its $+2.7$ dB SI-SDR gain over HT-Demucs comes with a one-point onset-F *loss* (Figure 3): signal-level and task-level quality metrics diverge, so separator selection should be scored on the downstream task. A related contract lesson: the 6-stem HT-Demucs variant, which routes guitar/piano to stems our 4-stem contract would drop, silently cost -0.20 note-F on accompaniment—the kind of quality cliff our no-silent-fallback rule exists to surface

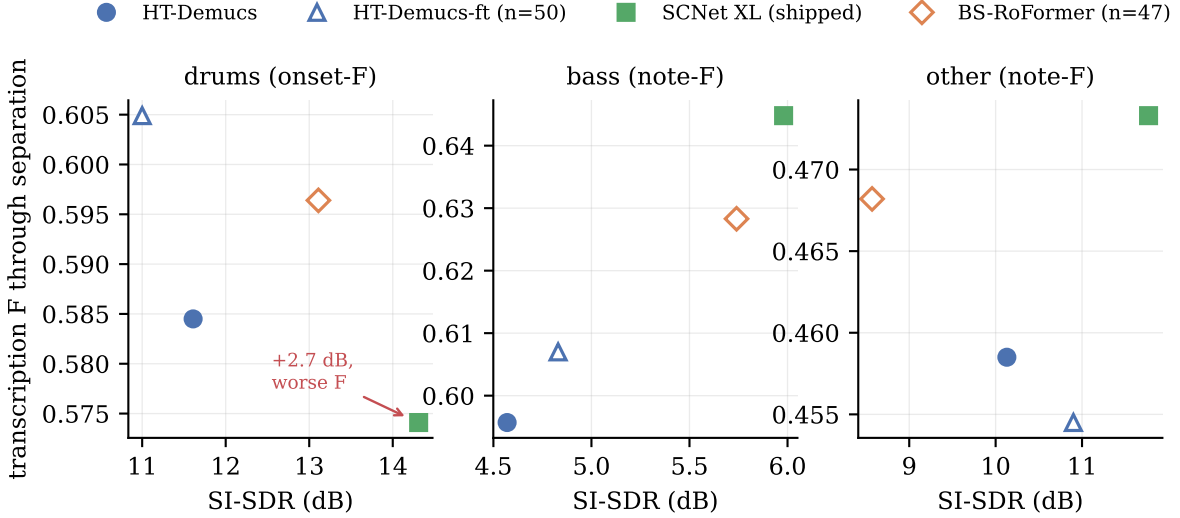


Figure 3: SI-SDR versus downstream transcription accuracy per stem (transcriber fixed). On pitched stems the two metrics agree; on drums, SCNet’s +2.7 dB SI-SDR *reduces* onset-F by one point—the drum transcriber is sensitive to the separator’s transient character in ways SI-SDR does not measure.

(it is disqualified by construction, not by tuning).

5.4 Structure: a pre-registered negative result

The shipped structure stack is the All-In-One [25] architecture running the Raveform authors’ released EDM-trained per-fold models [27] as an on-device ensemble (a state-dict port; no training of ours). “Stock” below always denotes the released member for the evaluated fold, so both arms of every comparison are strictly held-out on the evaluated tracks; each experiment’s gate (pass/fail criteria and metrics) was committed to the public experiments ledger before its results existed. On a 104-track held-out CV sample the stock system reaches beat-F 0.978, downbeat-F 0.964, boundary HR@0.5 0.755, pairwise-F 0.825, consistent with the dataset paper’s reported performance; the gate arms below re-measure it on full held-out folds (fold 2, $n=165$: beat-F 0.981, HR@0.5 0.757, pairwise-F 0.846). Its known weakness is rare-class label quality: buildup and cooldown segments are frequently absorbed by “drop” (coverage ≈ 0.49 and 0.48). This is exactly the failure mode class-rebalanced training is supposed to fix, so we attempted it—under pre-registered gates—in three isolated variants:

ST-v1: re-weighted from-scratch training.¹ Inverse-duration function-class weights (effective range $\sim 110:1$) with genre-balanced sampling. *Failed its gate on two independent folds:* boundary HR@0.5 $-0.15/-0.21$, pairwise $-0.18/-0.16$, and—the tell—beat-F -0.050 on *both* folds: the shared trunk itself degraded. Rare-class gains on fold 2 (cooldown $+0.25$) reversed on fold 1 (-0.18) under longer training: progressive damage, not a stable trade. A decode-threshold mismatch between the arms was later found and corrected; re-scoring moved beat-F by less than 0.01 and changed no verdict.

ST-v3: transfer with a frozen trunk. Stock weights loaded as initialization (verified round-trip byte-identical), trunk and beat/section heads frozen, class weights capped at 3.0; only

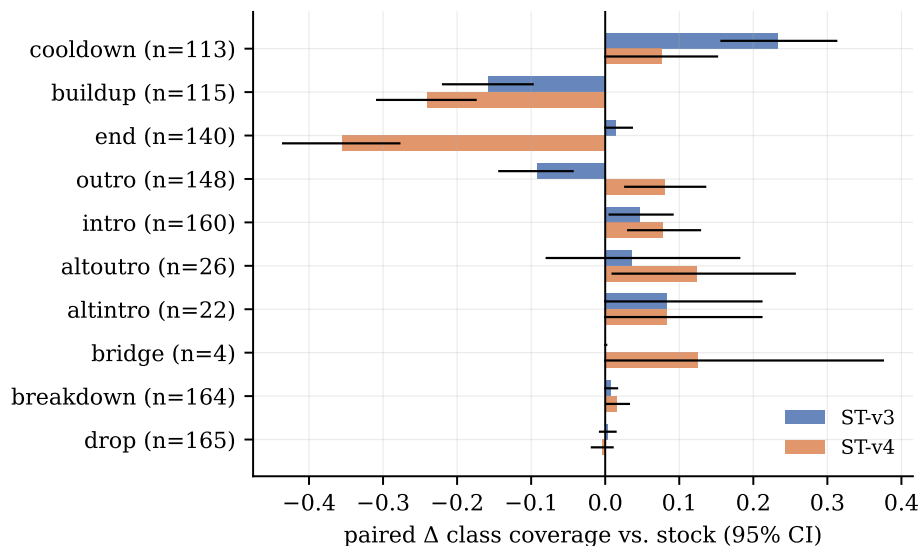


Figure 4: Per-class paired coverage deltas versus the stock model (fold-2 held-out, $n=165$ tracks; track-level bootstrap CIs). Both constrained variants keep beats/boundaries byte-identical to stock, isolating label quality—and both fund class gains with adjacent-class regressions. Neither improves *buildup*, a gate requirement.

the 1,067-parameter function readout trains. Validity held by construction and exactly: beats, downbeats, and boundaries byte-identical to stock on all 165 held-out tracks. The gate reduced to label quality—and exposed a **class trade** (Figure 4): cooldown $+0.233$ $[+0.157, +0.312]$ but buildup -0.158 $[-0.219, -0.098]$ and outro -0.092 .

ST-v4: capacity, single variable. A zero-initialized residual MLP ($96 \rightarrow 64 \rightarrow 11$; 7,990 trainable parameters) added to the same frozen configuration, byte-equal to stock at initialization. The capacity *re-routed* the trade rather than resolving it: intro/outro/altoutro gains, but buildup -0.240 $[-0.308, -0.175]$ (worse than v3), end -0.355 $[-0.435, -0.278]$, and v3’s cooldown gain shrank to a non-significant $+0.076$. The apparent bridge gain ($+0.125$) rests on $n=4$ tracks and is not significant.

Arc conclusion. Across re-weighted training, a rebalanced frozen readout, and added readout capacity, *buildup never improved and every gain was funded by an adjacent-class regression*. With weights, rebalancing, and capacity individually falsified, the binding constraint is the training signal itself—1,332 tracks of frame-level labels whose least consistently annotated classes (buildup boundaries, end) are precisely the ones at issue. The stock ensemble ships unchanged. We also stopped iterating for protocol reasons: fold 2 adjudicated three variants, approaching the limit of defensible held-out reuse. (A failed gate needs no cross-fold confirmation; a shipped pass would have required one.) The cheapest future directions are training-free per-class threshold calibration fit on training folds, and label-definition work.

¹An intermediate head-only variant (ST-v2) was invalidated before evaluation: checkpoint validation showed the trainer had no pretrained-weight loading, so its “frozen” trunk was randomly initialized. The same check established that ST-v1 was re-weighted from-scratch training rather than fine-tuning; its paired verdicts are unaffected. ST-v3 is the corrected experiment.

5.5 Measurement pitfalls worth publishing

Four findings below changed our numbers by more than typical model improvements do; we report them as first-class results.

Bass octave convention. Slakh bass MIDI follows written convention (sounding an octave lower). Scoring basic-pitch’s sounding-pitch output against it yields 0.04 note-F; applying the +12 semitone convention yields 0.80 ($n=19$ dev tracks, every track improved). Any cross-paper bass-transcription comparison that does not state its octave convention is suspect.

Bandwidth artifacts in reduced datasets. The 16 kHz “babyslakh” preview dataset caps drum onset-F at ~ 0.46 (vs. 0.64 full-bandwidth); hi-hat and cymbal energy above 8 kHz simply is not there. The drum transcriber scores 1.0 on its own 44.1 kHz reference. Dataset previews are for plumbing, not for numbers.

Beat-grid quantization. Snapping transcribed onsets to the analysis beat grid *costs* accuracy on every stem ($-2.5/-0.3/-1.7$ points bass/other/drums): quantization is a stylistic transform and defaults to off.

Tempo ground truth. The GiantSteps Key tempo labels are wrong for half-time genres (drum & bass labeled ~ 87 where the played tempo is ~ 174). With raw labels our tempo stack scores 0.919 Acc1; with corrections curated from the GiantSteps Tempo v2 re-annotation [31] plus an explicit full-tempo convention, 0.967 ($n=458$). The correction file is committed and auditable. Label quality, not model quality, was the larger error source. A related pitfall from our own history: an early cached baseline artifact predated the genre metadata that drives octave folding on 13 D&B/dubstep tracks; every baseline number here comes from a regeneration with the committed code, archived per track in the ledger.

6 Limitations

Subset, not full set. All GiantSteps Key numbers are on the $n=567$ usable subset. That is the point of the calibration finding, but it cuts both ways: our numbers must not be compared against published full-set numbers either. We provide the subset track list and per-track outputs for future same-subset comparisons.

S-KEY checkpoint provenance. The in-repo S-KEY checkpoint scores 0.817 here versus 0.721 in its paper [11]; newer weights and subset differences likely both contribute, and we cannot attribute the gap precisely.

Key CNN. A single training run (no seed variance), selected by training-corpus CV and evaluated exactly once; parity with madmom is a failure-to-reject, not demonstrated equivalence, though the CI is tight ($[-0.019, +0.018]$) and 486 of 567 tracks score identically. The model is trained and evaluated exclusively on EDM; out-of-genre behavior is unmeasured.

Synthetic transcription data. Slakh is sample-rendered; real-mix performance will differ. Vocals are unmeasured beyond a single smoke test. ADTOF drums are evaluated out-of-domain on E-GMD (0.645); an in-domain EDM drum benchmark does not yet exist.

Structure. Single training run per challenger variant (no seed variance); Raveform audio is YouTube-sourced (annotations were made on the same videos, so there is no master-mismatch, but 91 of 1,423 tracks were no longer retrievable in our pull); fold 2 adjudicated three variants, so any future *positive* result must be confirmed on a fresh fold; several rare-class estimates (bridge $n=4$) are on thin support.

Baselines. The madmom key CNN was run with its published weights (CC BY-NC-SA), evaluation-only. HT-Demucs-ft and BS-RoFormer separation A/Bs were run on subsets (50 and

47 tracks) for cost reasons and are marked as such.

7 Conclusion

An open, EDM-focused MIR stack assembled from openly licensed components matches the strongest system we measured to within noise—a pre-registered CNN, trained in two hours on public data, ties the madmom reference at $\Delta = -0.001$ —and exceeds widely used production defaults by wide margins (a mix→MIDI system whose accompaniment transcription beats a popular transcriber’s ground-truth-stem ceiling). The measurement findings travel beyond this system: benchmark-subset selection alone can move key-detection scores by more than six times the field’s eight years of claimed progress; SI-SDR can rank separators opposite to the task they feed; dataset conventions (bass octave, preview bandwidth, half-time tempo labels) shift scores by amounts that dwarf typical model improvements; and pre-registered gates with paired statistics make a negative result on class-rebalanced structure training defensible enough to publish. Hidden-test-set community evaluations (e.g., the revived MIREX campaigns) are the systemic complement to the same-subset paired protocol we advocate; we plan to submit the key system for independent validation.

Reproducibility

The repository (<https://github.com/jhurliman/jams>, MIT) contains the service, all acquisition and evaluation scripts, the experiments ledger every claim traces to, the statistics script that regenerates every CI in this paper, per-track result artifacts, and the figure-generation script for this paper. The key CNN is fully specified by its training script (`eval/train_key_cnn.py`) and shipped in-process inference module (`src/jams/analysis/key_cnn.py`); the drum CNN likewise by `eval/train_drum_cnn.py` and `src/jams/data/drum_worker.py`. Datasets are fetched by committed scripts (audio is not redistributed). Environment pins that materially affect reproduction are documented in the ledger.

Acknowledgments

Experiments, infrastructure, and drafting were carried out with substantial assistance from Claude (Anthropic), operating the evaluation harness described here.

References

- [1] Colin Raffel, Brian McFee, Eric J. Humphrey, Justin Salamon, Oriol Nieto, Dawen Liang, and Daniel P. W. Ellis. `mir_eval`: A transparent implementation of common MIR metrics. In *Proceedings of the 15th International Society for Music Information Retrieval Conference (ISMIR)*, Taipei, Taiwan, 2014.
- [2] Carol L. Krumhansl. *Cognitive Foundations of Musical Pitch*. Oxford University Press, 1990.
- [3] Ángel Faraldo, Emilia Gómez, Sergi Jordà, and Perfecto Herrera. Key estimation in electronic dance music. In *Proceedings of the 38th European Conference on Information Retrieval (ECIR)*, Padua, Italy, 2016.

- [4] Ángel Faraldo. *Tonality Estimation in Electronic Dance Music: A Computational and Musically Informed Examination*. PhD thesis, Universitat Pompeu Fabra, 2017. The GiantSteps-MTG-Keys dataset accompanies this work.
- [5] Dmitry Bogdanov, Nicolas Wack, Emilia Gómez, Sankalp Gulati, Perfecto Herrera, Oscar Mayor, Gerard Roma, Justin Salamon, José R. Zapata, and Xavier Serra. Essentia: An audio analysis library for music information retrieval. In *Proceedings of the 14th International Society for Music Information Retrieval Conference (ISMIR)*, Curitiba, Brazil, 2013.
- [6] Filip Korzeniowski and Gerhard Widmer. Genre-agnostic key classification with convolutional neural networks. In *Proceedings of the 19th International Society for Music Information Retrieval Conference (ISMIR)*, Paris, France, 2018.
- [7] Sebastian Böck, Filip Korzeniowski, Jan Schlüter, Florian Krebs, and Gerhard Widmer. madmom: A new python audio and music signal processing library. In *Proceedings of the 24th ACM International Conference on Multimedia*, Amsterdam, The Netherlands, 2016.
- [8] Hendrik Schreiber and Meinard Müller. Musical tempo and key estimation using convolutional neural networks with directional filters. In *Proceedings of the Sound and Music Computing Conference (SMC)*, Málaga, Spain, 2019.
- [9] Stefan A. Baumann. Deeper convolutional neural networks and broad augmentation policies improve performance in musical key estimation. In *Proceedings of the 22nd International Society for Music Information Retrieval Conference (ISMIR)*, 2021. Model released as “InceptionKeyNet”.
- [10] Yuexuan Kong, Vincent Lostanlen, Gabriel Meseguer-Brocal, Stella Wong, Mathieu Lagrange, and Romain Hennequin. STONE: Self-supervised tonality estimator. In *Proceedings of the 25th International Society for Music Information Retrieval Conference (ISMIR)*, San Francisco, USA, 2024.
- [11] Yuexuan Kong, Gabriel Meseguer-Brocal, Vincent Lostanlen, Mathieu Lagrange, and Romain Hennequin. S-KEY: Self-supervised learning of major and minor keys from audio. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2025.
- [12] Ori Yonay, Tracy Hammond, and Tianbao Yang. Masked contrastive pre-training improves music audio key detection, 2026. arXiv:2604.10021. Model released as “KeyMyna”.
- [13] Peter Knees, Ángel Faraldo, Perfecto Herrera, Richard Vogl, Sebastian Böck, Florian Hörschläger, and Mickael Le Goff. Two data sets for tempo estimation and key detection in electronic dance music annotated from user corrections. In *Proceedings of the 16th International Society for Music Information Retrieval Conference (ISMIR)*, Málaga, Spain, 2015.
- [14] Rachel M. Bittner, Juan José Bosch, David Rubinstein, Gabriel Meseguer-Brocal, and Sebastian Ewert. A lightweight instrument-agnostic model for polyphonic note transcription and multipitch estimation. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022.

- [15] Josh Gardner, Ian Simon, Ethan Manilow, Curtis Hawthorne, and Jesse Engel. MT3: Multi-task multitrack music transcription. In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2022.
- [16] Sungkyun Chang, Emmanouil Benetos, Holger Kirchhoff, and Simon Dixon. YourMT3+: Multi-instrument music transcription with enhanced transformer architectures and cross-dataset stem augmentation. In *Proceedings of the IEEE International Workshop on Machine Learning for Signal Processing (MLSP)*, 2024.
- [17] Ethan Manilow, Gordon Wichern, Prem Seetharaman, and Jonathan Le Roux. Cutting music source separation some Slakh: A dataset to study the impact of training data quality and quantity. In *Proceedings of the IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*, 2019.
- [18] Lee Callender, Curtis Hawthorne, and Jesse Engel. Improving perceptual quality of drum transcription with the expanded groove MIDI dataset, 2020. arXiv:2004.00188.
- [19] Mickael Zehren, Marco Alunno, and Paolo Bientinesi. ADTOF: A large dataset of non-synthetic music for automatic drum transcription. In *Proceedings of the 22nd International Society for Music Information Retrieval Conference (ISMIR)*, 2021.
- [20] Rachel M. Bittner, Justin Salamon, Mike Tierney, Matthias Mauch, Chris Cannam, and Juan Pablo Bello. MedleyDB: A multitrack dataset for annotation-intensive MIR research. In *Proceedings of the 15th International Society for Music Information Retrieval Conference (ISMIR)*, Taipei, Taiwan, 2014.
- [21] Simon Rouard, Francisco Massa, and Alexandre Défossez. Hybrid transformers for music source separation. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2023.
- [22] Wei-Tsung Lu, Ju-Chiang Wang, Qiuqiang Kong, and Yun-Ning Hung. Music source separation with band-split rope transformer. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2024.
- [23] Weinan Tong, Jiaxu Zhu, Jun Chen, Shiyin Kang, Tao Jiang, Yang Li, Zhiyong Wu, and Helen Meng. SCNet: Sparse compression network for music source separation. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2024.
- [24] Roman Solovyev, Alexander Stempkovskiy, and Tatiana Habruseva. Benchmarks and leaderboards for sound demixing tasks, 2023. arXiv:2305.07489; Music-Source-Separation-Training (MSST) model zoo, <https://github.com/ZFTurbo/Music-Source-Separation-Training>.
- [25] Taejun Kim and Juhan Nam. All-in-one metrical and functional structure analysis with neighborhood attentions on demixed audio. In *Proceedings of the IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*, 2023.
- [26] Oriol Nieto, Matthew McCallum, Matthew E. P. Davies, Andrew Robertson, Adam Stark, and Eran Egozy. The Harmonix Set: Beats, downbeats, and functional segment annotations

- of western popular music. In *Proceedings of the 20th International Society for Music Information Retrieval Conference (ISMIR)*, Delft, The Netherlands, 2019.
- [27] Taejun Kim, Jongsoo Kim, Hyungyu Kim, and Juhan Nam. Raveform: A dataset of metrical and functional structure annotations for EDM tracks in DJ mixes. *Transactions of the International Society for Music Information Retrieval*, 9(1):131–143, 2026. doi: 10.5334/tismir.288.
 - [28] Sebastian Böck and Matthew E. P. Davies. Deconstruct, analyse, reconstruct: How to improve tempo, beat, and downbeat estimation. In *Proceedings of the 21st International Society for Music Information Retrieval Conference (ISMIR)*, Montréal, Canada, 2020.
 - [29] Francesco Foscari, Jan Schlüter, and Gerhard Widmer. Beat this! Accurate beat tracking without DBN postprocessing. In *Proceedings of the 25th International Society for Music Information Retrieval Conference (ISMIR)*, San Francisco, USA, 2024.
 - [30] Rachel M. Bittner, Magdalena Fuentes, David Rubinstein, Andreas Jansson, Keunwoo Choi, and Thor Kell. mirdataset: Software for reproducible usage of datasets. In *Proceedings of the 20th International Society for Music Information Retrieval Conference (ISMIR)*, Delft, The Netherlands, 2019.
 - [31] Hendrik Schreiber and Meinard Müller. A crowdsourced experiment for tempo estimation of electronic dance music. In *Proceedings of the 19th International Society for Music Information Retrieval Conference (ISMIR)*, Paris, France, 2018. GiantSteps Tempo v2 annotations.
 - [32] Hendrik Schreiber and Meinard Müller. A single-step approach to musical tempo estimation using a convolutional neural network. In *Proceedings of the 19th International Society for Music Information Retrieval Conference (ISMIR)*, Paris, France, 2018.
 - [33] Mickael Zehren, Marco Alunno, and Paolo Bientinesi. High-quality and reproducible automatic drum transcription from crowdsourced data. *Signals*, 4(4):768–787, 2023.