

Evaluating a Modular Mix-to-MIDI Pipeline on Slakh2100

John Hurliman

Independent researcher

jhurliman@jhurliman.org

September 2026

Abstract

In a modular audio-to-MIDI system, source separation and note transcription must be evaluated together: improvement at an intermediate stage need not improve the final output. We present a retrospective case study of **jams**, an open-source pipeline, using reported experiments on the Slakh2100-redux test split. For grouped non-bass pitched accompaniment, replacing basic-pitch with YourMT3+ increases mean onset-and-pitch F1 from 0.4733 to 0.7877 after the same SCNet separator. With reference stems as input, the corresponding scores are 0.4897 and 0.8488. The larger transcriber therefore retains an advantage despite separation errors in this configuration. A second comparison finds opposite directions of change in drum SI-SDR and downstream onset F1, without establishing a statistically reliable reversal. These observations support measuring the complete cascade; they do not establish that separation improves transcription, and do not measure performance on real electronic dance music. We specify the scoring and aggregation conventions, commit the per-recording score archives for the Slakh comparisons with checksums, and recompute every mean and interval of those comparisons from them; the structure intervals in the appendix are likewise recomputed from committed per-track predictions, while the secondary key, tempo, and drum results remain reported values, and only one transcription arm’s note predictions were archived.

1 Introduction

An audio-to-MIDI application may use a separator to expose instrument groups, then apply a different transcriber to each group. This arrangement offers editable stems alongside symbolic output, but introduces two coupled sources of error. A separator can remove useful note information or introduce interference that changes a transcriber’s predictions. Conversely, a stronger transcriber may recover more notes from imperfect stems than a weaker transcriber recovers from reference audio. The practical question is which component change improves the output a user receives.

We investigate this question through the mix-to-MIDI component of **jams**, a local music-analysis service.¹ The study uses existing pretrained models and previously recorded Slakh2100 experiments. Its contribution is a specified component comparison and an account of what that comparison supports, rather than a new neural architecture. We distinguish three contrasts: changing the transcriber on reference stems; changing it after a fixed separator; and changing the separator while holding the transcriber fixed. The main analysis concerns grouped pitched accompaniment, called *other* by the separator. This is a polyphonic group, not an individual instrument.

¹This project is separate from the JAMS annotation format and library at <https://github.com/marl/jams>.

The first two contrasts give the clearest result: the reported YourMT3+ advantage over basic-pitch persists after separation. The third is a diagnostic observation: two separators have different orderings under drum SI-SDR and downstream onset F1. Neither establishes that a cascade is better than direct mixture transcription, which was not measured under the same protocol. Appendices retain secondary system results and methodological qualifications.

2 Related work and scope

Separation followed by transcription is an established design; for example, Derby et al. [1] describe a modular route from mixtures to stems, MIDI, and notation. Slakh2100 [2] supplies synthesized multitracks and aligned MIDI suitable for examining both stages. Its grouped stems allow a reference-input condition without assuming that reference input is an upper bound on a transcriber’s score.

Basic-pitch [3] is designed for lightweight, instrument-agnostic transcription. MT3 [4] and YourMT3+ [5] instead use sequence models for multi-instrument transcription. YourMT3+ incorporates Slakh training data and stem augmentation; our comparison does not control training data, model capacity, or computational cost. Its original evaluation also addresses instrument identity and note offsets, which our main metric omits. Recent lightweight models, including the Harmonica preprint [6], further limit any interpretation of basic-pitch as representative of the best current transcription systems.

We use HT-Demucs [7] and a released SCNet variant [8] for the principal separator comparison. Their architecture papers establish the methods, not the provenance or performance of every subsequently released checkpoint. SI-SDR [9] measures waveform reconstruction, whereas note F1 measures agreement between discrete events. There is no monotonic relationship implied by their definitions. This study examines component selection within one pipeline, not a general ranking of model families.

3 System and evaluation protocol

3.1 Pipeline and evaluated configurations

The service accepts audio and returns separated audio files and per-group MIDI. Separation produces drums, bass, other, and vocals. Pitched groups are transcribed with basic-pitch or YourMT3+; a separate drum model produces percussion onsets. The historical experiments analyzed here used an ADTOF-derived drum port [10]. That port was subsequently replaced, so these measurements describe the recorded configuration rather than every current service default.

For SCNet, the worker identifies the MSST release v1.0.15, configuration `config_musdb18_scnet_xl_more_wide_v5.yaml`, and weights `model_scnet_ep_36_sdr_10.0891.ckpt`. The repository calls this configuration “SCNet XL IHF.” The pitched transformer is recorded as YourMT3+ YPTF.MoE+Multi, invoked through `mt3-infer` and decoded from 16 kHz mono input. Basic-pitch uses its ICASSP 2022 checkpoint. For other, the recorded onset/frame thresholds are 0.60/0.25, selected in a preliminary babyslakh sweep; the worker also specifies a 58 ms minimum note length.

Only the other group is central to the analysis because bass processing adds a monophonic filter and a fixed octave transposition (Appendix A). Instrument labels are discarded within each pitched group. Beat-grid quantization is disabled during evaluation. Model environments are separated into subprocesses, but some dependency declarations are version ranges and external

model downloads lack cryptographic digests. This is useful execution isolation, not a guarantee of bitwise reproduction.

3.2 Dataset, grouping, and exclusions

The experiment ledger identifies the Slakh2100-redux test split, with 151 multitracks. The acquisition script groups stems marked as drums into drums, General MIDI bass programs 32–39 (zero-indexed), or stems labeled Bass, into bass, and all remaining pitched stems into other. It sums audio within each group and merges the corresponding MIDI instruments. An audit of all 445 grouped references (151 multitracks; 8 have no bass stem) found no stem whose MIDI was merged while its audio was unreadable, no truncation of a group to a shorter member, no clipping in the 16-bit sums (largest summed peak 0.93), grouped audio equal to the recomputed sums to one quantization step, and no note beyond the audio end. Cross-correlating each group’s onset-strength envelope with its MIDI onsets over ± 500 ms puts the global maximum between 0 and 70 ms after note-on for 417 of the 445 groups (class-wise 12–58 ms, consistent with instrument attack times plus the estimator’s one-frame bias). The other 28 (22 drums, 3 bass, 3 other) have their global peak elsewhere, at a one-beat multiple on periodic parts; for 20 of them the near-zero peak is within 10% of the global one and for 8 it is at 79–90%. Separately, six dense accompaniment groups have correlation below 0.3 throughout (five of them with near-zero maxima), so the estimate is uninformative there. For these groups the method cannot exclude an offset, though none shows a consistent shift. The audit script and report are in the repository. Slakh contains synthesized instrumental music; there is no reference vocal group in this evaluation.

The historical summary reports 151 accompaniment pairs and 143 bass pairs in the reference-input comparison. A missing reference group is excluded from that group’s mean; an existing reference with no predicted notes scores zero. Failures and missing groups must therefore be reported separately. The end-to-end archives record 151 completed multitracks, zero pipeline failures, and 143 eligible bass pairs, the same support as the reference-input comparison.

These are retrospective development results. The ledger records selection of components after examining Slakh test performance. It does not establish an untouched, confirmatory test of the complete pipeline. YourMT3+ was trained on Slakh’s training split according to its authors, so this is not zero-shot evaluation on an unseen dataset. Exact checkpoint and split identities, including the preliminary babyslakh development IDs, require archival verification. Source-MIDI overlap across splits is a separate question from matching local filenames.

3.3 Metrics and statistical interpretation

For each multitrack and pitched group, reference and estimated notes are matched one-to-one using `mir_eval` [11], with 50 ms onset and 50-cent pitch tolerances and no offset criterion. Precision and recall are computed from matched notes, with $F_1 = 2PR/(P + R)$. The corpus score is the arithmetic mean of per-multitrack F1 over eligible reference groups, not F1 computed after pooling all notes. Instrument identity, velocity, and notation quality are not measured by this score.

For two systems A and B on the same eligible tracks, the paired effect is

$$\hat{\Delta}_{A-B} = \frac{1}{n} \sum_{i=1}^n (F_{1,i}^A - F_{1,i}^B). \quad (1)$$

The archived reference-input analysis reports a percentile bootstrap with 10,000 track resamples and seed 0. Its intervals describe uncertainty conditional on these trained models, track selection, and scoring choices. They do not account for training-seed variation, prior test-set reuse, or dependence

Table 1: Reported accompaniment (other) onset-and-pitch F1 on Slakh2100-redux, $n = 151$. Reference input is the summed ground-truth group. Brackets are 95% percentile bootstrap intervals (10,000 track resamples, seed 0) recomputed from the committed per-track score archives. T1/T2b/S4/T10 identify runs in the project ledger.

Input	Transcriber	Mean F1 [95% CI]	Run
Reference other	basic-pitch	0.4897 [0.4742, 0.5055]	T1
Reference other	YourMT3+	0.8488 [0.8369, 0.8607]	T2b
SCNet other	basic-pitch	0.4733 [0.4581, 0.4890]	S4
SCNet other	YourMT3+	0.7877 [0.7742, 0.8011]	T10

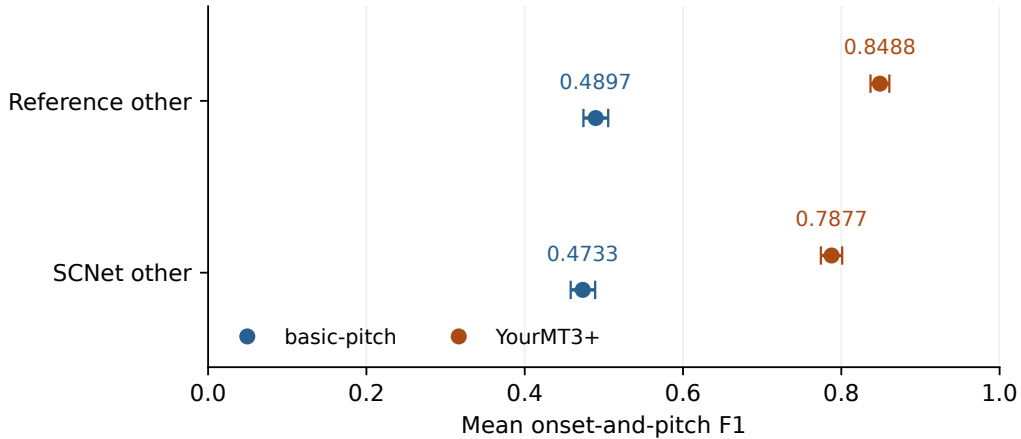


Figure 1: The transcriber comparison under two input conditions (Table 1). Separation is fixed for the mix-input condition. Intervals are recomputed from the committed per-track score archives; no predictions were regenerated.

between arrangements derived from related MIDI. We retain the reported intervals, identify them as archival summaries, and make no multiplicity-adjusted confirmatory claims.

Drum onset F1 uses five classes: kick, snare, hi-hat, tom, and cymbal. The scorer averages class F1 within a multitrack, including a class if either reference or estimate contains it, then averages across multitracks. Absent reference classes with false detections contribute zero. The SI-SDR implementation downmixes to mono, resamples the estimate to the reference rate, and truncates to the shorter signal. For reference s and estimate $\hat{s}$, it computes

$$\alpha = \frac{\langle \hat{s}, s \rangle}{\|s\|^2}, \quad \text{SI-SDR} = 10 \log_{10} \frac{\|\alpha s\|^2}{\|\hat{s} - \alpha s\|^2}, \quad (2)$$

with 10^{-9} numerical stabilizers, no explicit mean removal or time-alignment search, and subsequent averaging in dB. Silent reference signals are excluded. These details distinguish the implementation from other SDR protocols.

4 Results

4.1 Changing the transcriber

With reference accompaniment as input, the recorded mean F1 is 0.4897 for basic-pitch and 0.8488 for YourMT3+ (Table 1). The archived paired difference is +0.3591 [+0.3471, +0.3713], with YourMT3+

Table 2: Reported separator comparison with basic-pitch for pitched groups and the historical ADTOF port for drums, on the same 151-track test split (143 eligible bass pairs in both archives). Paired differences recomputed from the per-track archives, SCNet minus HT-Demucs: other +0.0148 [+0.0119, +0.0176], bass +0.0490 [+0.0330, +0.0656], drums -0.0104 [-0.0209, +0.0004].

Separator	SI-SDR (dB)			Downstream F1		
	Drums	Bass	Other	Drums	Bass	Other
HT-Demucs	11.61	4.57	10.13	0.5845	0.5957	0.4585
SCNet	14.31	5.98	11.77	0.5741	0.6448	0.4733

ahead on all 151 pairs. This is the strongest numerical contrast in the study; recomputation from the committed per-track archive reproduces the archived mean and interval exactly.

After the same SCNet separator, the scores are 0.4733 and 0.7877, a paired difference of +0.3144 [+0.3017, +0.3271], again with YourMT3+ ahead on all 151 pairs. Relative to each model’s reference-input score, separation is associated with a decrease of 0.0164 [0.0136, 0.0193] for basic-pitch (lower on 135 of 151 tracks) and 0.0611 [0.0547, 0.0677] for YourMT3+ (lower on 149). The larger absolute decrease for YourMT3+ does not reverse the model ordering. These intervals are recomputed from the stored per-track scores; they inherit every caveat of the original runs.

YourMT3+ after separation also exceeds basic-pitch on reference stems by 0.2980. This compares two complete configurations with different transcribers, not a violation of an “oracle ceiling.” A reference-input score is an observed operating point, not a mathematical upper bound. The comparison supports upgrading the transcriber in this particular pipeline. It does not show that improving transcription is generally more valuable than improving separation, nor that the gain comes from architecture alone.

4.2 Changing the separator

SCNet has higher reported mean SI-SDR than HT-Demucs for all three groups (Table 2). Its downstream F1 is also higher for other and bass. On drums, however, SI-SDR increases from 11.61 to 14.31 dB while onset F1 decreases from 0.5845 to 0.5741. The paired drum difference recomputed from the two archives is -0.0104 [-0.0209, +0.0004], with SCNet lower on 87 of 151 tracks and higher on 63; the interval includes zero. The opposite directions in these averages are therefore an observed discrepancy, not a demonstrated population-level reversal.

Differences in transient preservation are one possible explanation, but this experiment does not isolate them. Decoder thresholds, interference, temporal alignment, and the drum model’s training distribution could also matter. The limited operational implication is to measure transcription on separator output instead of assuming an SI-SDR improvement will transfer to note accuracy. Subset-only runs of other separators are retained in Appendix A.1; they are not ranked against full-split averages.

5 Limitations and next evaluation

The principal limitations affect interpretation, not just generality. First, the component choices were informed by this test set. A fresh corpus with a frozen configuration is needed for confirmatory evaluation. Second, the baseline comparison jointly changes model capacity, training data, and inference cost. We did not measure a quality-latency frontier. Third, an instrument-agnostic onset metric does not establish usable note durations, instrument assignments, velocities, or editing effort.

The most informative missing control is *the same YourMT3+ checkpoint on the unseparated mixture*, scored against the same grouped references with an explicit instrument-to-group mapping. Without that control, the incremental value of separation is unknown. A new lightweight baseline should also be tested before making claims about current model families. These comparisons should use a fixed development split, record every failure, and archive per-track predictions and resource use. They are proposed experiments, not previously completed work.

Slakh uses sample-rendered audio. The findings do not establish performance on real EDM, recorded acoustic ensembles, or vocals. A real-audio evaluation and an editing study would address those distinct questions. The bass transposition requires its own audio/MIDI audit and sensitivity analysis before its scores can support a general pitch-accuracy claim (Appendix A).

6 Conclusion

The reported Slakh2100 experiments favor YourMT3+ over basic-pitch for grouped accompaniment both with reference stems and after a fixed SCNet separator. They also show that average waveform and downstream event metrics can move in opposite directions. These are bounded observations about evaluated configurations. They motivate paired evaluation of the complete pipeline, with explicit grouping, scoring, and model provenance, while leaving the benefit of separation over direct transcription unresolved.

Code and data availability

Source code, the experiment ledger, and the per-recording evidence behind the Slakh comparisons (Sections 3–4) and the structure appendix are in the repository at <https://github.com/jhurliman/jams>; the key, tempo, and drum appendix rows are ledger summaries whose archived outputs were not recovered. The five per-recording score archives (runs T1, T2b, S4, T10, and the HT-Demucs run S1) and the S4 SI-SDR aggregate are committed under `paper/evidence/` with SHA-256 checksums, and `paper/verify_results.py` recomputes every mean and paired interval of the Slakh comparisons in Sections 3–4 from them (accompaniment rows, the bass reference, and the separator table and deltas), refusing missing archives, duplicate rows, or mismatched track sets. The raw gate predictions of the structure experiments (all challenger and stock arms) are committed as well, and `eval/structure_class_cis.py` recomputes every per-class and aggregate interval of Appendix C from them with complete held-out coverage, cross-checking the archived scored artifacts per track. The key, tempo, and drum intervals in the appendices are reported from the ledger and are not covered by this recomputation. The tables and figure regenerate from a summary snapshot that records that verification. Reproducing the analysis needs no private cloud storage: everything beyond the repository comes from public dataset downloads (the Slakh2100-redux test MIDI and metadata from Zenodo for the rescore, and the Raveform annotation archive for the structure recomputation); no audio is required for either.

The YourMT3+ reference-input predictions (run T2b) were also saved. Rescoring them from the raw note lists against independently rebuilt grouped Slakh references, with the same scorer and library versions, reproduces every archived per-track precision, recall, and F1 value exactly for all 151 accompaniment and 143 bass pairs (`paper/rescore_t2b.py`). The basic-pitch and end-to-end note predictions were not saved, so those arms are verified at the stored-score level only. Checkpoint identities, library versions, decoding parameters, and the items that remain unrecoverable are recorded in `paper/PROVENANCE.md`. No model inference was rerun for this revision, and no missing measurement has been estimated or synthesized.

Acknowledgments and AI use

We thank the authors and maintainers of the datasets, models, and evaluation software cited in this paper. The original manuscript was generated with Claude (Anthropic), which also assisted implementation and experiment execution under the author’s direction. OpenAI Codex assisted source checking, evaluation-code auditing, and substantive manuscript revision. This use extends beyond language editing. The named human author is responsible for the submitted work; neither system is an author. The limits of the verification performed are stated above.

A Bass and smaller separator experiments

The reference-input bass comparison has 143 eligible pairs in the archived statistics, with F1 0.7889 for basic-pitch and 0.8486 for YourMT3+; the reported paired difference is +0.0597 [+0.0034, +0.1100]. The YourMT3+ score follows a fixed +12-semitone shift of the estimated bass notes and no other post-processing: rescoreing the archived predictions reproduces 0.8486 only with the shift alone, whereas adding the service’s monophonic filter would give 0.8126. The service applies the shift in its orchestrator; the evaluation CLI also offers an additional shift, so the exact arguments matter and are now documented. The earlier manuscript called this a universal written-MIDI convention. The repository’s empirical observation on a small preview subset does not establish that assertion. A renderer- and instrument-specific pitch audit, with shifted and unshifted sensitivity results, is required. Bass is therefore excluded from the main transcription claim.

A.1 Subset-only separator runs

HT-Demucs-ft was evaluated on 50 tracks and BS-RoFormer on 47. The ledger attributes the latter restriction to an output-naming mismatch that left 104 tracks unmatched. Those missing outputs may be systematically different. Although the ledger asserts a comparison to SCNet on the matched subset, that paired result is not publicly reconstructible from the aggregate table. We retain these runs in the ledger and make no cross-subset ranking here. Similarly, the earlier loss from discarding guitar and piano outputs of a six-stem model is an integration error, not evidence against that separation architecture.

B Key detection: corrected interpretation

The project’s K10 model is a small convolutional key classifier trained on `beatport_key`; its log-CQT input and absolute-frequency readout are specified in `eval/train_key_cnn.py`. It is related to the convolutional family of Korzeniowski and Widmer [12]. The ledger reports 1,363 usable training examples and zero track-ID overlap with GiantSteps Key. This check does not rule out duplicate recordings or prior use of the benchmark for development. K10’s motivation explicitly cites earlier GiantSteps test-error analysis, and an older classifier was trained on that test set. A final model being evaluated once does not make the entire development history blind to the benchmark.

The historical summaries report K10 exact accuracy 0.7795 on 567 examples and weighted score 0.8321, versus 0.7725 and 0.8328 for madmom’s default processor. The score implementation awards 0.5 for a same-mode fifth in *either* direction. This agrees with the definition in the 2018 paper but differs from `mir_eval` 0.8.2’s ascending-fifth-only implementation. These scores must retain that convention label. The official 2026 task implementation must be checked before claiming protocol compatibility.

The archived paired weighted difference, $-0.0007 [-0.0187, +0.0182]$, does not establish superiority, equivalence, or non-inferiority. Equivalence would require a justified margin and a corresponding analysis. These intervals are also conditional on an already observed benchmark.

B.1 Why the earlier subset explanation is invalid

The previous draft attributed the difference between a published score of 0.746 and a local score of 0.8328 entirely to retaining 567 of 604 tracks. For nonnegative scores and unchanged predictions, scoring, and labels, a subset mean obeys

$$\bar{s}_{\text{subset}} \leq \frac{N}{n} \bar{s}_{\text{full}}. \quad (3)$$

Even assigning zero to all excluded tracks gives $604(0.746)/567 = 0.7947$, below 0.8328. Track exclusion alone cannot explain the reported difference under the draft’s own assumptions. Moreover, the 2018 article reports a selected single model, whereas madmom’s documented default processor uses an ensemble. Checkpoint and annotation differences are further possibilities. No causal attribution of the discrepancy is supported, and the earlier “six times the field’s progress” claim is withdrawn.

C Secondary tempo, drum, and structure results

The ledger records a replacement tempo CNN and a replacement drum CRNN, separate from the historical transcription experiments. The tempo comparison reports a paired Acc1 difference of $-0.002 [-0.015, +0.011]$ on 458 corrected-label examples. The genre-informed octave resolver and label corrections are part of that protocol, not intrinsic properties of the CNN. For drums, the reported reference-stem macro onset F1 is 0.767 versus 0.638 on Slakh and 0.818 versus 0.645 on a 500-example E-GMD subset. These are not end-to-end results for the replacement drum model. Partitions, aggregation, and archived outputs must be recovered before further inferential claims; the acoustic-kit experiments in the ledger also show weaker transfer than the synthetic results alone would suggest.

The structure experiments use the Raveform authors’ released models [13], with three locally trained challengers. The ledger records failure of the stated acceptance criteria for reweighted training from scratch, a frozen-trunk readout, and a residual readout. For the frozen readout on fold 2, the reported cooldown-coverage gain is $+0.233 [+0.157, +0.312]$, while buildup loses 0.158 $[0.098, 0.219]$; the residual readout loses 0.240 $[0.175, 0.308]$ on buildup. These intervals, and those of the from-scratch arms on both folds, are recomputed from the committed raw predictions of every arm (165 held-out tracks on fold 2, 162 on fold 1, no missing or failed tracks); the archived scored artifacts match the recomputation track by track, and the frozen-readout arms reproduce the stock beat and boundary scores exactly. The code averages the fraction correctly labeled within each reference segment, then averages within each track and across eligible tracks. This is not corpus-duration-weighted accuracy or a precision measure; overprediction can raise coverage.

These outcomes show that the evaluated interventions did not meet their goals. They do not identify label quality as the limiting cause or exhaust possible architectures, objectives, and optimization choices. Reuse of fold 2, single training runs, and sparse class support limit inference. No assertion that a negative result needs no replication is made.

References

- [1] Bradford Derby, Lucas Dunker, Samarth Galchar, Shashank Jarmale, and Akash Setti. Source separation & automatic transcription for music, 2024. URL <https://arxiv.org/abs/2412.06703>. Preprint, arXiv:2412.06703.
- [2] Ethan Manilow, Gordon Wichern, Prem Seetharaman, and Jonathan Le Roux. Cutting music source separation some Slakh: A dataset to study the impact of training data quality and quantity. In *Proceedings of the IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*, 2019. URL <https://arxiv.org/abs/1909.08494>.
- [3] Rachel M. Bittner, Juan José Bosch, David Rubinstein, Gabriel Meseguer-Brocal, and Sebastian Ewert. A lightweight instrument-agnostic model for polyphonic note transcription and multipitch estimation. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022. URL <https://arxiv.org/abs/2203.09893>.
- [4] Josh Gardner, Ian Simon, Ethan Manilow, Curtis Hawthorne, and Jesse Engel. MT3: Multi-task multitrack music transcription. In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2022. URL <https://arxiv.org/abs/2111.03017>.
- [5] Sungkyun Chang, Emmanouil Benetos, Holger Kirchhoff, and Simon Dixon. YourMT3+: Multi-instrument music transcription with enhanced transformer architectures and cross-dataset stem augmentation. In *Proceedings of the IEEE International Workshop on Machine Learning for Signal Processing (MLSP)*, 2024. URL <https://arxiv.org/abs/2407.04822>.
- [6] Longshen Ou, Héctor Martel, Joe Hennessy-Priest, and Taemin Cho. Harmonica: Accurate and lightweight instrument-agnostic music transcription, 2026. URL <https://arxiv.org/abs/2609.04640>. Preprint, arXiv:2609.04640.
- [7] Simon Rouard, Francisco Massa, and Alexandre Défossez. Hybrid transformers for music source separation. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2023. URL <https://arxiv.org/abs/2211.08553>.
- [8] Weinan Tong, Jiaxu Zhu, Jun Chen, Shiyin Kang, Tao Jiang, Yang Li, Zhiyong Wu, and Helen Meng. SCNet: Sparse compression network for music source separation. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2024. URL <https://arxiv.org/abs/2401.13276>.
- [9] Jonathan Le Roux, Scott Wisdom, Hakan Erdogan, and John R. Hershey. SDR—half-baked or well done? In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 626–630, 2019. doi: 10.1109/ICASSP.2019.8683855. URL <https://arxiv.org/abs/1811.02508>.
- [10] Mickael Zehren, Marco Alunno, and Paolo Bientinesi. ADTOF: A large dataset of non-synthetic music for automatic drum transcription. In *Proceedings of the 22nd International Society for Music Information Retrieval Conference (ISMIR)*, 2021. URL <https://doi.org/10.5281/zenodo.5624527>.
- [11] Colin Raffel, Brian McFee, Eric J. Humphrey, Justin Salamon, Oriol Nieto, Dawen Liang, and Daniel P. W. Ellis. mir_eval: A transparent implementation of common MIR metrics. In *Proceedings of the 15th International Society for Music Information Retrieval Conference (ISMIR)*, Taipei, Taiwan, 2014. URL <https://zenodo.org/records/1416528>.

- [12] Filip Korzeniowski and Gerhard Widmer. Genre-agnostic key classification with convolutional neural networks. In *Proceedings of the 19th International Society for Music Information Retrieval Conference (ISMIR)*, Paris, France, 2018. URL <https://arxiv.org/abs/1808.05340>.
- [13] Taejun Kim, Jongsoo Kim, Hyungyu Kim, and Juhan Nam. Raveform: A dataset of metrical and functional structure annotations for EDM tracks in DJ mixes. *Transactions of the International Society for Music Information Retrieval*, 9(1):131–143, 2026. doi: 10.5334/tismir.288.