# Current routing and operating boundaries

**Intake:** Power Apps freezes the envelope and UUID. The flow validates, conditionally appends, verifies the immutable GitLab file, and responds. Only a successful new-save response triggers the owner Teams notice.


**Callback:** the owner-only manual flow validates an event, claims or finds its Dataverse receipt, compares the exact payload, and sends once through its frozen destination. Sent replays skip delivery; uncertain Sending stays held for reconciliation.

**Teams:** mr-created and report-no-changes. **Email:** review-needed, artifact-ready, and failed. Existing receipts retain their original destination, including earlier routine email receipts.

Existing connections: Microsoft Teams Default-52fd4, Office 365 Outlook Default-29833, and the protected GitLab connections. The app flow binding was refreshed, saved, published, and exercised. Intake checker warnings requested that refresh; there were no checker errors. External callback authentication and Vergil delivery remain unimplemented.

CURRENT WORKFLOW / DEVELOPER


# Confirmed capture precedes the Teams notice

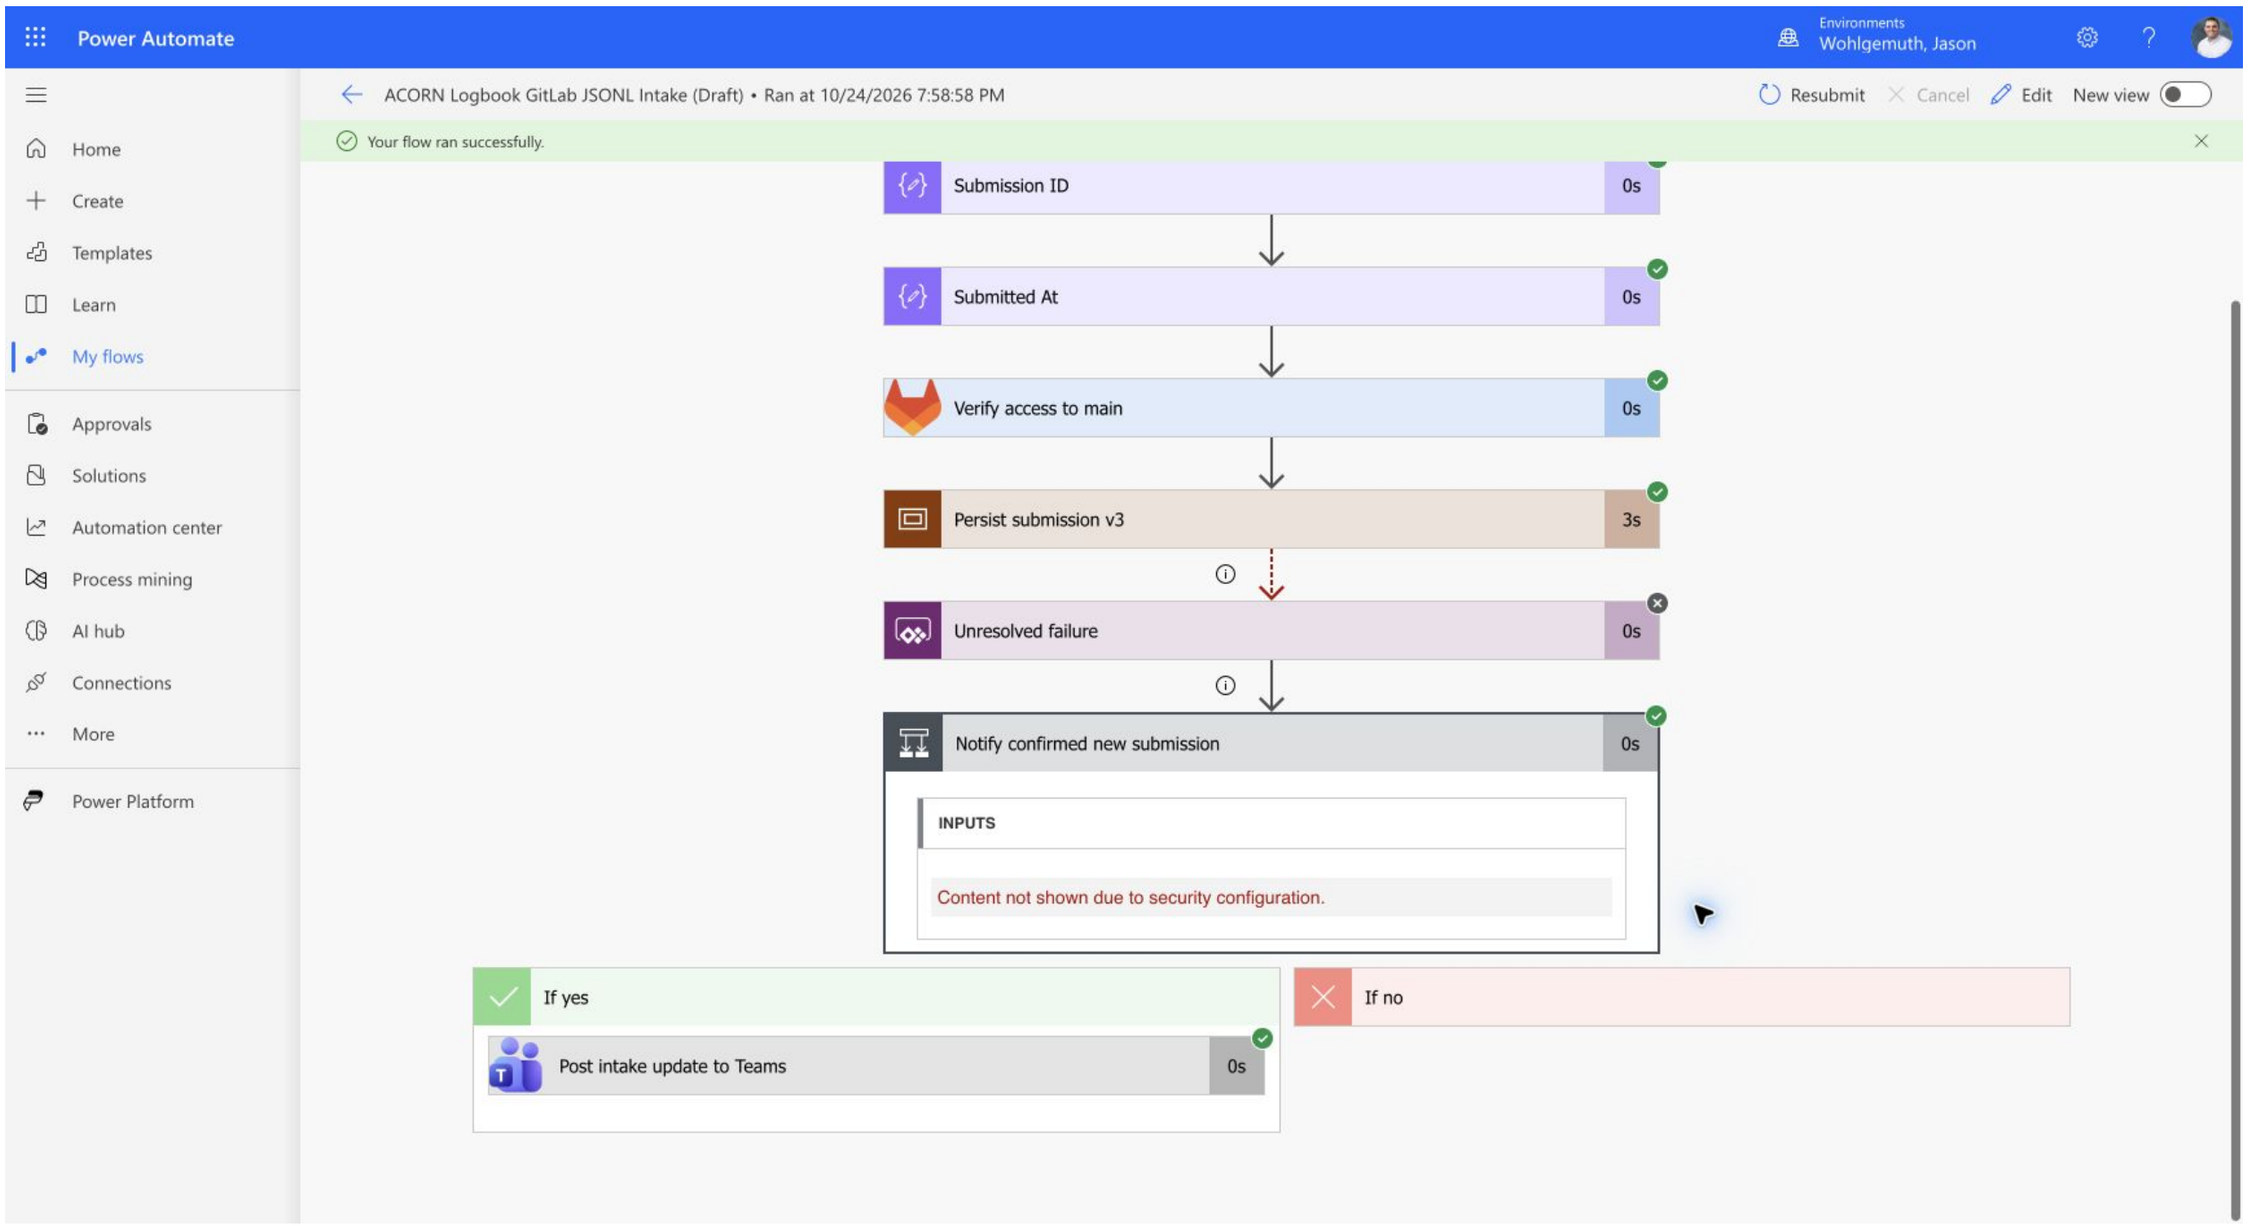


Run 08584087205468981614810029297CU09 succeeded. The unresolved-response action skipped; the Teams action succeeded. A notice failure cannot undo the already confirmed GitLab write.


CURRENT WORKFLOW / DEVELOPER

# Routine callback goes to Teams

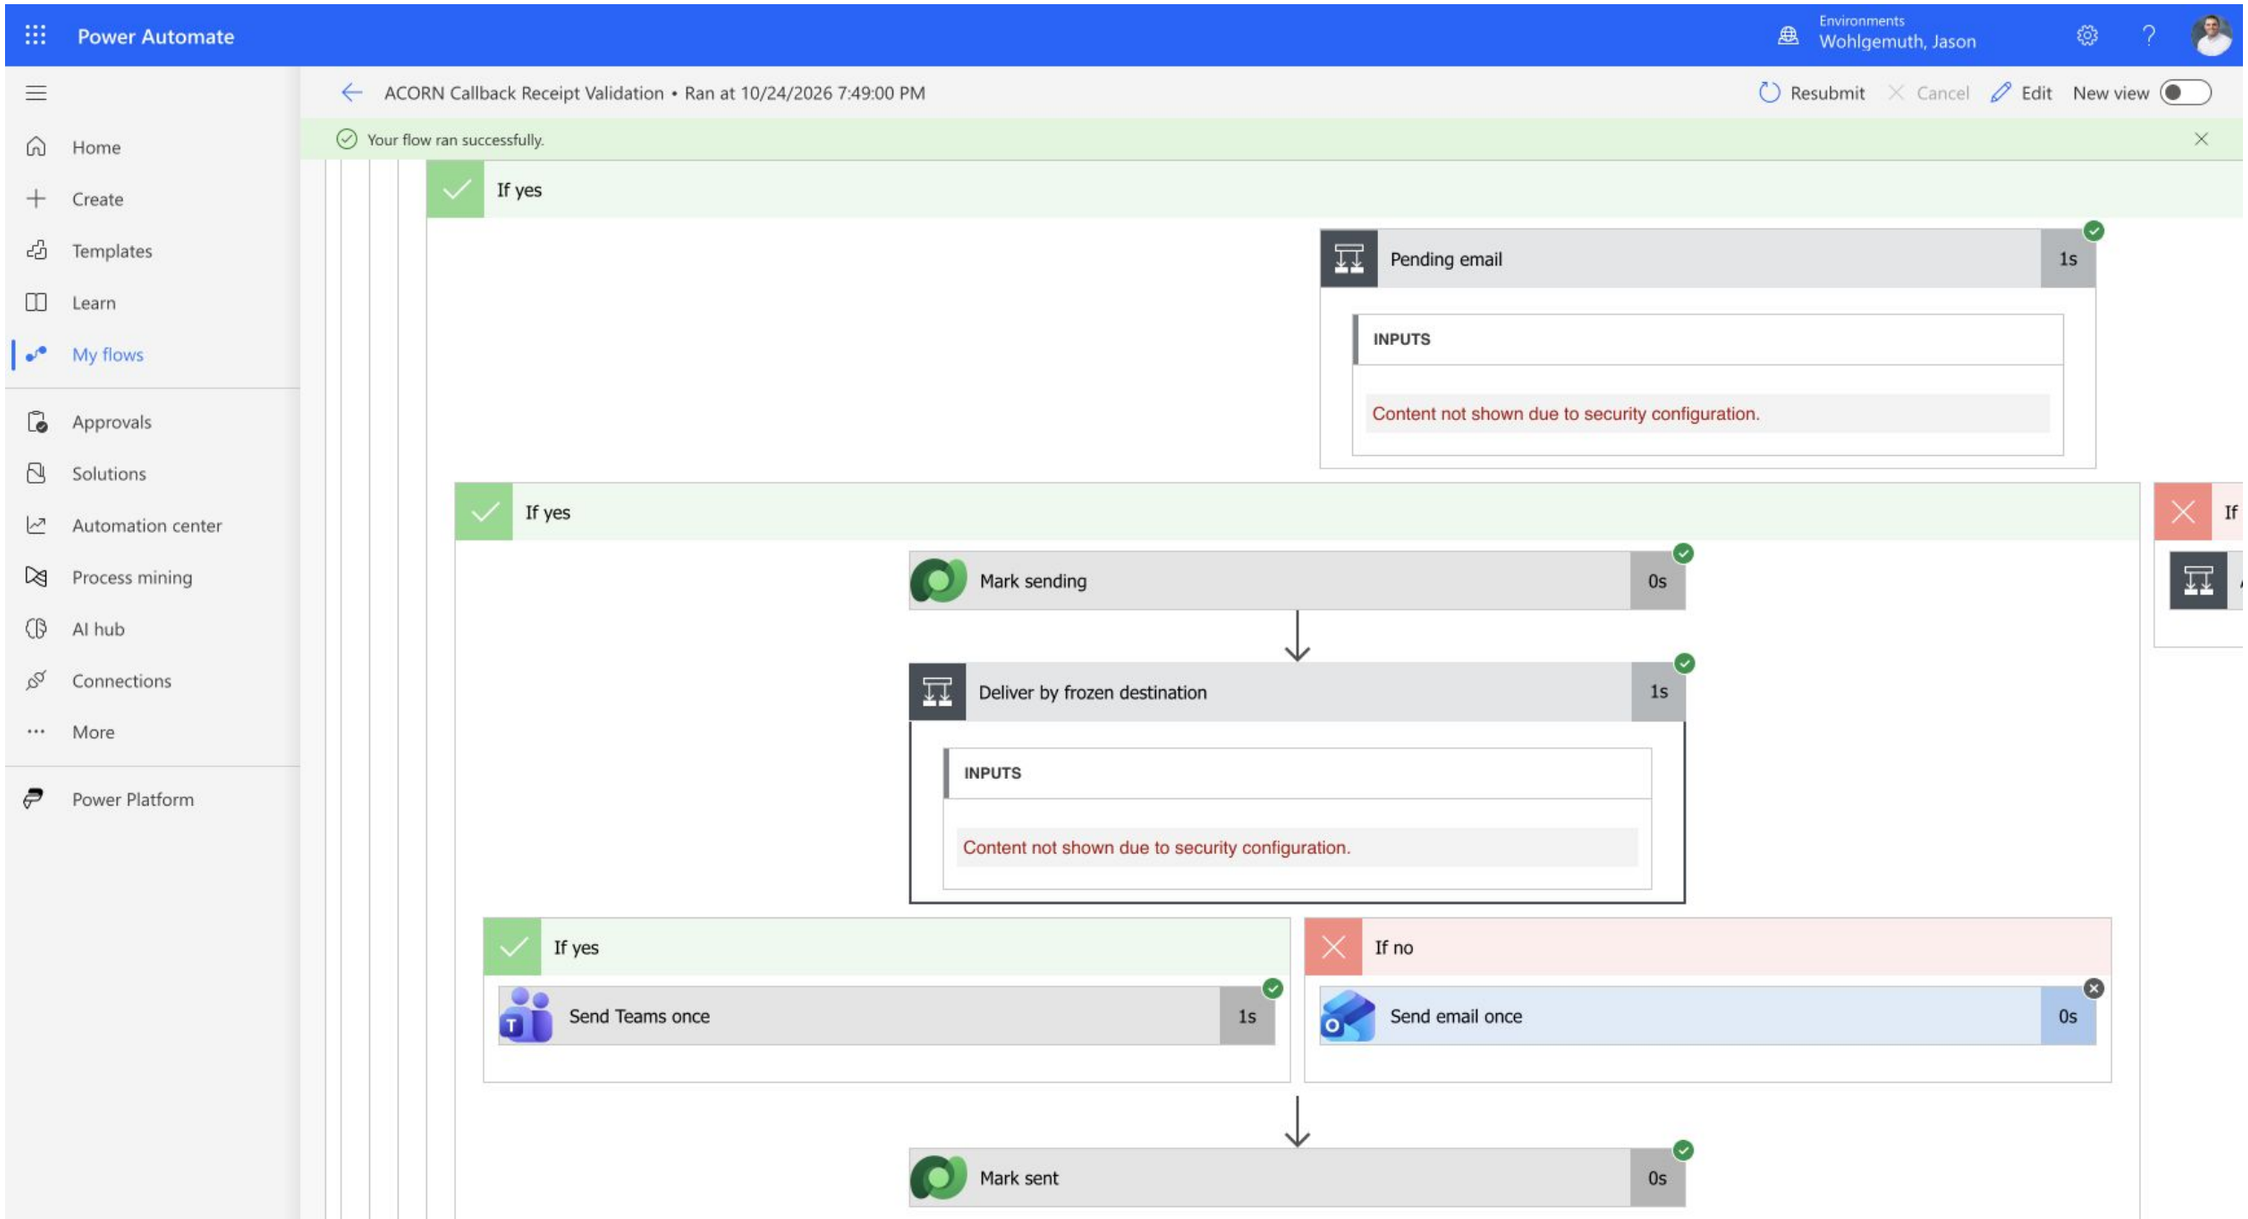


The report-no-changes test succeeded in Teams and skipped Outlook. Its exact replay reached Duplicate no send. The receipt ledger remains authoritative for callback delivery state.

# Milestone callback keeps email

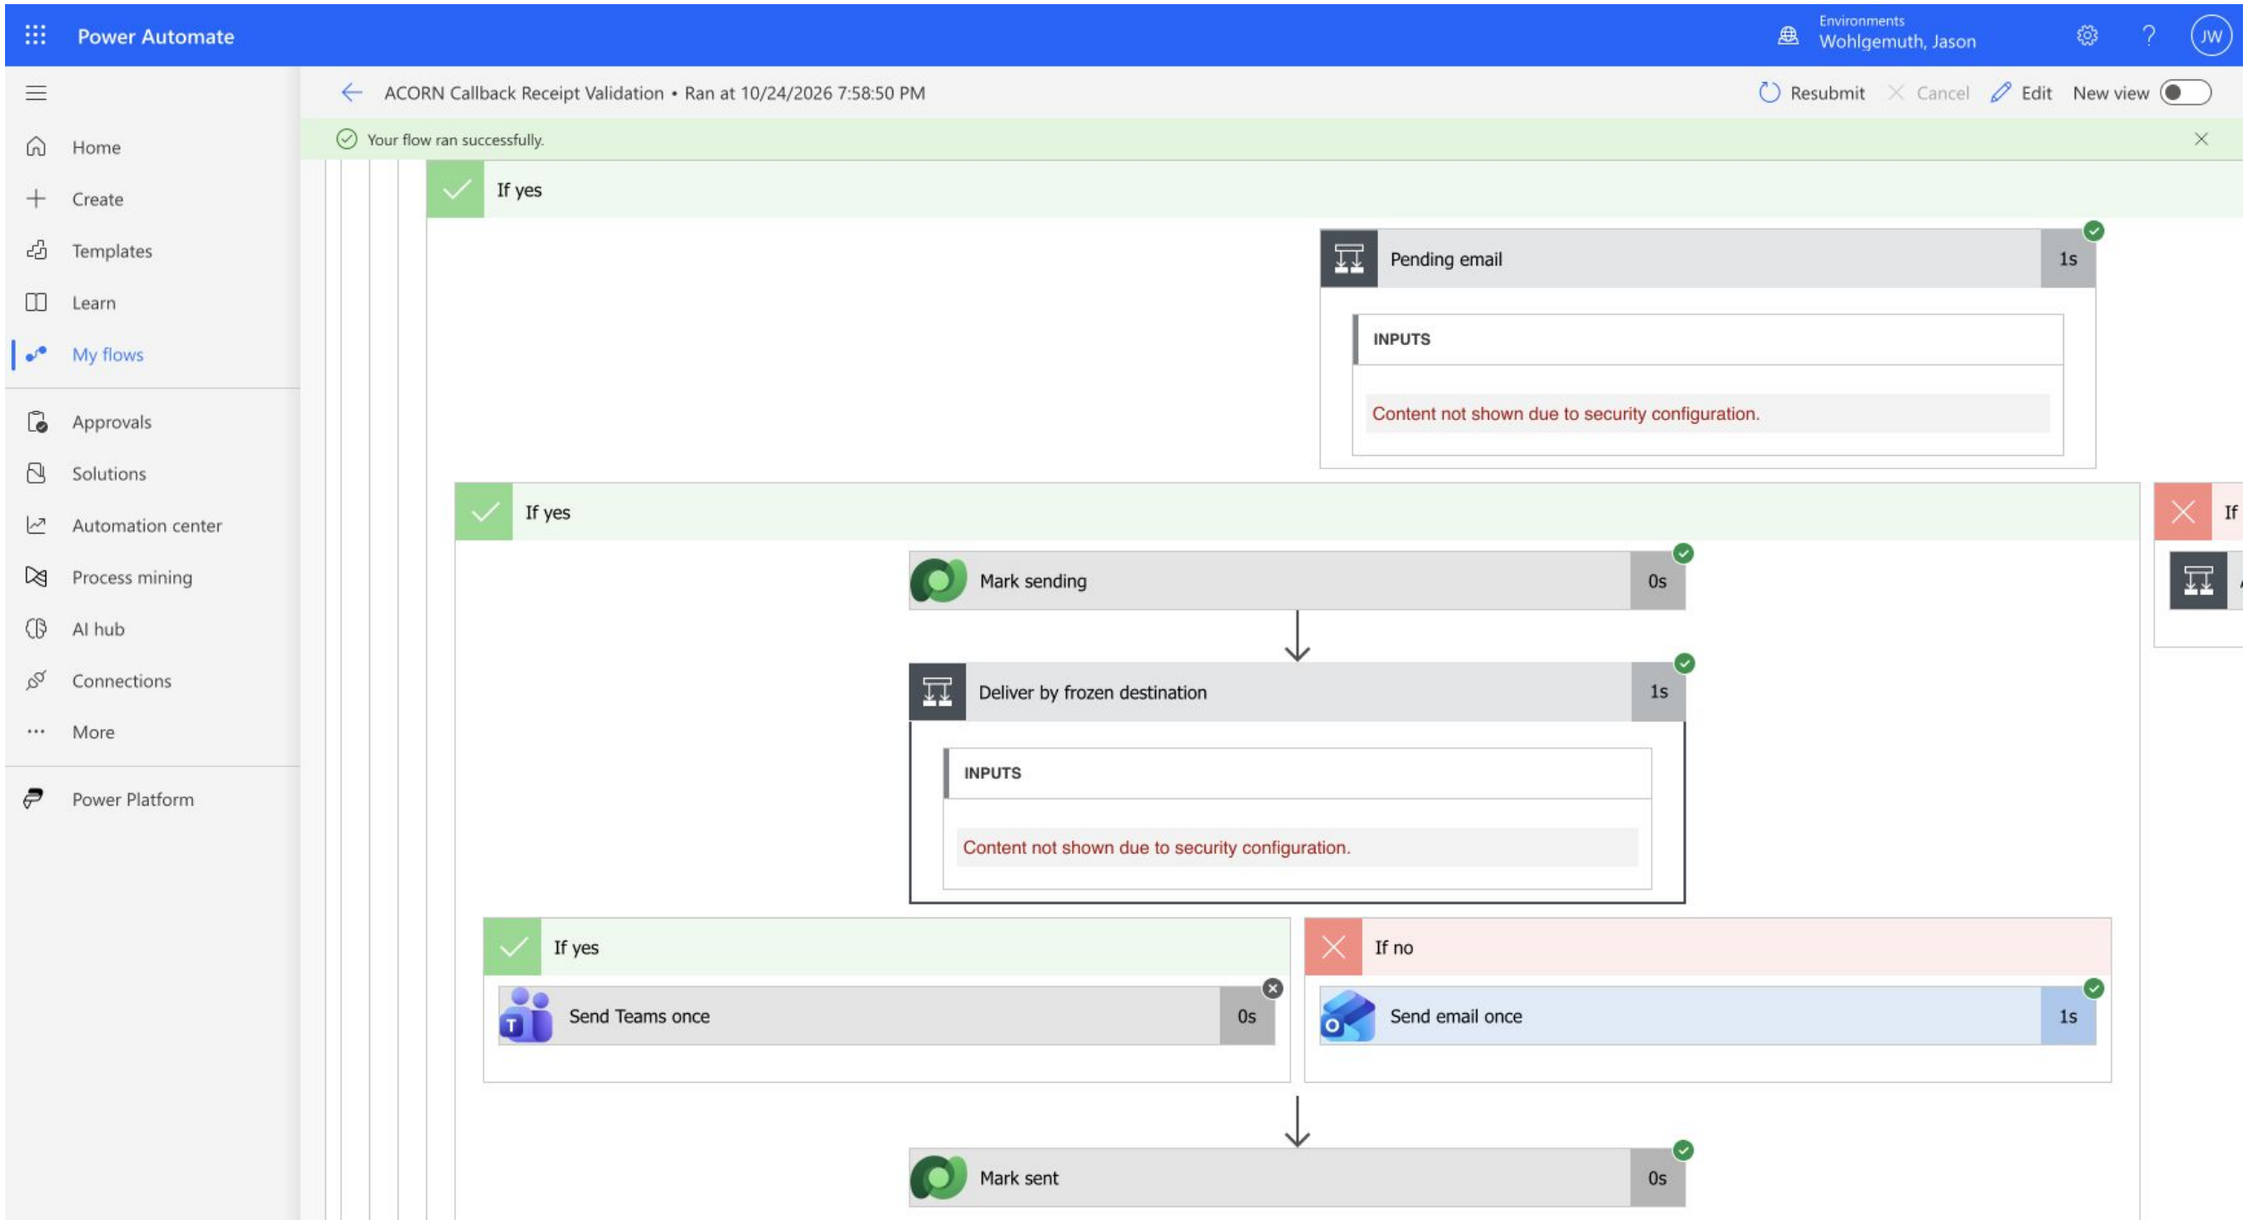


A labeled failed-event test used Outlook successfully and skipped Teams: run 08584087205548109223433666322CU07. Inbox receipt was not independently inspected.

# Run the manual milestone and recover safely

1. Open ACORN Callback Receipt Validation in Wohlgemuth, Jason. Choose Run. Enter a stable Webhook ID and exact Event JSON matching the schema. Use the actual event after the stage occurs; never represent a synthetic fixture as real review or publication.

2. Confirm the run and receipt state. Exact replay uses the same ID and identical JSON. Do not create a new ID to work around an uncertain delivery. Inspect the original attempt and Teams chat or Outlook Sent Items before reconciling Sending.

3. Intake notices are best effort, with automatic send retries disabled. If a save succeeds but its notice fails, retain the GitLab receipt and reconcile the notice separately. Replaying intake does not send another saved-highlight notice.

Legacy Dataverse column names still say email: emailrecipient stores the frozen route (teams-self:o9w@ornl.gov or email), and emailstate/emailattemptrun track the single selected channel. Group-channel delivery needs an approved destination and separate channel state in PA-12. The source bundle is not an importable solution.