


ARTIFICIAL INTELLIGENCE



**CSC304
CPE406
SC430**

**School of Computer Engineering
Nanyang Technological University**

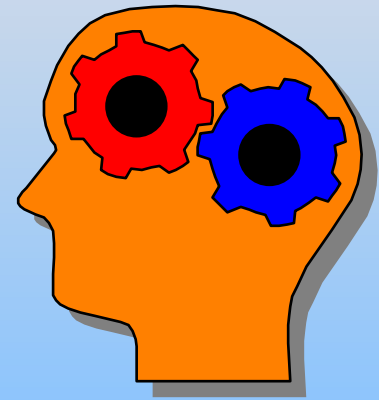

Part III – Knowledge and Reasoning

- **6 Agents that Reason Logically**
 - Knowledge-based Agents. – Representations.
 - Propositional Logic. – The Wumpus World.
- **7 First-Order Logic**
 - Syntax and Semantics. – Using First-Order Logic.
 - Logical Agents. – Representing Changes.
 - Deducing Properties of the World.
 - Goal-based Agents.
- **8 Building a Knowledge Base**
 - Knowledge Engineering. – General Ontology.




7 – FIRST-ORDER LOGIC

“In which we introduce a logic that is sufficient for building knowledge-based agents.”



Representing Knowledge

- **Knowledge-based agent**
 - Have representations of the world in which they operate
 - Use those representations to infer what actions to take
- **Ontological commitments**
 - The world as facts (propositional logic)
 - The world as objects (first-order logic)
with properties *about* each object,
and relations *between* objects
 - e.g. the blocks world:
Objects: cubes, cylinders, cones, ...
Properties: shape, colour, location, ...
Relations: above, under, next-to, ...

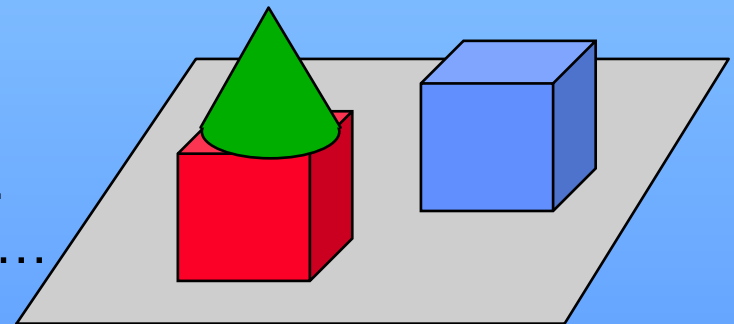



Why is FOL Important?

- **A very powerful KR scheme**
 - Essential representation of the world
 - Deal with objects, properties, and relations (as Philosophy).
 - Simple, generic representation
 - Does not deal with specialised concepts such as categories, time, and events.
 - Universal language
 - Can express anything that can be programmed.
 - Most studied and best understood
 - More powerful proposals still debated.
 - Less powerful schemes too limited.

Propositional vs. First-Order Logic

- Aristotle's syllogism**

- Socrates is a man. All men are mortal. Therefore Socrates is mortal.

Statement	Propositional Logic	First-Order Logic
"Socrates is a man."	SocratesMan, S43	Man(Socrates), P52(S21)
"Plato is a man."	PlatoMan, S157	Man(Plato), P52(S99)
"All men are mortal."	MortalMan S421 Man \Rightarrow Mortal S9 \Rightarrow S4	Man(x) \Rightarrow Mortal(x), P52(V1) \Rightarrow P66(V1)
"Socrates is mortal."	MortalSocrates S957 S43 \wedge S421 \vdash S957 ?!?	Mortal(Socrates) V1 \leftarrow S21, ... \vdash P66(S21)



Syntax and Semantics of FOL

- **Sentences**
 - Built from quantifiers, predicate symbols, and terms
- **Terms**
 - Represent objects
 - Built from variables, constant and function symbols
- **Constant symbols**
 - Refer to (“name”) particular objects of the world
 - The object is specified by the interpretation
e.g. “John” is a constant , may refer to “John, king of England from 1199 to 1216 and younger brother of Richard Lionheart”, or my uncle, or ...



Predicate and Function Symbols

- **Predicate symbols**

- Refer to particular relations on objects
 - Binary relation specified by the interpretation
e.g. $\text{Brother}(\text{KingJohn}, \text{RichardLionheart}) \rightarrow \text{T or F}$
- A *n-ary* relation if defined by a set of *n-tuples*
 - Collection of objects arranged in a fixed order
e.g. $\{ \langle \text{KingJohn}, \text{RichardLionheart} \rangle, \langle \text{KingJohn}, \text{Henry} \rangle, \dots \}$

- **Function symbols**

- Refer to functional relations on objects
 - Many-to-one relation specified by the interpretation
e.g. $\text{BrotherOf}(\text{KingJohn}) \rightarrow \text{a person, e.g. Richard (not T/F)}$
- Defined by a set of *n+1-tuples*
 - Last element is the function value for the first *n* elements.



Variables and Terms in FOL

- **Variables**

- Refer to any object of the world
 - e.g. x , person, ... as in $\text{Brother}(\text{KingJohn}, \text{person})$.
- Can be substituted by a constant symbol
 - e.g. $\text{person} \leftarrow \text{Richard}$, yielding $\text{Brother}(\text{KingJohn}, \text{Richard})$.

- **Terms**

- Logical expressions referring to objects
 - Include constant symbols (“names”) and variables.
 - Make use of function symbols.
 - e.g. $\text{LeftLegOf}(\text{KingJohn})$ to refer to his leg without naming it
- Compositional interpretation
 - e.g. $\text{LeftLegOf}(), \text{KingJohn} \rightarrow \text{LeftLegOf}(\text{KingJohn})$.



Sentences in FOL

- **Atomic sentences**

- State facts, using terms and predicate symbols
 - e.g. Brother(Richard, John).
- Can have complex terms as arguments
 - e.g. Married(FatherOf(Richard), MotherOf(John)).
- Have a truth value
 - Depends on both the interpretation and the world.

- **Complex sentences**

- Combine sentences with connectives
 - e.g. Father(Henry, KingJohn) \wedge Mother(Mary, KingJohn)
- Connectives identical to propositional logic
 - i.e.: $\wedge, \vee, \Leftrightarrow, \Rightarrow, \neg$



Sentence Equivalence

- *There are many ways to write a logical statement in FOL*

- Example

- $A \Rightarrow B$ equivalent to $\neg A \vee B$
“rule form” “complementary cases”

$\text{Dog}(x) \Rightarrow \text{Mammal}(x)$ $\neg \text{Dog}(x) \vee \text{Mammal}(x)$
“dogs are mammals” “either it’s not a dog or it’s a mammal”

- $A \wedge B \Rightarrow C$ equivalent to $A \Rightarrow (B \Rightarrow C)$

Proof: $A \wedge B \Rightarrow C \Leftrightarrow \neg (A \wedge B) \vee C \Leftrightarrow (\neg A \vee \neg B) \vee C$
 $\Leftrightarrow \neg A \vee \neg B \vee C \Leftrightarrow \neg A \vee (\neg B \vee C)$
 $\neg P \vee Q \Leftrightarrow P \Rightarrow Q \Leftrightarrow \neg A \vee (B \Rightarrow C) \Leftrightarrow A \Rightarrow (B \Rightarrow C)$

Sentences in Normal Form

- *There is only one way to write a logical statement using a Normal Form of FOL*

– Example

$$\neg B \Rightarrow \neg A$$

- $A \Rightarrow B$, $A \wedge B \Rightarrow C$ equivalent to $\neg A \vee B$, $\neg A \vee \neg B \vee C$
 “Implicative Normal Form” “Conjunctive Normal Form”

- *Rewriting logical sentences allows to determine whether they are equivalent or not*

– Example

- $A \wedge B \Rightarrow C$ and $A \Rightarrow (B \Rightarrow C)$
 both have the same CNF: $\neg A \vee \neg B \vee C$

- *Using FOL is the most convenient, but using a Normal Form is the most efficient*



Sentence Verification

- ***Rewriting logical sentences helps to understand their meaning***

- Example

- $\text{Owns}(x,y) \Rightarrow (\text{Dog}(y) \Rightarrow \text{AnimalLover}(x))$

$$A \Rightarrow (B \Rightarrow C)$$

- $\text{Owns}(x,y) \wedge \text{Dog}(y) \Rightarrow \text{AnimalLover}(x)$

$$A \wedge B \Rightarrow C$$

- “A dog owner is an animal lover”*

- ***Rewriting logical sentences helps to verify their meaning is as intended***

- Example

- *“Dogs all have the same enemies”*

- $\text{Dog}(x) \wedge \text{Enemy}(z, x) \Rightarrow (\text{Dog}(y) \Rightarrow \text{Enemy}(z, y))$ same as

- $\text{Dog}(x) \wedge \text{Dog}(y) \wedge \text{Enemy}(z, x) \Rightarrow \text{Enemy}(z, y)$



Universal Quantifier \forall

- **Express properties of collections of objects**
 - Make a statement about *every* objects w/out enumerating
 - e.g. “All kings are mortal”
 $\text{King}(\text{Henry}) \Rightarrow \text{Mortal}(\text{Henry}) \wedge$
 $\text{King}(\text{John}) \Rightarrow \text{Mortal}(\text{John}) \wedge$
 $\text{King}(\text{Richard}) \Rightarrow \text{Mortal}(\text{Richard}) \wedge$
 $\text{King}(\text{London}) \Rightarrow \text{Mortal}(\text{London}) \wedge$
...
instead: $\forall x, \text{King}(x) \Rightarrow \text{Mortal}(x)$
- Note: the semantics of the implication says $F \Rightarrow F$ is TRUE,
thus for those individuals that satisfy the premise $\text{King}(x)$
the rule asserts the conclusion $\text{Mortal}(x)$
but for those individuals that do not satisfy the premise
the rule makes no assertion.



Using the Universal Quantifier

- ***The implication (\Rightarrow) is the natural connective to use with the universal quantifier (\forall)***
 - Example
 - General form: $\forall x P(x) \Rightarrow Q(x)$ e.g. $\forall x \text{Dog}(x) \Rightarrow \text{Mammal}(x)$
“all dogs are mammals”
 - Use conjunction? $\forall x P(x) \wedge Q(x)$ e.g. $\forall x \text{Dog}(x) \wedge \text{Mammal}(x)$
same as $\forall x P(x)$ and $\forall x Q(x)$
e.g. $\forall x \text{Dog}(x)$ and $\forall x \text{Mammal}(x)$
→ yields a very strong statement (too strong! i.e. *incorrect*)



Existential Quantifier \exists

- **Express properties of some particular objects**
 - Make a statement about *one* object without naming it
 - e.g. “King John has a brother who is king”
 $\exists x, \text{Brother}(x, \text{KingJohn}) \wedge \text{King}(x)$

instead of

$\text{Brother}(\text{Henry}, \text{KingJohn}) \wedge \text{King}(\text{Henry}) \vee$
 $\text{Brother}(\text{KingJohn}, \text{KingJohn}) \wedge \text{King}(\text{KingJohn}) \vee$
 $\text{Brother}(\text{Mary}, \text{KingJohn}) \wedge \text{King}(\text{Mary}) \vee$
 $\text{Brother}(\text{London}, \text{KingJohn}) \wedge \text{King}(\text{London}) \vee$
 $\text{Brother}(\text{Richard}, \text{KingJohn}) \wedge \text{King}(\text{Richard}) \vee$
...



Using the Existential Quantifier

- ***The conjunction (\wedge) is the natural connective to use with the existential quantifier (\exists)***
 - Example
 - General form: $\exists x P(x) \wedge Q(x)$ e.g. $\exists x \text{Dog}(x) \wedge \text{Owns}(\text{John}, x)$
“John owns a dog”
 - Use Implication? $\exists x P(x) \Rightarrow Q(x)$ e.g. $\exists x \text{Dog}(x) \Rightarrow \text{Owns}(\text{John}, x)$
true for all x such that $P(x)$ is false
e.g. $\text{Dog}(\text{Garfield}) \Rightarrow \text{Owns}(\text{John}, \text{Garfield})$
→ yields a very weak statement (too weak! i.e. *useless*)

end