

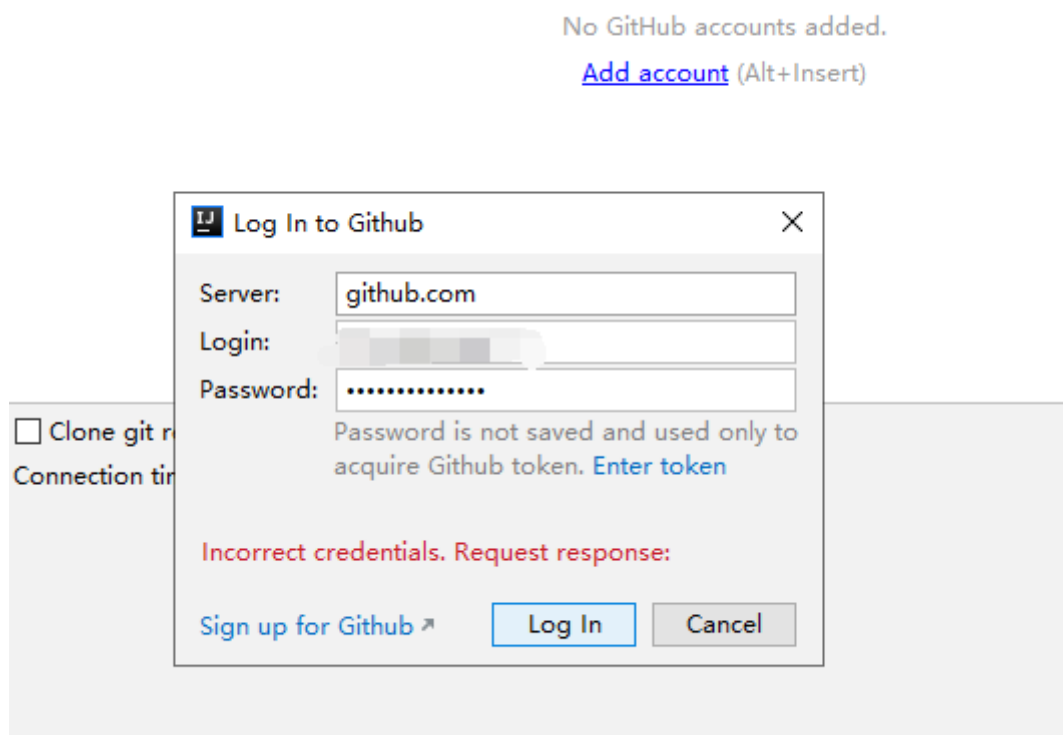
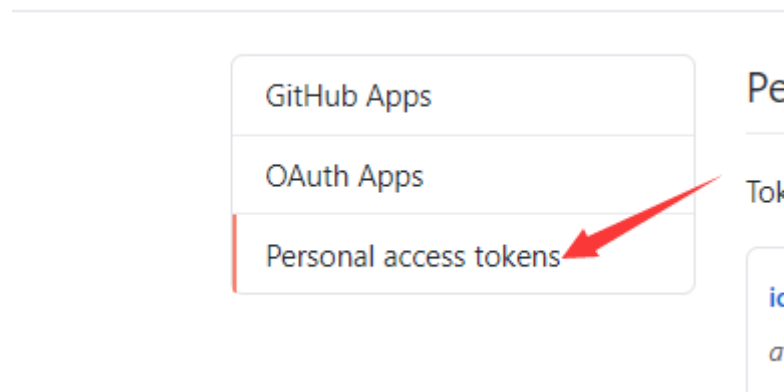


## incorrect credentials. request response (凭据不正确。请求-响应)

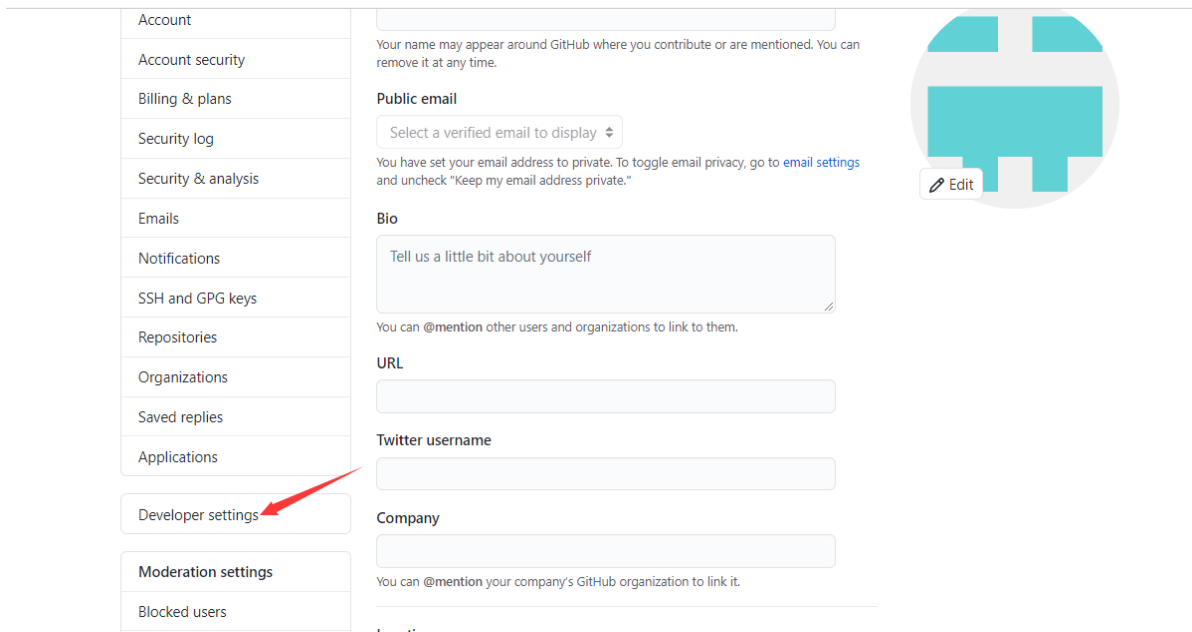

在idea中登录GitHub时，直接的登录用户名密码是登录不上的，在百度上搜索incorrect credentials. request response（凭据不正确。请求-响应）也找不到，最后添加私人的token才行登录上。

创建私有token方法：

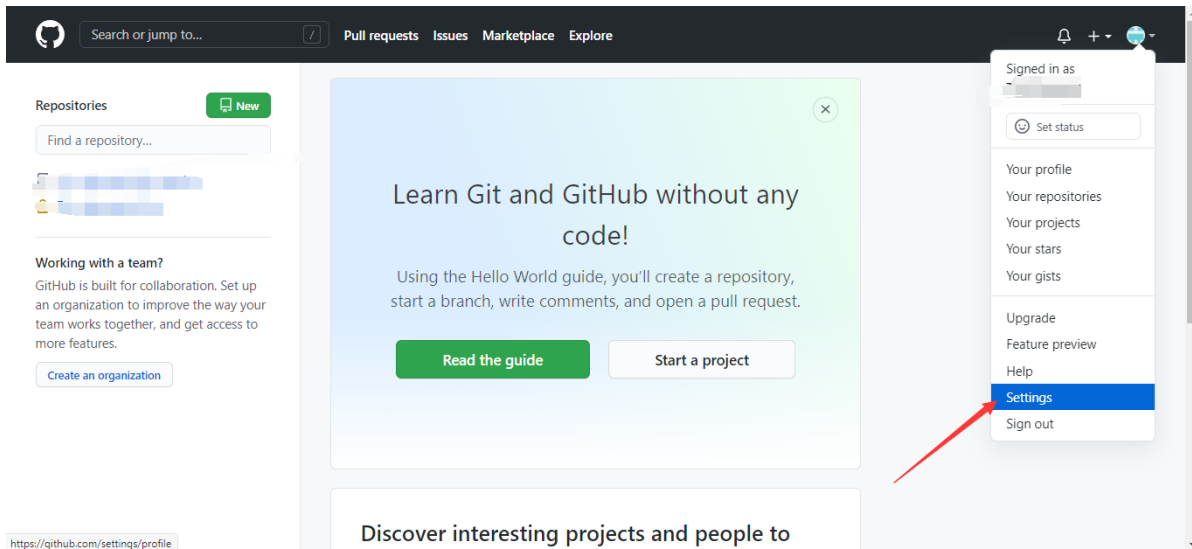

# Personal access tokens

Generate new token

Need an API token for scripts or testing? [Generate a personal access token](#) for quick access to the [GitHub API](#).

- ② Personal access tokens function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Token描述 (Token description) 随便打一个，不要重复了。

## New personal access token

Personal access tokens function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

### Token description

yii

What's this token for?

### Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#).

<input checked="" type="checkbox"/> <b>repo</b>	Full control of private repositories
<input checked="" type="checkbox"/> repo:status	Access commit status
<input checked="" type="checkbox"/> repo_deployment	Access deployment status
<input checked="" type="checkbox"/> public_repo	Access public repositories
<input checked="" type="checkbox"/> <b>admin:org</b>	Full control of orgs and teams
<input checked="" type="checkbox"/> write:org	Read and write org and team membership
<input checked="" type="checkbox"/> read:org	Read org and team membership
<input checked="" type="checkbox"/> <b>admin:public_key</b>	Full control of user public keys
<input checked="" type="checkbox"/> write:public_key	Write user public keys
<input checked="" type="checkbox"/> read:public_key	Read user public keys
<input checked="" type="checkbox"/> <b>admin:repo_hook</b>	Full control of repository hooks
<input checked="" type="checkbox"/> write:repo_hook	Write repository hooks
<input checked="" type="checkbox"/> read:repo_hook	Read repository hooks
<input checked="" type="checkbox"/> <b>admin:org_hook</b>	Full control of organization hooks
<input checked="" type="checkbox"/> <b>gist</b>	Create gists
<input checked="" type="checkbox"/> <b>notifications</b>	Access notifications
<input checked="" type="checkbox"/> <b>user</b>	Update all user data

☒ read:pgp\_key Read user gpg keys

**Generate token** Cancel


## Personal access tokens

Generate new token

Revoke all

Tokens you have generated that can be used to access the [GitHub API](#).

Make sure to copy your new personal access token now. You won't be able to see it again!


✓ d5f4d1690b02f22430f47440db6932eb538776b3 

Edit

Delete

❓ Personal access tokens function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

复制这个token到idea


 Log In to Github


Server:

Login:

Password:

Password is not saved and used only to acquire Github token. [Enter token](#)

[Sign up for Github](#)  **Log In** Cancel

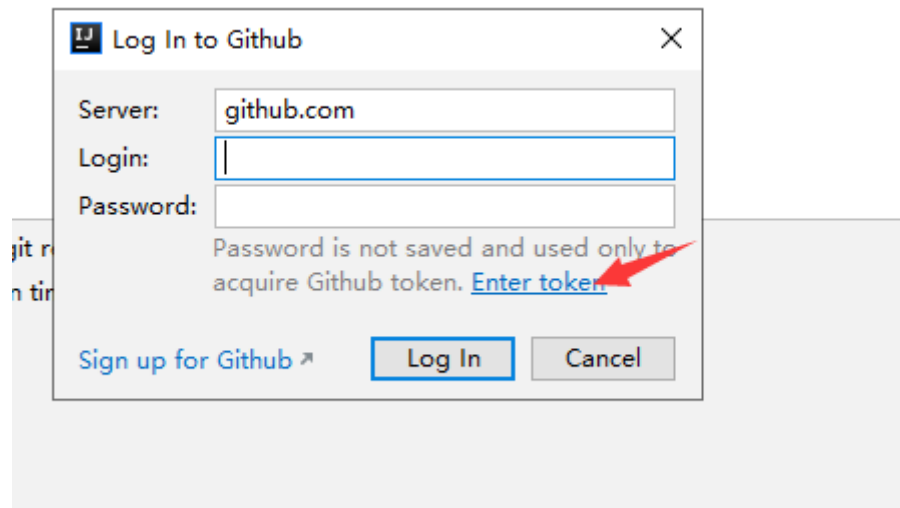

登录就可以了。

