

Inmp动态网站搭建

Inmp是什么?

LNMP是指一组通常一起使用来运行动态网站或者服务器的自由软件名称首字母缩写。L指Linux，N指Nginx，M一般指MySQL，也可以指MariaDB，P一般指PHP，也可以指Perl或Python。

准备工作：检查电脑是否已经安装nginx, mysql, php等。

```
rpm -qa nginx mysql php* mariadb
```

```
[root@f2cfruryol0dalfq ~]# rpm -qa nginx mysql php* mariadb
[root@f2cfruryol0dalfq ~]#
```

配置yum源

配置yum源的步骤

1. 备份原有的yum源

```
mv /etc/yum.repos.d/CentOS-Base.repo CentOS-Base.repo.bak
```

2. 配置yum源，找到阿里云的官方镜像源地址 <https://developer.aliyun.com/mirror/>

3. 下载centos7的yum源

```
wget -O /etc/yum.repos.d/CentOS-Base.repo https://mirrors.aliyun.com/repo/Centos-7.repo
```

4. 清空旧的yum缓存

```
yum clean all
```

5. 生成新的yum仓库缓存

```
yum makecache
```

6. 配置一个第三方的 额外仓库源（epel源），这个源的作用是，如果阿里云源找不到这个软件，就在这里找

```
wget -O /etc/yum.repos.d/epel.repo http://mirrors.aliyun.com/repo/epel-7.repo
```

```
[root@f2cfruryol0dalfq ~]# cd /etc/yum.repos.d/
[root@f2cfruryol0dalfq yum.repos.d]# ll
total 4
-rw-r--r-- 1 root root 1627 Dec 23 2020 CentOS7-ctyun.repo
[root@f2cfruryol0dalfq yum.repos.d]# wget -O /etc/yum.repos.d/CentOS-Base.repo https://mirrors.aliyun.com/repo/Centos-7.repo
--2023-02-24 10:12:14-- https://mirrors.aliyun.com/repo/Centos-7.repo
Resolving mirrors.aliyun.com (mirrors.aliyun.com)... 116.11.124.242, 14.17.66.242, 116.11.124.243, ...
Connecting to mirrors.aliyun.com (mirrors.aliyun.com)[116.11.124.242]:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 2523 (2.5K) [application/octet-stream]
Saving to: '/etc/yum.repos.d/CentOS-Base.repo'

100%[=====>] 2,523 ---K/s in 0.004s

2023-02-24 10:12:16 (599 KB/s) - '/etc/yum.repos.d/CentOS-Base.repo' saved [2523/2523]

[root@f2cfruryol0dalfq yum.repos.d]# yum clean all
Loaded plugins: fastestmirror
Repository base is listed more than once in the configuration
Repository updates is listed more than once in the configuration
Repository extras is listed more than once in the configuration
Repository centosplus is listed more than once in the configuration
Cleaning repos: base extras updates
Cleaning up list of fastest mirrors
Other repos take up 163 M of disk space (use --verbose for details)
[root@f2cfruryol0dalfq yum.repos.d]#
```

```
[root@2cfruryol0dalfq yum.repos.d]# yum makecache
Loaded plugins: fastestmirror
Repository base is listed more than once in the configuration
Repository updates is listed more than once in the configuration
Repository extras is listed more than once in the configuration
Repository centosplus is listed more than once in the configuration
Determining fastest mirrors
 * base: mirrors.aliyun.com
 * extras: mirrors.aliyun.com
 * updates: mirrors.aliyun.com
base | 3.6 kB 00:00:00
extras | 2.9 kB 00:00:00
updates | 2.9 kB 00:00:00
(1/10): base/7/x86_64/group_gz | 153 kB 00:00:00
(2/10): base/7/x86_64/primary_db | 6.1 MB 00:00:13
(3/10): base/7/x86_64/filelists_db | 7.2 MB 00:00:15
(4/10): extras/7/x86_64/primary_db | 249 kB 00:00:03
(5/10): extras/7/x86_64/filelists_db | 276 kB 00:00:03
(6/10): extras/7/x86_64/other_db | 149 kB 00:00:00
(7/10): base/7/x86_64/other_db | 2.6 MB 00:00:05
(8/10): updates/7/x86_64/filelists_db | 11 MB 00:00:27
(9/10): updates/7/x86_64/other_db | 1.3 MB 00:00:03
(10/10): updates/7/x86_64/primary_db | 19 MB 00:00:46
Metadata Cache Created
[root@2cfruryol0dalfq yum.repos.d]# wget -O /etc/yum.repos.d/epel.repo http://mirrors.aliyun.com/repo/epel-7.repo
--2023-02-24 10:14:37-- http://mirrors.aliyun.com/repo/epel-7.repo
Resolving mirrors.aliyun.com (mirrors.aliyun.com)... 111.170.130.232, 111.170.130.231, 116.11.124.240, ...
Connecting to mirrors.aliyun.com (mirrors.aliyun.com)|111.170.130.232|:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 664 [application/octet-stream]
Saving to: '/etc/yum.repos.d/epel.repo'

100%[=====>] 664 --.-K/s in 0.002s
```

配置好后查看一下

```
[root@2cfruryol0dalfq yum.repos.d]# pwd
/etc/yum.repos.d
[root@2cfruryol0dalfq yum.repos.d]# ll
total 12
-rw-r--r--. 1 root root 1627 Dec 23 2020 CentOS7-ctyun.repo
-rw-r--r-- 1 root root 2523 Aug 4 2022 CentOS-Base.repo
-rw-r--r-- 1 root root 664 Aug 4 2022 epel.repo
[root@2cfruryol0dalfq yum.repos.d]#
```

一.部署nginx

1.配置nginx源

```
rpm -Uvh http://nginx.org/packages/centos/7/noarch/RPMS/nginx-release-centos-7-0.el7.ngx.noarch.rpm
```

```
[root@2cfruryol0dalfq ~]# rpm -Uvh http://nginx.org/packages/centos/7/noarch/RPMS/nginx-release-centos-7-0.el7.ngx.noarch.rpm
Retrieving http://nginx.org/packages/centos/7/noarch/RPMS/nginx-release-centos-7-0.el7.ngx.noarch.rpm
warning: /var/tmp/rpm-tmp.uWghYN: Header V4 RSA/SHA1 Signature, key ID 7bd9bf62: NOKEY
Preparing... ##### [100%]
Updating / installing...
1:nginx-release-centos-7-0.el7.ngx ##### [100%]
```

2.列出可以安装的nginx以及安装版本

```
yum --showduplicates list nginx
```

```
[root@f2cfruryo10dalfq ~]# yum --showduplicates list nginx
Loaded plugins: fastestmirror
Repository base is listed more than once in the configuration
Repository updates is listed more than once in the configuration
Repository extras is listed more than once in the configuration
Repository centosplus is listed more than once in the configuration
Loading mirror speeds from cached hostfile
 * base: mirrors.aliyun.com
 * extras: mirrors.aliyun.com
 * updates: mirrors.aliyun.com
Available Packages
nginx.x86_64 1:1.8.0-1.el7.ngx nginx
nginx.x86_64 1:1.8.1-1.el7.ngx nginx
nginx.x86_64 1:1.10.0-1.el7.ngx nginx
nginx.x86_64 1:1.10.1-1.el7.ngx nginx
nginx.x86_64 1:1.10.2-1.el7.ngx nginx
nginx.x86_64 1:1.10.3-1.el7.ngx nginx
nginx.x86_64 1:1.12.0-1.el7.ngx nginx
nginx.x86_64 1:1.12.1-1.el7.ngx nginx
nginx.x86_64 1:1.12.2-1.el7_4.ngx nginx
nginx.x86_64 1:1.14.0-1.el7_4.ngx nginx
nginx.x86_64 1:1.14.1-1.el7_4.ngx nginx
nginx.x86_64 1:1.14.2-1.el7_4.ngx nginx
nginx.x86_64 1:1.16.0-1.el7.ngx nginx
nginx.x86_64 1:1.16.1-1.el7.ngx nginx
nginx.x86_64 1:1.18.0-1.el7.ngx nginx
nginx.x86_64 1:1.18.0-2.el7.ngx nginx
nginx.x86_64 1:1.20.0-1.el7.ngx nginx
nginx.x86_64 1:1.20.1-1.el7.ngx nginx
nginx.x86_64 1:1.20.1-10.el7 epel
nginx.x86_64 1:1.20.2-1.el7.ngx nginx
nginx.x86_64 1:1.22.0-1.el7.ngx nginx
nginx.x86_64 1:1.22.1-1.el7.ngx nginx
```

3. 指定安装nginx-1.18.0-1.el7.ngx.x86_64

```
yum -y install nginx-1.18.0-1.el7.ngx.x86_64
```

```
[root@f2cfruryo10dalfq ~]# yum -y install nginx-1.18.0-1.el7.ngx.x86_64
Loaded plugins: fastestmirror
Repository base is listed more than once in the configuration
Repository updates is listed more than once in the configuration
Repository extras is listed more than once in the configuration
Repository centosplus is listed more than once in the configuration
Loading mirror speeds from cached hostfile
 * base: mirrors.aliyun.com
 * extras: mirrors.aliyun.com
 * updates: mirrors.aliyun.com
Resolving Dependencies
--> Running transaction check
--> Package nginx.x86_64 1:1.18.0-1.el7.ngx will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package                Arch                Version              Repository            Size
=====
Installing:
nginx                  x86_64              1:1.18.0-1.el7.ngx   nginx                 772 k
Transaction Summary
-----
Install 1 Package

Total download size: 772 k
Installed size: 2.7 M
Downloading packages:
```

4. 安装完成启动验证

```
#验证是否安装成功
rpm -qa nginx
#启动nginx
systemctl start nginx
#查看nginx进程 (查看是否已经启动)
ps -ef |grep nginx
#设置nginx开机自启
systemctl enable nginx
#临时关闭防火墙
systemctl stop firewalld
```

```
[root@f2cfruryo10dalfq ~]# systemctl start nginx
[root@f2cfruryo10dalfq ~]# ps -ef |grep nginx
root      1564      1    0 10:42 ?        00:00:00 nginx: master process /usr/sbin/nginx -c /etc/nginx/nginx.conf
nginx     1565    1564    0 10:42 ?        00:00:00 nginx: worker process
root      1567    1149    0 10:42 pts/0    00:00:00 grep --color=auto nginx
```

出现这两条代表已经启动

5.浏览器访问一下是否可以成功访问

http://ip:端口 #默认端口是80，我这里修改成了8002，根据自己的端口进行访问

能够访问代表nginx安装完成

← → ↻ ⚠ 不安全 | http:// 3002

Welcome to nginx!

If you see this page, the nginx web server is successfully installed and working. Further configuration is required.

For online documentation and support please refer to nginx.org.
Commercial support is available at nginx.com.

Thank you for using nginx.

6.修改nginx配置文件

#这个配置文件需要php安装完成后进行修改

#修改的路径 vim /etc/nginx/conf.d/default.conf

```
server {
    listen      8002; #端口号
    server_name localhost; #主机名，如果有域名填写域名
    location / {
        root    /usr/share/nginx/html; #源码存放路径
        index   index.php index.html index.htm; #支持格式
    }
    error_page  500 502 503 504 /50x.html; #报错引导
    location = /50x.html {
        root    /usr/share/nginx/html;
    }
    location ~ \.php$ { #连接php
        root            /usr/share/nginx/html;
        fastcgi_pass    127.0.0.1:9000;
        fastcgi_index   index.php;
        fastcgi_param   SCRIPT_FILENAME $document_root$fastcgi_script_name;
        include          fastcgi_params;
    }
}
```

3.修改配置文件之后重新启动nginx

systemctl restart nginx

```
[root@f2cfruryo10dalfq ~]# systemctl restart nginx
[root@f2cfruryo10dalfq ~]# ps -ef|grep nginx
root      1594      1  0 10:47 ?        00:00:00 nginx: master process /usr/sbin/nginx -c /etc/nginx/nginx.conf
nginx     1596    1594  0 10:47 ?        00:00:00 nginx: worker process
root      1620    1149  0 10:51 pts/0    00:00:00 grep --color=auto nginx
[root@f2cfruryo10dalfq ~]#
```

二.php部署

1.配置PHP的yum源

#依次执行一下命令

```
yum install epel-release
```

```
yum install http://rpms.remirepo.net/enterprise/remi-release-7.rpm
```

#查看一下是否存在php74安装包

```
yum search php74
```

2.安装

```
yum install -y php74-php-fpm php74-php-mysqlnd php74-php-gd
```

php74-php-fpm #连接nginx的

php74-php-mysqlnd #连接mysql的

php74-php-gd #图形库, 处理图片

```
[root@f2cfruryo10dalfq ~]# yum install -y php74-php-fpm php74-php-mysqlnd php74-php-gd
Loaded plugins: fastestmirror
Repository base is listed more than once in the configuration
Repository updates is listed more than once in the configuration
Repository extras is listed more than once in the configuration
Repository centosplus is listed more than once in the configuration
Loading mirror speeds from cached hostfile
 * base: mirrors.aliyun.com
 * extras: mirrors.aliyun.com
 * remi-safe: mirrors.tuna.tsinghua.edu.cn
 * updates: mirrors.aliyun.com
Resolving Dependencies
--> Running transaction check
--> Package php74-php-fpm.x86_64 0:7.4.33-4.el7.remi will be installed
--> Processing Dependency: php74-php-common(x86-64) = 7.4.33-4.el7.remi for package: php74-php-fpm-7.4.33-4.el7.remi.x86_64
--> Package php74-php-gd.x86_64 0:7.4.33-4.el7.remi will be installed
--> Processing Dependency: libgd.so.103()(64bit) for package: php74-php-gd-7.4.33-4.el7.remi.x86_64
--> Package php74-php-mysqlnd.x86_64 0:7.4.33-4.el7.remi will be installed
--> Processing Dependency: php74-php-pdo(x86-64) = 7.4.33-4.el7.remi for package: php74-php-mysqlnd-7.4.33-4.el7.remi.x86_64
--> Running transaction check
--> Package gd3php.x86_64 0:2.3.3-7.el7.remi will be installed
--> Processing Dependency: libjpeg.so.62(LIBJPEG 6.2)(64bit) for package: gd3php-2.3.3-7.el7.remi.x86_64
--> Processing Dependency: libtiff.so.5(LIBTIFF 4.0)(64bit) for package: gd3php-2.3.3-7.el7.remi.x86_64
--> Processing Dependency: libX11.so.6()(64bit) for package: gd3php-2.3.3-7.el7.remi.x86_64
--> Processing Dependency: libXpm.so.4()(64bit) for package: gd3php-2.3.3-7.el7.remi.x86_64
--> Processing Dependency: libfontconfig.so.1()(64bit) for package: gd3php-2.3.3-7.el7.remi.x86_64
```

验证一下是否安装好了

```
rpm -qa php74-php-fpm php74-php-mysqlnd php74-php-gd
```

```
[root@f2cfruryo10dalfq ~]# rpm -qa php74-php-fpm php74-php-mysqlnd php74-php-gd
php74-php-mysqlnd-7.4.33-4.el7.remi.x86_64
php74-php-gd-7.4.33-4.el7.remi.x86_64
php74-php-fpm-7.4.33-4.el7.remi.x86_64
[root@f2cfruryo10dalfq ~]#
```

出现这几个代表安装完成

3.启动

```
#启动php
systemctl start php74-php-fpm
#重启
systemctl restart php74-php-fpm
#停止
systemctl stop php74-php-fpm
#开机自启
systemctl enable php74-php-fpm
```

4.使用查看端口的方式查看是否启动成功

```
netstat -anp|grep 9000
```

```
[root@f2cfruryol0dalq ~]# systemctl start php74-php-fpm
[root@f2cfruryol0dalq ~]# netstat -anp|grep 9000
tcp        0      0 127.0.0.1:9000        0.0.0.0:*             LISTEN      1952/php-fpm: maste
[root@f2cfruryol0dalq ~]#
```

出现这个代表启动成功

5.此时可以先去给nginx配置文件配置一下，配置方法查看修改nginx配置文件


修改完成后记得重启nginx

```
server {
    listen      8002;
    server_name localhost;
    #charset koi8-r;
    #access_log /var/log/nginx/host.access.log main;
    location / {
        root    /usr/share/nginx/html;
        index   index.php index.html index.htm;
    }
    #error_page 404 /404.html;
    # redirect server error pages to the static page /50x.html
    #
    error_page 500 502 503 504 /50x.html;
    location = /50x.html {
        root    /usr/share/nginx/html;
    }
    # proxy the PHP scripts to Apache listening on 127.0.0.1:80
    #
    #location ~ \.php$ {
    #    proxy_pass http://127.0.0.1;
    #}
    # pass the PHP scripts to FastCGI server listening on 127.0.0.1:9000
    #
    location ~ \.php$ {
        root            /usr/share/nginx/html;
        fastcgi_pass    127.0.0.1:9000;
        fastcgi_index   index.php;
        fastcgi_param   SCRIPT_FILENAME $document_root$fastcgi_script_name;
        include          fastcgi_params;
    }
}
```

需要注意的地方

6.编写一个php文件测试

```
#进入/usr/share/nginx/html/目录
cd /usr/share/nginx/html/
#新建一个index.php文件
vim index.php
#写入一下内容，这个可以查看php信息
<?php
phpinfo();
?>
```

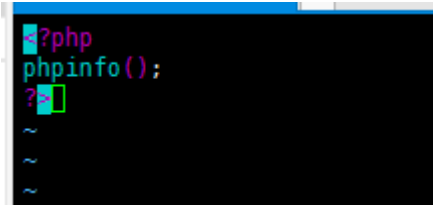

7.浏览器查看一下

http://ip:端口 #默认端口是80，我这里修改成了8002，根据自己的端口进行访问

能出来以下内容代表完成

← → ↻ ⚠ 不安全 | http://:8002

PHP Version 7.4.33

System	Linux f2cfruryo10dalfq 3.10.0-957.el7.x86_64 #1 SMP Thu Nov 8 23:39:32 UTC 2018 x86_64
Build Date	Feb 14 2023 08:49:52
Build System	Red Hat Enterprise Linux Server release 7.9 (Maipo)
Build Provider	Remi's RPM repository <https://rpms.remirepo.net/> #StandWithUkraine
Server API	FPM/FastCGI
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc/opt/remi/php74
Loaded Configuration File	/etc/opt/remi/php74/php.ini
Scan this dir for additional .ini files	/etc/opt/remi/php74/php.d
Additional .ini files parsed	/etc/opt/remi/php74/php.d/20-bz2.ini, /etc/opt/remi/php74/php.d/20-calendar.ini, /etc/opt/remi/php74/php.d/20-ctype.ini, /etc/opt/remi/php74/php.d/20-curl.ini, /etc/opt/remi/php74/php.d/20-exif.ini, /etc/opt/remi/php74/php.d/20-fileinfo.ini, /etc/opt/remi/php74/php.d/20-ftp.ini, /etc/opt/remi/php74/php.d/20-gd.ini, /etc/opt/remi/php74/php.d/20-gettext.ini, /etc/opt/remi/php74/php.d/20-iconv.ini, /etc/opt/remi/php74/php.d/20-json.ini, /etc/opt/remi/php74/php.d/20-mysqlnd.ini, /etc/opt/remi/php74/php.d/20-pdo.ini, /etc/opt/remi/php74/php.d/20-phar.ini, /etc/opt/remi/php74/php.d/20-sockets.ini, /etc/opt/remi/php74/php.d/20-sqlite3.ini, /etc/opt/remi/php74/php.d/20-tokenizer.ini, /etc/opt/remi/php74/php.d/30-mysql.ini, /etc/opt/remi/php74/php.d/30-pdo_mysql.ini, /etc/opt/remi/php74/php.d/30-pdo_sqlite.ini
PHP API	20190902
PHP Extension	20190902
Zend Extension	320190902
Zend Extension Build	API320190902.NTS
PHP Extension Build	API20190902.NTS

三.mariadb部署

1.安装

```
#这里使用的是mariadb和mysql差不多
yum -y install mariadb-server mariadb
```

```
[root@f2cfruryol0dalfq ~]# yum -y install mariadb-server mariadb
Loaded plugins: fastestmirror
Repository base is listed more than once in the configuration
Repository updates is listed more than once in the configuration
Repository extras is listed more than once in the configuration
Repository centosplus is listed more than once in the configuration
Loading mirror speeds from cached hostfile
 * base: mirrors.aliyun.com
 * extras: mirrors.aliyun.com
 * remi-safe: mirrors.tuna.tsinghua.edu.cn
 * updates: mirrors.aliyun.com
Resolving Dependencies
--> Running transaction check
--> Package mariadb.x86_64 1:5.5.68-1.el7 will be installed
--> Package mariadb-server.x86_64 1:5.5.68-1.el7 will be installed
--> Processing Dependency: perl-DBI for package: 1:mariadb-server-5.5.68-1.el7.x86_64
```

检查是否安装成功

```
rpm -qa mariadb-server mariadb
```

```
[root@f2cfruryol0dalfq ~]# rpm -qa mariadb-server mariadb
mariadb-server-5.5.68-1.el7.x86_64
mariadb-5.5.68-1.el7.x86_64
[root@f2cfruryol0dalfq ~]#
```

2.启动

```
#启动
systemctl start mariadb
#重启
systemctl restart mariadb
#停止
systemctl stop mariadb
#开机自启
systemctl enable mariadb
```

3.登录mysql设置权限

```
#修改mysql密码
mysqladmin password "123456"
#登录数据库
mysql -uroot -p
#给数据库设置权限, 可以使用其他ip进行登录
GRANT ALL PRIVILEGES ON *.* TO 'root'@'%' IDENTIFIED BY '123456' WITH GRANT OPTION;
#创建一个数据库
create database wordpress;
#刷新
flush privileges;
#退出
exit
```



```
[root@f2cfruryol0dalq ~]# systemctl start mariadb
[root@f2cfruryol0dalq ~]# mysqladmin password "123456"
[root@f2cfruryol0dalq ~]# mysql -uroot -p
Enter password: []
```

输入你修改的数据库密码回车

登录成功后依次执行

```
'database wordpress' at line 1
MariaDB [(none)]> GRANT ALL PRIVILEGES ON *.* TO 'root'@'% IDENTIFIED BY '123456' WITH GRANT OPTION;
Query OK, 0 rows affected (0.00 sec)

MariaDB [(none)]> create database wordpress;
Query OK, 1 row affected (0.00 sec)

MariaDB [(none)]> flush privileges;
Query OK, 0 rows affected (0.00 sec)

MariaDB [(none)]> exit
Bye
```

四.项目案例

这里使用wordpress搭建测试使用

1.下载wordpress

#下载地址

<https://cn.wordpress.org/download/>



2.删除/usr/share/nginx/html/里面原本的文件

#也可以自己备份一份

```
[root@f2cfruryo10dalfq ~]# cd /usr/share/nginx/html/
[root@f2cfruryo10dalfq html]# ll
total 12
-rw-r--r-- 1 root root 494 Apr 21 2020 50x.html
-rw-r--r-- 1 root root 612 Apr 21 2020 index.html
-rw-r--r-- 1 root root 20 Feb 24 11:16 index.php
[root@f2cfruryo10dalfq html]# rm -rf *
[root@f2cfruryo10dalfq html]#
```

```
[root@f2cfruryo10dalfq ~]# cd /usr/share/nginx/html/
[root@f2cfruryo10dalfq html]# ll
total 12
-rw-r--r-- 1 root root 494 Apr 21 2020 50x.html
-rw-r--r-- 1 root root 612 Apr 21 2020 index.html
-rw-r--r-- 1 root root 20 Feb 24 11:16 index.php
[root@f2cfruryo10dalfq html]# rm -rf *
[root@f2cfruryo10dalfq html]#
```

3.上传下载好的wordpress

4.解压wordpress

```
unzip wordpress-6.1.1-zh_CN.zip
```

```
[root@f2cfruryo10dalfq html]# ll
total 24624
drwxr-xr-x 5 root root 4096 Dec 18 15:00 wordpress
-rw-r--r-- 1 root root 25206808 Feb 24 12:17 wordpress-6.1.1-zh_CN.zip
[root@f2cfruryo10dalfq html]#
```

5.浏览器访问进行安装

```
http://ip:8002/wordpress
```



填好内容提交



请在下方填写您的数据库连接信息。如果您不确定，请联系您的主机服务提供商。

数据库名	wordpress	希望将WordPress安装到的数据库名称。
用户名	root	您的数据库用户名。
密码	123456	您的数据库密码。
数据库主机	127.0.0.1	如果 localhost 不起作用，您通常能够从主机商处获得正确的信息。
表前缀	wp_	如果您希望在同一个数据库安装多个WordPress，请修改前缀。

弹出一下页面需要我们自己再服务器里面写配置文件



无法写入wp-config.php文件。

您可以手工创建wp-config.php文件，并将以下文字粘贴于其中。

wp-config.php 的配置规则：

```
<?php
/**
 * The base configuration for WordPress
 *
 * The wp-config.php creation script uses this file during the installation.
 * You don't have to use the web site, you can copy this file to "wp-config.php"
 * and fill in the values.
 *
 * This file contains the following configurations:
 *
 * * Database settings
 * * Secret keys
 * * Database table prefix
 * * ABSPATH
 */
```

完成这些后，请点击“运行安装程序”。



编辑，然后把配置规则里面的代码复制进来，保存并退出

```
[root@f2cfruryo10dalfq html]# ll
total 24624
drwxr-xr-x 5 root root    4096 Dec 18 15:00 wordpress
-rw-r--r-- 1 root root 25206808 Feb 24 12:17 wordpress-6.1.1-zh_CN.zip
[root@f2cfruryo10dalfq html]# vim wordpress/wp-config.php
```

```

<?php
/**
 * The base configuration for WordPress
 *
 * The wp-config.php creation script uses this file during the installation.
 * You don't have to use the web site, you can copy this file to "wp-config.php"
 * and fill in the values.
 *
 * This file contains the following configurations:
 *
 * * Database settings
 * * Secret keys
 * * Database table prefix
 * * ABSPATH
 *
 * @link https://wordpress.org/support/article/editing-wp-config-php/
 *
 * @package WordPress
 */

// ** Database settings - You can get this info from your web host ** //
/** The name of the database for WordPress */
define( 'DB_NAME', 'wordpress' );

/** Database username */
define( 'DB_USER', 'root' );

/** Database password */
define( 'DB_PASSWORD', '123456' );

/** Database hostname */
define( 'DB_HOST', '127.0.0.1' );

/** Database charset to use in creating database tables. */
define( 'DB_CHARSET', 'utf8mb4' );

```

然后点击浏览器刷新一下



刷新后点击现在安装



给自己站点进行设置，搭建完成



欢迎

欢迎使用著名的WordPress五分钟安装程序！请简单地填写下面的表单，来开始使用这个世界上最具扩展性、最强大的个人信息发布平台。

需要信息

请填写以下信息：无需担心填错，您以后可以随时更改这些设置。

站点标题

用户名

用户名只能含有字母、数字、空格、下划线、连字符、句号和“@”符号。

密码



重要：您将需要此密码来登录，请将其保存在安全的位置。