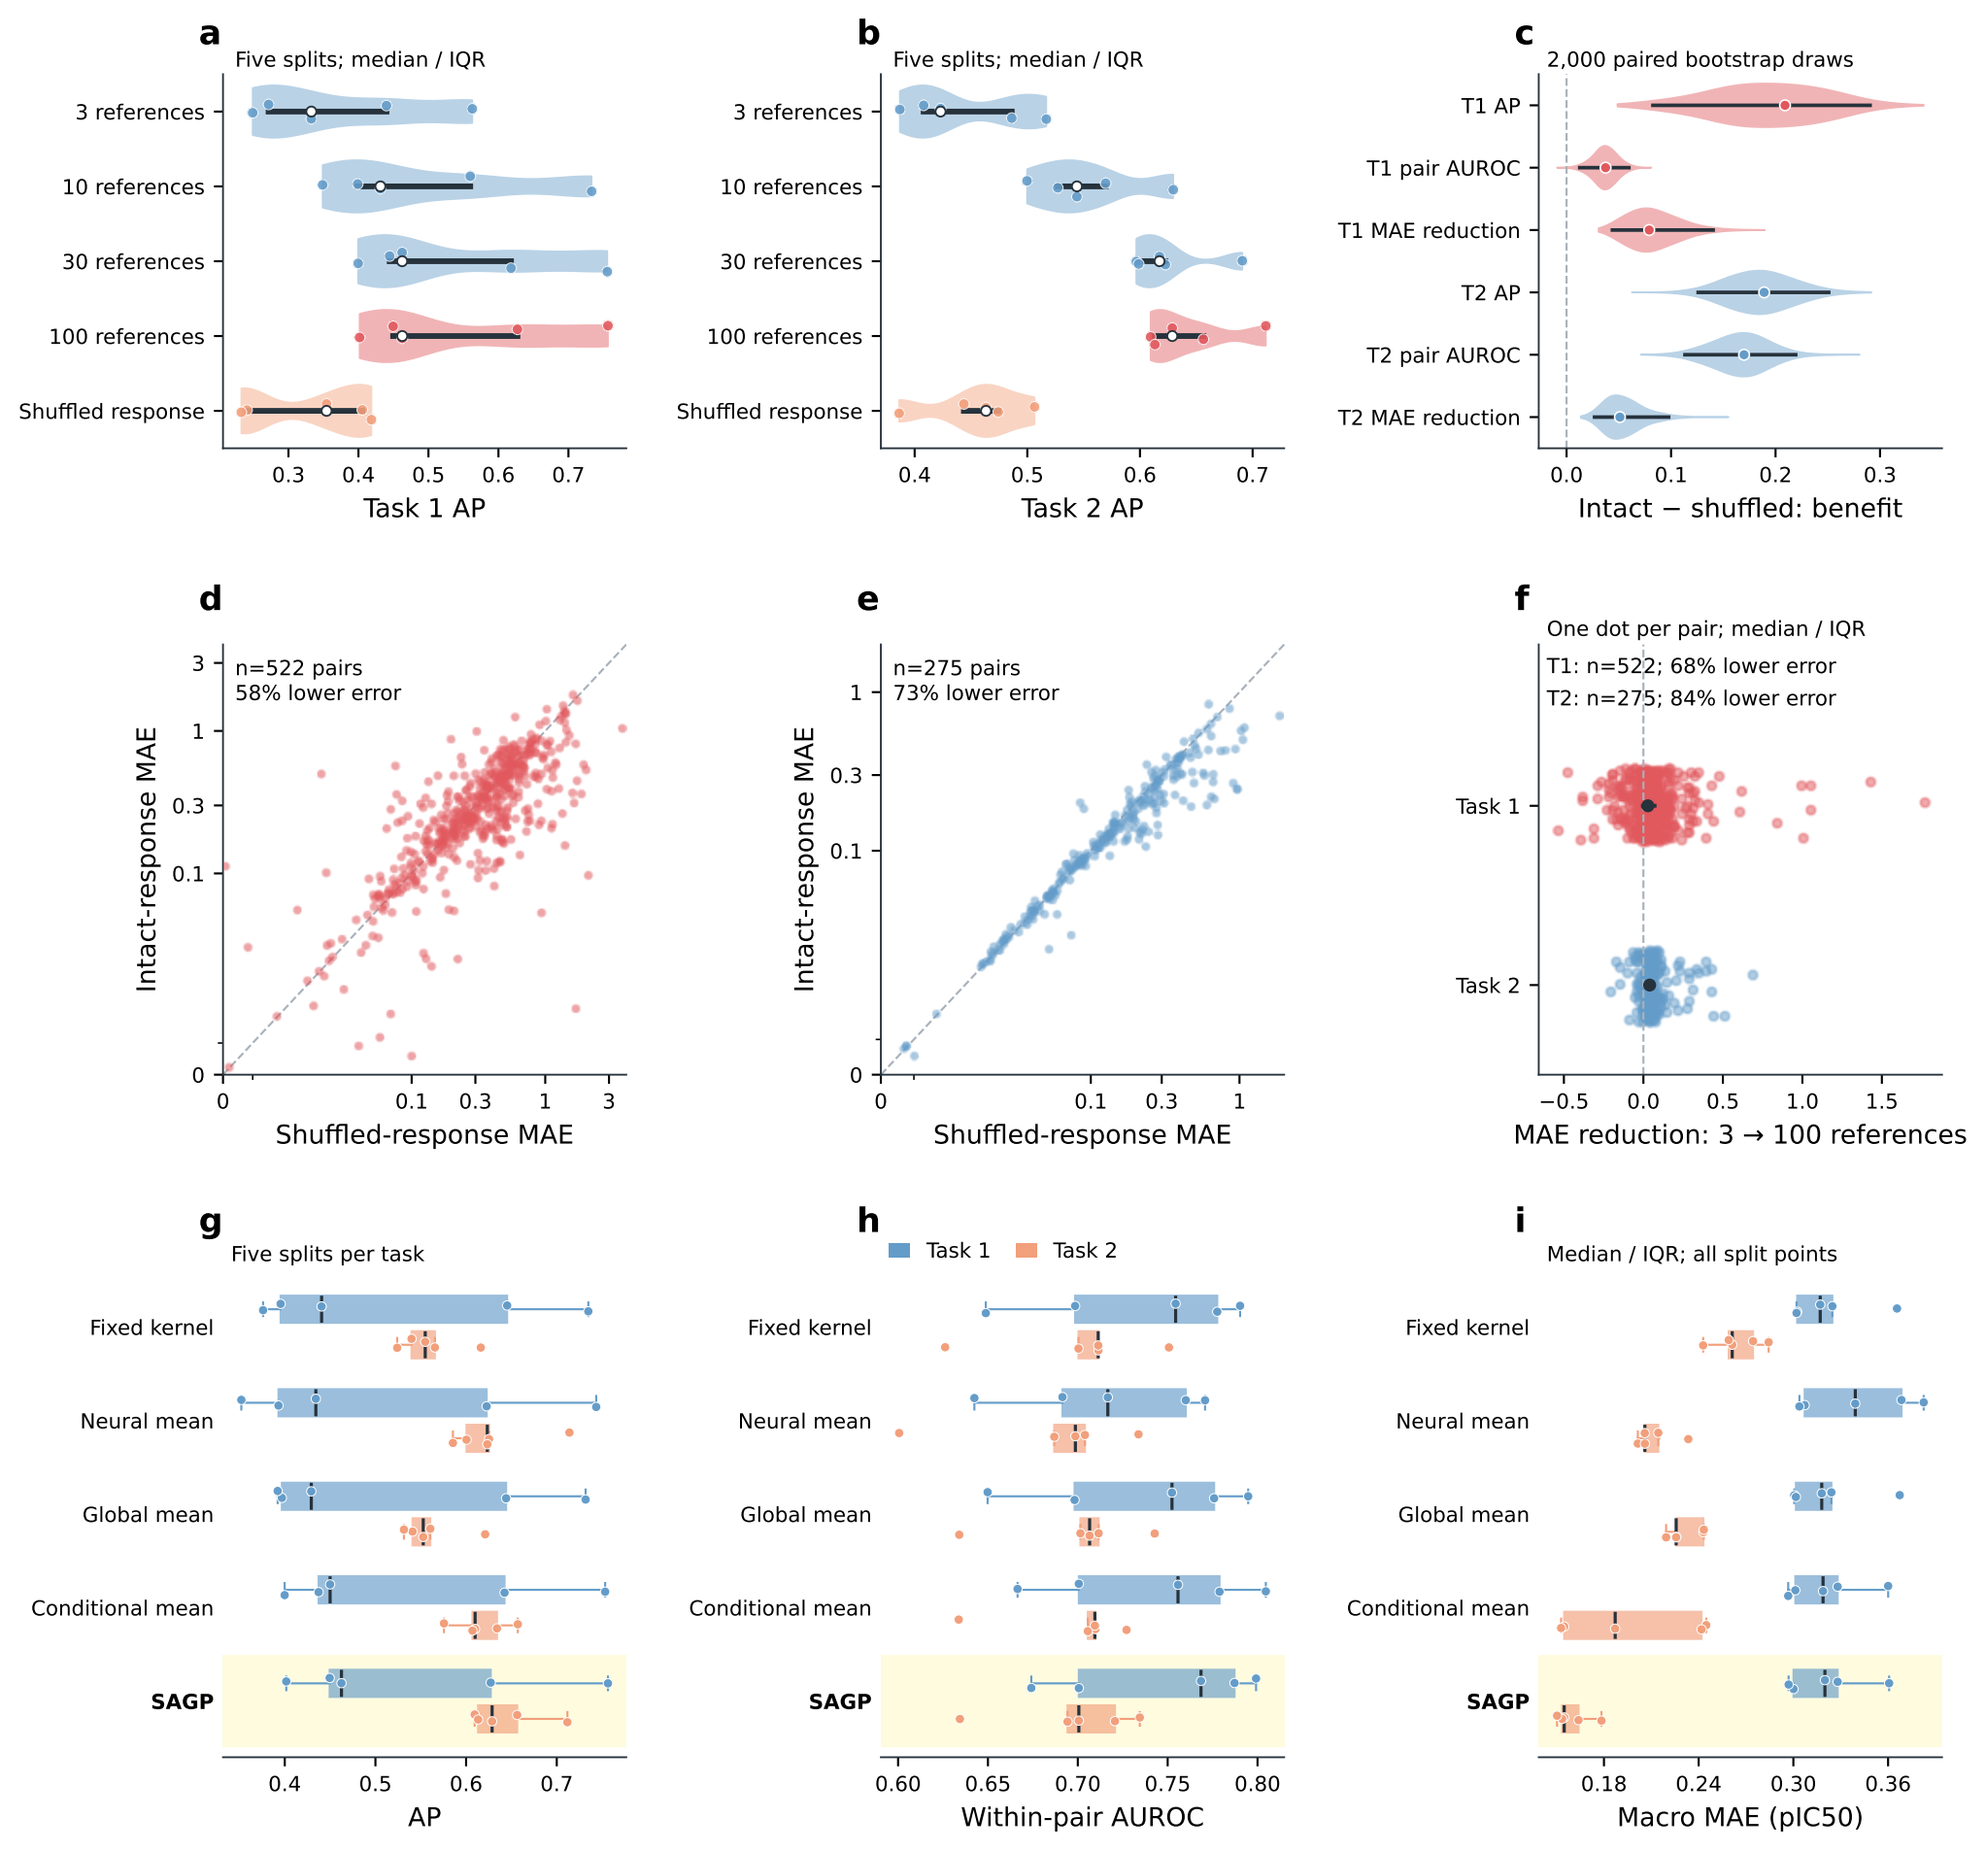

a
Five splits; median / IQR
3 references
10 references
30 references
100 references
Shuffled response
0.3
0.4
0.5
0.6
0.7
Task 1 AP
b
Five splits; median / IQR
3 references
10 references
30 references
100 references
Shuffled response
0.4
0.5
0.6
0.7
Task 2 AP
c
2,000 paired bootstrap draws
T1 AP
T1 pair AUROC
T1 MAE reduction
T2 AP
T2 pair AUROC
T2 MAE reduction
0.0
0.1
0.2
0.3
Intact − shuffled: benefit
d
n=522 pairs
58% lower error
Intact-response MAE
3
1
0.3
0.1
0
0.1
0.3
1
3
Shuffled-response MAE
e
n=275 pairs
73% lower error
Intact-response MAE
1
0.3
0.1
0
0.1
0.3
1
Shuffled-response MAE
f
One dot per pair; median / IQR
T1: n=522; 68% lower error
T2: n=275; 84% lower error
Task 1
Task 2
−0.5
0.0
0.5
1.0
1.5
MAE reduction: 3 → 100 references
g
Five splits per task
Fixed kernel
Neural mean
Global mean
Conditional mean
SAGP
0.4
0.5
0.6
0.7
AP
h
Task 1
Task 2
Fixed kernel
Neural mean
Global mean
Conditional mean
SAGP
0.60
0.65
0.70
0.75
0.80
Within-pair AUROC
i
Median / IQR; all split points
Fixed kernel
Neural mean
Global mean
Conditional mean
SAGP
0.18
0.24
0.30
0.36
Macro MAE (pIC50)