


AM4 Function


Note: serial call Api calls must be, that is, when the end of an Api, can call an Api, Otherwise it will appear the Api function failure.

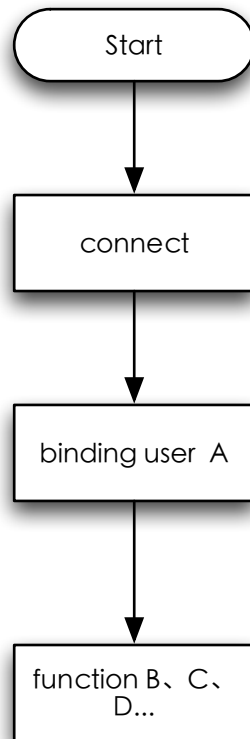


Note: the some functions of parallel relationship, there is no order

AM4 binding User


AM4 binding 1-1

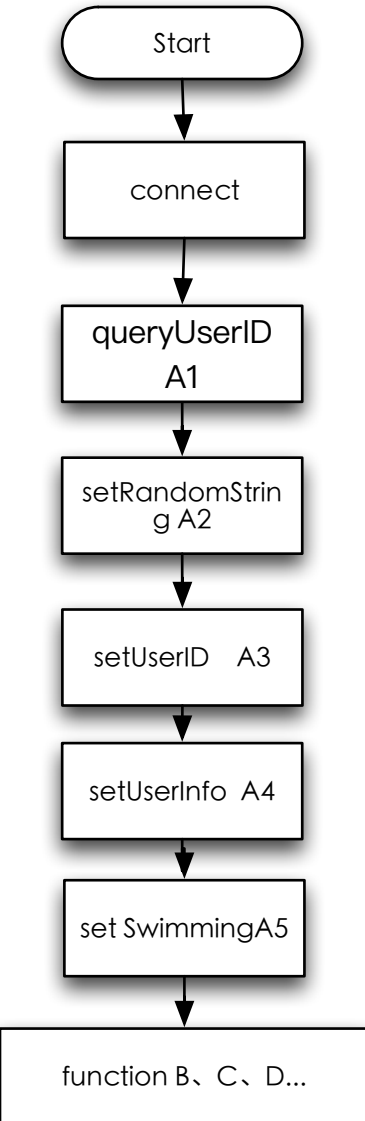

AM4 binding 1-2

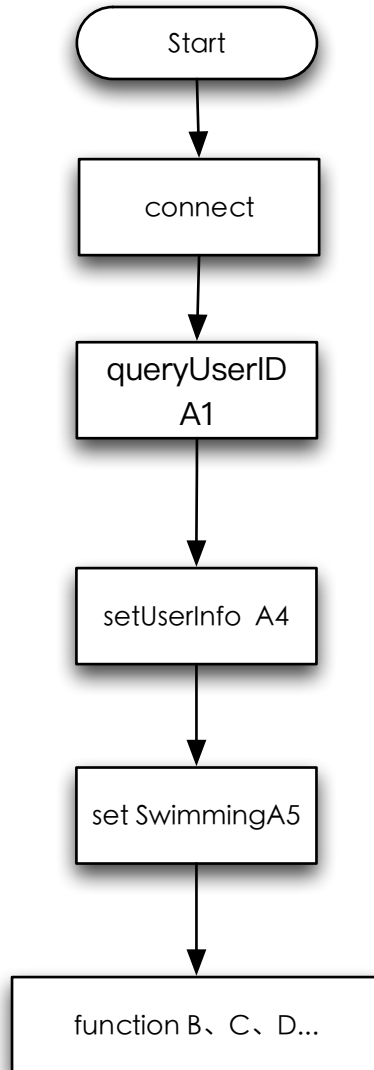

AM4 binding 1-3

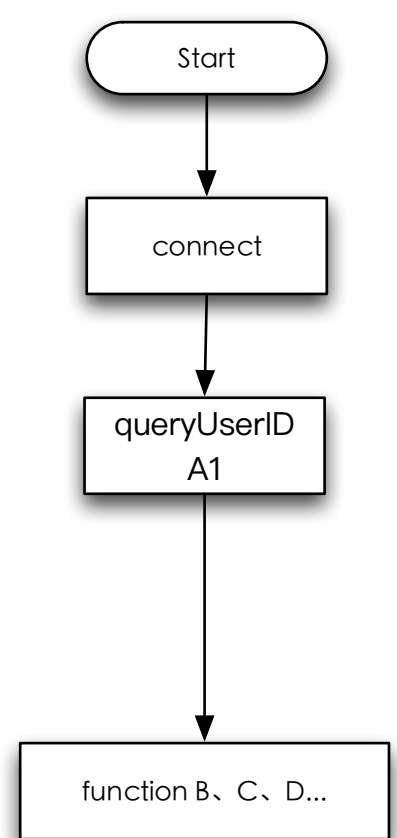

Note: 1、 serial call Api calls must be, that is, when the end of an Api, can call an Api,Otherwise it will appear the Api function failure.

2、 Use 1-1 for the first time binding process; if the same user, the user information is changed, the process requires the use of 1-2; if the same user, the same user information, use 1-3 Process

3 、 the three functions of parallel relationship, there is no order

A-1:commandCreateUserManageConnectWithUser:Authentication: currentUserSerialNub: amUser: binedAMSerialNub: currentSerialNub: DisposeErrorBlock:


A-2:commandAM4SetRandomBlock: disposeErrorBlock:

A-3: commandSetAM4UserID: withRandom: DisposeBlock: DisposeErrorBlock:

A-4:commandSyncUserInfoWithUser: andGoal: DisposeStateInfo: DisposeBattery: DisposeBlock: DisposeErrorBlock:

A-5:commandAM4SetSwimmingState: swimmingPoolLength: NOSwimmingTime: unit: resultBlock: disposeErrorBlock:

AM3S sync Data

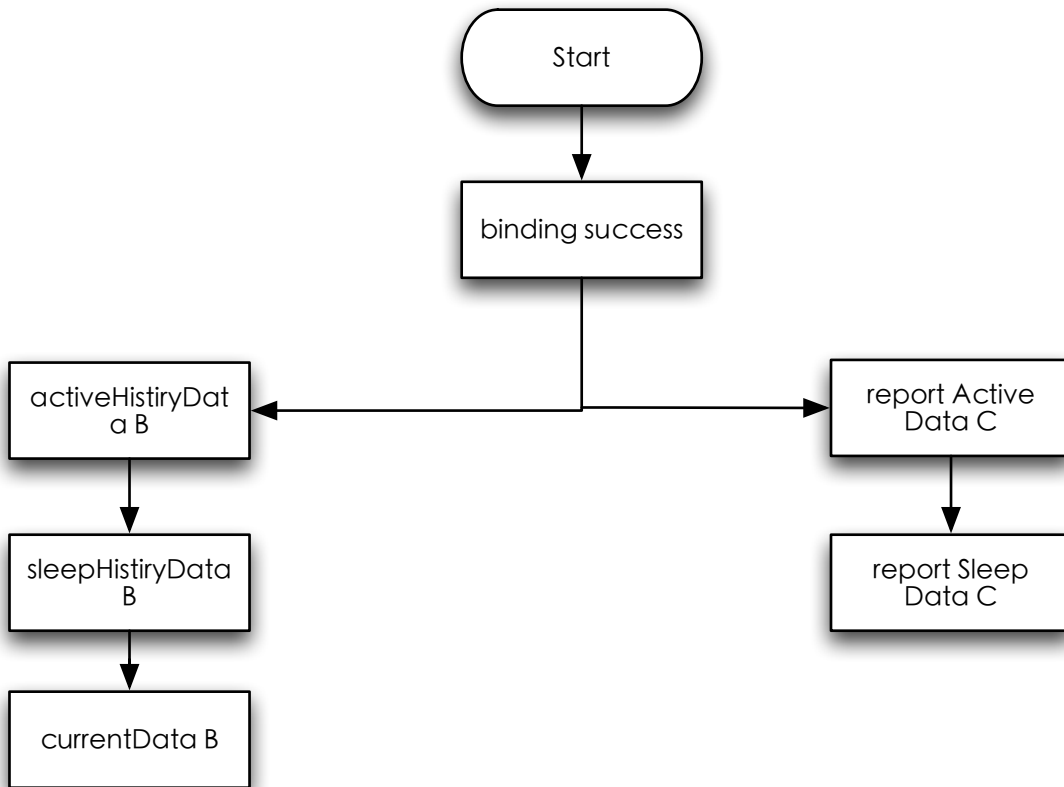


Note: 1、 serial call Api calls must be, that is, when the end of an Api, can call an Api,Otherwise it will appear the Api function failure.

2 、 the two functions of parallel relationship, there is no order

B: commandAM4StartSyncActiveData: activeHistoryData: activeFinishTransmission:
startSyncAM4SleepData: sleepHistoryData: sleepFinishTransmission: currentActiveInfo:
disposeErrorBlock:

C: commandAM4SetSyncsportCount: disposeMeasureData: disposeFinishMeasure:
disposeErrorBlock:

AM3S query or set

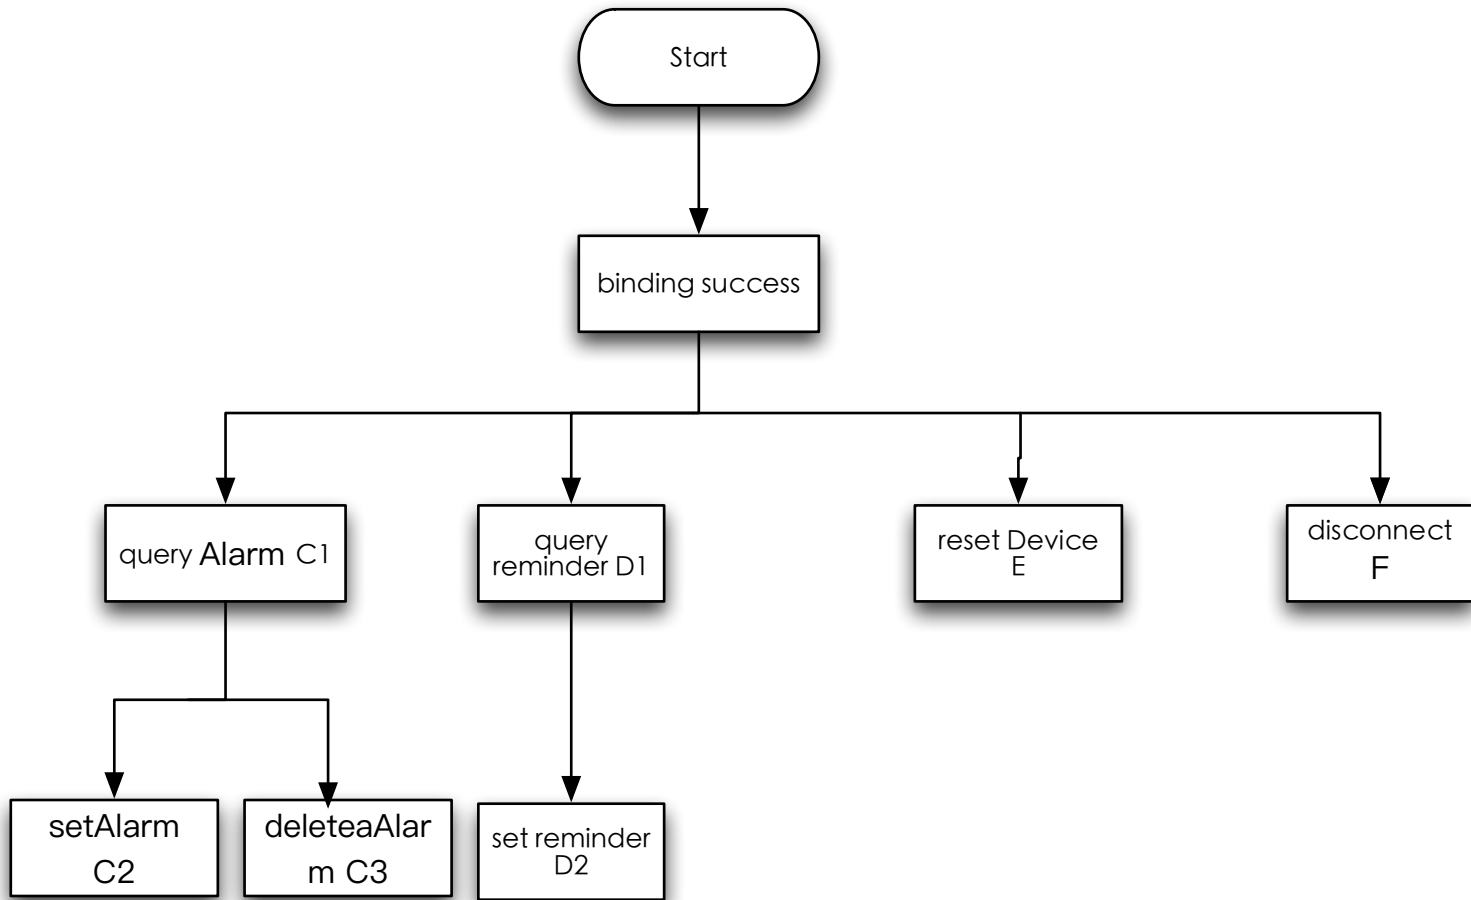

Note: 1、 serial call Api calls must be, that is, when the end of an Api, can call an Api,Otherwise it will be wrong
2 、 the four functions of parallel relationship, there is no order

C1: commandAM4QueryReminder: disposeErrorBlock:

C2: commandAM4SetReminderWithReminderDictionary: disposeResultBlock: disposeErrorBlock:

C3: commandAM4DeleteAlarmID: disposeResultBlock: disposeErrorBlock:

D1: commandAM4QueryAlarmInfoDisposeTotoalAlarmData: disposeErrorBlock:

D2: commandAM4SetAlarmWithAlarmDictionary: disposeResultBlock:disposeErrorBlock:

E: commandAM4ResetDeviceDisposeResultBlock:disposeErrorBlock:

F: commandAM4Disconnect: disposeErrorBlock: