

P0: published CM states and an independent CytoSPACE parameter comparison


Published author CM states: retrieved final annotations

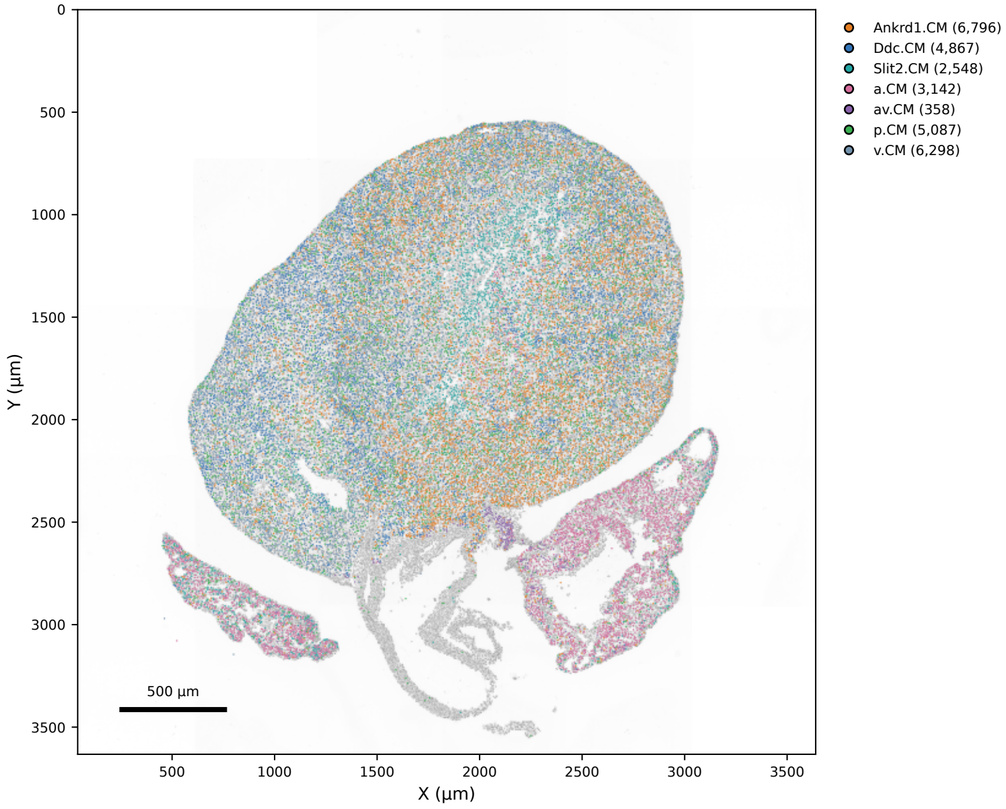


Published ventricular states + chamber-unresolved p.CM

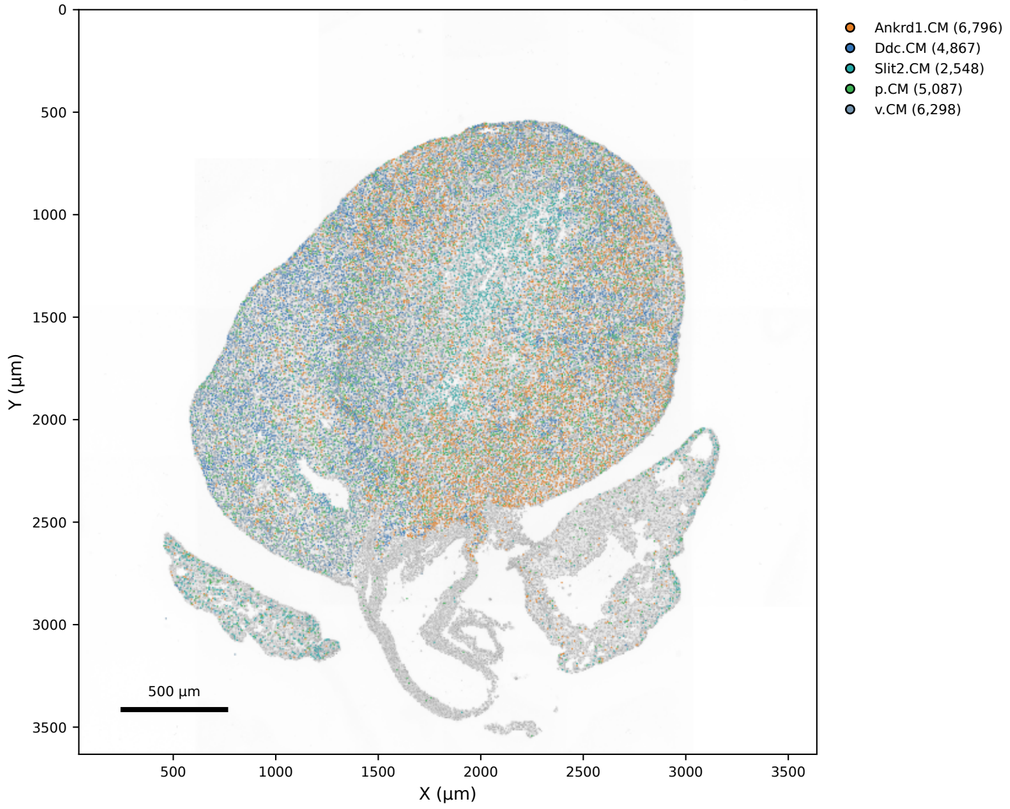

Independent reference families: raw/default 10,000-cell run

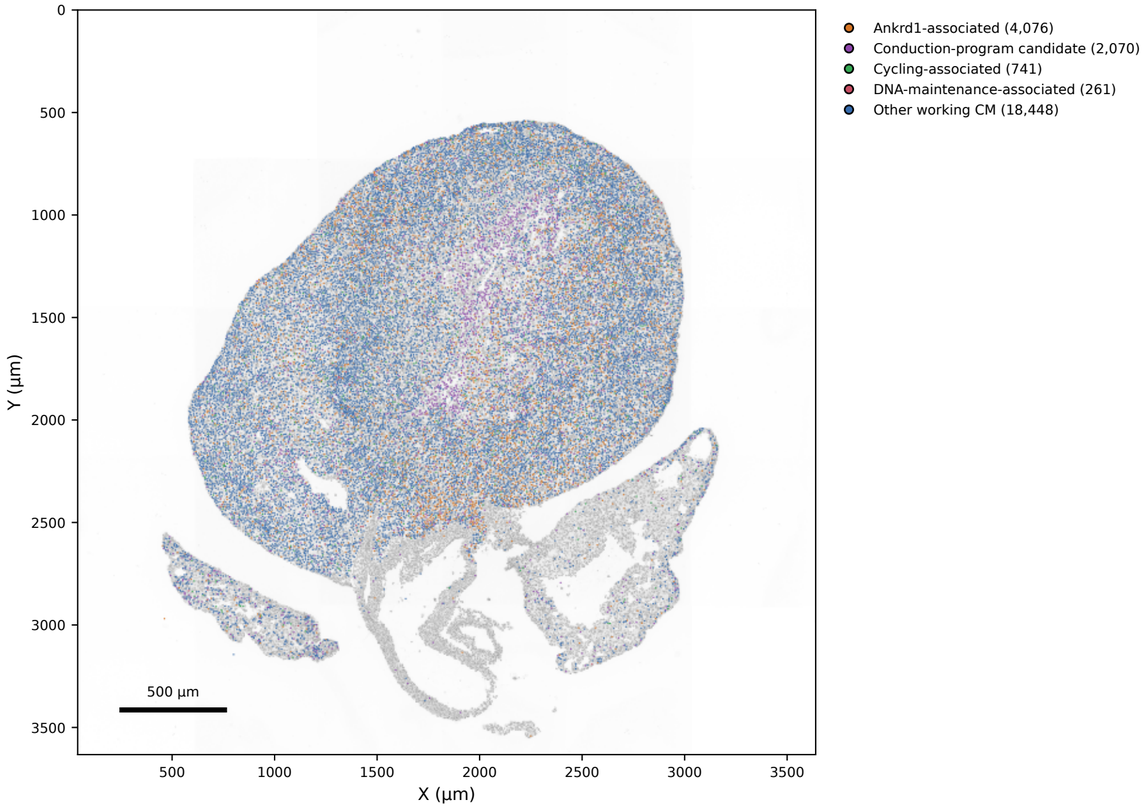



Measured Slit2 RNA in the selected CM cohort

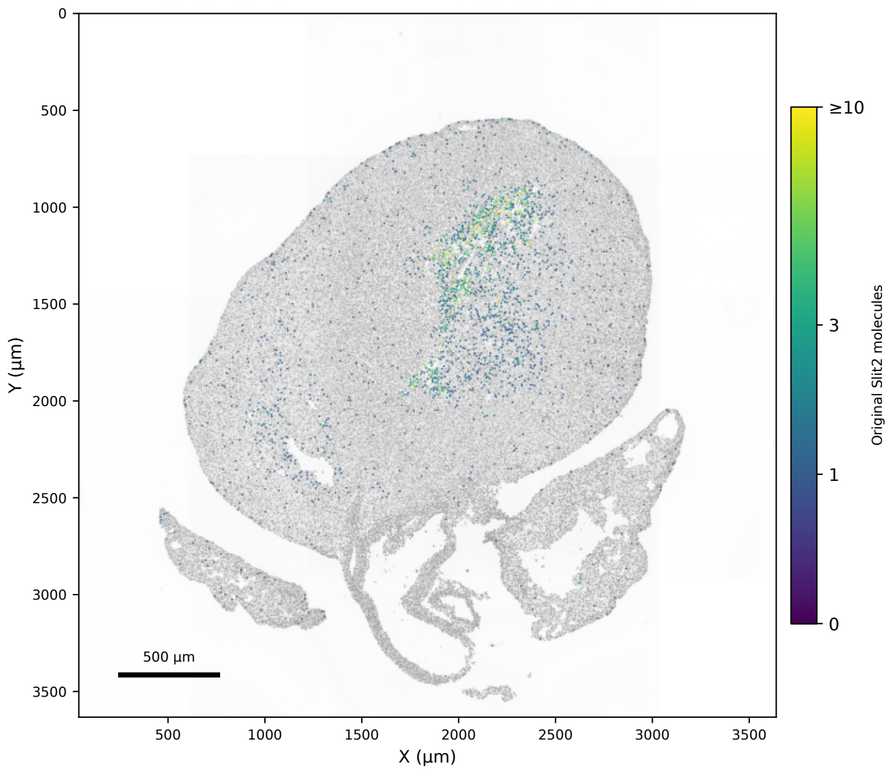



Top: authors' published final labels, verified against original barcodes, centroids and transcript totals. These are not newly inferred identities.
Bottom left: our independent snRNA reference, raw counts, default seed/downsampling and 10,000-cell partitions; no ventricular subtype labels supplied.
The two annotation systems differ. v.CM is one working-ventricular state; p.CM includes chamber-unresolved cycling CMs.
Kcnd2 and Irx5 are unassayed; TF_Irx5 is a derived feature. Positions and measured counts are unchanged.

P7: published CM states and an independent CytoSPACE parameter comparison

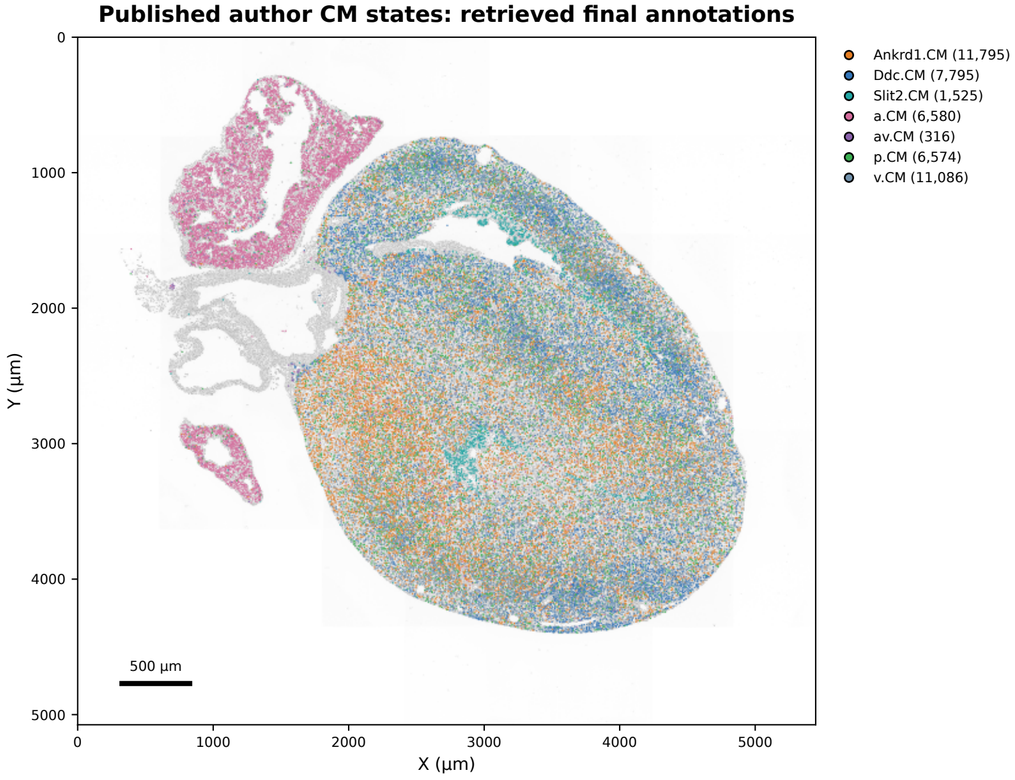

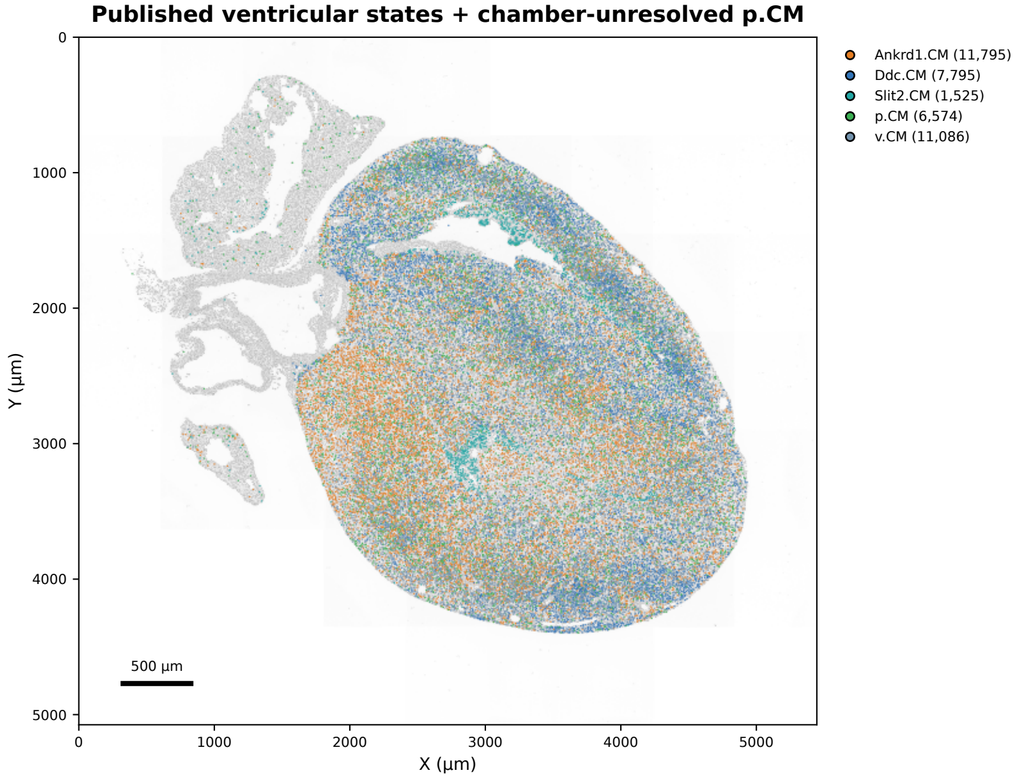

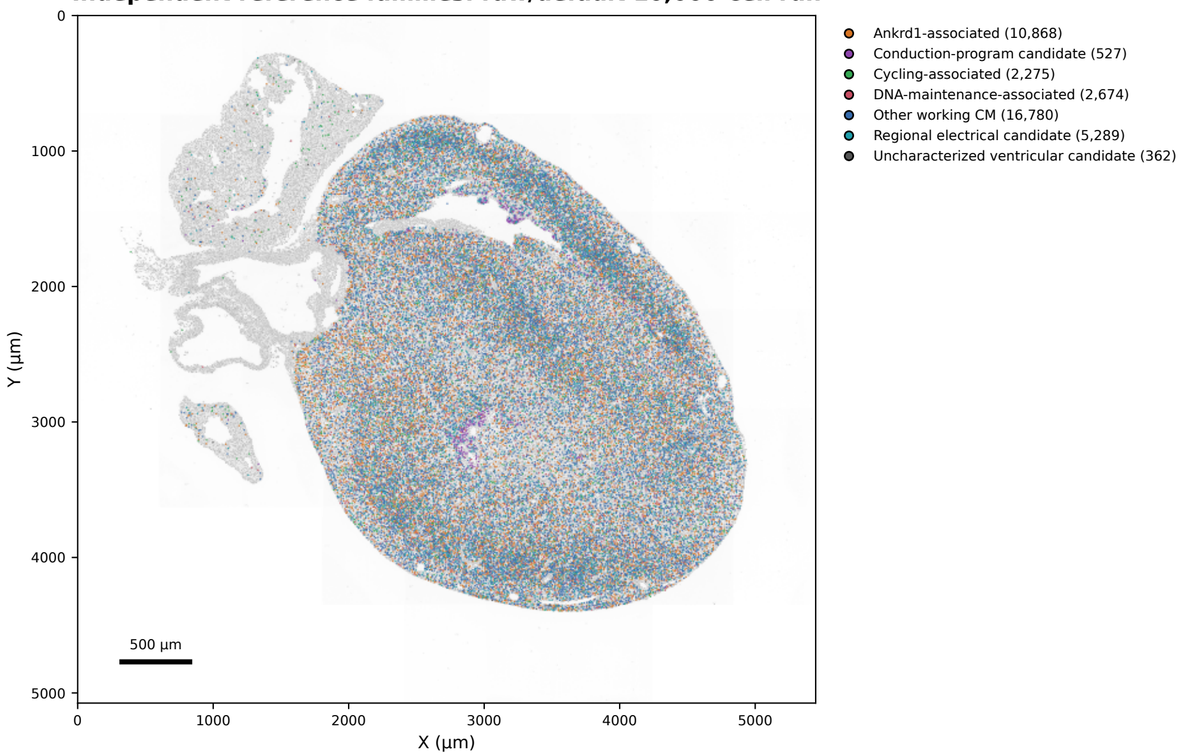


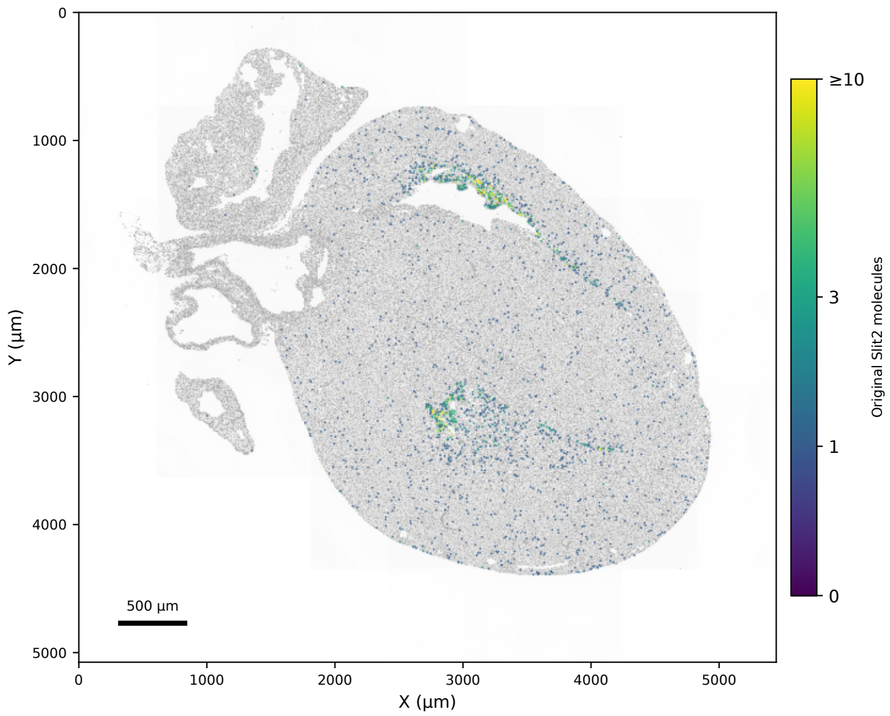


Top: authors' published final labels, verified against original barcodes, centroids and transcript totals. These are not newly inferred identities.
Bottom left: our independent snRNA reference, raw counts, default seed/downsampling and 10,000-cell partitions; no ventricular subtype labels supplied.
The two annotation systems differ. v.CM is one working-ventricular state; p.CM includes chamber-unresolved cycling CMs.
Kcnd2 and Irx5 are unassayed; TF_Irx5 is a derived feature. Positions and measured counts are unchanged.

P14: published CM states and an independent CytoSPACE parameter comparison


Published author CM states: retrieved final annotations

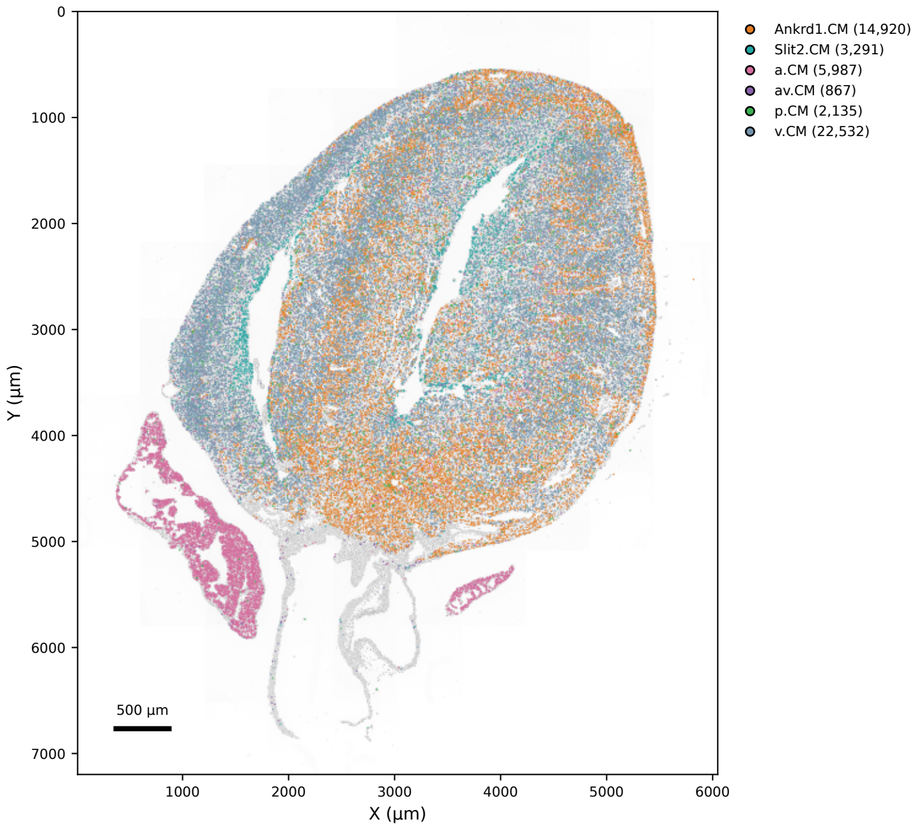


Published ventricular states + chamber-unresolved p.CM

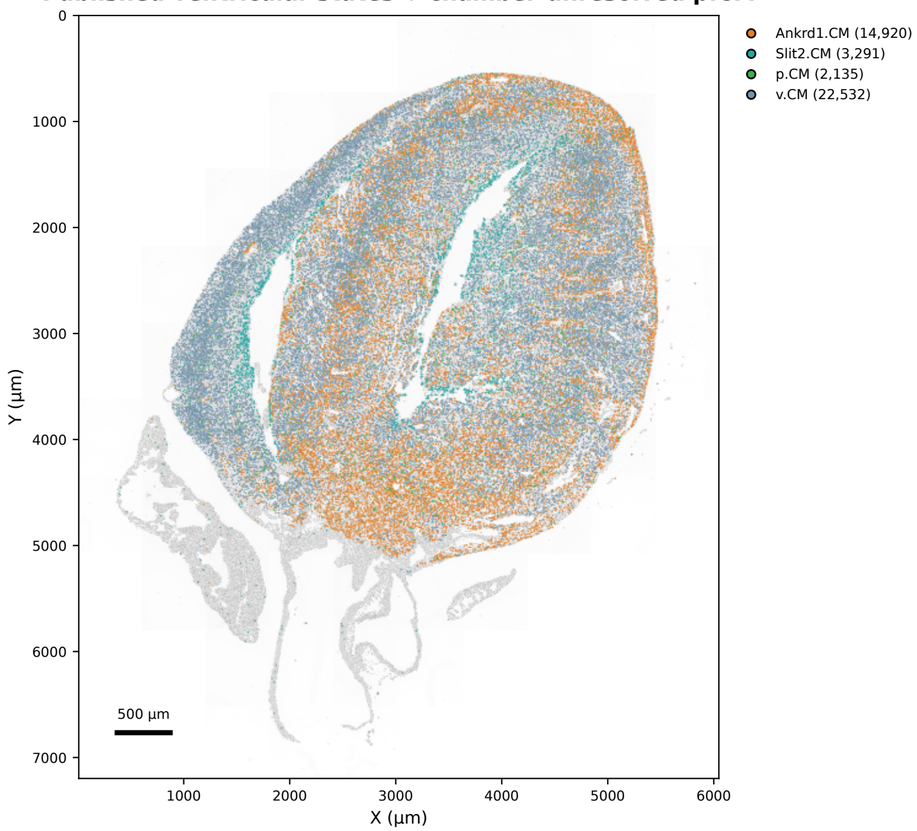

Independent reference families: raw/default 10,000-cell run

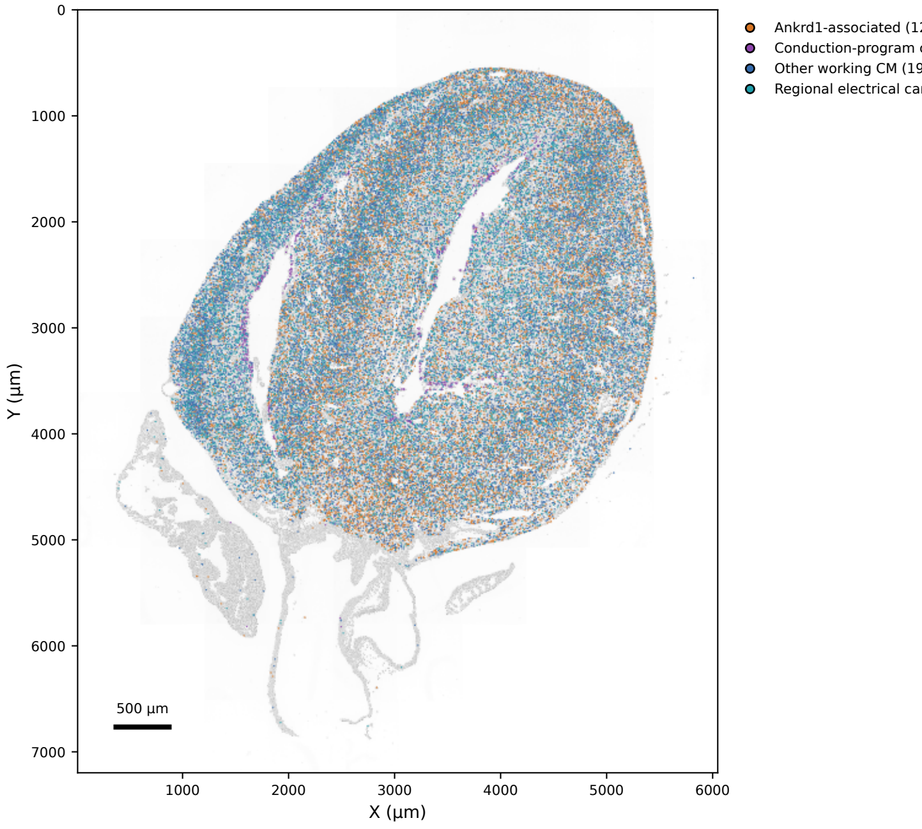



Measured Slit2 RNA in the selected CM cohort

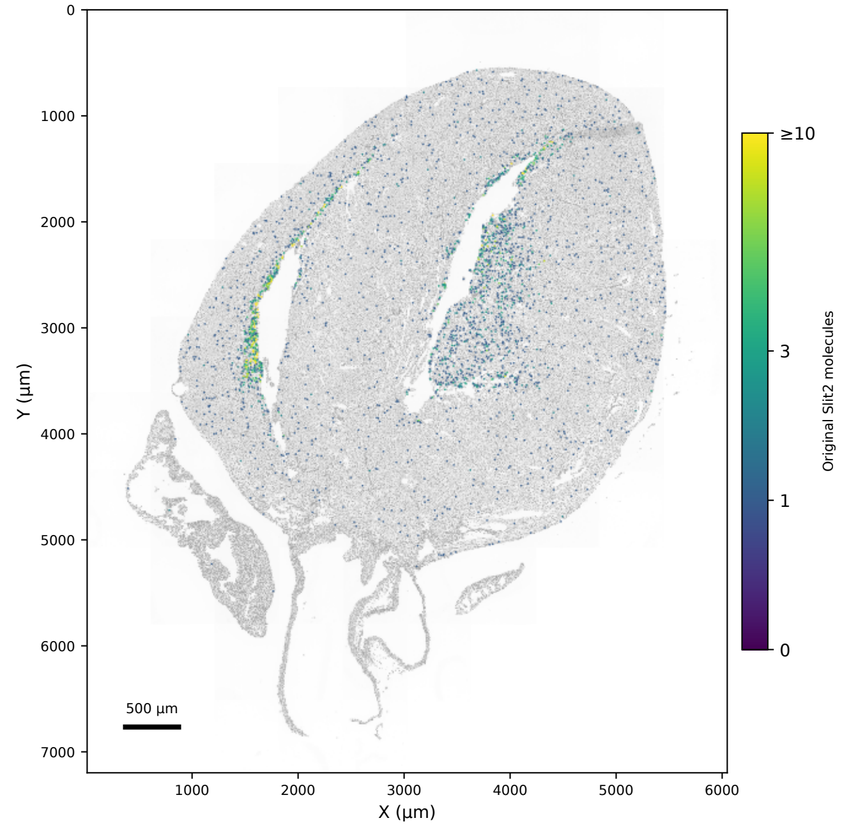



Top: authors' published final labels, verified against original barcodes, centroids and transcript totals. These are not newly inferred identities.
Bottom left: our independent snRNA reference, raw counts, default seed/downsampling and 10,000-cell partitions; no ventricular subtype labels supplied.
The two annotation systems differ. v.CM is one working-ventricular state; p.CM includes chamber-unresolved cycling CMs.
Kcnd2 and Irx5 are unassayed; TF_Irx5 is a derived feature. Positions and measured counts are unchanged.

P21: published CM states and an independent CytoSPACE parameter comparison

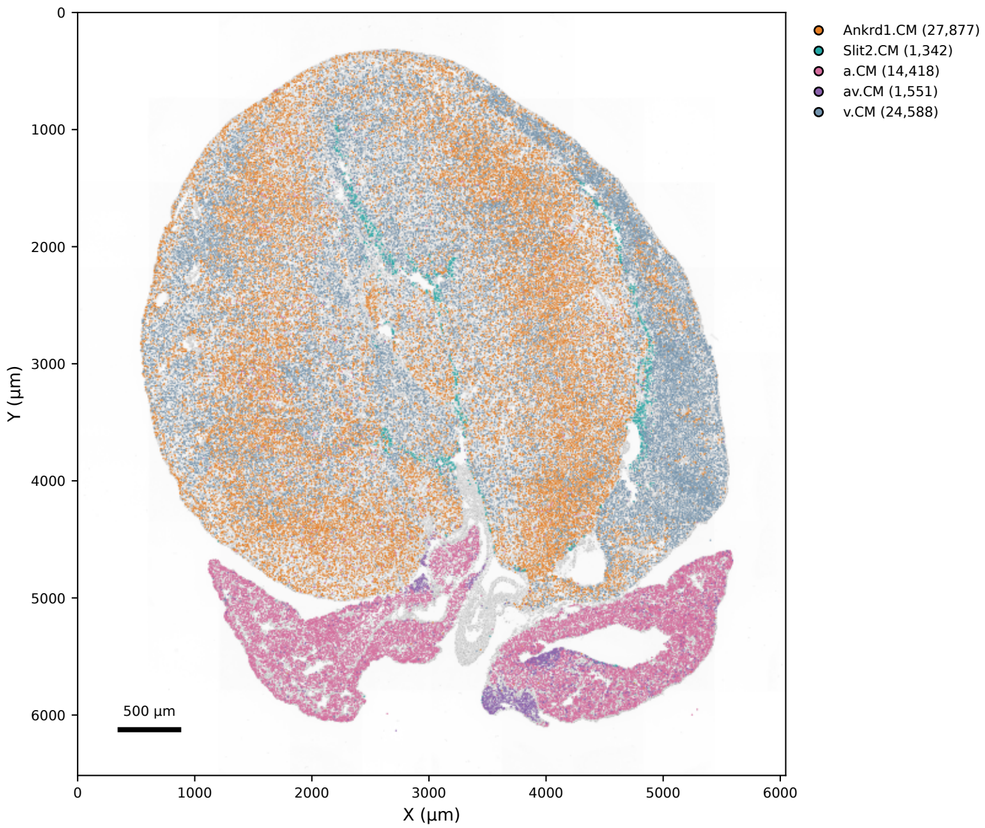

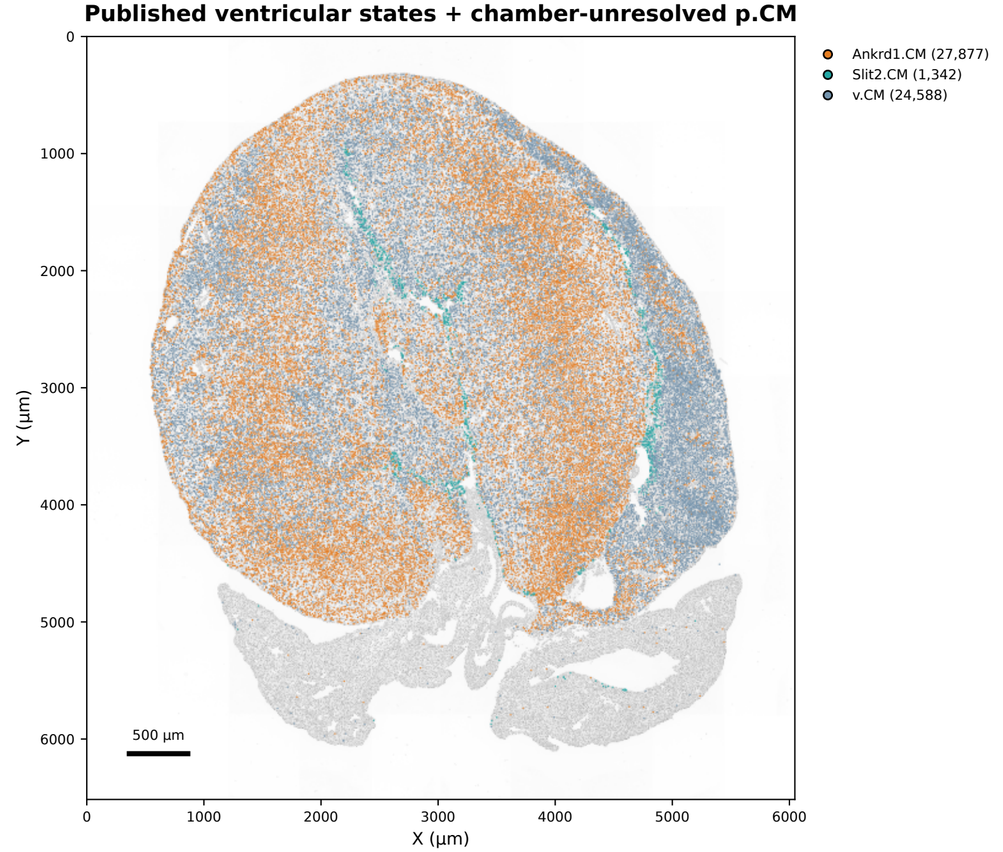


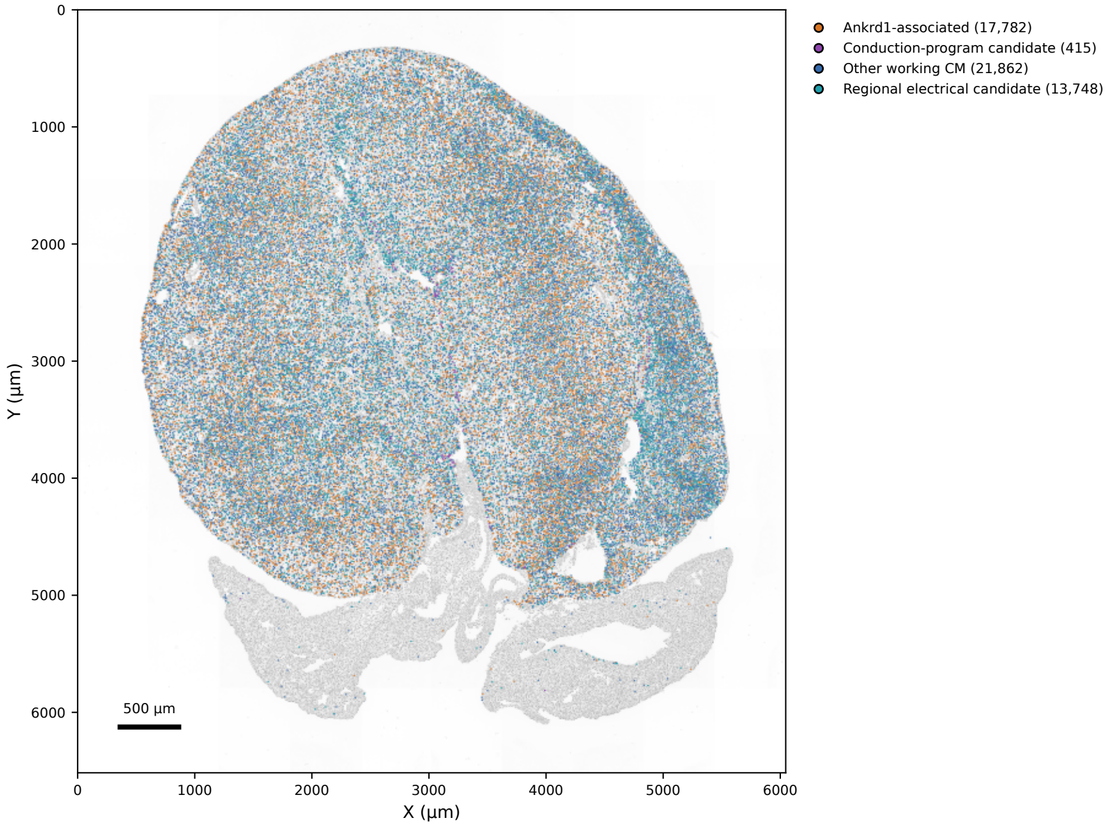


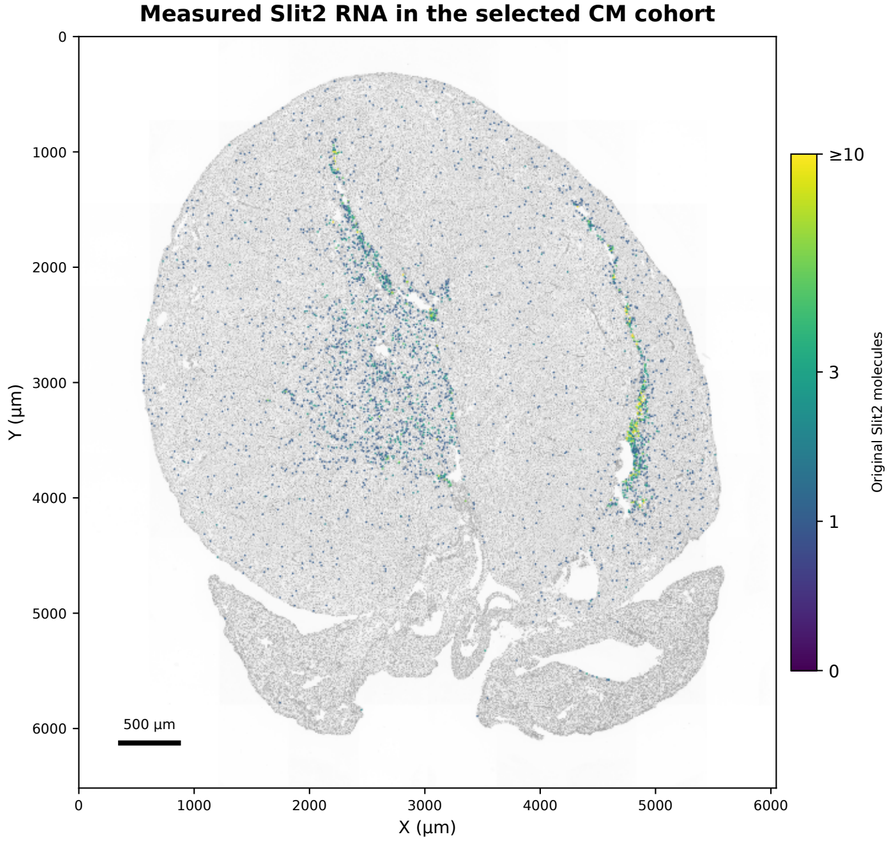



Top: authors' published final labels, verified against original barcodes, centroids and transcript totals. These are not newly inferred identities.
Bottom left: our independent snRNA reference, raw counts, default seed/downsampling and 10,000-cell partitions; no ventricular subtype labels supplied.
The two annotation systems differ. v.CM is one working-ventricular state; p.CM includes chamber-unresolved cycling CMs.
Kcnd2 and Irx5 are unassayed; TF_Irx5 is a derived feature. Positions and measured counts are unchanged.

Directly measured Xenium marker profiles under the published CM-state labels

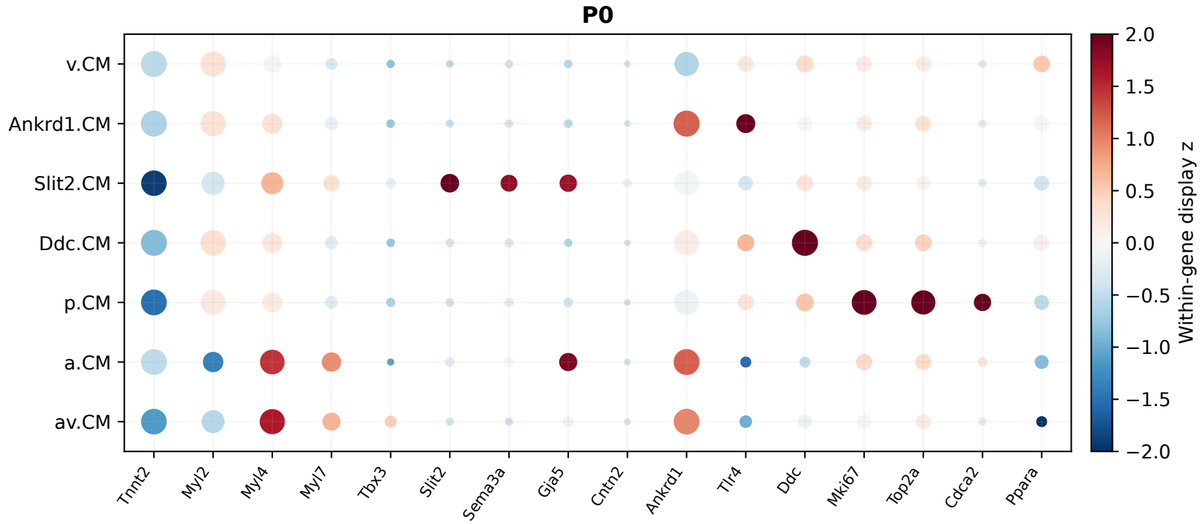

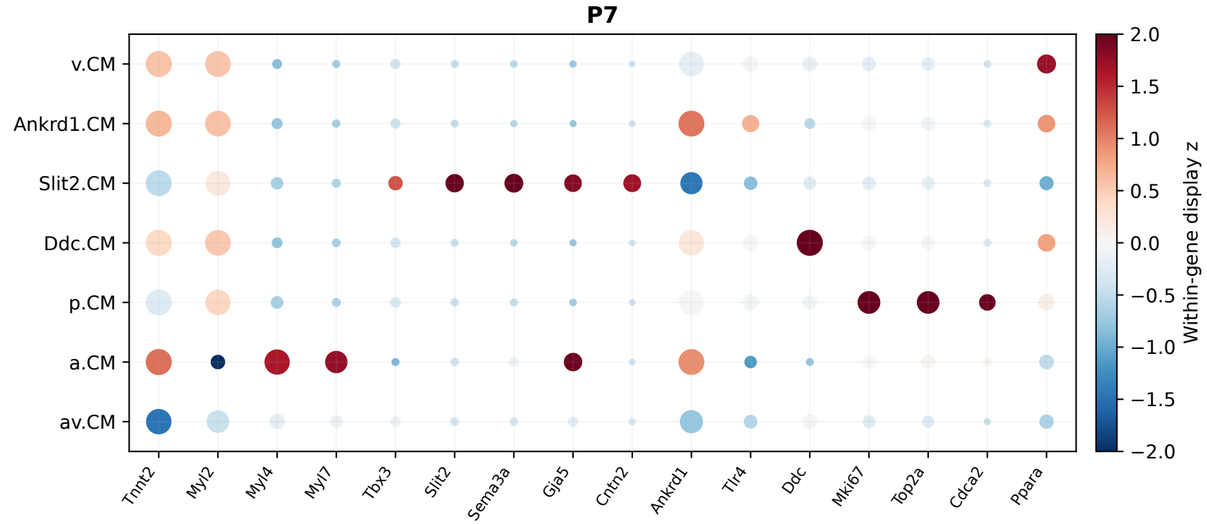

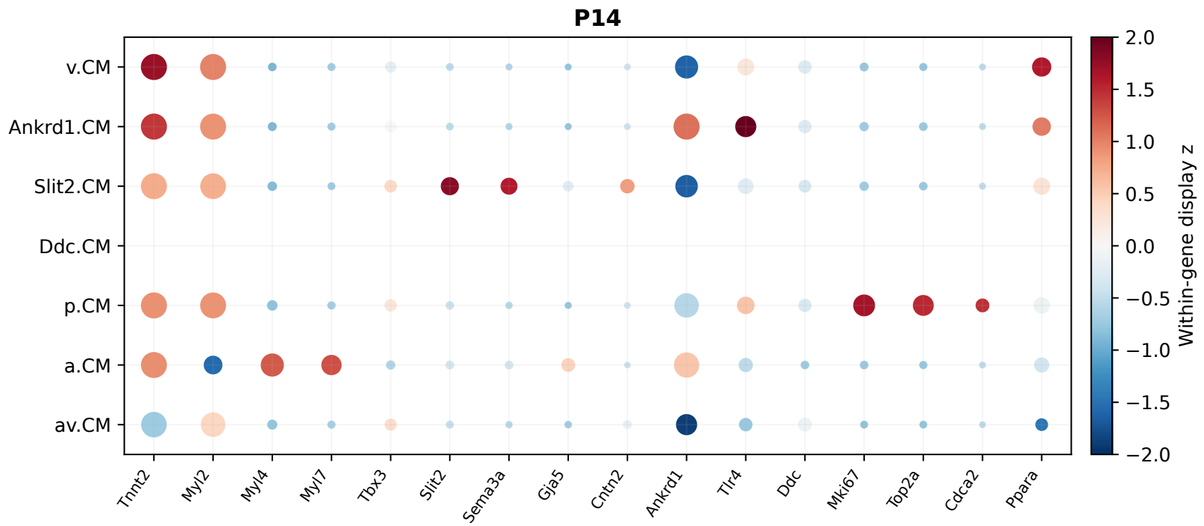

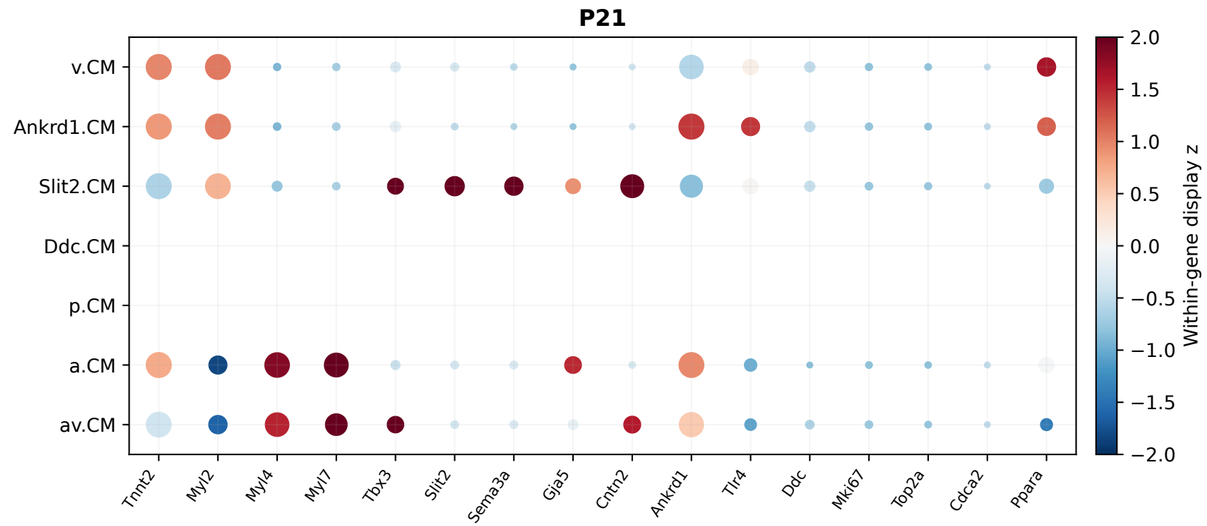

Dot area reflects detection fraction. Color is standardized mean log1p(CP10k) within each gene across state/stage summaries.
Blank rows indicate no published segments in that state. These are descriptive profiles, not independent label validation or animal-replicated differential expression.