Zero-Shot Low-Dose CT Image Denoising

Bo Su Xiangyun Hu Yunfei Zha Baochang Zhang

the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores

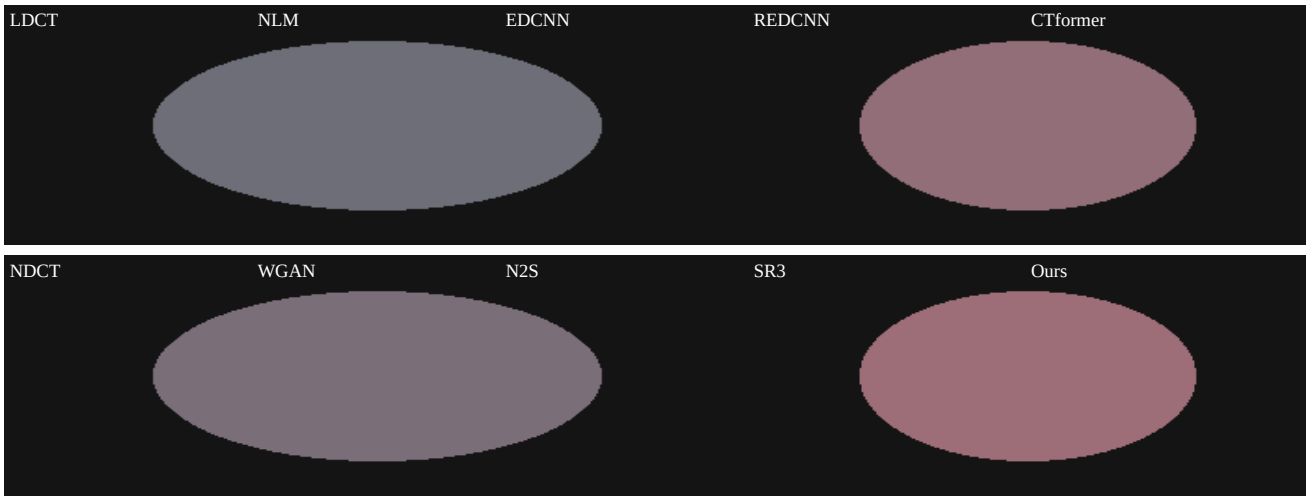


Fig. 8. Axial results of different denoising methods on the Mayo 2016 dataset. The window is [-100, 200] HU.
Zoomed parts over the region of interest (ROI) marked by the yellow box.

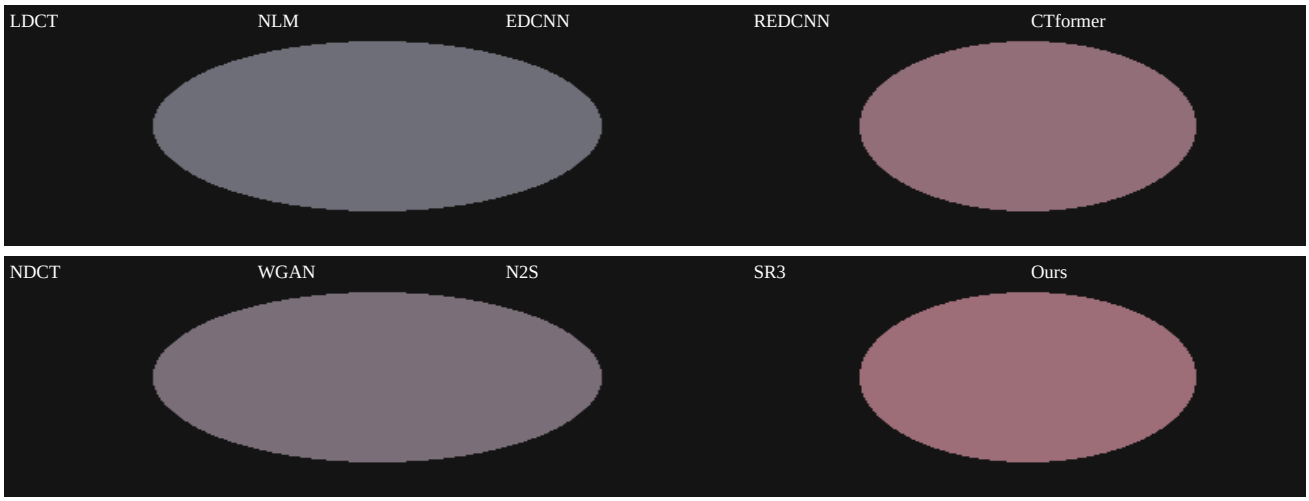


Fig. 9. Comparison of denoising performance of Mayo data slices in different methods.
The yellow ROI areas are zoomed in to show the denoising details.

restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low

method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed

$$\left[\hat{g} = \arg\min \; g - l \right. \\ \left. -\lambda \log p(g \mid g) \right] \quad (10)$$

of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the

texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising

proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography slices in the frequency domain the proposed method restores the texture of the reconstructed images while the denoising network removes the noise and keeps the structure of the low dose computed tomography