

安装教程参考：<https://www.cnblogs.com/jxd283465/p/11542680.html>

在系统设置中找到 “Jenkins Location” ，配置管理员邮箱，即发信邮箱

Jenkins Location	
Jenkins URL	http://192.168.8.30/
系统管理员邮件地址	jenkins@192.168.8.30

Extended E-mail Notification

SMTP server

Default user E-mail suffix

☒ Use SMTP Authentication

User Name

Password

Advanced Email Properties

Use SSL

SMTP port

Charset

Additional accounts

Default Content Type

☐ Use List-ID E-mail Header

☐ Add 'Precedence: bulk' E-mail Header

Default Recipients

Reply To List

Emergency reroute

Allowed Domains

Excluded Recipients

Default Subject

Maximum Attachment Size

Default Content

Default Pre-send Script

Default Post-send Script

Additional groovy classpath

☒ Enable Debug Mode

☐ Require Administrator for Template Testing

☐ Enable watching for jobs

☐ Allow sending to unregistered users

smtp.exmail.qq.com

@exmail.qq.com

Build@minibuild.com

\*\*\*\*\*

☒

465

UTF-8

新增

HTML (text/html)

构建通知 : \$PROJECT\_NAME - Build # \$BUILD\_NUMBER - \$BUILD\_STATUS!

<td><b><font color="#0B610B">构建日志 (最后 100行):</font></b>  
<hr size="2" width="100%" align="center" /></td>  
</tr>  
<t-- <tr>  
<td>Test Logs (if test has ran): <a  
href="\$PROJECT\_URL/ws/TestResult/archive\_logs/Loo-Build-\$BUILD\_NUMBER.zip">\$PROJECT\_URL/ws/TestResult/archive\_logs/Loo-Build-\$BUILD\_NUMBER.zip</a>

新增

构建通知: \$PROJECT NAME - Build # \$BUILD NUMBER - \$BUILD STATUS!


```
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>${ENV, var="JOB_NAME"}-第${BUILD_NUMBER} 次构建日志</title>
</head>

<body leftmargin="8" marginwidth="0" topmargin="8" marginheight="4"
offset="0">
<table width="95%" cellpadding="0" cellspacing="0"
style="font-size: 11pt; font-family: Tahoma, Arial, Helvetica, sans-serif">
<tr>
<td>(本邮件是程序自动下发的, 请勿回复!)</td>
</tr>
```

```
<tr>
  <td><h2>
    <font color="#0000FF">构建结果 - ${BUILD_STATUS}</font>
  </h2></td>
</tr>
<tr>
  <td><br />
    <b><font color="#0B610B">构建信息</font></b>
    <hr size="2" width="100%" align="center" />
</td>
</tr>
<tr>
  <td>
    <ul>
      <li>项目名称 : ${PROJECT_NAME}</li>
      <li>构建编号 : 第${BUILD_NUMBER}次构建</li>
      <li>构建人: ${GIT_BRANCH}</li>
      <li>触发原因: ${CAUSE}</li>
      <li>构建日志: <a href="${BUILD_URL}console">${BUILD_URL}console</a></li>
      <li>构建 Url : <a href="${BUILD_URL}">${BUILD_URL}</a></li>
      <li>工作目录 : <a href="${PROJECT_URL}ws">${PROJECT_URL}ws</a></li>
      <li>项目 Url : <a href="${PROJECT_URL}">${PROJECT_URL}</a></li>
      <li>代码审查: <a href="http://192.168.8.100:9002/dashboard?id=${PROJECT_NAME}">http://192.168.8.100:9002/dashboard?id=${PROJECT_NAME}</a></li>
    </ul>
  </td>
</tr>
<tr>
  <td><b><font color="#0B610B">Changes Since Last
    Successful Build:</font></b>
    <hr size="2" width="100%" align="center" />
</td>
</tr>
<tr>
  <td>
    <ul>
      <li>历史变更记录 : <a href="${PROJECT_URL}changes">${PROJECT_URL} changes</a></li>
    </ul>
    <ul> ${CHANGES_SINCE_LAST_SUCCESS,reverse=true, format="Changes for Build #n:<br />%c<br />", showPaths=true, changesFormat="%pre>[%a]<br />%m</pre>
  </td>
</tr>
<tr>
  <td><b>Failed Test Results</b>
    <hr size="2" width="100%" align="center" />
</td>
</tr>
<tr>
  <td><pre
    style="font-size: 11pt; font-family: Tahoma, Arial, Helvetica, sans-serif">${FAILED_TESTS}</pre>
    <br />
</td>
</tr>
<tr>
  <td><b><font color="#0B610B">构建日志 (最后 100行):</font></b>
    <hr size="2" width="100%" align="center" />
</td>
</tr>
<!-- <tr>
  <td>Test Logs (if test has ran): <a
    href="${PROJECT_URL}ws/TestResult/archive_logs/Log-Build-${BUILD_NUMBER}.zip">${PROJECT_URL}/ws/TestResult/archive_logs/Log-Build-${BUILD_NUMBER}.zip
  <br />
</td>
</tr> -->
<tr>
  <td><textarea cols="80" rows="30" readonly="readonly"
    style="font-family: Courier New">${BUILD_LOG, maxLines=100}</textarea>
  </td>
</tr>
</table>
</body>
</html>
```

Jenkins项目配置：

构建后操作选择--Editable Email Notification

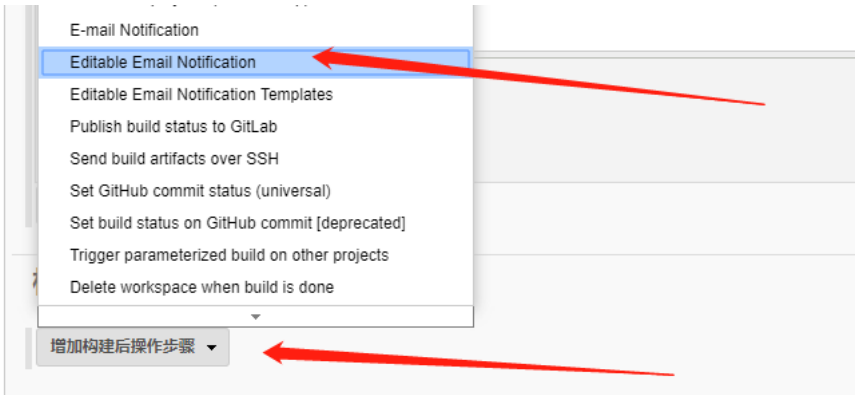

Editable Email Notification

Disable Extended Email Publisher

Allows the user to disable the publisher, while maintaining the settings

Project From

Project Recipient List

jenkins@jenkins.com

收信人，用；分割

Project Reply-To List

\$DEFAULT\_REPLYTO

抄送列表

Content Type

Default Content Type

Default Subject

\$DEFAULT\_SUBJECT

邮件标题

Default Content

\$DEFAULT\_CONTENT

邮件模板

Attachments

Attach Build Log

Attach Build Log

Content Token Reference

点击 “ Advanced Settings ” 设置邮件发送tigger

Attachments

Can use wildcards like 'module/dist/\*\*/\*.\*.zip'. See the @includes of Ant fileset for the exact format. The base directory is the workspace.

Attach Build Log

Attach Build Log

Content Token Reference

Content Token Reference

Pre-send Script  
\$DEFAULT\_PRESEND\_SCRIPT

Post-send Script  
\$DEFAULT\_POSTSEND\_SCRIPT

Additional groovy classpath  
新增

Save to Workspace  
☐

Triggers

Always

Send To

Developers

Recipient List

新增

Add Trigger

发送成功！

```

firstFoundIdx-substring: [REDACTED]
=> found type: 0
Looking for: [REDACTED]
starting at: 39
firstFoundIdx: 39
firstFoundIdx-substring: [REDACTED]
=> found type: 0
Analyzing: [REDACTED]
Looking for: [REDACTED]
starting at: 0
firstFoundIdx: 0
firstFoundIdx-substring: [REDACTED]
=> found type: 0
Looking for: [REDACTED]
starting at: 21
firstFoundIdx: 21
firstFoundIdx-substring: [REDACTED]
=> found type: 0
Looking for: [REDACTED]
starting at: 39
firstFoundIdx: 39
firstFoundIdx-substring: [REDACTED]
=> found type: 0
Analyzing: [REDACTED]
Looking for: [REDACTED]
starting at: 0
firstFoundIdx: 0
firstFoundIdx-substring: [REDACTED]
=> found type: 0
Looking for: [REDACTED]
starting at: 21
firstFoundIdx: 21
firstFoundIdx-substring: [REDACTED]
=> found type: 0
Looking for: [REDACTED]
starting at: 39
firstFoundIdx: 39
firstFoundIdx-substring: [REDACTED]
=> found type: 0
Adding recipients from trigger recipient list
Successfully created MimeMessage
Sending email to: [REDACTED]
Finished: SUCCESS

```

构建通知 : MingByteWeb - Build # 12 - Successful! ★

发给 [MingByteWeb](#)

build.log (9 KB)

(本邮件是程序自动下发的，请勿回复！)  
**构建结果 - Successful**

构建信息

- 项目名称 : MingByteWeb
- 构建编号 : 第12次构建
- 构建人 : origin/master
- 触发原因: Started by user admin
- 构建日志 : <http://192.168.8.30/job/MingByteWeb/12/console>
- 构建 Url : <http://192.168.8.30/job/MingByteWeb/12/>
- 工作目录 : <http://192.168.8.30/job/MingByteWeb/ws>
- 项目 Url : <http://192.168.8.30/job/MingByteWeb/>
- 代码审查 : <http://192.168.8.100:9002/dashboard?id=MingByteWeb>

Changes Since Last Successful Build:

- 历史变更记录 : <http://192.168.8.30/job/MingByteWeb/changes>

Changes for Build #12:  
No changes

Failed Test Results

No tests ran.

构建日志 (最后 100行):

```
[...truncated 2.88 KB...]
assets/img/fzlc1.04b5a7d6.png (1.72 MiB)
assets/img/bg.10e66f2d.png (269 KiB)
assets/img/neng2.51572385.svg (708 KiB)
assets/img/aboutus-bg.24b126e4.png (3.06 MiB)
assets/img/homeImg.2d4c24fe.jpg (605 KiB)
assets/img/banner.d0de1296.png (877 KiB)
assets/img/en-hu.10ba4555.png (748 KiB)
assets/img/shuzi.0c4edbf4.png (2.82 MiB)
assets/img/en-jiao-bg.327842dc.png (352 KiB)
assets/img/banner.dc7b97a9.png (535 KiB)
```