

Supplementary Material for “Neural Cone Radiosity for Interactive Global Illumination with Glossy Materials”

Jierui Ren, Haojie Jin, Bo Pang, Yisong Chen, Guoping Wang, Sheng Li*, *Member, IEEE*

APPENDIX

FULL-FRAME RENDERING COMPARISONS

Figure 3 shows the full-frame results corresponding to the main comparison in the paper. Unlike the cropped regions in Figure 5, these results show the complete rendered frames for all scenes and methods under the same experimental settings.

QUALITATIVE RESULTS OF ABLATION STUDIES

We provide qualitative results for the cluster-count and reflection-ray ablations reported in Tables II and III of the main paper.

Figure 1 shows the effect of varying the number of clusters K with $T = 128$. Increasing K improves reconstruction quality, while the improvement becomes marginal beyond $K = 4$, consistent with the quantitative results.

Figure 2 shows the effect of the reflection-ray budget T and post-processing. Increasing T reduces residual sampling noise, while post-processing further improves perceptual quality, particularly at lower ray budgets. The slightly higher MAPE after post-processing reflects the small bias introduced by filtering.

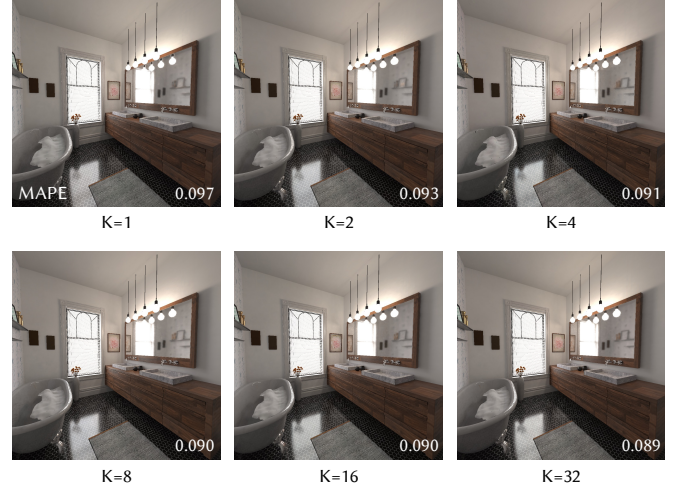


Fig. 1. Qualitative cluster-count ablation in the *bathroom* scene with $T = 128$. From left to right and top to bottom, the panels correspond to $K = 1, 2, 4, 8, 16$, and 32 . MAPE is shown in the bottom-right corner of each image.

Jierui Ren is with the College of Future Technology, Peking University, China. jerry@stu.pku.edu.cn

Haojie Jin, Bo Pang, Yisong Chen, Guoping Wang, and Sheng Li are with the School of Computer Science, Peking University, China.

E-mail: {jhj|chenyisong|wgp|lisheng}@pku.edu.cn, bo98@stu.pku.edu.cn

Guoping Wang and Sheng Li are also with the National Key Laboratory of Intelligent Parallel Technology.

Sheng Li is the corresponding author.

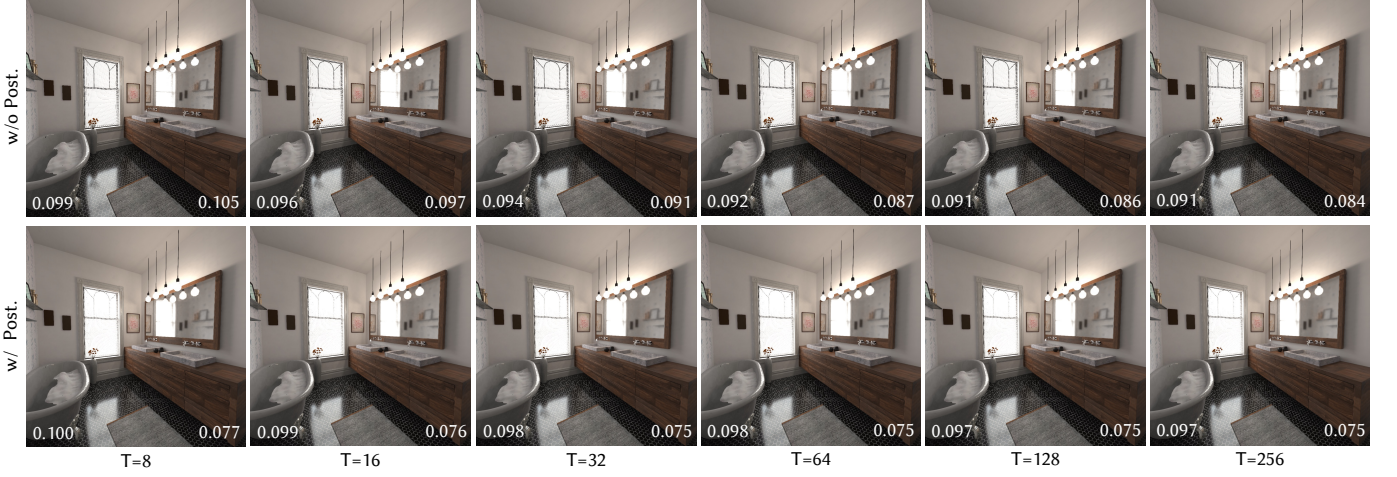


Fig. 2. Qualitative reflection-ray and post-processing ablations in the *bathroom* scene with $K = 4$. The columns correspond to $T = 8, 16, 32, 64, 128$, and 256 . The top row is without post-processing and the bottom row is with FXAA and cross-bilateral filtering. MAPE and LPIPS are shown in the bottom-left and bottom-right corners, respectively.

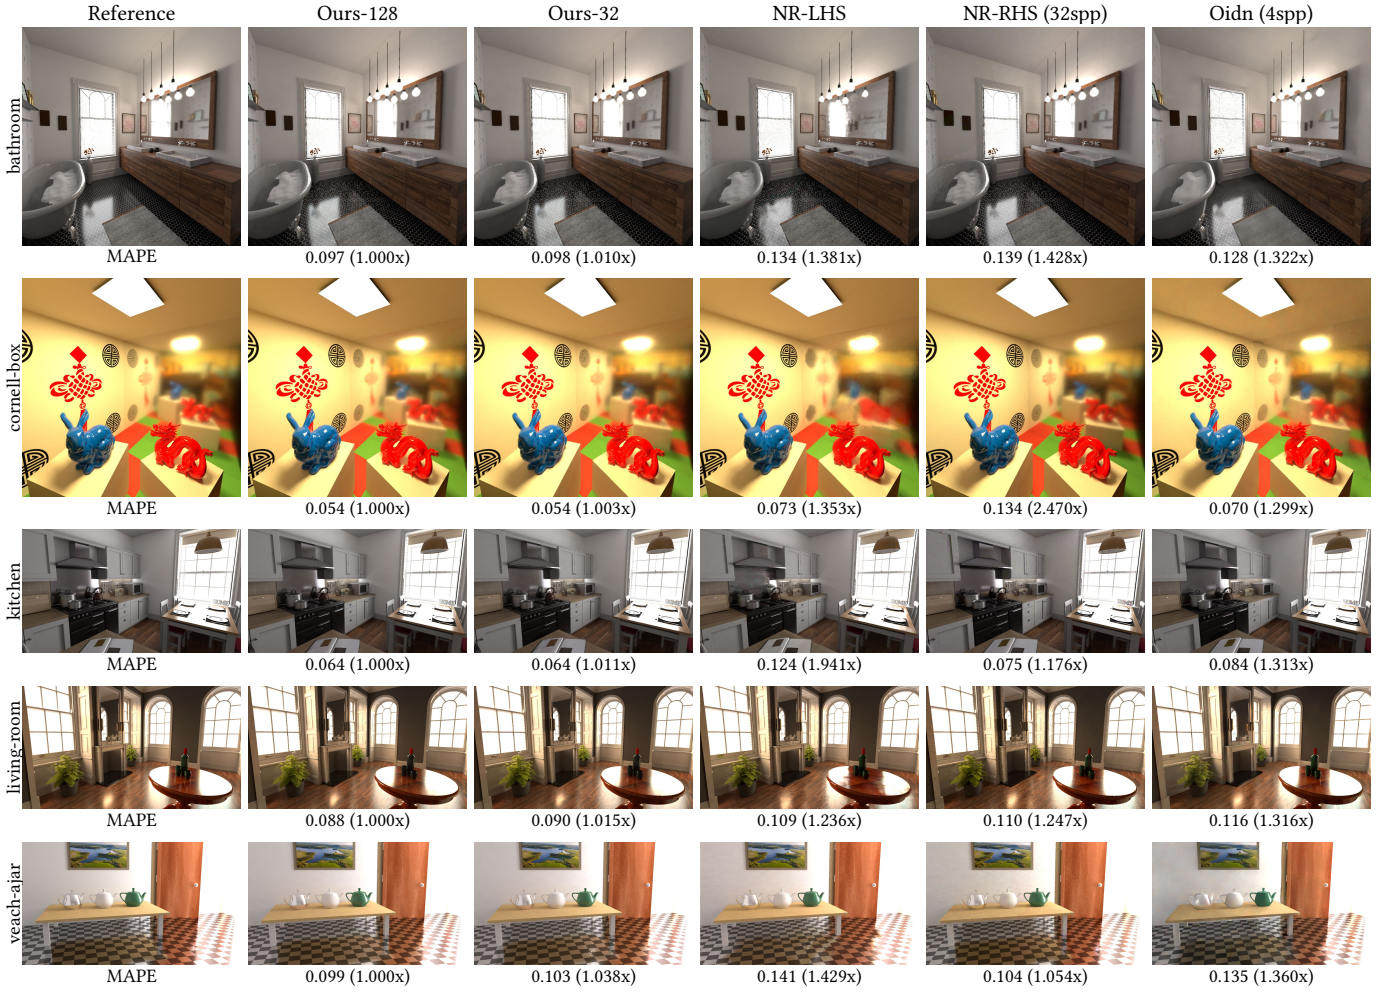


Fig. 3. Full-frame comparisons across all scenes and methods in the main experiment. We show the reference, **Ours-128**, **Ours-32**, **NR-LHS**, **NR-RHS** (32 spp), and an equal-time 4-spp path tracer with Oidn denoising (**Oidn**). MAPE is computed against the 100,000-spp reference.