

ml

Userid ↲

string ID: 123

string Name: "user1"

"User"

db

⊕ User

- "xxx"

|
- "

- "

ID: 123

Name: "user1"

"unique id"


"unique id"

"unique id"

child()


⊕ User
- (2D)

⊕ User
⊕ "123"

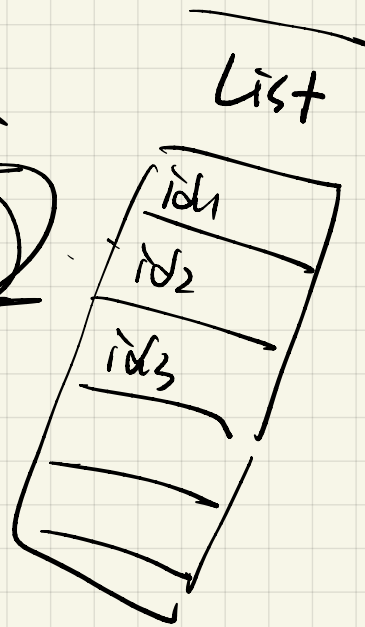

⊕ Complaint

⊕ "1xxx...x" ^{key} unique id



Info ID: "1xxx...x" ^{value}
Subject: _____
Content: _____
Submit ID: "123"