

r-workshop-demo-rmarkdown-Chinese

吕杰好 (Jieyu Lv)

2023-02-20

目录

什么是rmarkdown?	1
如何进行安装rmarkdown包	1
slide 幻灯片	3
如何在rmarkdown里进行书写。	3
Chunks options	6
1	7
2	7
3	7
4	7

什么是rmarkdown?

使用Rmarkdown相比于Rscript有什么好处?

R Markdown is easy enough to use that a little experience with each of the coding frameworks will give you sufficient flexibility to create reports in different formats with widely varying appearances.

You won't find a report-generating system nearly as powerful and easy-to-use as R Markdown in any other statistical software.

如何进行安装rmarkdown包

```
# 使用语句安装  
# install.packages("rmarkdown")
```


Syntax	Becomes												
Plain text	Plain text												
End a line with two spaces to start a new paragraph.	End a line with two spaces to start a new paragraph.												
<code>*italics*</code> and <code>_italics_</code>	<i>italics</i> and <i>italics</i>												
<code>**bold**</code> and <code>__bold__</code>	bold and bold												
<code>superscript^2^</code>	^{superscript} 2												
<code>--strikethrough--</code>	strikethrough												
<code>[link](www.rstudio.com)</code>	link												
<code># Header 1</code>	Header 1												
<code>## Header 2</code>	Header 2												
<code>### Header 3</code>	Header 3												
<code>#### Header 4</code>	Header 4												
<code>##### Header 5</code>	Header 5												
<code>##### Header 6</code>	Header 6												
<code>endash: --</code>	endash: –												
<code>emdash: ---</code>	emdash: —												
<code>ellipsis: ...</code>	ellipsis: …												
<code>inline equation: \$A = \pi*r^{2}\$</code>	inline equation: $A = \pi * r^2$												
<code>image: </code>	image: 												
<code>horizontal rule (or slide break):</code>	horizontal rule (or slide break):												
<code>***</code>													
<code>> block quote</code>	block quote												
<code>* unordered list</code>	<ul style="list-style-type: none"> • unordered list 												
<code>* item 2</code>	<ul style="list-style-type: none"> • item 2 <ul style="list-style-type: none"> ◦ sub-item 1 ◦ sub-item 2 												
<code>+ sub-item 1</code>													
<code>+ sub-item 2</code>													
<code>1. ordered list</code>	<ol style="list-style-type: none"> 1. ordered list 												
<code>2. item 2</code>	<ol style="list-style-type: none"> 2. item 2 <ul style="list-style-type: none"> ◦ sub-item 1 ◦ sub-item 2 												
<code>+ sub-item 1</code>													
<code>+ sub-item 2</code>													
<table> <tr> <th>Table Header</th><th>Second Header</th></tr> <tr> <td>Table Cell</td><td>Cell 2</td></tr> <tr> <td>Cell 3</td><td>Cell 4</td></tr> </table>	Table Header	Second Header	Table Cell	Cell 2	Cell 3	Cell 4	<table> <tr> <th>Table Header</th><th>Second Header</th></tr> <tr> <td>Table Cell</td><td>Cell 2</td></tr> <tr> <td>Cell 3</td><td>Cell 4</td></tr> </table>	Table Header	Second Header	Table Cell	Cell 2	Cell 3	Cell 4
Table Header	Second Header												
Table Cell	Cell 2												
Cell 3	Cell 4												
Table Header	Second Header												
Table Cell	Cell 2												
Cell 3	Cell 4												

图 1: rmarkdown documents

Syntax	Becomes
<p>Make a code chunk with three back ticks followed by an <code>r</code> in braces. End the chunk with three back ticks:</p> <pre>```{r} paste("Hello", "World!") ```</pre>	<p>Make a code chunk with three back ticks followed by an <code>r</code> in braces. End the chunk with three back ticks:</p> <pre>paste("Hello", "World!") ## [1] "Hello World!"</pre>
<p>Place code inline with a single back ticks. The first back tick must be followed by an <code>R</code>, like this <code>`r paste("Hello", "World!")`</code>.</p>	<p>Place code inline with a single back ticks. The first back tick must be followed by an <code>R</code>, like this <code>Hello World!</code>.</p>
<p>Add chunk options within braces. For example, <code>`echo=FALSE`</code> will prevent source code from being displayed:</p> <pre>```{r eval=TRUE, echo=FALSE} paste("Hello", "World!") ```</pre>	<p>Add chunk options within braces. For example, <code>echo=FALSE</code> will prevent source code from being displayed:</p> <pre>## [1] "Hello World!"</pre>

图 2: rmarkdown documents

slide 幻灯片

Templates	Basic YAML	Template options	Latex options	Interactive Docs
html_document	---	---	---	---
pdf_document	title: "A Web Doc"	title: "Chapters"	title: "My PDF"	title: "Slides"
word_document	author: "John Doe"	output:	output: pdf_document	output:
md_document	date: "May 1, 2015"	html_document:	fontsize: 11pt	slidy_presentation:
ioslides_presentation	output: md_document	toc: true	geometry: margin=1in	incremental: true
slidy_presentation	---	toc_depth: 2	---	runtime: shiny
beamer_presentation	---	---	---	---

图 3: rmarkdown documents

如何在rmarkdown里进行书写。

```
#-----headers-----
# Things I like
## Things I like
### Things I like
#### Things I like
Things I like
```

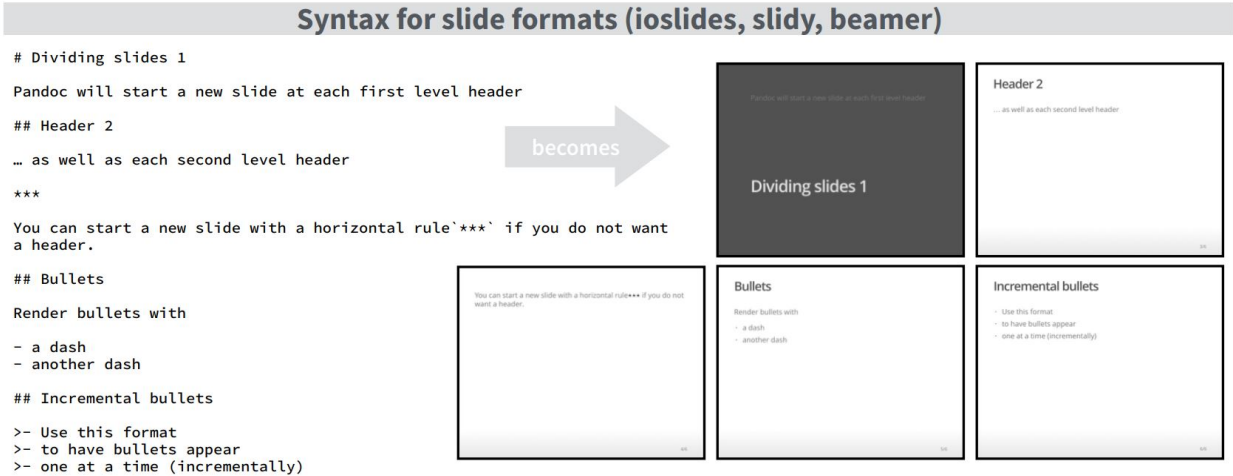


图 4: rmarkdown documents

Slide display modes	
Press a key below during presentation to enter display mode. Press esc to exit display mode.	
ioslides	slidy
f - enable fullscreen mode	C - show table of contents
w - toggle widescreen mode	F - toggle display of the footer
o - enable overview mode	A - toggle display of current vs all slides
h - enable code highlight mode	S - make fonts smaller
p - show presenter notes	B - make fonts bigger

图 5: rmarkdown documents

option	html	pdf	word	md	ioslides	slidy	beamer	description
colortheme							X	Beamer color theme to use (e.g., <code>colortheme: "dolphin"</code>).
css	X				X	X		Filepath to CSS style to use to style document (e.g., <code>css: styles.css</code>).
duration						X		Add a countdown timer (in minutes) to footer of slides (e.g., <code>duration: 45</code>).
fig_caption	X	X	X		X	X	X	Should figures be rendered with captions?
fig_crop		X					X	Should pdfcrop utility be automatically applied to figures (when available)?
fig_height	X	X	X	X	X	X	X	Default figure height (in inches) for document.
fig_retina	X			X	X	X		Scaling to perform for retina displays (e.g., <code>fig_retina: 2</code>).
fig_width	X	X	X	X	X	X	X	Default figure width (in inches) for document.
font_adjustmen						X		Increase or decrease font size for entire presentation (e.g., <code>font_adjustment: -1</code>).
fonttheme							X	Beamer font theme to use (e.g., <code>fonttheme: "structurebold"</code>).
footer						X		Text to add to footer of each slide (e.g., <code>footer: "Copyright (c) 2014 RStudio"</code>).
highlight	X	X				X	X	Syntax highlighting style (e.g. "tango", "pygments", "kate", "zenburn", and
includes	X	X		X	X	X	X	See below
-in_header	X	X			X	X	X	File of content to place in document header (e.g., <code>in_header: header.html</code>).
-before_body	X	X			X	X	X	File of content to place before document body (e.g., <code>before_body:</code>
-after_body	X	X			X	X	X	File of content to place after document body (e.g., <code>after_body: doc_suffix.html</code>).
incremental					X	X	X	Should bullets appear one at a time (on presenter mouse clicks)?
keep_md	X				X	X		Save a copy of .md file that contains knitr output (in addition to the .Rmd and HTML files)?
keep_tex		X					X	Save a copy of .tex file that contains knitr output (in addition to the .Rmd and PDF files)?
latex_engine		X						Engine to render latex. Should be one of "pdflatex", "xelatex", and "lualatex".
lib_dir	X				X	X		Directory of dependency files to use (Bootstrap, MathJax, etc.) (e.g., <code>lib_dir: libs</code>).
logo					X			File path to a logo (at least 128 x 128) to add to presentation (e.g., <code>logo: logo.png</code>).
mathjax	X				X	X		Set to local or a URL to use a local/URL version of MathJax to render equations
number_section	X	X						Add section numbering to headers (e.g., <code>number_sections: true</code>).
pandoc_args	X	X	X	X	X	X	X	Arguments to pass to Pandoc (e.g., <code>pandoc_args: ["--title-prefix", "Foo"]</code>).
preserve_yaml				X				Preserve YAML front matter in final document?
reference_docx			X					A .docx file whose styles should be copied to use (e.g., <code>reference_docx:</code>
self_contained	X				X	X		Embed dependencies into the doc? Set to <code>false</code> to keep dependencies in external files.
slide_level							X	The lowest heading level that defines individual slides (e.g., <code>slide_level: 2</code>).
smaller					X			Use the smaller font size in the presentation?
smart	X				X	X		Convert straight quotes to curly, dashes to em-dashes, ... to ellipses, and so on?
template	X	X				X	X	Pandoc template to use when rendering file (e.g., <code>template:</code>
theme	X						X	Bootswatch or Beamer theme to use for page. Valid bootswatch themes include "cerulean", "journal", "flatly", "readable", "spacelab", "united", and "cosmo".
toc	X	X		X			X	Add a table of contents at start of document? (e.g., <code>toc: true</code>).
toc_depth	X	X		X				The lowest level of headings to add to table of contents (e.g., <code>toc_depth: 2</code>).
transition					X			Speed of slide transitions should be "slower", "faster" or a number in seconds.
variant				X				The flavor of markdown to use; one of "markdown", "markdown_strict", "markdown_github", "markdown_mmd", and "markdown_phpxtra"
widescreen					X			Display presentation in widescreen format?

图 6: rmarkdown documents

#如何来呈现列表 —————Lists—————

* statistics

* R

* LaTeX

* Word

* SPSS

#多层级的列表

Things You like

- writing
 - academic writing
 - novel writing
- English
- paper
- working

#—————emphasizing text—————

- statistics
- **R**
- *LaTeX*
- Word
- SPSS

Text^{superscript} Text_{subscript}

Text^{superscript}

Text_{subscript}

#—————image—————

#—————Hyperlinks—————

text_describing_link

Psychology Experiments

R study materials

Chunks options

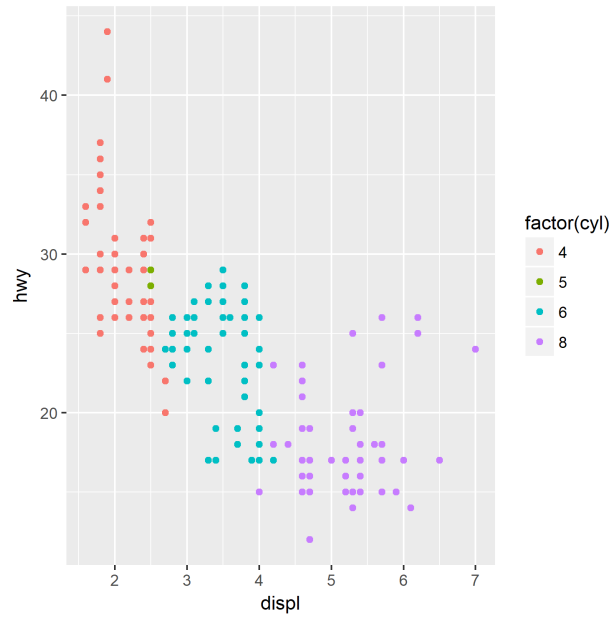


图 7: Figure_demo

1

```
getwd()
```

```
## [1] "E:/A-CourseR/R2020-2021-2-workshop-postgraduate/R2020-2021-2-courseproject"
```

2

```
getwd()
```

```
## [1] "E:/A-CourseR/R2020-2021-2-workshop-postgraduate/R2020-2021-2-courseproject"
```

3

```
## [1] "E:/A-CourseR/R2020-2021-2-workshop-postgraduate/R2020-2021-2-courseproject"
```

4

```
getwd()
```


Chunk options		
option	default value	description
Code evaluation		
child	NULL	A character vector of filenames. Knitr will knit the files and place them into the main document.
code	NULL	Set to R code. Knitr will replace the code in the chunk with the code in the code option.
engine	'R'	Knitr will evaluate the chunk in the named language, e.g. engine = 'python'. Run <code>names(knitr::knit_engines\$get())</code> to see supported languages.
eval	TRUE	If FALSE , knitr will not run the code in the code chunk.
include	TRUE	If FALSE , knitr will run the chunk but not include the chunk in the final document.
purl	TRUE	If FALSE , knitr will not include the chunk when running <code>purl()</code> to extract the source code.
Results		
collapse	FALSE	If TRUE , knitr will collapse all the source and output blocks created by the chunk into a single block.
echo	TRUE	If FALSE , knitr will not display the code in the code chunk above it's results in the final document.
results	'markup'	If 'hide' , knitr will not display the code's results in the final document. If 'hold' , knitr will delay displaying all output pieces until the end of the chunk. If 'asis' , knitr will pass through results without reformatting them (useful if results return raw HTML, etc.)
error	TRUE	If FALSE , knitr will not display any error messages generated by the code.
message	TRUE	If FALSE , knitr will not display any messages generated by the code.
warning	TRUE	If FALSE , knitr will not display any warning messages generated by the code.
Code Decoration		
comment	'##'	A character string. Knitr will append the string to the start of each line of results in the final document.
highlight	TRUE	If TRUE , knitr will highlight the source code in the final output.
prompt	FALSE	If TRUE , knitr will add > to the start of each line of code displayed in the final document.
strip.white	TRUE	If TRUE , knitr will remove white spaces that appear at the beginning or end of a code chunk.
tidy	FALSE	If TRUE , knitr will tidy code chunks for display with the <code>tidy_source()</code> function in the formatR package.
Chunk options (Continued)		
option	default value	description
Chunks		
opts.label	NULL	The label of options set in <code>knitr::opts_template()</code> to use with the chunk.
R.options	NULL	Local R options to use with the chunk. Options are set with <code>options()</code> at start of chunk. Defaults are restored at end.
ref.label	NULL	A character vector of labels of the chunks from which the code of the current chunk is inherited.
Cache		
autodep	FALSE	If TRUE , knitr will attempt to figure out dependencies between chunks automatically by analyzing object names.
cache	FALSE	If TRUE , knitr will cache the results to reuse in future knits. Knitr will reuse the results until the code chunk is altered.
cache.comments	NULL	If FALSE , knitr will not rerun the chunk if only a code comment has changed.
cache.lazy	TRUE	If TRUE , knitr will use <code>lazyload()</code> to load objects in chunk. If FALSE , knitr will use <code>load()</code> to load objects in chunk.
cache.path	'cache/'	A file path to the directory to store cached results in. Path should begin in the directory that the .Rmd file is saved in.
cache.vars	NULL	A character vector of object names to cache if you do not wish to cache each object in the chunk.
dependson	NULL	A character vector of chunk labels to specify which other chunks a chunk depends on. Knitr will update a cached chunk if its dependencies change.
Animation		
anipots	'controls,loop'	Extra options for animations (see the animate package).
interval	1	The number of seconds to pause between animation frames.

Plots		
dev	'png'	The R function name that will be used as a graphical device to record plots, e.g. <code>dev='CairoPDF'</code> .
dev.args	NULL	Arguments to be passed to the device, e.g. <code>dev.args=list(bg='yellow', pointsize=10)</code> .
dpi	72	A number for knitr to use as the dots per inch (dpi) in graphics (when applicable).
external	TRUE	If TRUE, knitr will externalize tikz graphics to save LaTeX compilation time (only for the <code>tikzDevice::tikz()</code> device).
fig.align	'default'	How to align graphics in the final document. One of 'left', 'right', or 'center'.
fig.cap	NULL	A character string to be used as a figure caption in LaTeX.
fig.env	'figure'	The Latex environment for figures.
fig.ext	NULL	The file extension for figure output, e.g. <code>fig.ext='png'</code> .
fig.height, fig.width	7	The width and height to use in R for plots created by the chunk (in inches).
fig.keep	'high'	If 'high', knitr will merge low-level changes into high level plots. If 'all', knitr will keep all plots (low-level changes may produce new plots). If 'first', knitr will keep the first plot only. If 'last', knitr will keep the last plot only. If 'none', knitr will discard all plots.
fig.lp	'fig.'	A prefix to be used for figure labels in latex.
fig.path	'figure/'	A file path to the directory where knitr should store the graphics files created by the chunk.
fig.pos	"	A character string to be used as the figure position arrangement in LaTeX.
fig.process	NULL	A function to post-process a figure file. Should take a filename and return a filename of a new figure source.
fig.retina	1	Dpi multiplier for displaying HTML output on retina screens.
fig.scap	NULL	A character string to be used as a short figure caption.
fig.subcap	NULL	A character string to be used as captions in sub-figures in LaTeX.
fig.show	'asis'	If 'hide', knitr will generate the plots created in the chunk, but not include them in the final document. If 'hold', knitr will delay displaying the plots created by the chunk until the end of the chunk. If 'animate', knitr will combine all of the plots created by the chunk into an animation.
fig.showtext	NULL	If TRUE, knitr will call <code>showtext::showtext.begin()</code> before drawing plots.
out.extra	NULL	A character string of extra options for figures to be passed to LaTeX or HTML.
out.height, out.width	NULL	The width and height to scale plots to in the final output. Can be in units recognized by output, e.g. <code>8\\linewidth, 50px</code>
resize.height, resize.width	NULL	The width and height to resize tike graphics in LaTeX, passed to <code>\resizebox{ }{ }</code> .
sanitize	FALSE	If TRUE, knitr will sanitize tike graphics for LaTeX.