Ссылка на репозиторий: https://github.com/jijalily/labs

```
Ввод [2]: !git

usage: git [--version] [--help] [-C <path>] [-c <name>=<value>]
           [--exec-path[=<path>]] [--html-path] [--man-path] [--info-path]
           [-p | --paginate | -P | --no-pager] [--no-replace-objects] [--bare]
           [--git-dir=<path>] [--work-tree=<path>] [--namespace=<name>]
           [--super-prefix=<path>] [--config-env=<name>=<envvar>]
           <command> [<args>]

These are common Git commands used in various situations:

start a working area (see also: git help tutorial)
   clone     Clone a repository into a new directory
   init      Create an empty Git repository or reinitialize an existing one

work on the current change (see also: git help everyday)
   add       Add file contents to the index
   mv        Move or rename a file, a directory, or a symlink
   restore   Restore working tree files
   rm        Remove files from the working tree and from the index

examine the history and state (see also: git help revisions)
   bisect    Use binary search to find the commit that introduced a bug
   diff      Show changes between commits, commit and working tree, etc
   grep      Print lines matching a pattern
   log       Show commit logs
   show      Show various types of objects
   status    Show the working tree status

grow, mark and tweak your common history
   branch    List, create, or delete branches
   commit    Record changes to the repository
   merge     Join two or more development histories together
   rebase    Reapply commits on top of another base tip
   reset     Reset current HEAD to the specified state
   switch    Switch branches
   tag       Create, list, delete or verify a tag object signed with GPG

collaborate (see also: git help workflows)
   fetch     Download objects and refs from another repository
   pull      Fetch from and integrate with another repository or a local branch
   push      Update remote refs along with associated objects

'git help -a' and 'git help -g' list available subcommands and some
concept guides. See 'git help <command>' or 'git help <concept>'
to read about a specific subcommand or concept.
See 'git help git' for an overview of the system.
```
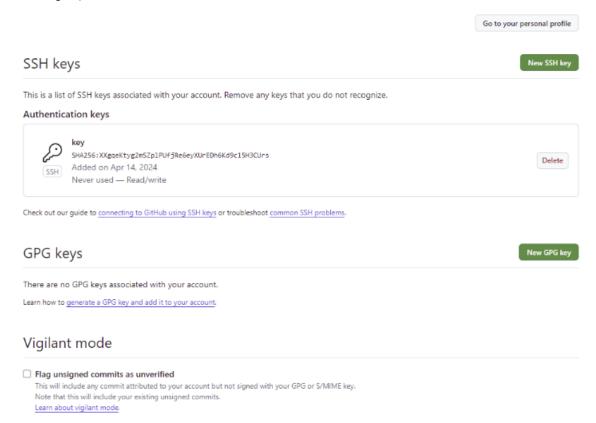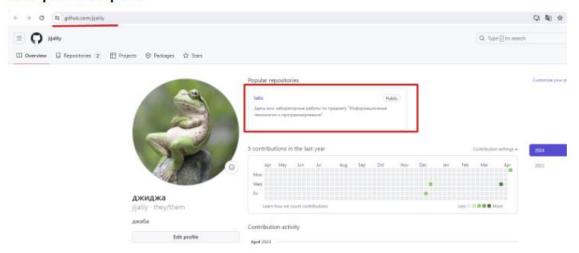
## Далее я сгенерировала ключ используя команду ssh-keygen и добавила его в настройки

```
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAAABAQDZ3zJ9K/SnLjymnQJGR/vAcc2zIFXUp3ICSzdJ8j3ztIDZmkznhDsm3sevCRWof5jWAhDlhaN39Whzwr/b
c3L2QARtEHrgJ64NxwP1iJwvTmyc6kKsJK4TA5i8jBKD2d7zcQ1XHmSJhDcdZVwiK10v/x5rdoTReo0uhjFiDbSYApBoKjqazEYAZXrCIw9Zq14WOBNq16xj
z3l1HEKnaHhB9R3z2qR2YG1BBSlTEAbWr50edcMrzOfXB7RGnEaGBvNiIqPiYXmGR51PQsYru1Jt3Spl/twyRWTJI+sudWH8fx4FEYqCXtY0Awm0tOJsrz6y
c/MrXbZgI6kfpfUmhixx
```

## SSH keys

New SSH key

This is a list of SSH keys associated with your account. Remove any keys that you do not recognize.

**Authentication keys**

key
SHA256:XXgqeKtyg2mSZplPUfjRe6eyXUrEDn6Kd9c15H3CUrs
Added on Apr 14, 2024
Never used — Read/write

Delete

Check out our guide to connecting to GitHub using SSH keys or troubleshoot common SSH problems.

## GPG keys

New GPG key

There are no GPG keys associated with your account.

Learn how to generate a GPG key and add it to your account.

## Vigilant mode

☐ **Flag unsigned commits as unverified**
This will include any commit attributed to your account but not signed with your GPG or S/MIME key.
Note that this will include your existing unsigned commits.
Learn about vigilant mode.

# Мой репозиторий

# Создаем папку pipe

Ввод [7]: `!md pipe`

Ввод [9]: `!git init`

Initialized empty Git repository in X:/Untitled Folder/.git/

Ввод [12]: `!git add .`

```
warning: LF will be replaced by CRLF in .ipynb_checkpoints/Untitled-checkpoint.ipynb.
The file will have its original line endings in your working directory
warning: LF will be replaced by CRLF in .ipynb_checkpoints/git-checkpoint.ipynb.
The file will have its original line endings in your working directory
warning: LF will be replaced by CRLF in Untitled.ipynb.
The file will have its original line endings in your working directory
warning: LF will be replaced by CRLF in git.ipynb.
The file will have its original line endings in your working directory
warning: LF will be replaced by CRLF in pipe/.ipynb_checkpoints/pipeline24-checkpoint.ipynb.
The file will have its original line endings in your working directory
warning: LF will be replaced by CRLF in pipe/pipeline24.ipynb.
The file will have its original line endings in your working directory
```

Ввод [13]: `!git status`

```
On branch main

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   .ipynb_checkpoints/Untitled-checkpoint.ipynb
        new file:   .ipynb_checkpoints/git-checkpoint.ipynb
        new file:   Untitled.ipynb
        new file:   git.ipynb
        new file:   pipe/.ipynb_checkpoints/pipeline24-checkpoint.ipynb
        new file:   pipe/pipeline24.ipynb

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   Untitled.ipynb
```

Ввод [14]: `!git commit -m "new commit"`

```
[main (root-commit) e0c8baf] new commit
 6 files changed, 377 insertions(+)
 create mode 100644 .ipynb_checkpoints/Untitled-checkpoint.ipynb
 create mode 100644 .ipynb_checkpoints/git-checkpoint.ipynb
 create mode 100644 Untitled.ipynb
 create mode 100644 git.ipynb
 create mode 100644 pipe/.ipynb_checkpoints/pipeline24-checkpoint.ipynb
 create mode 100644 pipe/pipeline24.ipynb
```

Ввод [15]: `!git branch -M main`

Ввод [16]: `!git remote add origin https://github.com/jijalily/labs.git`