


Great Ideas in Computer Architecture

C: Introduction, Pointers

Instructor: Shreyas Chand

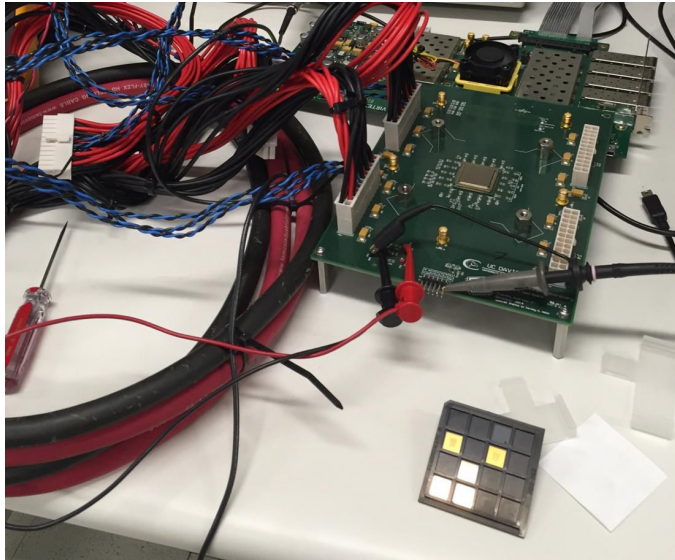

UC Davis ECE Lab creates first “KiloCore” chip

- “The energy-efficient “KiloCore” chip has a maximum computation rate of 1.78 trillion instructions per second and contains 621 million transistors. [It] can execute 115 billion instructions per second while dissipating only 0.7 Watts...”
- “Applications already developed for the chip include wireless coding/decoding, video processing, encryption, and others involving large amounts of parallel data such as scientific data applications and datacenter record processing.”
 - [Online article](#)

Review

- Bits can be used to represent anything!
- n bits can represent up to 2^n things
- Number Representation
 - Bits can represent anything!
 - n bits can represent up to 2^n things
 - Unsigned, Bias, 1's, 2's
 - Overflow
 - Sign Extension

Question: Take the 4-bit number $x = 0b1010$.

Which of the following numbers does x NOT represent in the schemes discussed last lecture?

- unsigned
- sign and magnitude
- biased notation
- one's complement
- two's complement

(A) -4

(B) -6

(C) 10

(D) -2

Two's Complement

Unsigned

Sign and Magnitude

Overview

**Higher-Level Language
Program (e.g. C)**

```
temp = v[k];  
v[k] = v[k+1];  
v[k+1] = temp;
```

This week

Compiler

**Assembly Language
Program (e.g. MIPS)**

Assembler

**Machine Language
Program (MIPS)**

```
lw    $t0, 0($2)  
lw    $t1, 4($2)  
sw    $t1, 0($2)  
sw    $t0, 4($2)
```


```
0000 1001 1100 0110 1010 1111 0101 1000  
1010 1111 0101 1000 0000 1001 1100 0110  
1100 0110 1010 1111 0101 1000 0000 1001  
0101 1000 0000 1001 1100 0110 1010 1111
```

*Machine
Interpretation*

**Hardware Architecture Description
(e.g. block diagrams)**

*Architecture
Implementation*

**Logic Circuit Description
(Circuit Schematic Diagrams)**

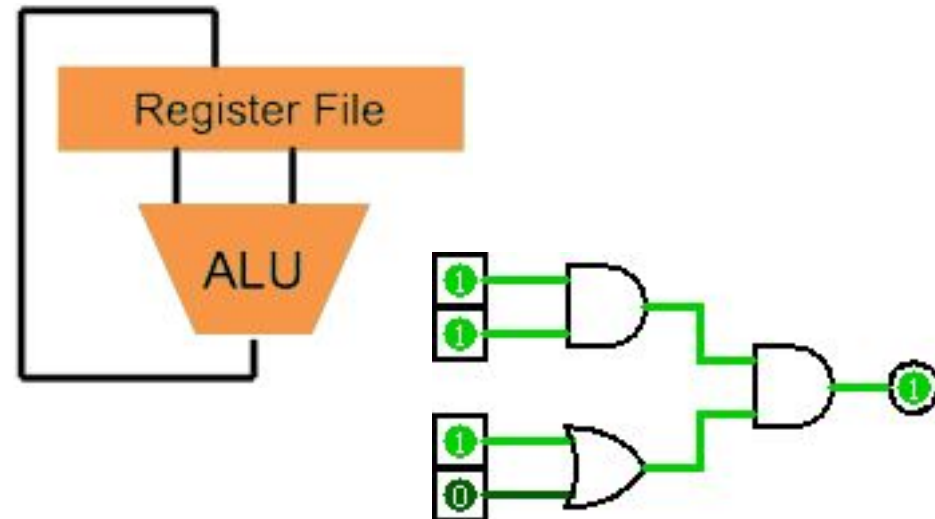

Agenda


- Basic C Concepts
 - Compilation
 - Variable Types
- Administtrivia
- C Syntax and Control Flow
- GTKYS
- Pointers
 - Address vs. Value

Prerequisites

- Official prerequisites: “Some” C experience is required before CS61C
 - C++ or JAVA okay
- Average CS61C class:
 - 9/10 already know JAVA
 - 1/2 already know C++
 - 1/3 already know C
 - 1/10 already know C#
 - 1/20 have not taken 61B or equivalent
- If you have no experience in these languages, then start early and ask a lot of questions in discussion!

Disclaimer

- You will not learn how to fully code in C in these lectures!
 - K&R is THE resource

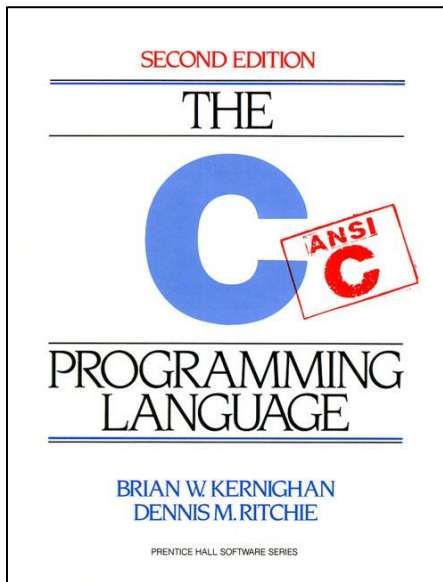

- Brian Harvey's notes (on course website)
- Other online sources
- HW, Labs for practice
- Projects will solidify knowledge

Introduction

- *C is not a “very high level” language, nor a “big” one, and is not specialized to any particular area of application. But its absence of restrictions and its generality make it more convenient and effective for many tasks than supposedly more powerful languages.*
— Kernighan and Ritchie
- With C we can write programs that allow us to exploit underlying features of the architecture

C Concepts

These concepts distinguish C from other programming languages that you may know:

Compiler	Creates useable programs from C source code
Typed variables	Must declare the kind of data the variable will contain
Typed functions	Must declare the kind of data returned from the function
Header files (.h)	Allows you to declare functions and variables in separate files
Structs	Groups of related values
Enums	Lists of predefined values
Pointers	Aliases to other variables

Compilation

- C is a **compiled** language
- *C compilers* map C programs into architecture-specific machine code (string of 0s and 1s)
 - Unlike Java, which converts to architecture-independent bytecode (run by JVM)
 - Unlike python, which directly *interprets* the code
 - Main difference is when your program is mapped to low-level machine instructions

Compilation Advantages

- **Excellent run-time performance:** Generally much faster than Python or Java for comparable code because it **optimizes for the given architecture**
- **Fair compilation time:** enhancements in compilation procedure (`Makefiles`) allow us to **recompile only the modified files**

Compilation Disadvantages

- Compiled files, including the executable, are architecture-specific (CPU type and OS)
 - Executable must be **rebuilt** on each new system
 - i.e. “porting your code” to a new architecture
- “Edit → Compile → Run [repeat]” iteration cycle can be slow

Typed Variables in C

declaration assignment

```
int x = 2;  
float y = 1.618;  
char z = 'A';
```

You must declare the type of data a variable will hold

Declaration must come before or simultaneously with assignment

Type	Description	Examples
int	signed integer	5,-12,0
short int (short)	smaller signed integer	
long int (long)	larger signed integer	
char	single text character or symbol 'a', 'D', '?'	
float	floating point non-integer numbers	0.0, 1.618, -1.4
double	greater precision FP number	

- Integer sizes are machine dependant!
 - Common size is 4 or 8 bytes (32/64-bit), but can't ever assume this
- Can add “unsigned” before `int` or `char`

sizeof()

- If integer sizes are machine dependent, how do we tell?
 - Use `sizeof()` function
 - Returns size in bytes of variable or data type name
- Examples: `int x; sizeof(x); sizeof(int);`
- Acts differently with arrays and structs, which we will cover later
 - Arrays: returns size of whole array
 - Structs: returns size of one instance of struct (sum of sizes of all struct variables + padding)

Characters

- Encode characters as numbers, same as everything!
- ASCII standard defines 128 different characters and their numeric encodings (<http://www.asciitable.com>)
 - `char` representing the character 'a' contains the value 97
 - `char c = 'a';` or `char c = 97;` are both valid
- **A `char` takes up 1 byte of space**
 - 7 bits is enough to store a char ($2^7 = 128$), but we add a bit to round up to 1 byte since computers usually deal with multiples of bytes

Typecasting in C (1/2)

- C is a “weakly” typed language
 - You can explicitly **typecast** from any type to any other:

```
int i = -1;
if(i < 0)
    printf("This will print\n");
if((unsigned int)i < 0)
    printf("This will not print\n");
```
- This is possible because everything is stored as bits!
 - Can be seen as changing the “programmer’s perspective” of the variable

Typecasting in C (2/2)

- C is a “weakly” typed language
 - You can explicitly **typecast** from any type to any other:

```
int i = -1;
if(i < 0)
    printf("This will print\n");
if((unsigned int)i < 0)
    printf("This will not print\n");
```

- Can typecast *anything*, even if it doesn't make sense:

```
struct node n;    /* structs in a few slides */
int i = (int) n;
```

- More freedom, but easier to shoot yourself in the foot

Typed Functions in C

```
// function prototypes
int my_func(int,int);
void sayHello();
```

```
// function definitions
int my_func(int x,int y)
{
    sayHello();
    return x*y;
}
void sayHello()
{
    printf("Hello\n");
}
```

- You have to declare the type of data you plan to return from a function
- Return type can be any C variable type or `void` for no return value
 - Place on the left of function name
- Also necessary to define types for function arguments
- Declaring the “prototype” of a function allows you to use it before the function’s definition

Structs in C

- Way of defining compound data types
- A structured group of variables, possibly including other structs


```
typedef struct {  
    int lengthInSeconds;  
    int yearRecorded;  
} Song;
```

```
Song song1;
```

```
song1.lengthInSeconds = 213;  
song1.yearRecorded    = 1994;
```

```
Song song2;
```

```
song2.lengthInSeconds = 248;  
song2.yearRecorded    = 1988;
```

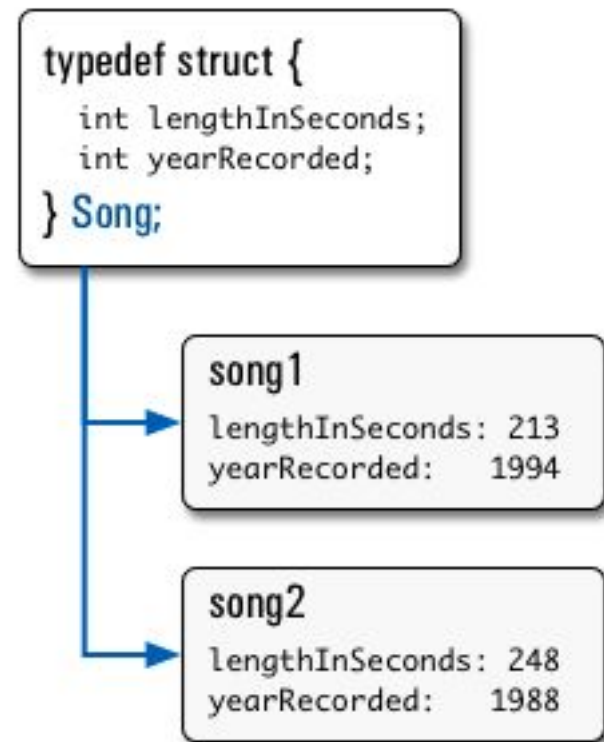

	C	Java
Type of Language	Function Oriented	Object Oriented
Program- ming Unit	Function	Class = Abstract Data Type
Compilation	Creates machine-dependent code	Creates machine-independent bytecode
Execution	<i>Loads and executes</i> program	<i>JVM interprets</i> bytecode
Hello World	<pre>#include<stdio.h> int main(void) { printf("Hello\n"); return 0; }</pre>	<pre>public class HelloWorld { public static void main(String[] args) { System.out.println("Hello"); } }</pre>
Memory manage- ment	Manual (<code>malloc</code> , <code>free</code>)	Automatic (garbage collection)

From <http://www.cs.princeton.edu/introcs/faq/c2java.html>

Agenda

- Basic C Concepts
 - Compilation
 - Variable Types
- **Administrivia**
- C Syntax and Control Flow
- GTKYS
- Pointers
 - Address vs. Value

Administrivia

- Lab 0 is today!
 - Make sure you have registered for a lab account.
 - Find a partner for labs
- HW0 is due this weekend
 - Main portion is on EdX (link on website)
 - Need lab account to submit mini-bio
- Don't forget about office hours and Guerilla Sessions! (check times on website)

Agenda

- Basic C Concepts
 - Compilation
 - Variable Types
- Administrivia
- C Syntax and Control Flow
- GTKYS
- Pointers
 - Address vs. Value

C and Java operators nearly identical

For precedence/order of execution, see Table 2-1 on p. 53 of K&R

- arithmetic: $+$, $-$, $*$, $/$, $\%$
- assignment: $=$
- augmented assignment:
 $+=$, $-=$, $*=$, $/=$, $\%=$, $\&=$,
 $|=$, $\wedge=$, $<<=$, $>>=$
- bitwise logic: \sim , $\&$, $|$, \wedge
- bitwise shifts: $<<$, $>>$
- boolean logic: $!$, $\&\&$, $||$
- equality testing: $==$, $!=$
- subexpression grouping: $()$
- order relations:
 $<$, $<=$, $>$, $>=$
- increment and decrement: $++$ and $--$
- member selection:
 \cdot , $->$
- conditional evaluation:
 $?$ $:$

Generic C Program Layout

Handled by Preprocessor

```
#include <system_files> } Dumps other files here (.h and .o)
#include "local_files"
```

```
#define macro_name macro_expr ← Macro substitutions
```

```
/* declare functions */
/* declare external variables and structs */
```

```
int main(int argc, char *argv[]) { (internal vs. external)
    /* the innards */
}
```

```
/* define other functions */
```

Programs start at `main()`
`main()` must return `int`

Sample C Code

```
#include <stdio.h>
#define REPEAT 5

int main(int argc, char *argv[]) {
    int i;
    int n = 5;
    for (i = 0; i < REPEAT; i = i + 1) {
        printf("hello, world\n");
    }
    return 0;
}
```

C Syntax: `main`

- To get arguments to the main function, use:
 - `int main(int argc, char *argv[])`
- What does this mean?
 - `argc` contains the number of strings on the command line (the executable name counts as one, plus one for each argument).
 - `argv` is an array containing *pointers* to the arguments as strings (more on pointers later)

main Example

```
$ foo hello 87
```

- Here `argc` = 3 and the array `argv` contains pointers to the following strings:

```
argv[0] = "foo"
```

```
argv[1] = "hello"
```

```
argv[2] = "87"
```

- We will cover pointers and strings later

C Syntax: Variable Declarations

- All variable declarations must appear before they are used (e.g. at the beginning of a block of code)
- A variable may be initialized in its declaration; if not, it holds garbage!
- Variables of the same type may be declared on the same line
- Examples of declarations:
 - Correct:

```
int x;  
int a, b=10, c;
```
 - Incorrect:

```
for(int i=0; i<10; i++);  
short x=1, float y=1.0;
```

C Syntax: True or False

- No explicit Boolean type in C (unlike Java)
- What evaluates to FALSE in C?
 - 0 (integer)
 - NULL (a special kind of *pointer*: more on this later)
- What evaluates to TRUE in C?
 - Anything that isn't false is true
 - Same idea as in Scheme: only #f is false, anything else is true!

C Syntax: Control Flow

- Should be similar to what you've seen before
 - if-else
 - `if (expression) statement`
 - `if (expression) statement1`
`else statement2`
 - while
 - `while (expression)`
`statement`
 - `do`
`statement`
`while (expression);`

C Syntax: Control Flow

- Should be similar to what you've seen before
 - for
 - `for (initialize; check; update)`
statement
 - switch
 - `switch (expression) {`
 `case const1: statements`
 `case const2: statements`
 `default: statements`
 `}`
 - `break`

switch and break

- Case statement (`switch`) requires proper placement of `break` to work properly
 - “Fall through” effect: will execute all cases until a `break` is found

```
switch(ch) {  
    case '+': ... /* does + and - */  
    case '-': ... break;  
    case '*': ... break;  
    default: ...  
}
```

- In certain cases, can take advantage of this!

Has there been an update to ANSI C?

- Yes! It's called the “C99” or “C9x” std
 - Use option “`gcc -std=c99`” at compilation

- References

<http://en.wikipedia.org/wiki/C99>

http://home.tiscalinet.ch/t_wolf/tw/c/c9x_changes.html


- **Highlights:**

- Declarations in `for` loops, like Java (#15)
- Java-like `//` comments (to end of line) (#10)
- Variable-length non-global arrays (#33)
- `<inttypes.h>` for explicit integer types (#38)
- `<stdbool.h>` for boolean logic definitions (#35)


Agenda

- Basic C Concepts
 - Compilation
 - Variable Types
- Administtrivia
- C Syntax and Control Flow
- GTKYS
- Pointers
 - Address vs. Value

Get To Know Your Staff



Alex



Brian


	Alex	Brian
Favorite Class	Anthro 160AC	CS61C
Favorite Place	Berkeley Marina	Memorial Glade
Favorite Restaurant	Seasons of Japan	Cheeseboard
Favorite Club/Group	n/a	n/a

Agenda

- Basic C Concepts
 - Compilation
 - Variable Types
- Administtrivia
- C Syntax and Control Flow
- GTKYS
- **Pointers**
 - **Address vs. Value**


Address vs. Value

- Consider memory to be a single huge array
 - Each cell/entry of the array has an address
 - Each cell also stores some value
- Don't confuse the address referring to a memory location with the value stored there

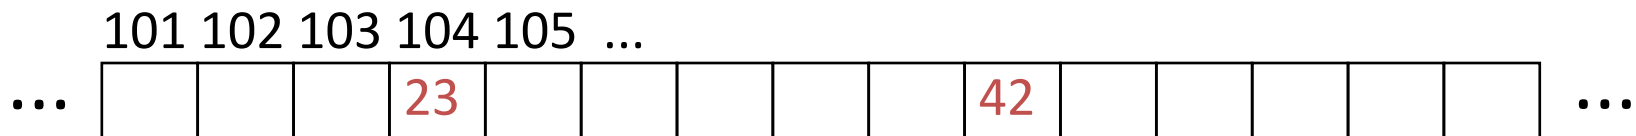

Pointers

- *A pointer is a variable that contains an address*
 - An address refers to a particular memory location, usually also associated with a variable name
 - Name comes from the fact that you can say that it *points* to a memory location

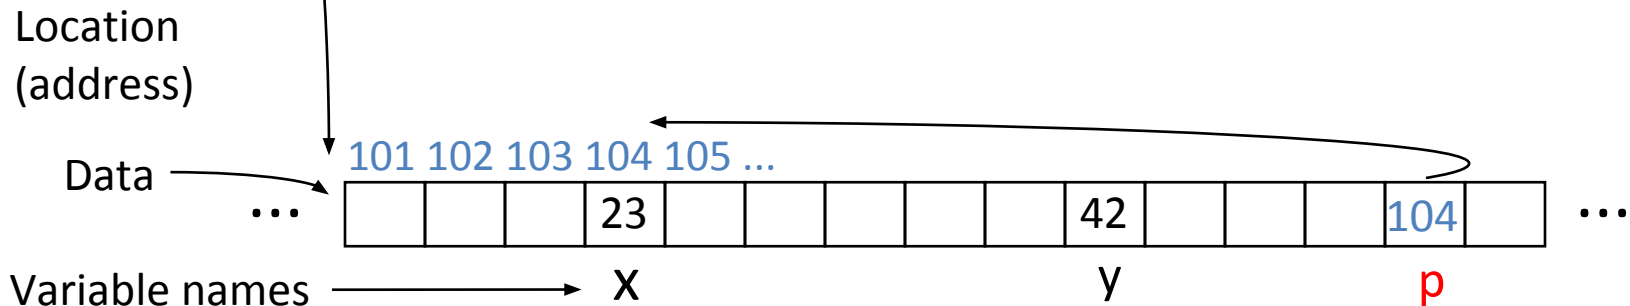


Pointer Syntax

- `int *x;`
 - Declare **variable `x` the address of** an `int`
- `x = &y;`
 - Assigns **address of `y`** to `x`
 - `&` called the “address operator” in this context
- `z = *x;`
 - Assigns the **value at address in `x`** to `z`
 - `*` called the “dereference operator” in this context


Pointer Example

```
int *p, x, y;
```




Declare

```
x=3; y=4;
```




Assign vals

```
p = &x;
```




Assign ref

```
*p = 5;
```

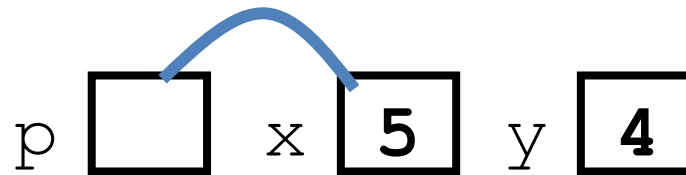

Dereference (1)

```
y = *p;
```

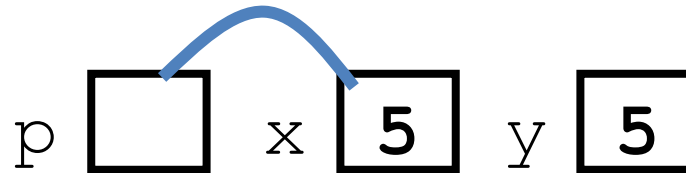

Dereference (2)

Pointer Types (1/2)

- Pointers are used to point to one kind of data (`int`, `char`, a `struct`, etc.)
 - Pointers to pointers? Oh yes! (e.g. `int **pp`)
- Exception is the type `void *`, which can point to anything (generic pointer)
 - Use sparingly to help avoid program bugs and other bad things!

Pointer Types (2/2)

- Functions can return pointers

```
char *foo(char data) {  
    return &data;  
}
```

- Placement of `*` does not matter to compiler, but might to you
 - `int* x` is the same as `int *x`
 - `int *x, y, z;` is the same as `int* x, y, z;` but NOT the same as `int *x, *y, *z;`

Pointers and Parameter Passing

- Java and C pass parameters “by value”
 - Procedure/function/method gets **a copy** of the parameter, *so changing the copy does not change the original*

Function:

```
void addOne (int x) {  
    x = x + 1;  
}
```

Code:

```
int y = 3;  
addOne (y);
```

← **y remains equal to 3**

Pointers and Parameter Passing

- How do we get a function to change a value?
 - Pass “by reference”: function accepts a pointer and then modifies value by dereferencing it

Function:

```
void addOne (int *p) {  
    *p = *p + 1;  
}
```

Code:

```
int y = 3;  
addOne (&y);
```

← *y is now equal to 4*


Pointers in C

- Why use pointers?
 - When passing a large struct or array, it's easier/faster to pass a pointer than a copy of the whole thing
 - In general, pointers allow cleaner, more compact code
- **Careful:** Pointers are likely the single largest source of bugs in C
 - Most problematic with dynamic memory management, which we will cover later
 - *Dangling references* and *memory leaks*


Pointer Bugs

- Local variables in C are not initialized, they may contain anything (a.k.a. “garbage”)
- Declaring a pointer just allocates space to hold the pointer – it does not allocate the thing being pointed to!

```
void f() {  
    int *p, x;  
    *p = *p;  
}
```

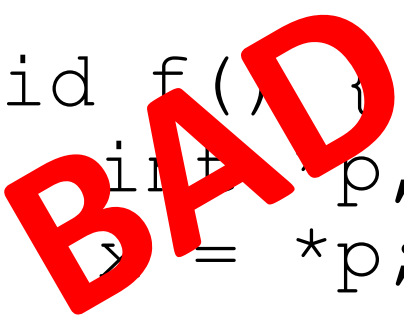

```
void f2() {  
    int *ptr;  
    ptr = 5;  
}
```

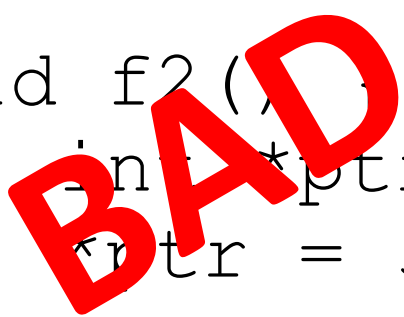

Question: How many errors (syntax and logic) in this C code (assume C99)?

```
void flip-sign(int *n) { *n = -(*n) }  
void main(); {  
    int *p, x=5, y; // init  
    y = *(p = &x) + 1;  
    int z;  
    flip-sign(p);  
    printf("x=%d, y=%d, p=%d\n", x, y, p);  
}
```

- (A) 2
- (B) 3
- (C) 4
- (D) 5+

Answer: How many errors (syntax and logic) in this C code (assume C99)?

```
#include <stdio.h> ← (1)
void flip-sign(int *n) { *n = -(*n); } ← (3)
(4) void main(); ← (2)
      int *p, x=5, y; // init
      y = *(p = &x) + 1;
      int z; ← (5)
      flip-sign(p);
      printf("x=%d, y=%d, p=%d\n", x, y, *p); ← (6)
    }
```

- | | |
|-----|----|
| (A) | 2 |
| (B) | 3 |
| (C) | 4 |
| (D) | 5+ |

Question: What is output from the corrected code below?

```
#include <stdio.h>
void flip_sign(int *n) { *n = - (*n) ; }
int main() {
    int *p, x=5, y; // init
    y = * (p = &x) + 1;
    int z;
    flip_sign(p);
    printf("x=%d, y=%d, *p=%d\n", x, y, *p);
}
```

- | | x, | y, | *p |
|-----|-----------|-----------|-----------|
| (A) | 5, | 6, | -5 |
| (B) | -5, | 6, | -5 |
| (C) | -5, | 4, | -5 |
| (D) | -5, | -6, | -5 |

Summary

- C is an efficient (compiled) language, but leaves safety to the programmer
 - Weak type safety, variables not auto-initialized
 - Use pointers with care: common source of bugs!
- Pointer is a C version (abstraction) of a data address
 - Each memory location has an address and a value stored in it
 - * “follows” a pointer to its value
 - & gets the address of a value
- C functions “pass by value”