


Vector database setup

Set up MongoDB

1. Access MongoDB: The Developer Data Platform MongoDB: The Developer Data Platform | MongoDB: <https://www.mongodb.com/>

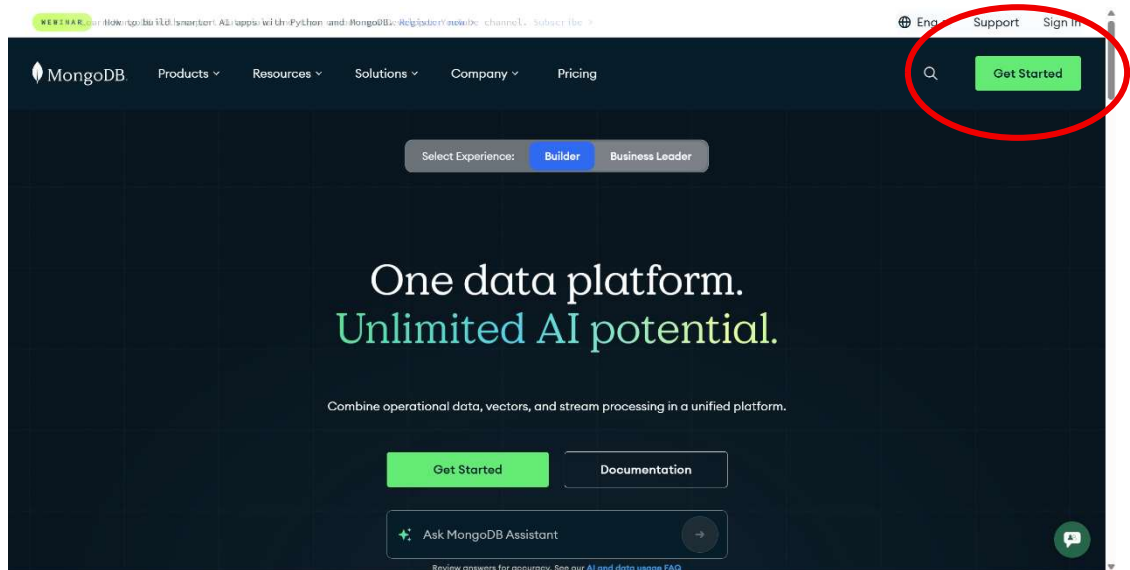

2. Choose the following options

A screenshot of the MongoDB Atlas onboarding form. The form is titled 'welcome to Atlas. Let's build something great.' and asks for user information to tailor the experience. The form is divided into two sections: 'GETTING TO KNOW YOU' and 'GETTING TO KNOW YOUR PROJECT'. Red arrows point to the following options: 'Learn MongoDB' for the primary goal, 'I've never developed software with MongoDB before' for development experience, 'Python' for the programming language, 'Vector embeddings' for the data type, and 'AI/ML/Entertainment' for the architectural model. The 'Finish' button is highlighted with a red arrow at the bottom right.

welcome to Atlas. Let's build something great.

Help us tailor your experience by taking a minute to answer the questions below.

GETTING TO KNOW YOU

What is your primary goal?

Learn MongoDB

How long have you been developing software with MongoDB?

I've never developed software with MongoDB before

GETTING TO KNOW YOUR PROJECT

What programming language are you primarily building on MongoDB with?

Python

What type(s) of data will your project use?

You can choose as many as you want



Vector embeddings

Will your application include any of the following architectural models?

You can choose as many as you want



AI/ML/Entertainment

Skip personalization Finish

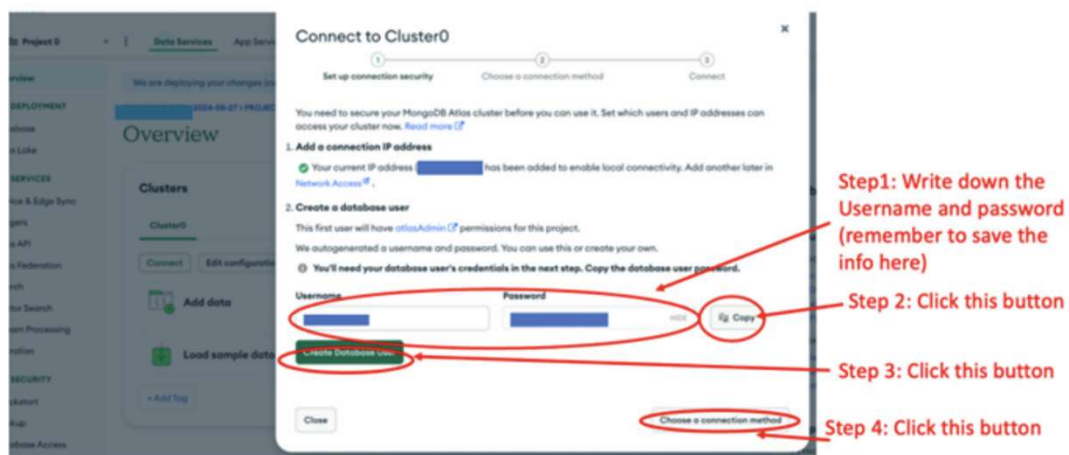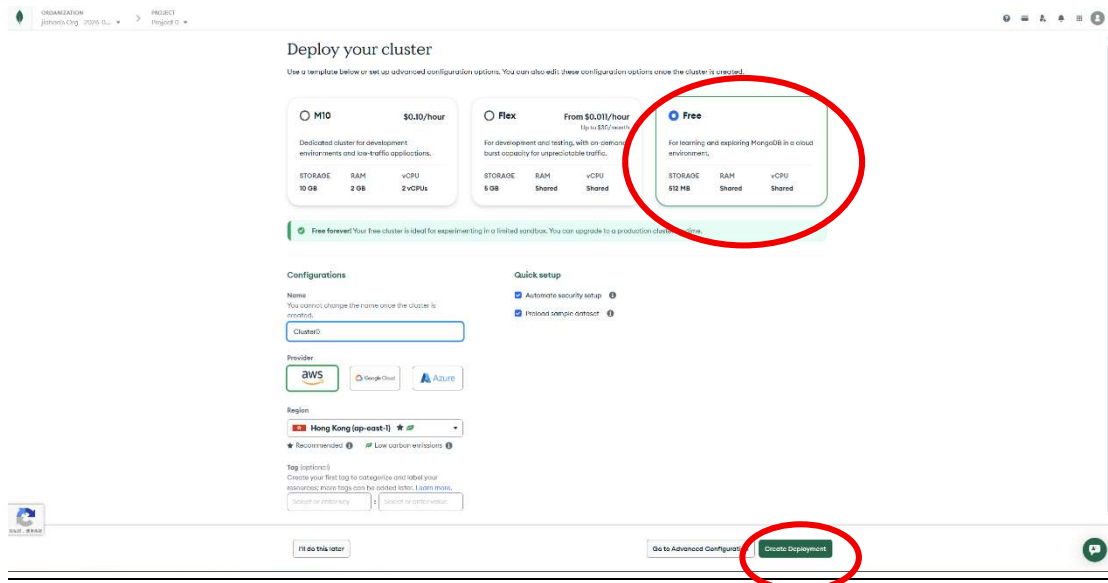

Note: it is suggested that the password should not contain any character “: / ? # [] @ ! \$ & Vector database setup 4 ' () * , ; = %” in this tutorial for simplicity.

Note: the username and password specific to this database, not your MongoDB account.

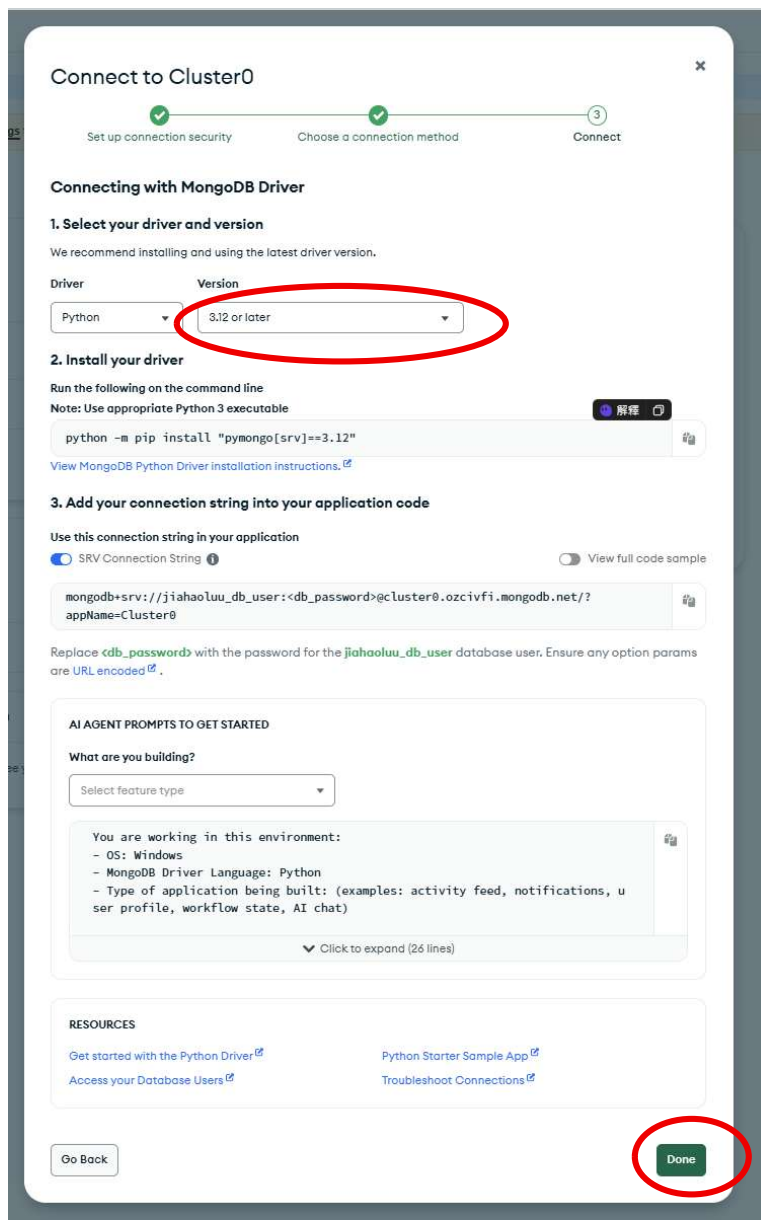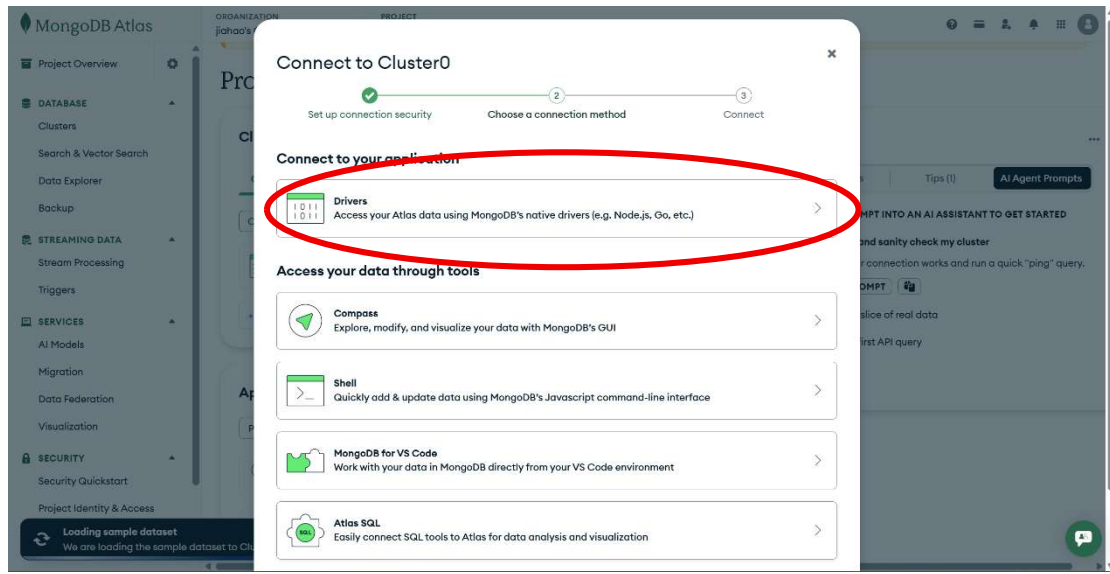

Congratulation! Now your own database is set up successfully!

3. Load 08_RAGwithMongoDB.ipynb in Colab.
4. Get the public IP address of the current machine.

```
# Get the public IP address of the current machine
# This IP can be used for MongoDB Atlas network access whitelist or remote access verification
!curl ifconfig.me

... 136.112.95.63
```

Add the IP address to MongoDB Atlas network access whitelist and then we can connect MongoDB successfully.

MongoDB Atlas

ORGANIZATION: jiahao's Org - 2026-0... PROJECT: Project 0

Project Overview

SECURITY

- Security Quickstart
- Project Identity & Access
- Database & Network Access
- Activity Feed

Where would you like to connect from?

Enable access for any network(s) that need to read and write data to your cluster.

My Local Environment
Use this to add network IP addresses to the IP Access List. This can be modified at any time.

Cloud Environment
Use this to configure network access between Atlas and your cloud or on-premise environment. Specifically, set up IP Access Lists, Network Peering, and Private Endpoints.

Add entries to your IP Access List

Only an IP address you add to your Access List will be able to connect to your project's clusters. You can manage existing IP entries via the [Network Access Page](#).

IP Address	Description
Enter IP Address	Enter description
Add Entry	
Add My Current IP Address	

IP Access List	Description	
43.132.141.16/32	Created as part of the Auto Setup process	EDIT REMOVE
136.112.95.63/32		EDIT REMOVE