
Labshock Installation & Operation

Labshock is a free-to-use software package that provides a fully-functioning OT/ICS environment where students can learn about the different technologies and cybersecurity tools and techniques.


Sign Up for a Free Labshock Account & Login

Visit the Labshock Security website, https://www.labshocksecurity.com/. While on the main screen, either click the **Get Started** or **Join** button.

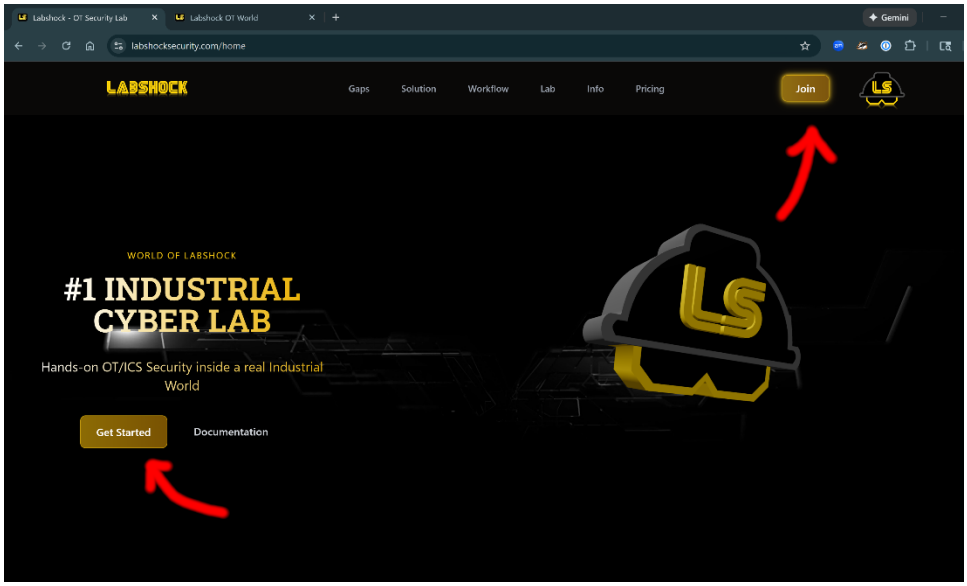


That will take you to the Labshock OT World site, https://world.labshocksecurity.com/. The first time you start Labshock, you will need to **Register** for a free account. Once there, click Register at the top and enter ***Your Name*** and ***A Valid Email Address***. Check the box for the terms of service. Click the **Register** button.

NOTE: After the first time, you will be able to just Sign In with your email.

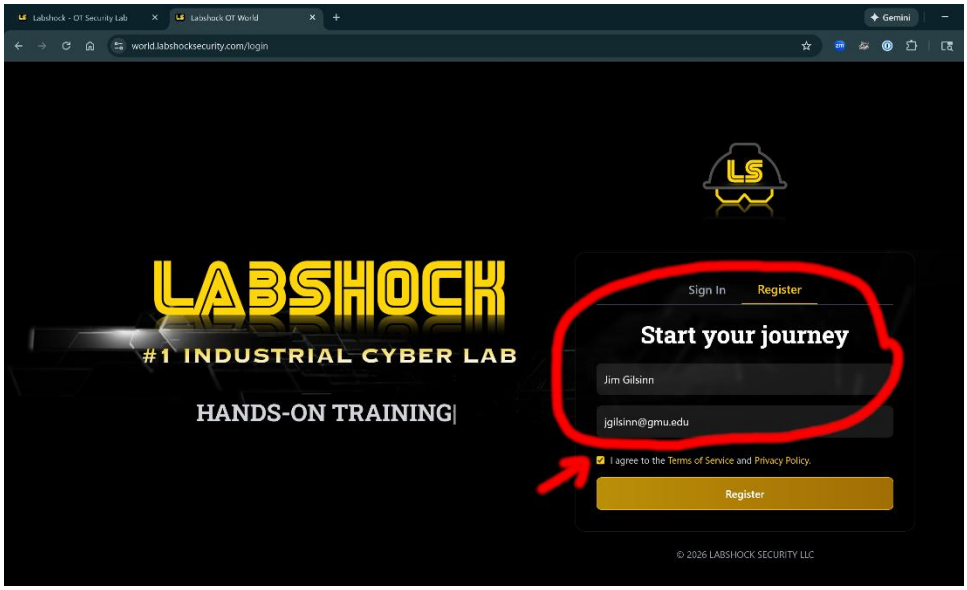


Labshock will now send you an ***Access Code*** to your email that you will need to copy/paste into the box. Then, click **Login**.

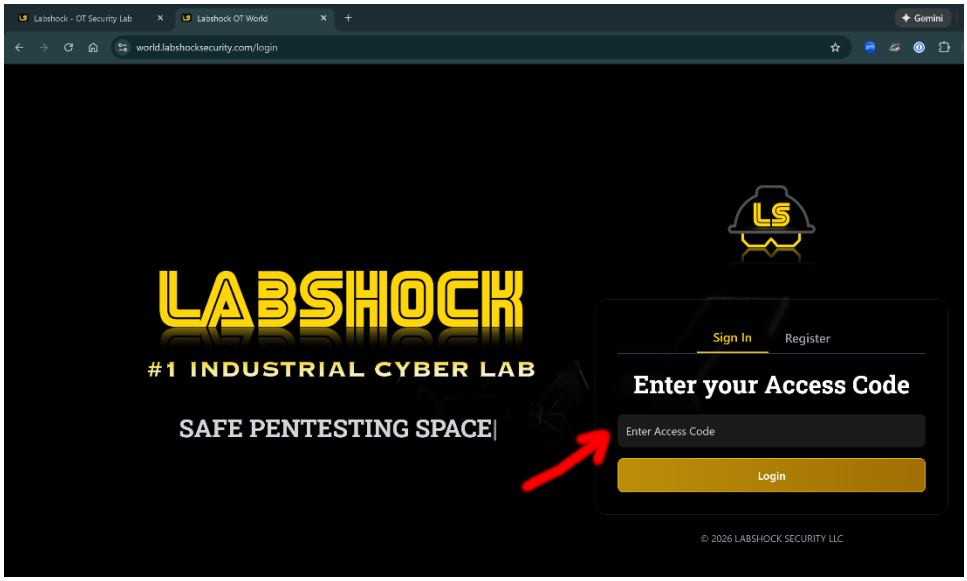


Install Docker & Labshock

Once you login to the World of Labshock, you will be presented with a screen that looks similar to this.

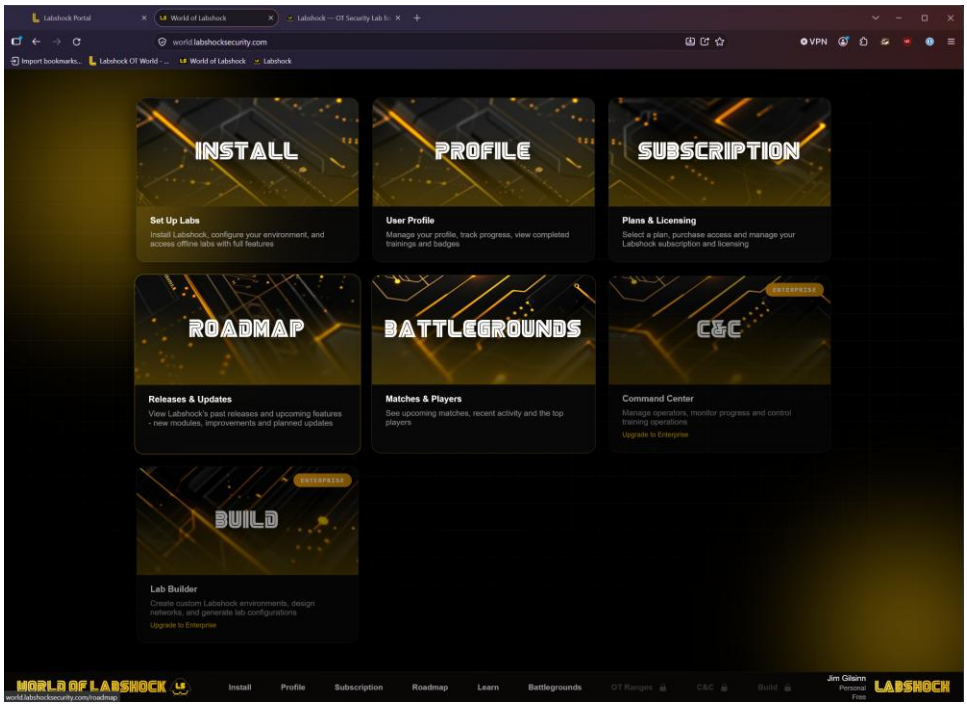


Click the **Install** button. This will take you to https://world.labshocksecurity.com/install, where you should see a screen similar to this.

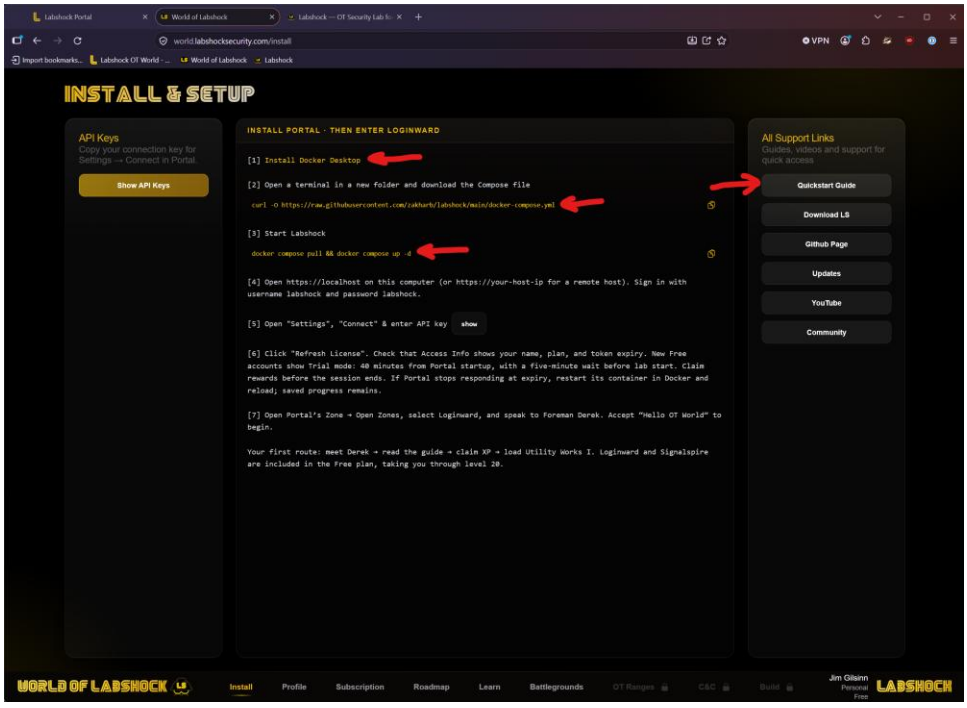

Step 1 – Install Docker


Click the **Docker Installation Guide** button. This should open another tab/window and take you to https://docs.docker.com/get-started/get-docker/. Follow the instructions on this page to install ***Docker Desktop*** for your particular computer system.

Step 2 – Labshock Quickstart Guide
After installing Docker Desktop, go to the **Labshock Quickstart Guide**, https://github.com/zakharb/labshock/wiki/Quickstart-Guide. Also, open Docker Desktop and the Terminal.

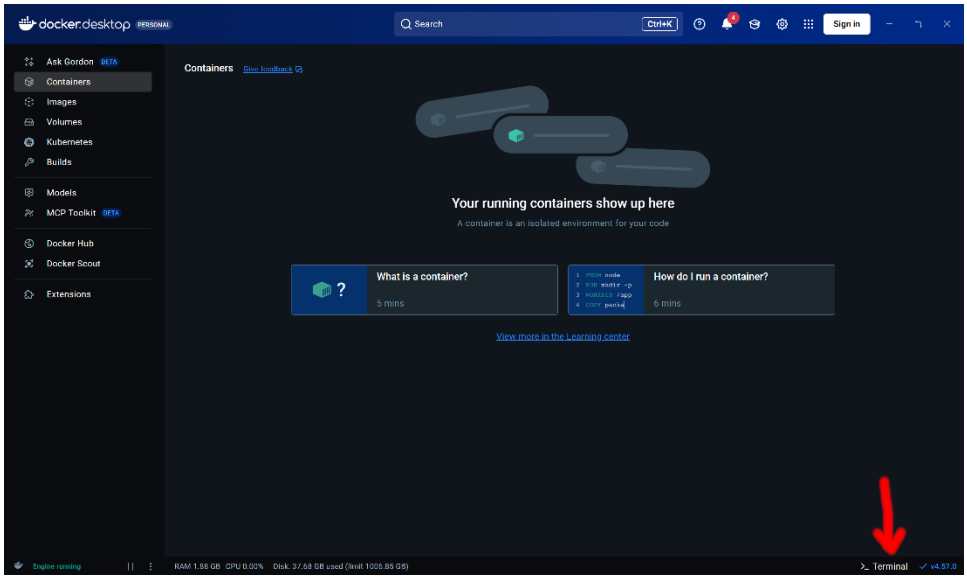

FIRST TIME - You will need to get the Labshock Docker software the first time run it. In the Docker Desktop Terminal window, enter the curl command from the Quickstart Guide.

```
curl -O https://raw.githubusercontent.com/zakharb/labshock/main/docker-compose.yml
```

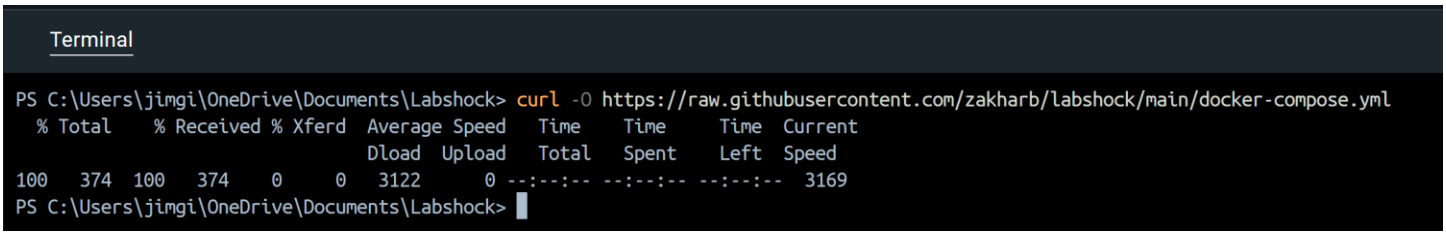


Running Labshock Docker Container

Once you have the Labshock Docker compose file, you should be able to run the software using the following command each time you want to run.

```
docker compose pull & docker compose up
```

The `pull` command will get the latest version of any internal modules that are needed by Labshock. It may take a moment to pull things down the first time. After that, the `up` command will start the container running. You should now see the container running in the top portion of the Docker Desktop screen, similar to this.

NOTE: The Labshock documentation suggests adding a `-d` option after the compose up command to put it into quiet mode. For debugging, it is easier to leave this off.

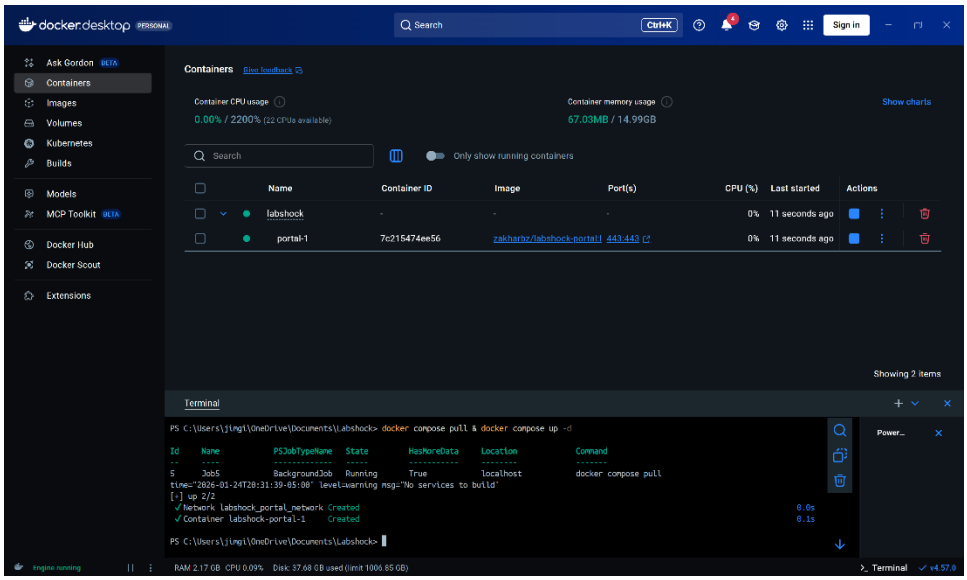


NOTE: If you are running from a Linux terminal directly, not the terminal within Docker Desktop, you may need to run the above docker compose commands with sudo.

Login to Labshock


Once the Labshock Docker container starts, you should be able to access the Labshock instance by going to https://localhost and logging in with the default account.


Username: `labshock`

Password: `labshock`

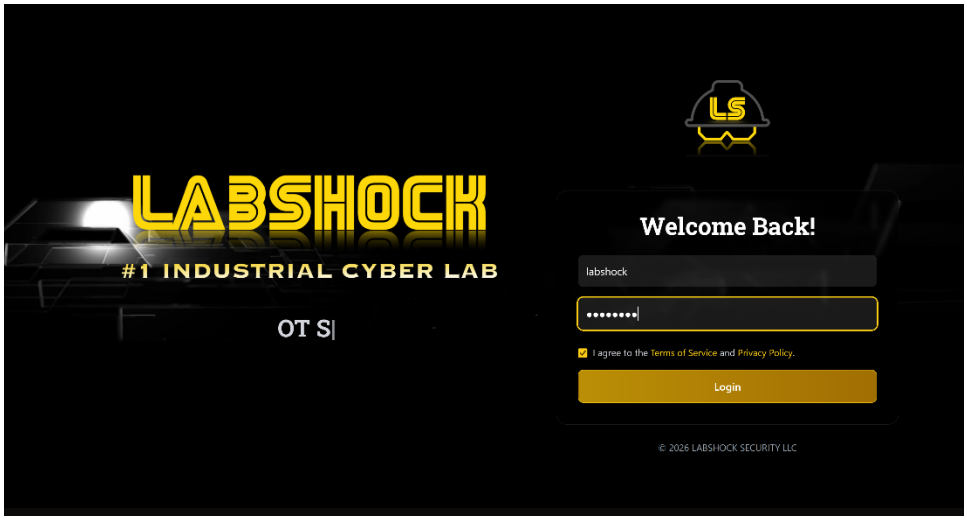


You will then need to connect your Labshock Docker container to your Labshock account. Click the Settings button.

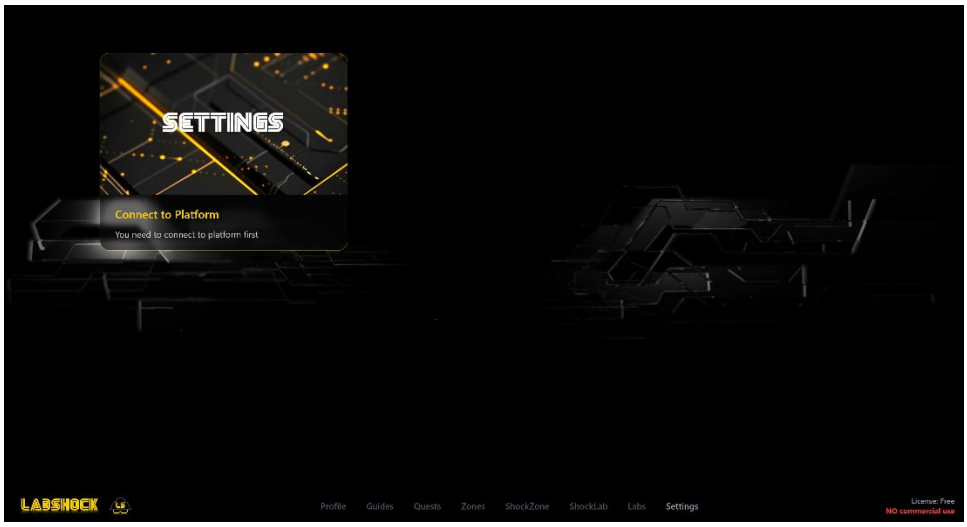


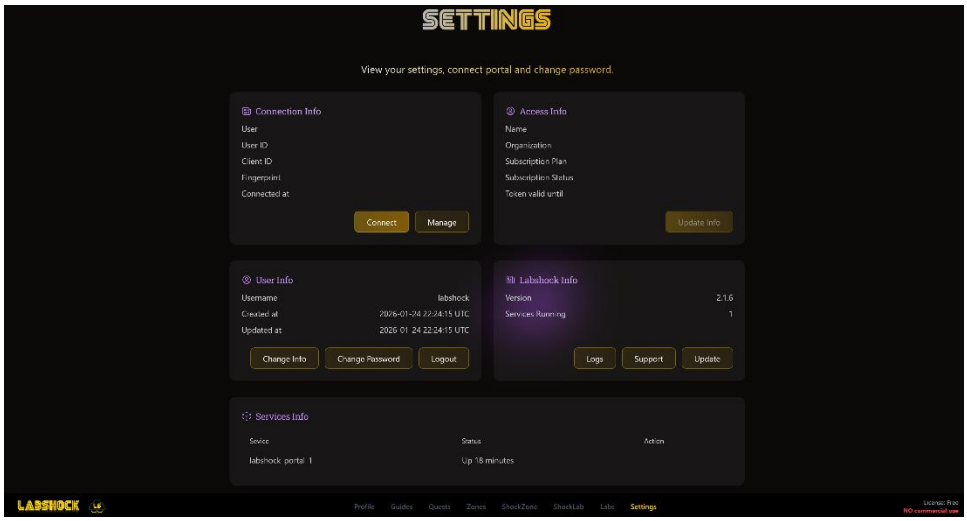


Return to the World of Labshock Installation screen, https://world.labshocksecurity.com/install, and click the **Show API Keys** button on the left of the screen. This will now have the ability to copy the API key that is generated. Click the **Copy Key** button.

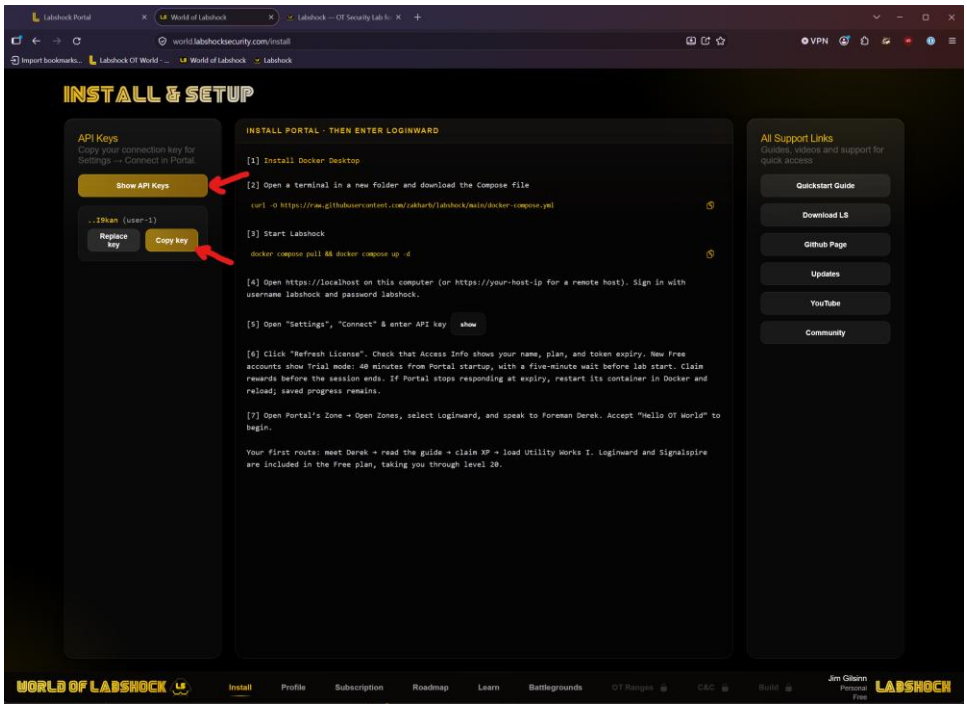


Return to the localhost Labshock instance and click the **Connect** button. A box will pop up where you can paste the API Key and click **Connect**.

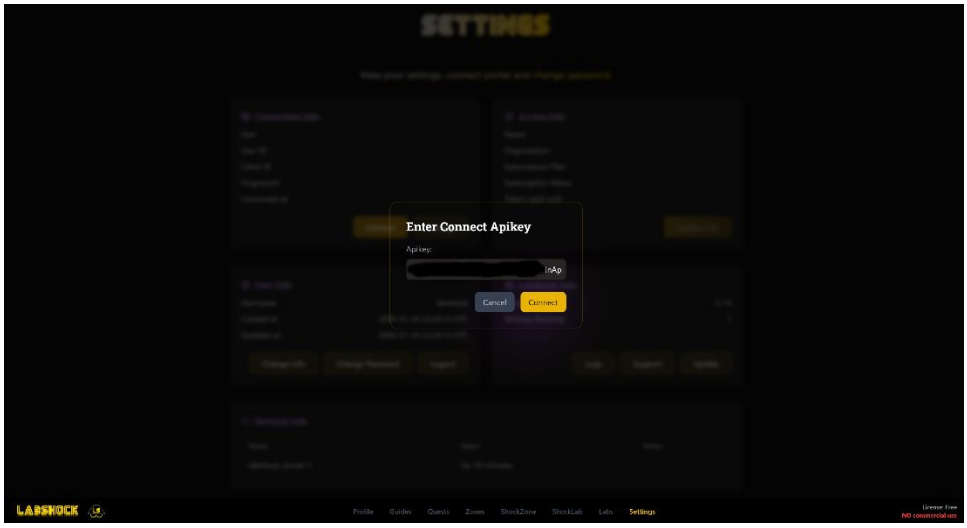

Your local instance of Labshock should now be connected to your Labshock account. If you click the Update Info button, you should now see your name listed.

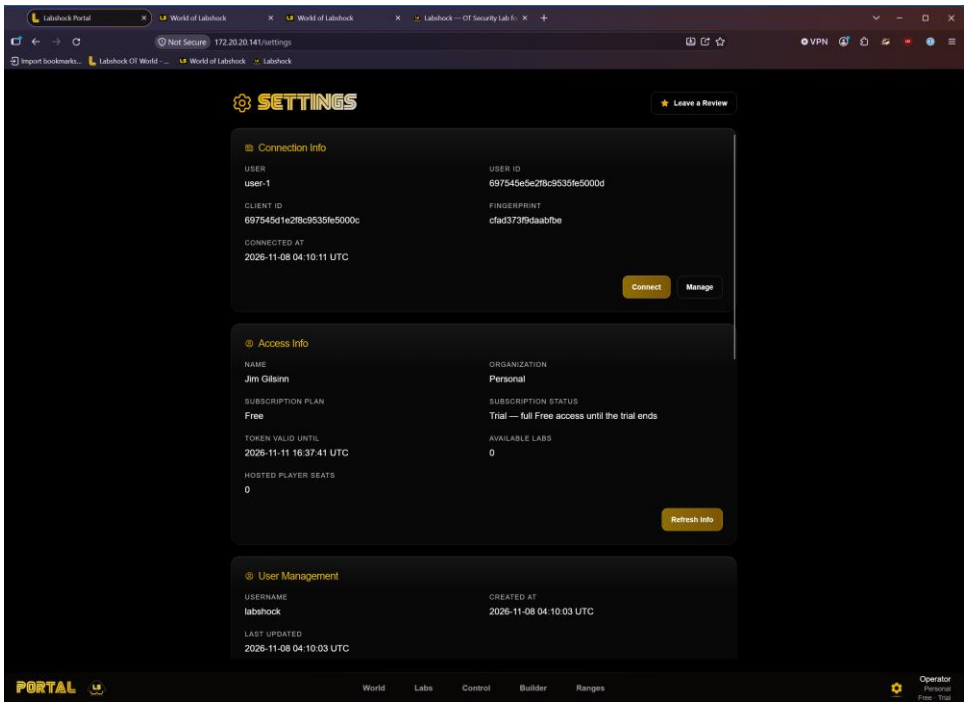

You should now be able to see your Profile using the menu at the bottom of the window.

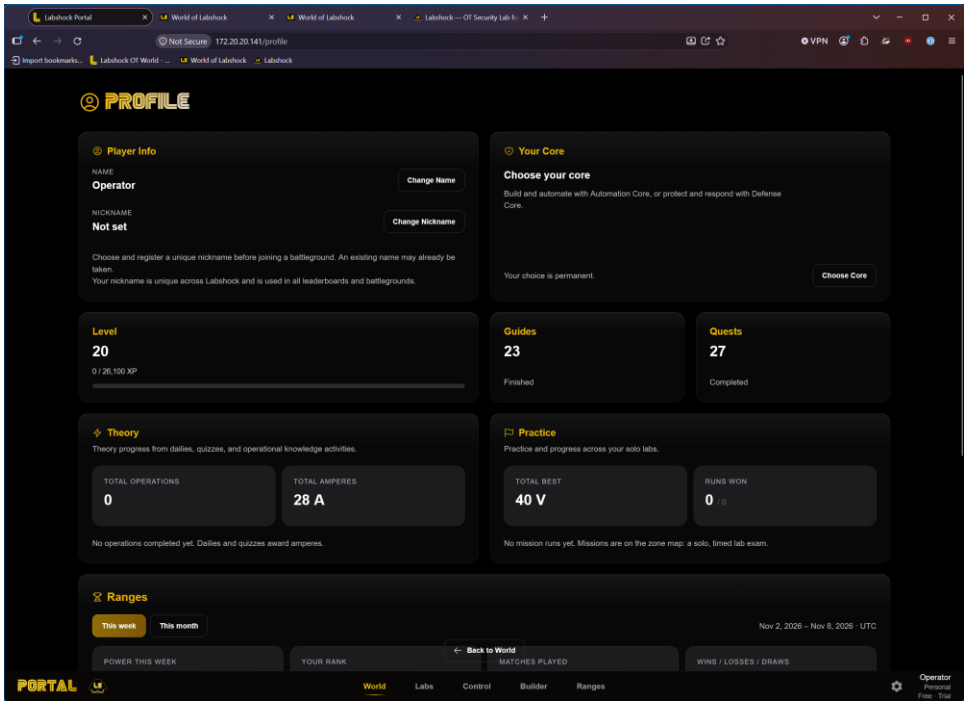


Stopping/Downing Labshock Docker Container

When you don't need it, you should stop and down the Labshock Docker container. Stopping the Labshock container will keep the instance resident, but not actively running. Downing the container will remove the container completely. You should be able to stop or down the container without any problems.

```
docker compose stop
```

or

```
docker compose down
```

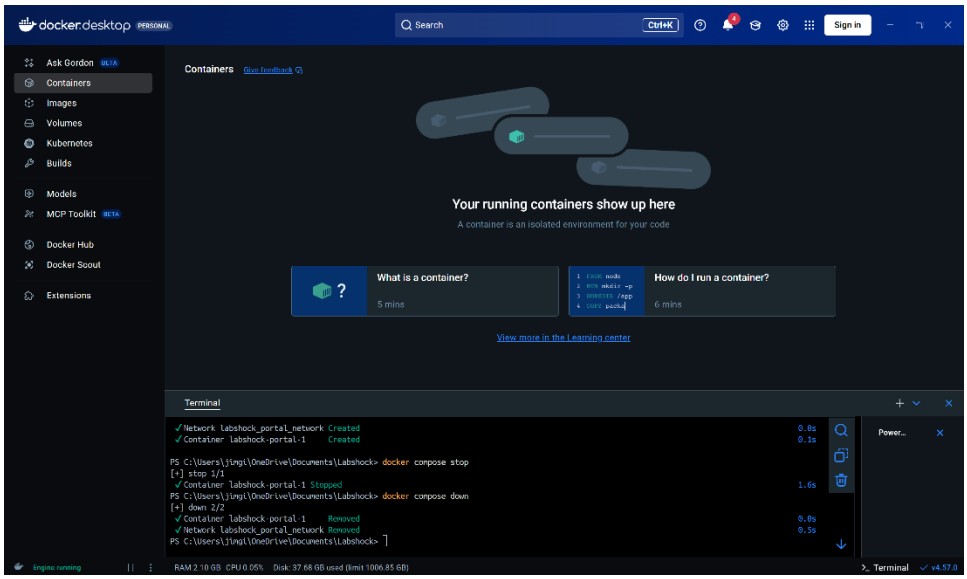

Time Limit on Labshock Docker Container

Some of the software running inside Labshock uses lab/free/community licenses, not intended for production use. As such, there are some time limits for some of the modules. To make sure the system runs properly, **you should stop/down and restart Labshock every 30-45 minutes** when using it. The container may look like it is running properly, but you may not be able to access the local Labshock portal or some of the individual modules.

You shouldn't lose any of your work with Labshock. The software is designed to keep track of your progress. Stopping/downing and restarting Labshock should restart the clock on the licenses and you should be able to continue from where you left off.