Nox User Guide

Version 0.8.0 · October 2026

Nox is a Mac app that runs your AI coding agents (Claude Code and Codex) for you, from one window. Talk to them directly in any project, typed or spoken, the way you would in Terminal: your own plugins and settings, the model you choose, and as much access as you give. Or hand Nox a task: one agent builds and the other reviews, each in its own copy of your repo, and you decide what to keep. Nox also keeps Node, Claude Code, Codex and your plugins up to date with one click, adds all your projects at once, and tells you the moment something needs you.

This guide shows every screen, how to use each function, and a short demo you can follow on a throwaway repo.

> **About the pictures.** Every screenshot in this guide is Nox's real Mac interface, taken by an automated test with demo projects (`demo-a`, `demo-b`, `nox-try`), simulated agents shown as Claude and Codex, a made-up user ("Alex") and a fixed clock (Thursday 15 October, 10:24). None of it is real work or a real person's Mac.


> **Home or Sessions?** Home: Nox's assistant plans and runs tasks in a safe copy, another agent reviews them, you Keep or Discard. Sessions (`⌘3`): you work with Claude Code or Codex directly in your real folder, like in Terminal.

What's new in Nox 0.8

Make Nox yours. The notch becomes a live control strip you can arrange, Nox has seven looks and your own accent colour, and Settings is split into sections with a search box.

Notch 2.0


Point at the notch (or click it, if you prefer) to open the panel. **Now** shows what is running: tasks, session replies, Update all and scheduled runs. Below it are the widgets you choose and order in **Settings** → **Notch**: **Agents** (Allow, Deny and Stop), **Quick ask**, **Updates**, **Today** and **Next automations**. Drop a folder on the notch to start a session there. **Allow** appears only when the whole command fits on screen; otherwise **Open** shows it in full in the main window.

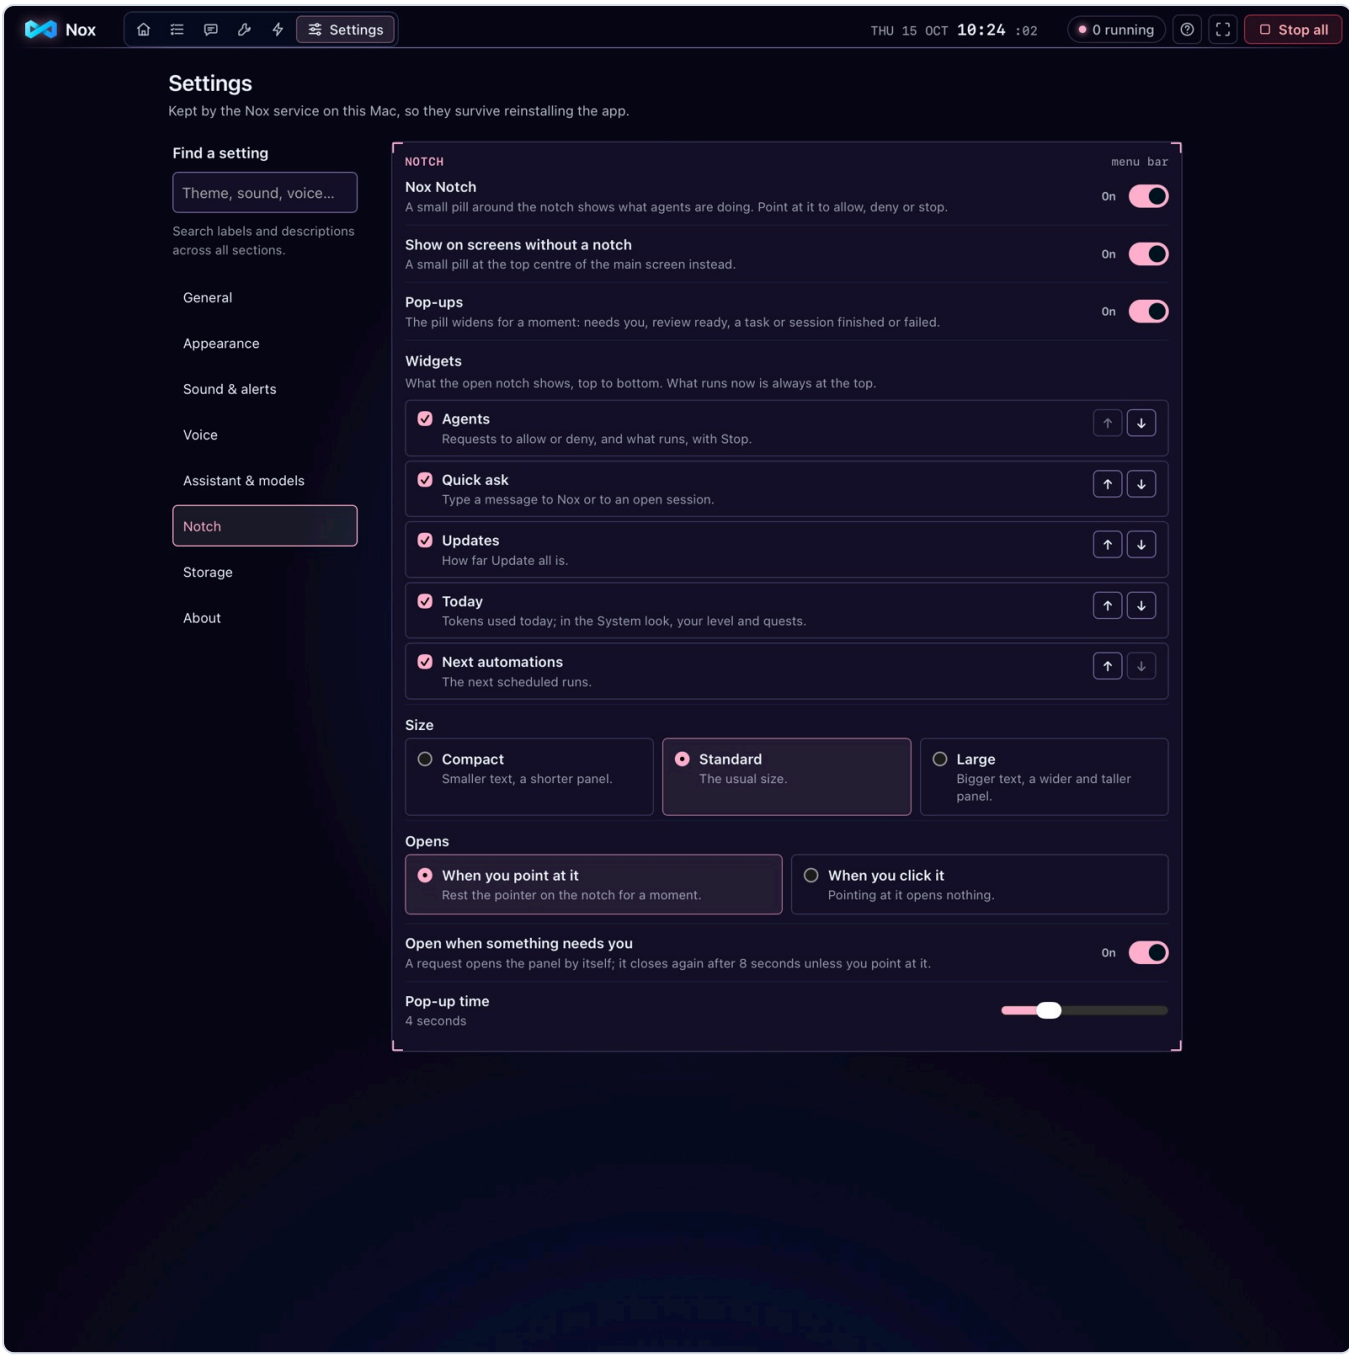

Settings → Notch: widgets in your order, size, how it opens, Auto-open and pop-up time

Seven themes and an accent colour


Settings → **Appearance**: Nox, System, Midnight, Matrix, Amber, Rose or Graphite, each with a live preview, plus six accent colours (or reset to the theme's own).

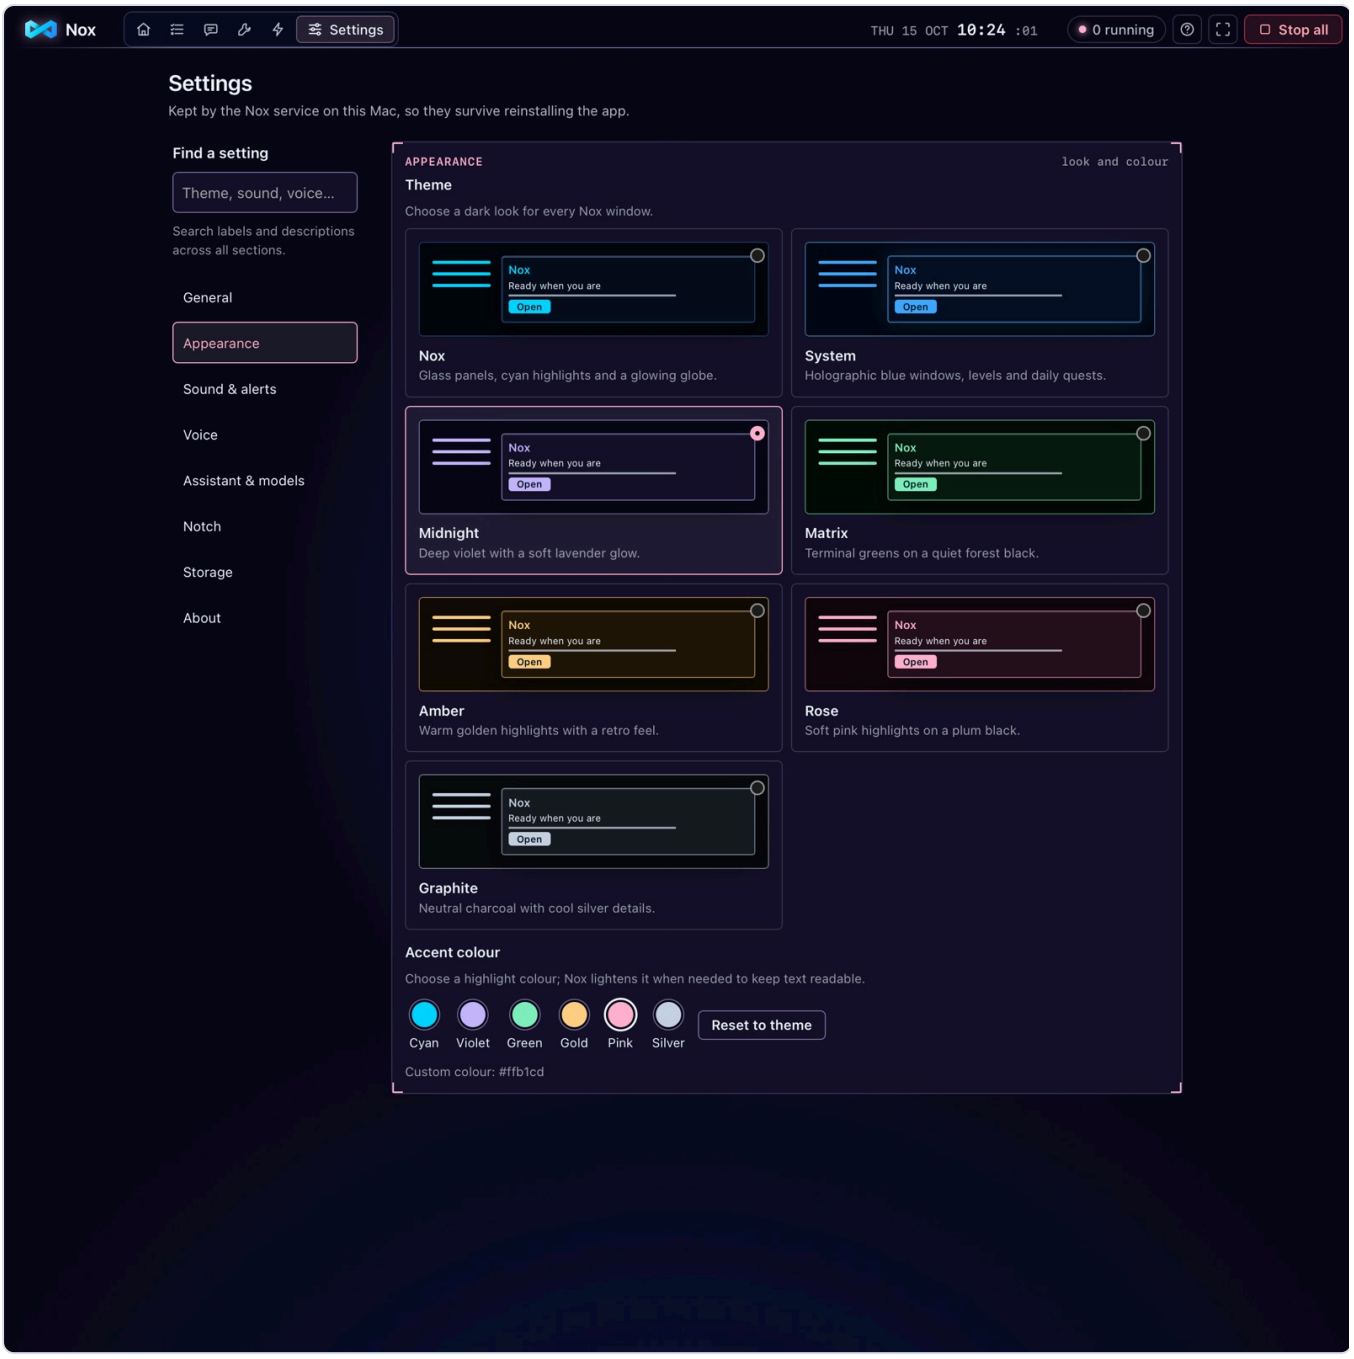

The theme gallery with Midnight chosen and an accent colour

Easier Settings

A menu on the left (General, Appearance, Sound & alerts, Voice, Assistant & models, Notch, Storage, About) and a search box that finds any setting by name or by everyday words like "sound", "voice" or "dark". Sounds and volume now live in **Sound & alerts**.

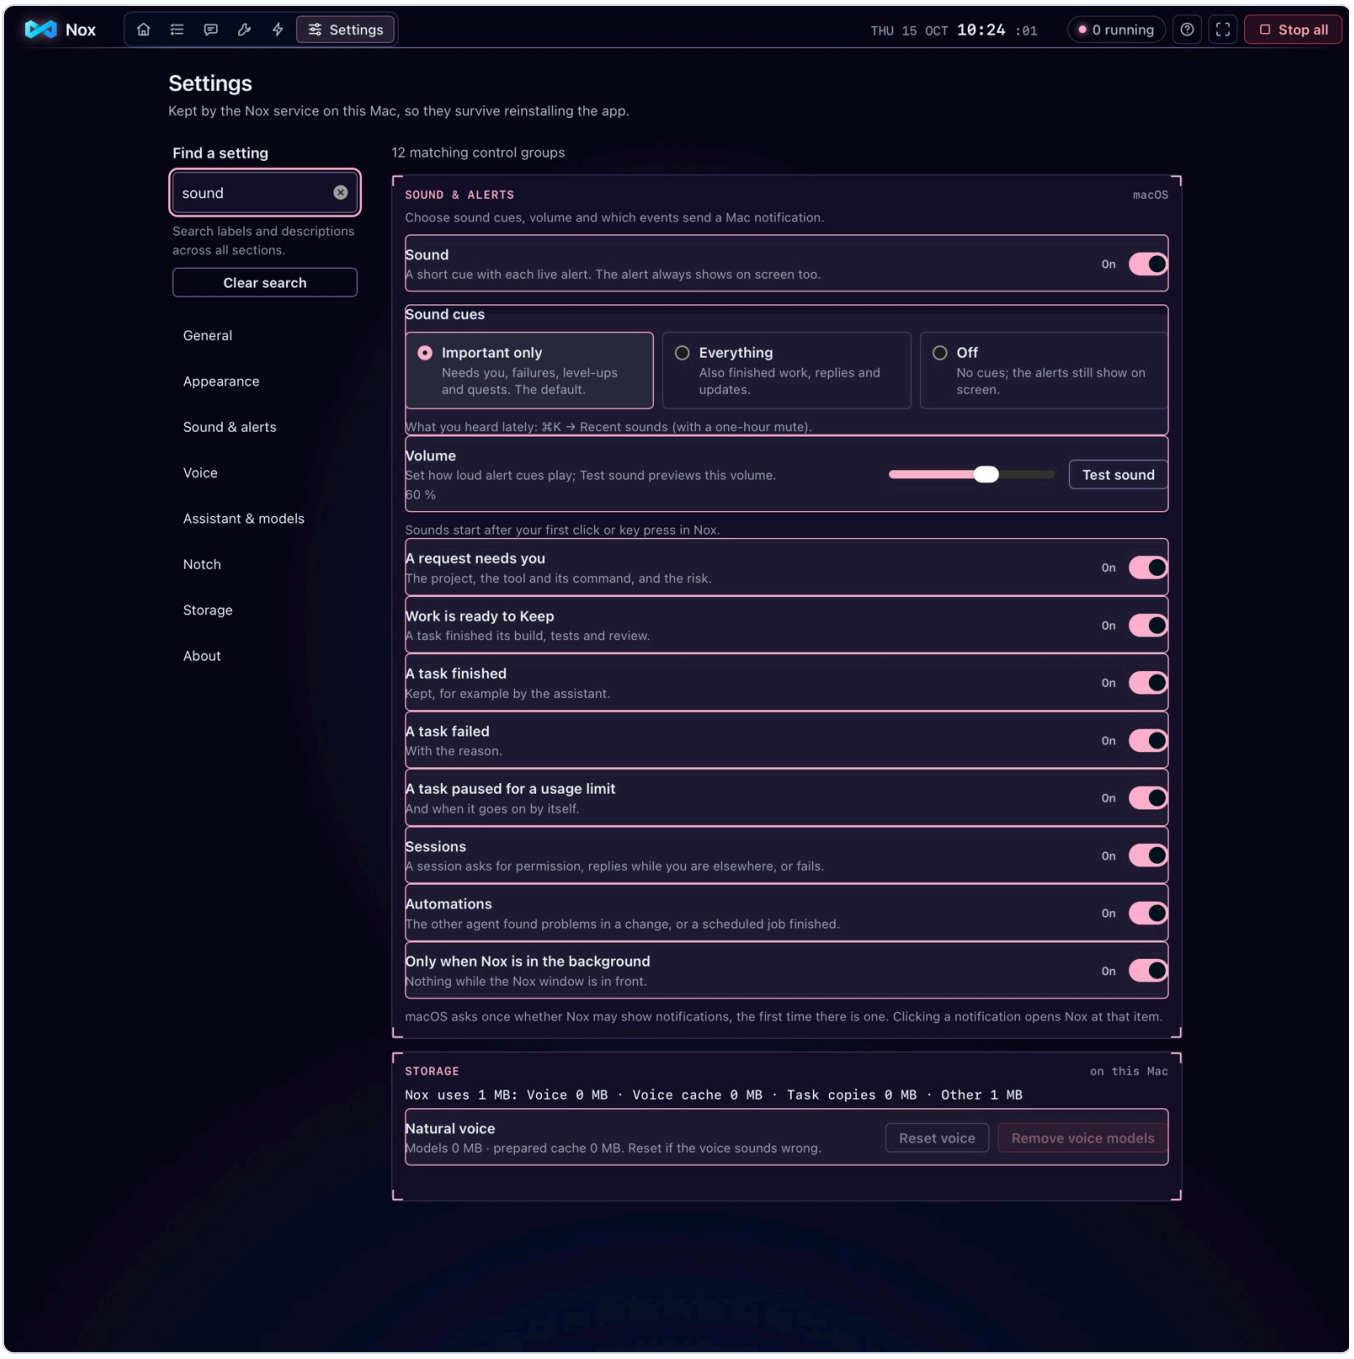


Searching Settings for "sound": the matching controls, highlighted

New in Nox 0.7

Nox now checks your agents' work for you. When a session changes your code, the other agent reviews it. Jobs you schedule, like a nightly Update all or a morning review of new commits, run by themselves. Both live on the new **Automations** page (⌘5).

After-work review: Claude and Codex check each other

When a Claude session changes code, Codex reads the change, and the other way round. By default only **risky changes** are reviewed: code touching payments, logins, permissions, database migrations, routes, settings or secrets, or a big change. Small, harmless edits are skipped. The reviewer only reads; it never edits your files. Its findings appear in the chat as a card. **Fix these** sends them to the session, and Nox re-checks the fix once.

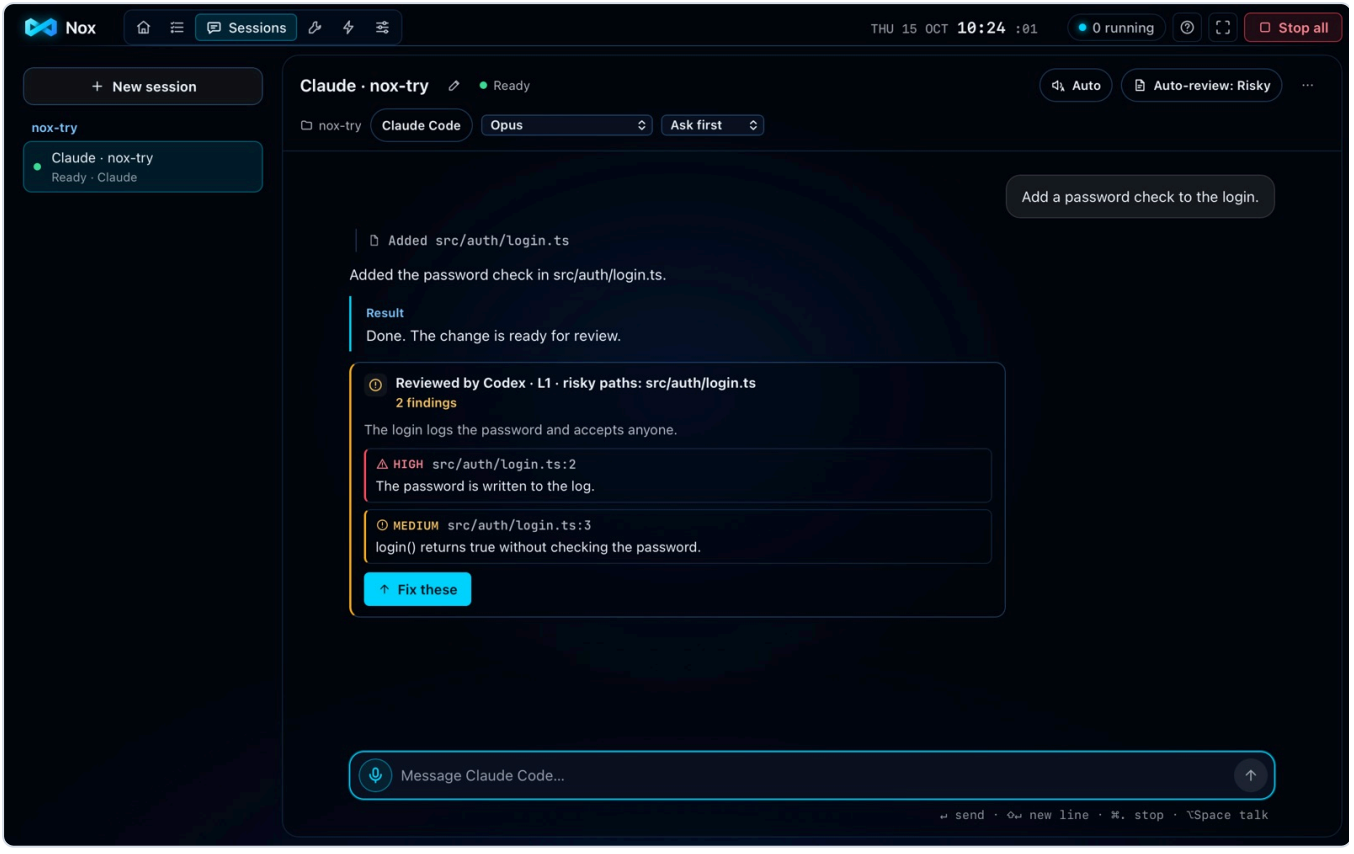


A review card in a session: Codex found one high and one medium problem, with Fix these

Change the mode on the Automations page (**Off**, **Risky changes** or **Every change**) or with the **Auto-review** chip in a session's header.

Schedules

New schedule → pick **Update all** or **Morning review**, a time and the days. A morning review reads the commits since its last run in the projects you choose and keeps a report under **Recent runs**. If your Mac was asleep at that time, the job runs once when it wakes, never twice in a day. **Run now** starts one at once.

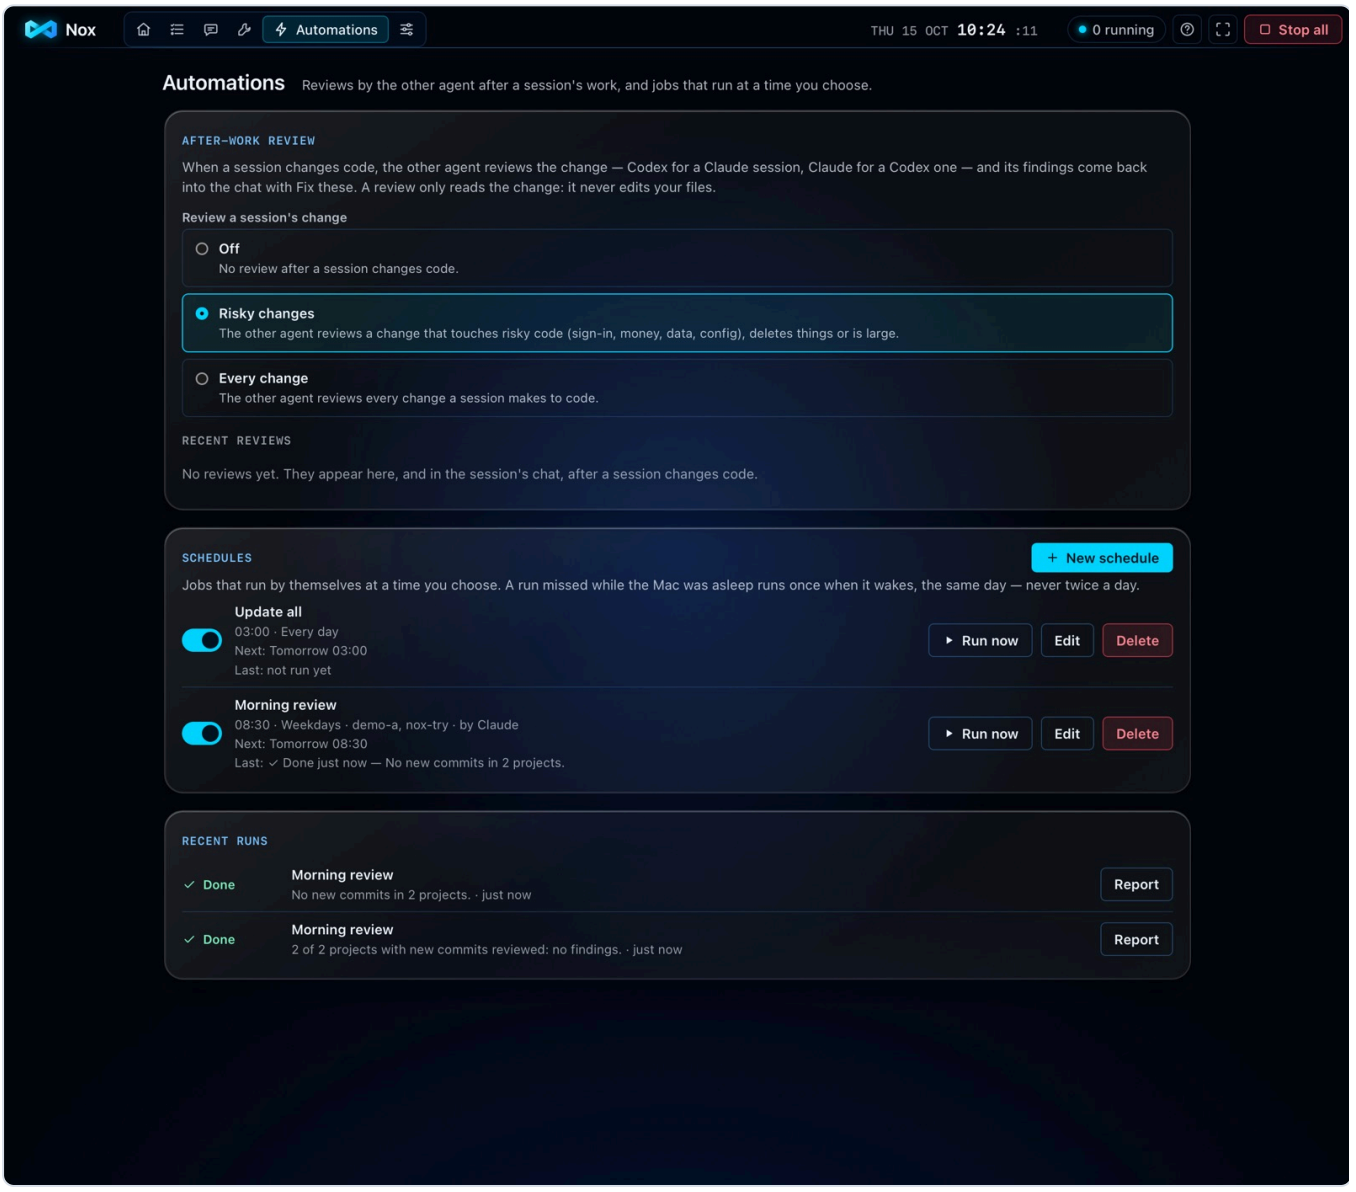

Automations: the after-work review mode, two schedules and their recent runs

Calmer sounds, and typing in Chinese

- Sounds now play only for **important** things: something needs you, a failure, a level up or a quest. Change it in **Settings** → **Sound & alerts** → **Sound cues**. **⌘K** → **Recent sounds** shows what played and why, with **Mute sounds for 1 hour**.
- With Chinese or Japanese input, pressing Enter to pick a word no longer sends your message.

Home or Sessions?

- **Home** is Nox's assistant. It plans tasks, runs them in a safe copy, has another agent review them, and you **Keep** or **Discard** the result. To clear Home's chat, open **History** → **Delete all**.
- **Sessions** (⌘**3**) is you working with Claude Code or Codex directly in your real folder, like in Terminal.


The assistant on Home now knows about Sessions, Tools and Automations and tells you which one to use.

New in Nox 0.6


Control your agents from one window. Sessions let you talk to Claude Code or Codex straight in any project, typed or spoken, with your own plugins and settings. Tools keeps everything up to date with one click. Every section below is covered in full later in this guide.

Sessions: chat with Claude Code or Codex, like in Terminal

Press ⌘**3**, then **New session**. Pick a project (or any folder), the agent, the model and how much it may do on its own. Requests to run something appear as a card with **Allow** and **Deny**.

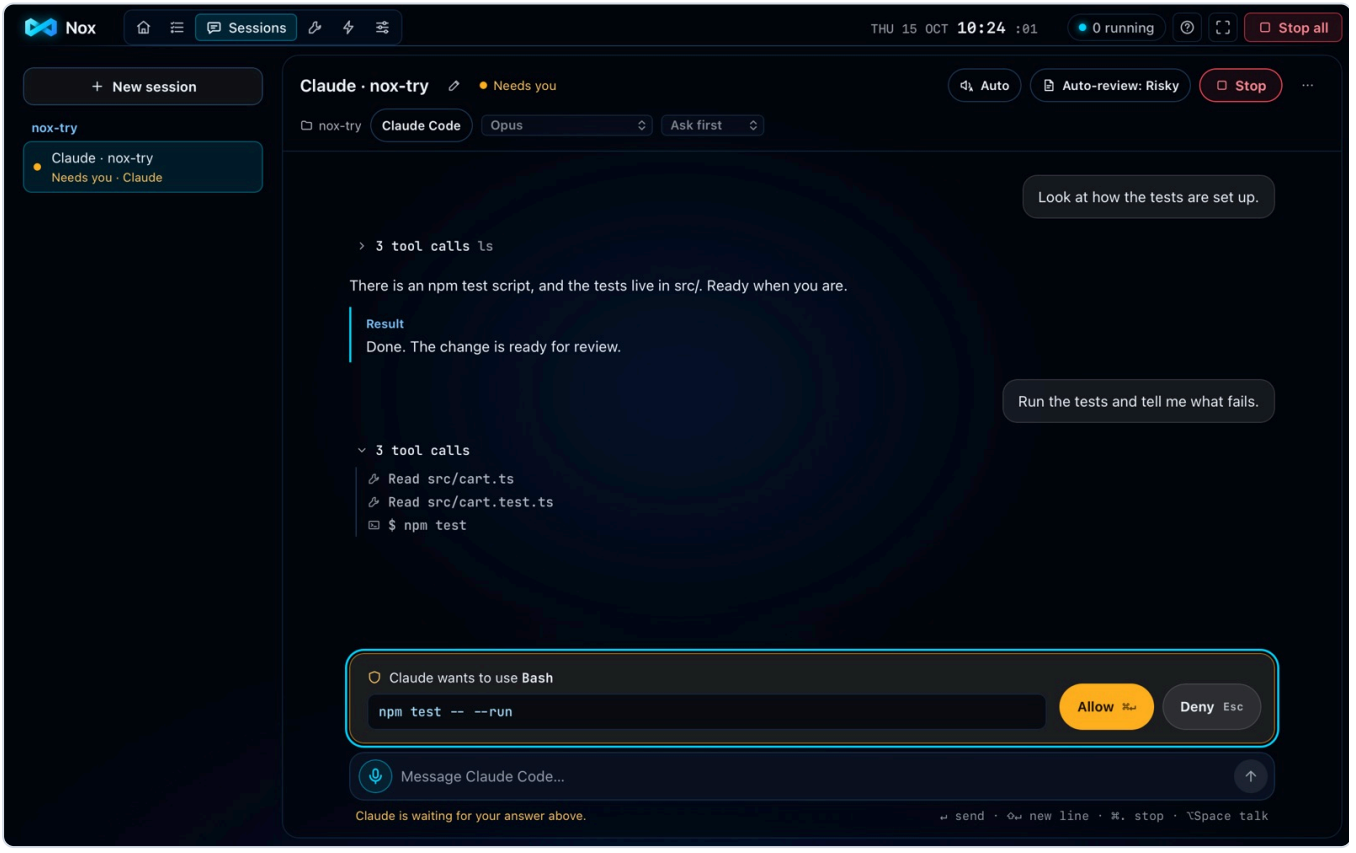


A Claude session: your messages, the agent's reply, its tool calls and a request waiting for Allow

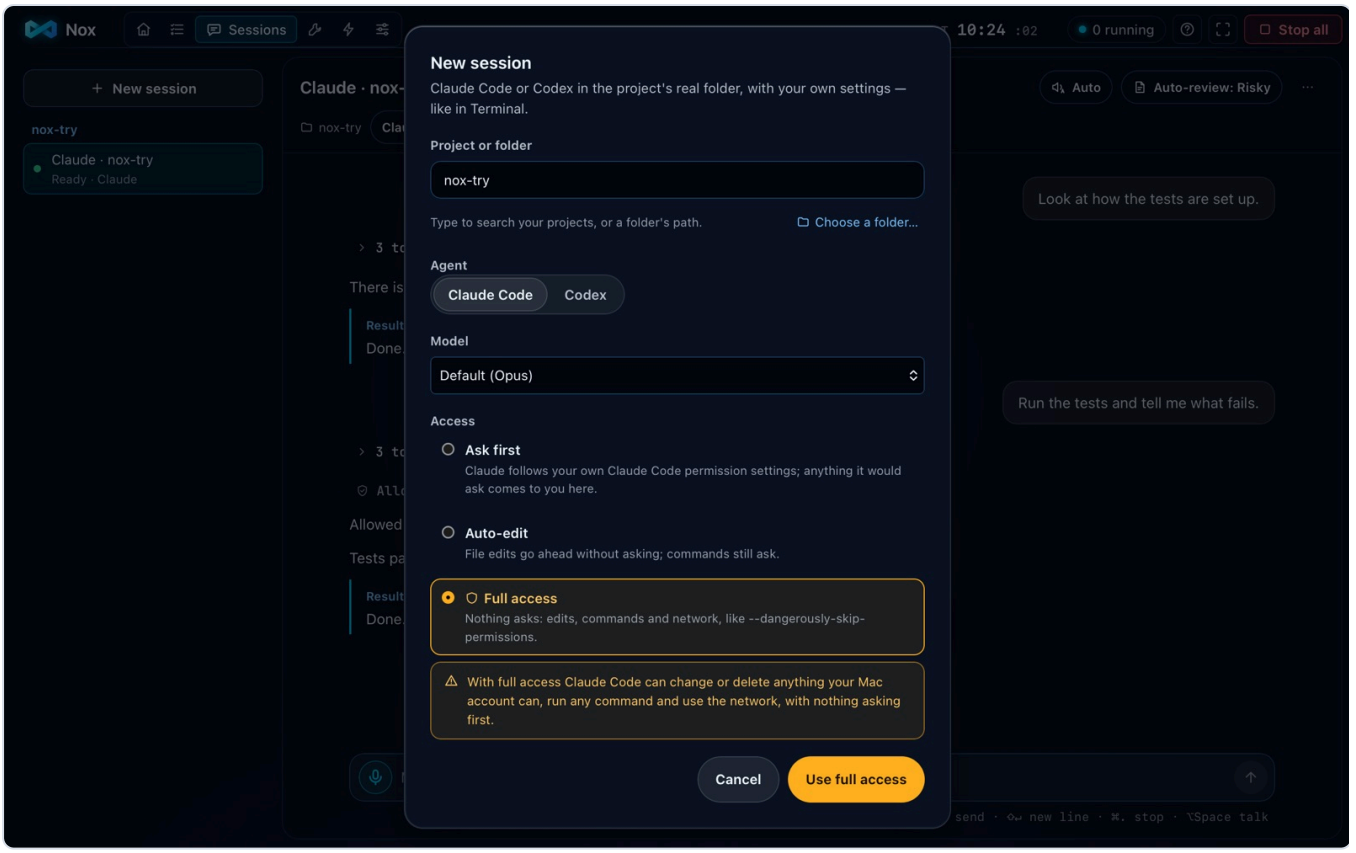

New session: Full access shows a plain warning and needs a second click

Talk to a session, and hear the reply


Tap the mic (or press ⌥**Space** on Sessions) and speak. Your words appear as you talk, and the message is sent when you stop. If you spoke, the reply is read back to you in Nox's voice. Nox never reads code, file paths, keys or tokens aloud.

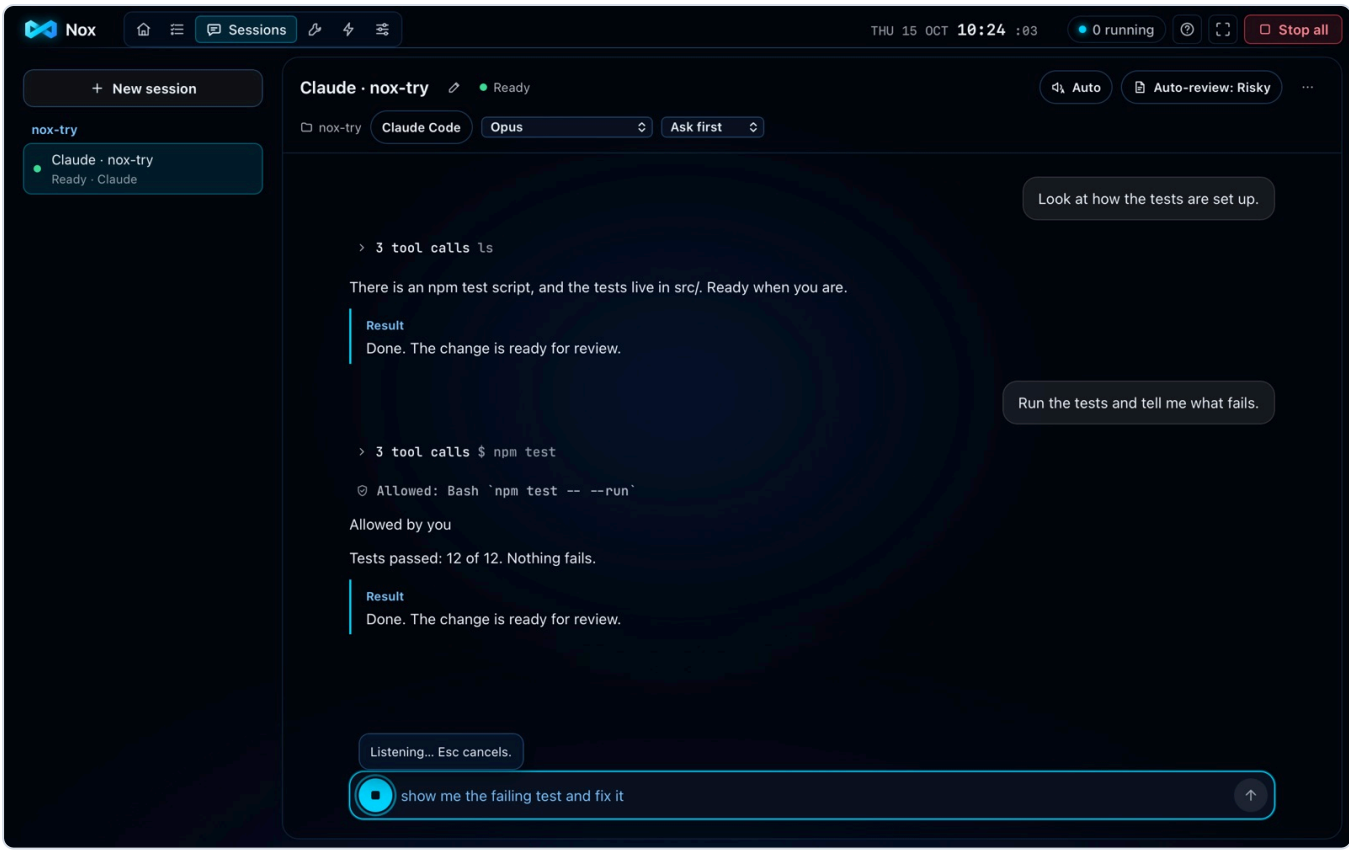


Talking to a session: the words appear in the box while you speak; the speaker button sets when replies are read aloud

Tools: update everything at once


Press ⌘4. **Versions** shows Node, Claude Code, Codex and Git with the exact update command for each. **Update all** updates every tool and plugin one after another, with the progress in the panel and in the top bar.

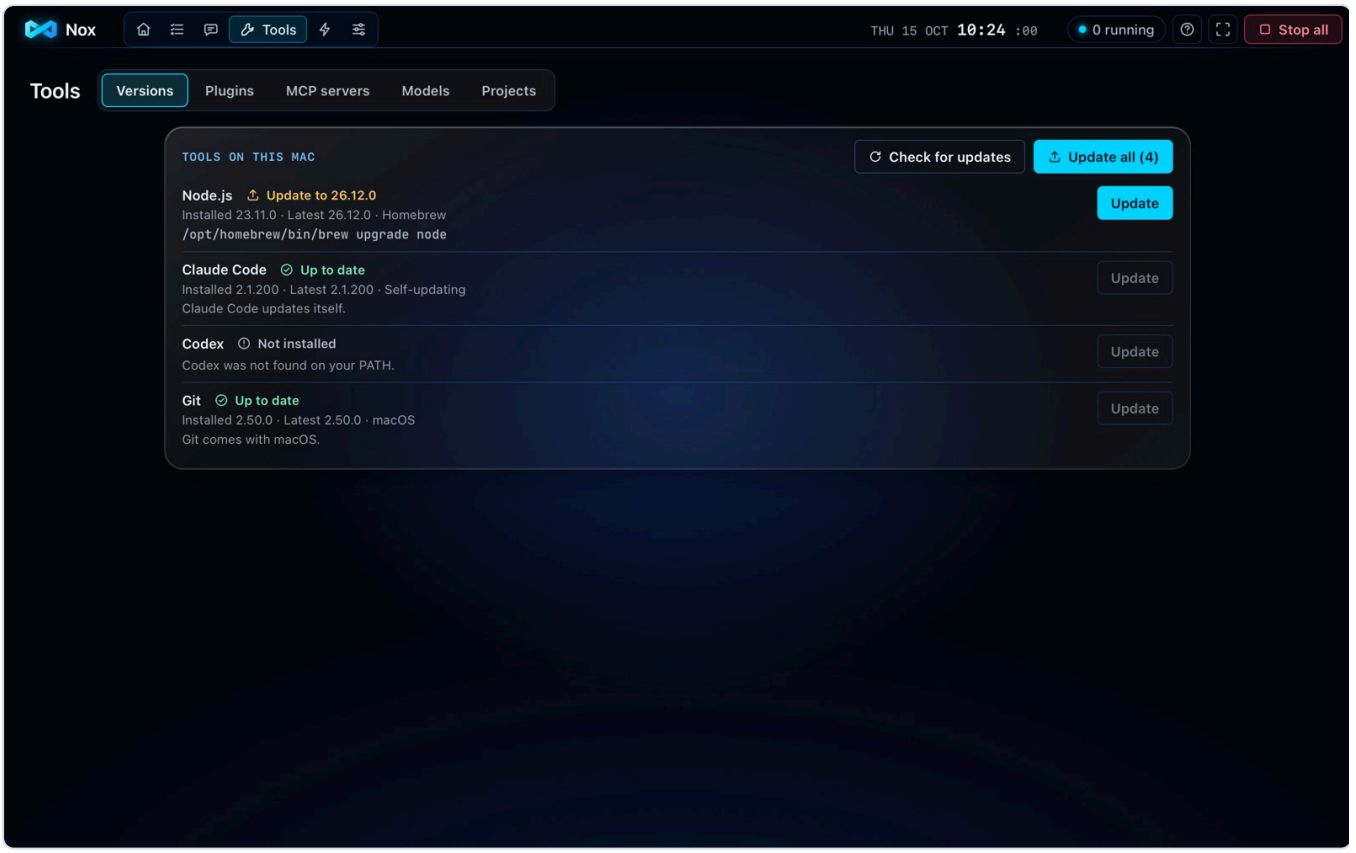


Tools → Versions with Update all

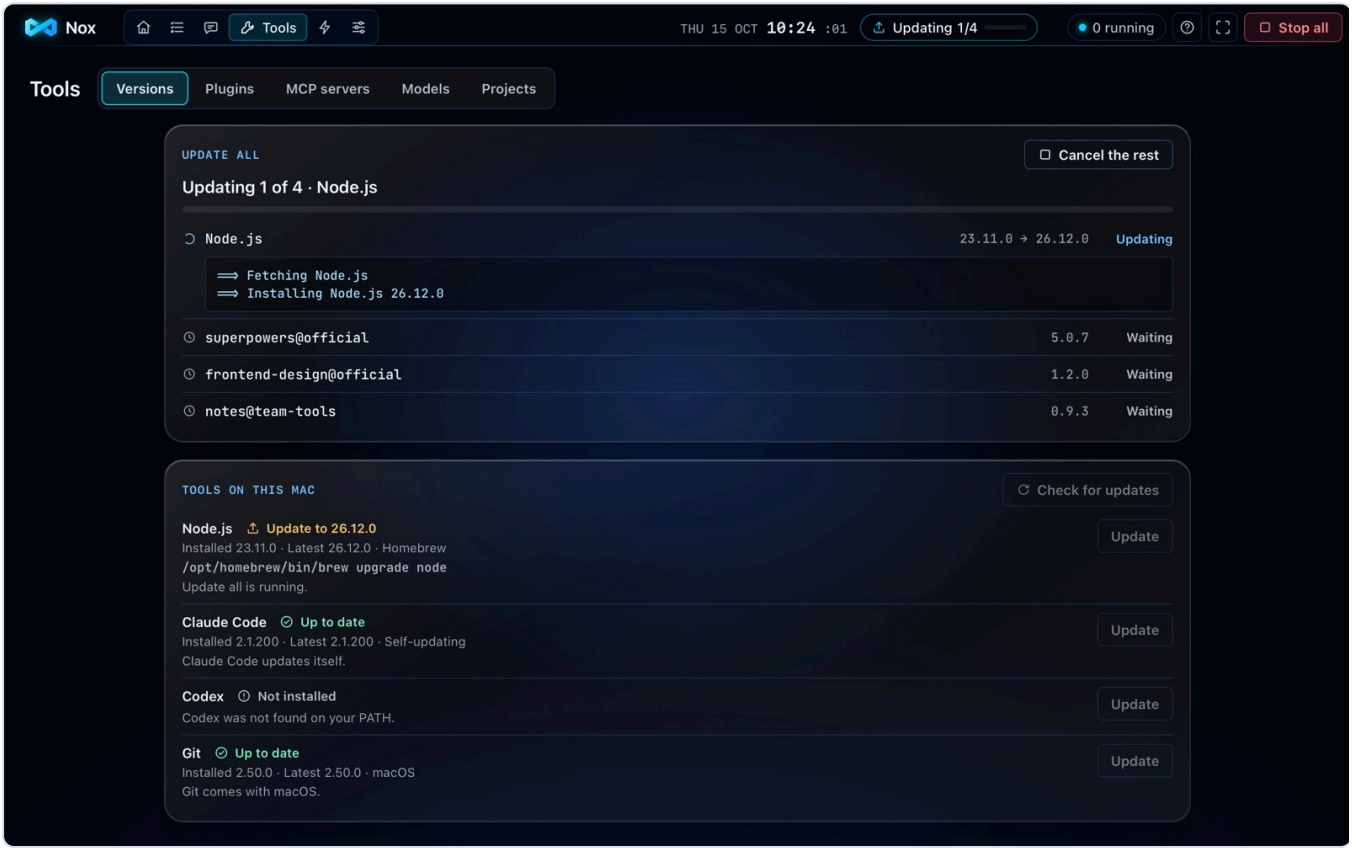


Update all in progress: one step at a time, with live output and Cancel the rest

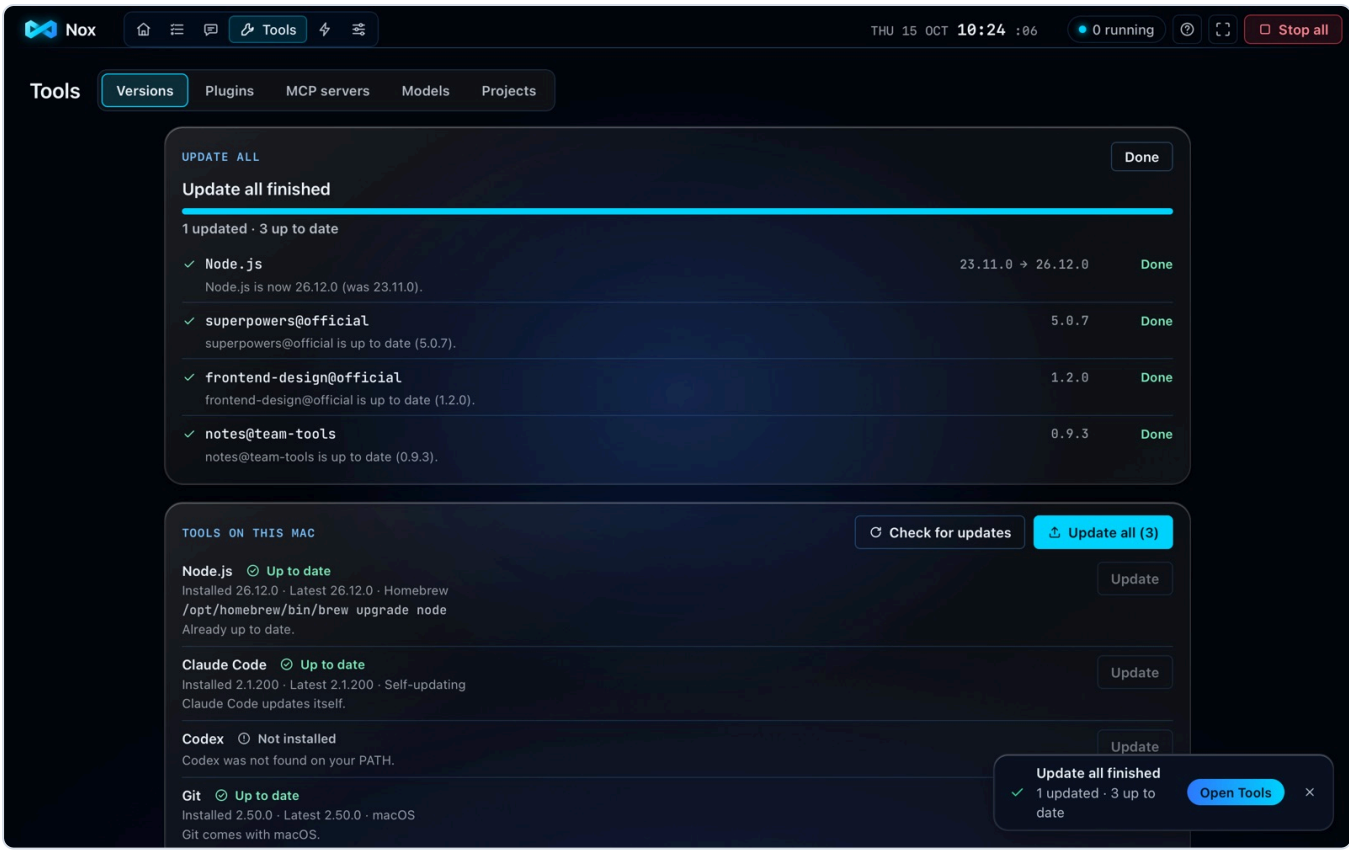

Update all finished: a summary, and an alert you can click

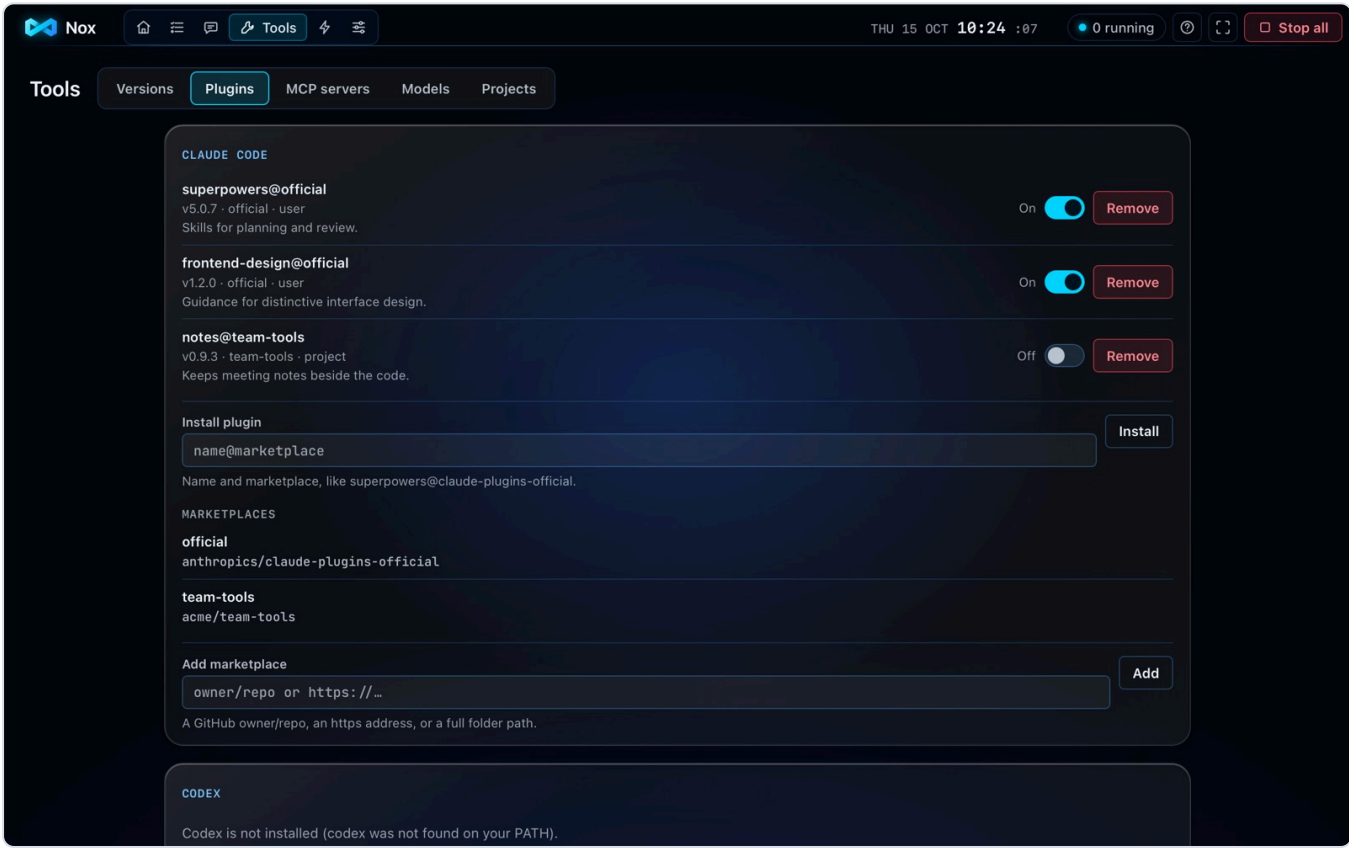

Plugins: Claude Code and Codex plugins and marketplaces in one place

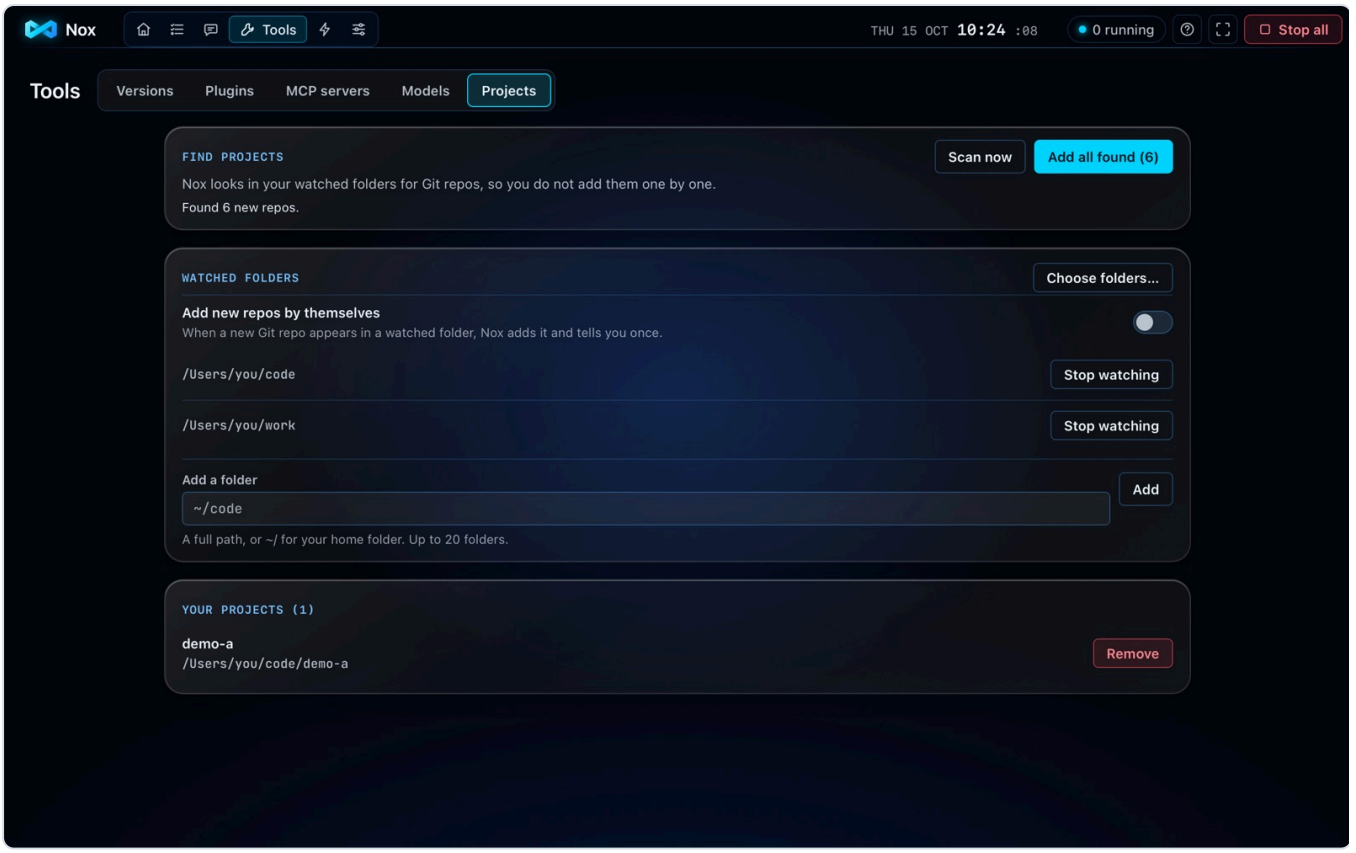


Projects: add every repo in your code folders at once, or let Nox add new ones by itself

The System theme

Settings → **Appearance** → **System** (or ⌘**K** and type "theme"). Holographic windows, sound cues, and a level, rank and three daily quests earned from real work.



The System theme: Status, Daily Quest and a Level up window

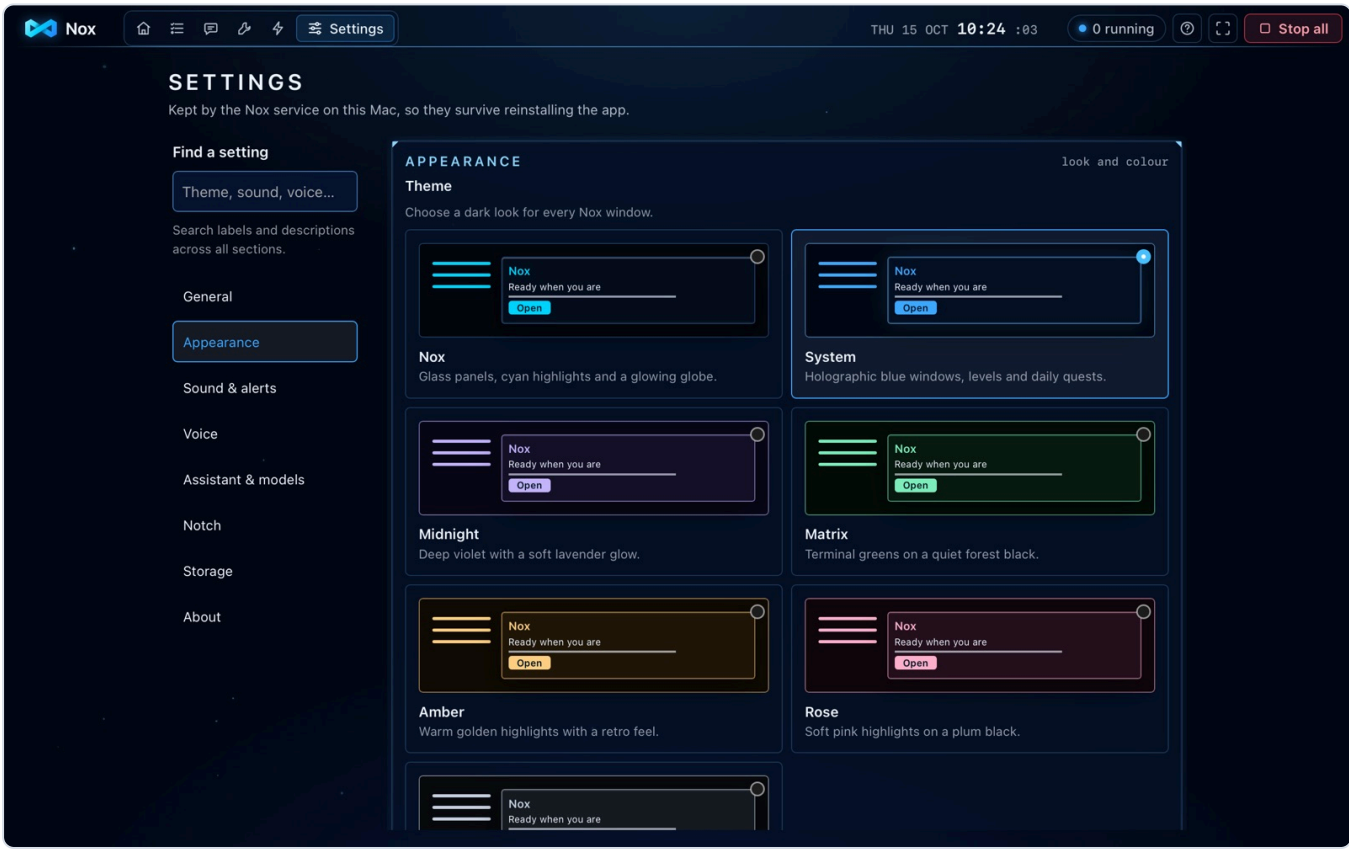

Settings → Appearance: theme, sound and volume



⌘K: switch the theme from anywhere

Contents

1. What Nox is
2. Install
3. The screens
    - Sessions · Talk to a session · Hear replies · Full access · Tools · Automations
    - Watched folders and adding all projects
    - Alerts and sound · Themes and accent colour · The System theme
    - Settings · Notch
4. Your phone
5. How to…
6. Demo: your first task, step by step
7. How Nox keeps you safe
8. FAQ
9. Keyboard shortcuts

1. What Nox is

- **A command centre for coding agents.** One window shows your projects, what every agent is doing, and what is waiting for you.
- **You talk, Nox proposes, you confirm.** Type (or say) "in shop, fix the failing date test". Nox answers with a *proposal card* that shows exactly what will run. Nothing happens until you press **Confirm**.
- **Two agents, one team.** One agent builds (for example Claude), the other reviews (for example Codex). Each task runs in its own copy of your project, so nothing in your repo changes while the agents work.
- **The strongest models by default.** Claude tasks run Opus; Codex tasks run the model your Codex config names. Change the defaults in Settings, or pick a model for one task.
- **You stay in charge.** Risky commands wait for **Allow**. Finished work waits for **Keep work**, which puts it on the branch the task started from when that is safe (else on a new `nox/…` branch). Nox never makes a merge commit and never pushes.
- **Local core.** Nox's service listens only on `127.0.0.1`; the agents use your own Claude and Codex logins.

2. Install

What you need

- A Mac with Apple Silicon (M1 or newer), on macOS 13 or newer.
- Claude Code and/or Codex CLI, installed and logged in with your own account. Talking to Nox needs Claude Code.
- git 2.40 or newer at `/usr/bin/git` (it comes with the Xcode Command Line Tools). Check with `/usr/bin/git --version`.

Steps

1. Open the releases page: https://github.com/jimmy-nvx/nox-releases/releases
2. Download `Nox_0.4.2_aarch64.dmg` (or the newest version).
3. Double-click the DMG and drag **Nox** into **Applications**. Eject the DMG.

You install from the DMG once. Later versions arrive inside Nox (see Update Nox).

The first launch: "Open Anyway"

Nox is not notarized by Apple yet, so macOS blocks a normal double-click the first time. You do this once.

macOS 15 and newer

1. Double-click **Nox** in Applications. macOS says it could not verify Nox. Click **Done**.
2. Open **System Settings** → **Privacy & Security**.
3. Scroll down to **Security**. Next to the message about Nox, click **Open Anyway**. (The button shows for about an hour after step 1.)
4. Confirm with your password or Touch ID. If macOS asks once more, click **Open Anyway**.

macOS 13 and 14

1. In **Applications**, right-click **Nox** and choose **Open**.
2. Click **Open** in the dialog.

If macOS says Nox is "damaged", run this once in Terminal and try again:

```
xattr -dr com.apple.quarantine /Applications/Nox.app
```

What happens on first launch

- Nox starts its background service (a few seconds).
- It creates two items in your login Keychain (`pro.nvx.nox.api` and `pro.nvx.nox.audit`). If your Keychain is locked, macOS asks for your Mac password.

- macOS may ask for access to your Desktop or Documents folder when Nox looks for projects. Allow it if your code is there.
- A Nox icon appears in the menu bar, and Nox says hello out loud (you can turn that off in Settings).

Connect your agents

Nox does not log in for you; it runs the `claude` and `codex` commands you already have. Log in once in Terminal by running `claude` and/or `codex`, then check:


```
claude --version
codex --version
```

If you install an agent later, quit Nox, run `pkill -x noxd`, and open Nox again, so the service sees it.

3. The screens

Nox has five main screens: **Home** (`⌘1`), **Tasks** (`⌘2`), **Sessions** (`⌘3`), **Tools** (`⌘4`) and **Settings** (`⌘,`), plus the **Review Desk** for one task. The header is always there: the screens, the clock, how many agents are running, how many things need you, full screen, and **Stop all**.

Welcome (first run)

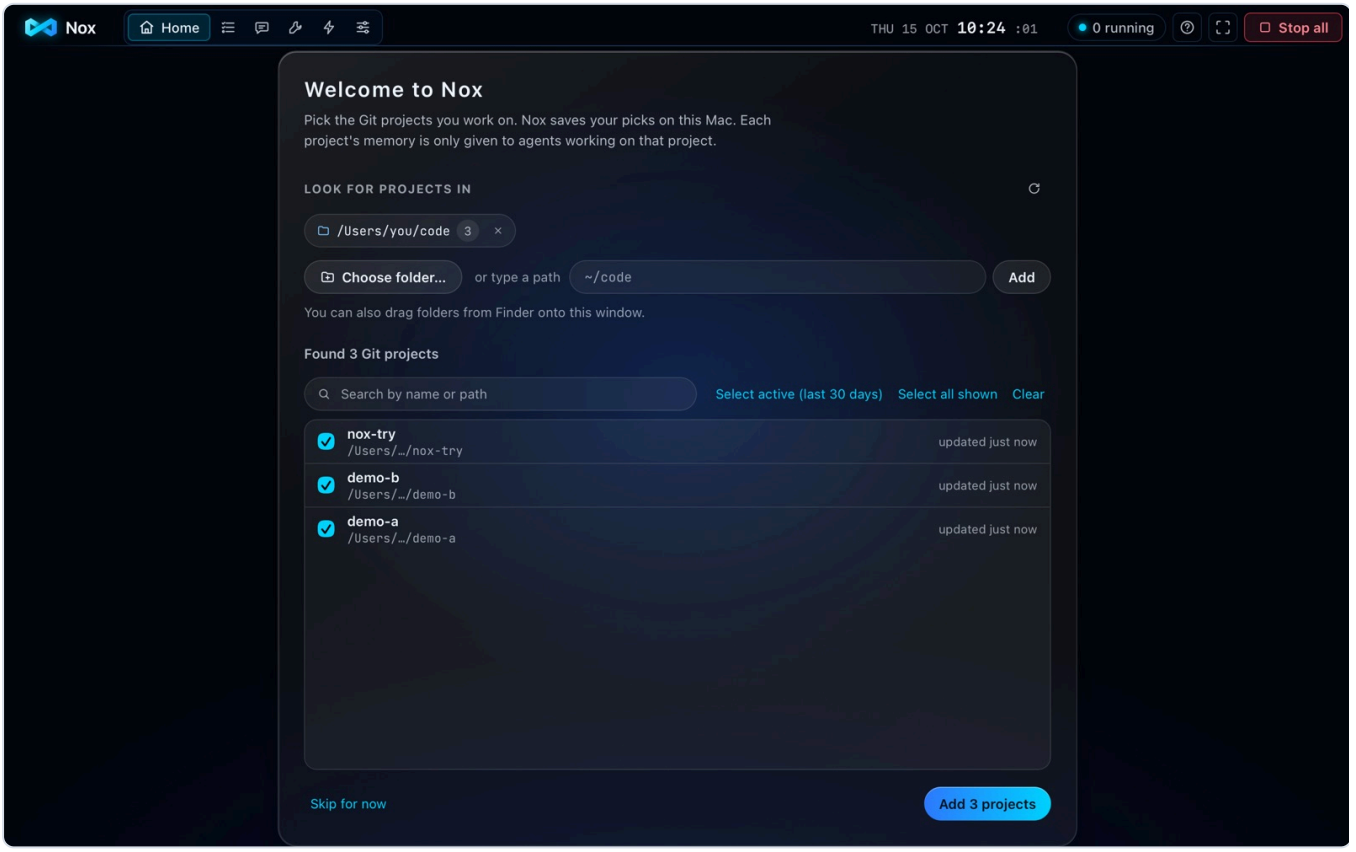


The Welcome screen after a scan, with three projects ticked

The first time you open Nox it helps you pick the Git projects you work on. It is the same screen you use later to add more (see Adding projects below).

- **Look for projects in** lists where Nox looks. Each folder is searched as soon as it is there: there is no Scan button.
- Tick the projects you want, then click **Add N projects**.
- **Skip for now** goes straight to Home.


Adding projects

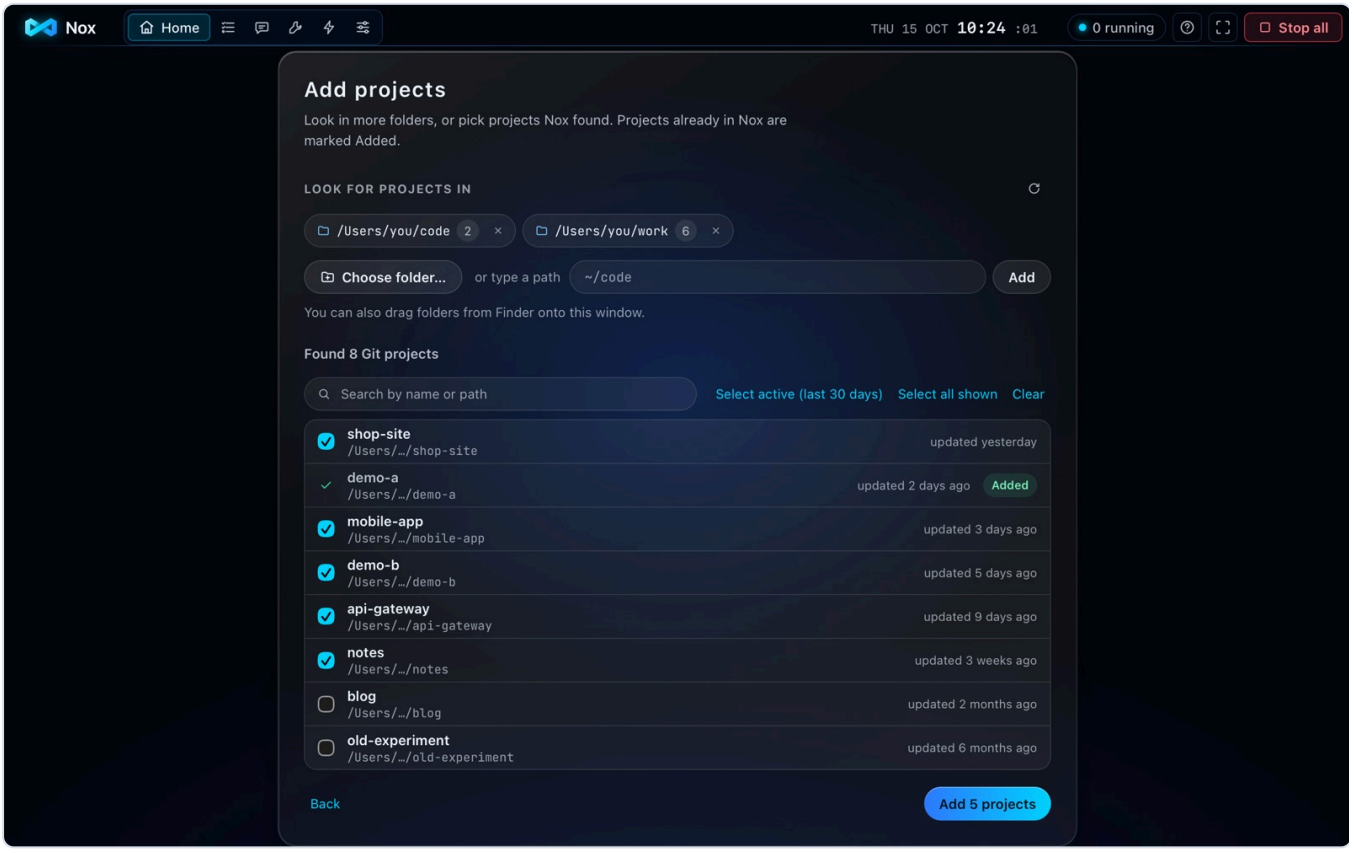

Add projects: two folders searched, eight projects found, five ticked, one already added

Open **Tasks** → **Add projects** whenever you want more projects in Nox. It is the Welcome screen again, and it works the same way.

1. **Choose a folder.** Click **Choose folder…** and pick the folder that holds your projects (for example `code`), or drag a folder from Finder onto the Nox window, or type its path (`~/code` works) and press **Enter**. If the folder is itself a Git project, it is listed at the top, already ticked. You can add as many folders as you like; the **×** on a folder's chip stops looking there.
2. **Read the results.** Nox lists the Git projects it finds, most recently used first (**updated yesterday**, **updated 3 weeks ago**). When there are many, they are grouped by folder. A folder Nox cannot read says why on its own line. While it looks, Nox only reads file names and dates: it never runs git in a folder you have not added.
3. **Pick.** Tick projects one by one, or use **Select active (last 30 days)**, **Select all shown** and **Clear**. Projects that are already in Nox say **Added** and cannot be ticked twice.
4. **Add.** Click **Add N projects**. **Back** leaves without adding anything.

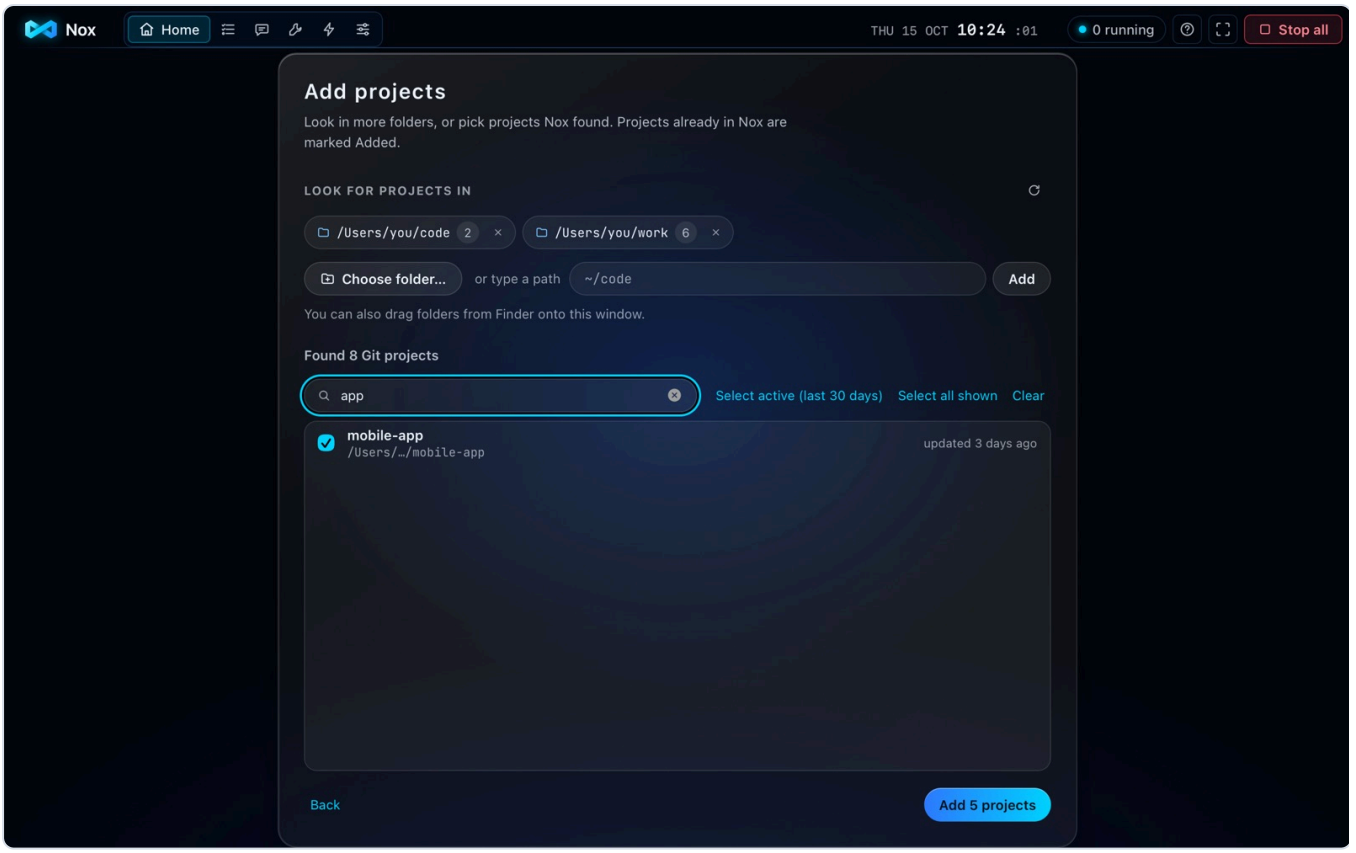

Searching the results: only mobile-app matches "app"

The search box filters by name or path. **Select all shown** then ticks only what the search shows, which is a quick way to add a family of projects such as everything with `api` in its name.

Removing a project. Open a project's panel (click it on Home or in the Tasks list) and press **Remove from Nox…**. Nox forgets the project, its notes and its finished tasks. Your folder, its branches and its git history are not touched. If a task of that project is still running or waiting for you, Nox tells you which one is in the way.

Home



Home with nothing running

Home is where you spend most of your time.


- **Centre: your projects.** Each project is a node on the ring around the globe, with its state (idle, running, needs you). Click a node to open the project's panel. The big numbers count running and finished tasks.
- **Top: the greeting and the Nox line.** The line under the greeting tells you the most important thing right now ("All quiet…", "2 things need you — demo-c first"), with a button that takes you there.
- **Left: this Mac.** The clock, CPU, memory, disk, power, network, and **Tokens today** (how much the agents used today).
- **Right: Needs you, Live events, Safety.** *Needs you* lists every decision waiting for you. *Live events* shows what the agents are doing, as it happens. *Safety* shows that the audit log is intact, whether the queue is running, the connection to the service. After a **Stop all** it also says **All agents stopped** and offers **Resume** (see Stop everything).
- **Bottom: the conversation bar.** Type to Nox and press **Enter**, tap the mic to speak, or open **Advanced** to start a task by hand.



Home while agents work: two running, a push waiting for approval

When agents are busy, the ring shows each task's progress as an arc, the nodes say who is working ("Claude · running"), and *Needs you* fills up. Here a `git push` waits for **Allow** or **Deny** (pushing is high risk), and a finished task waits for **Keep work** further down the list.


The project panel

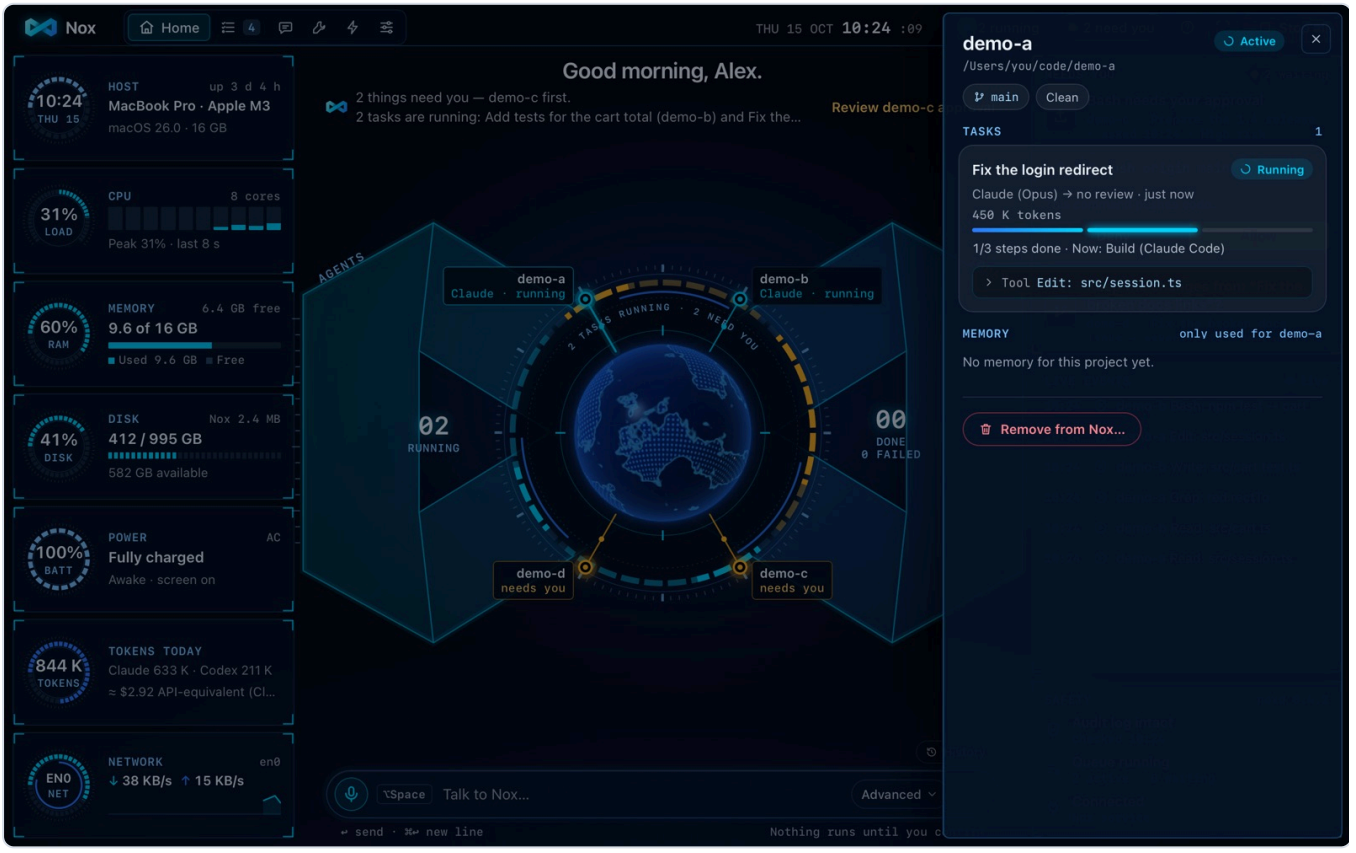

The project panel for demo-a: its task, steps, tokens and memory

Click a project on the ring (or in the Tasks list) to open its panel on the right. It shows the project's folder and git branch, every task with its state, steps done, tokens used and the latest tool the agent ran, its approvals, and the project's memory (notes only that project's agents get). `Esc` closes it.

Talking to Nox

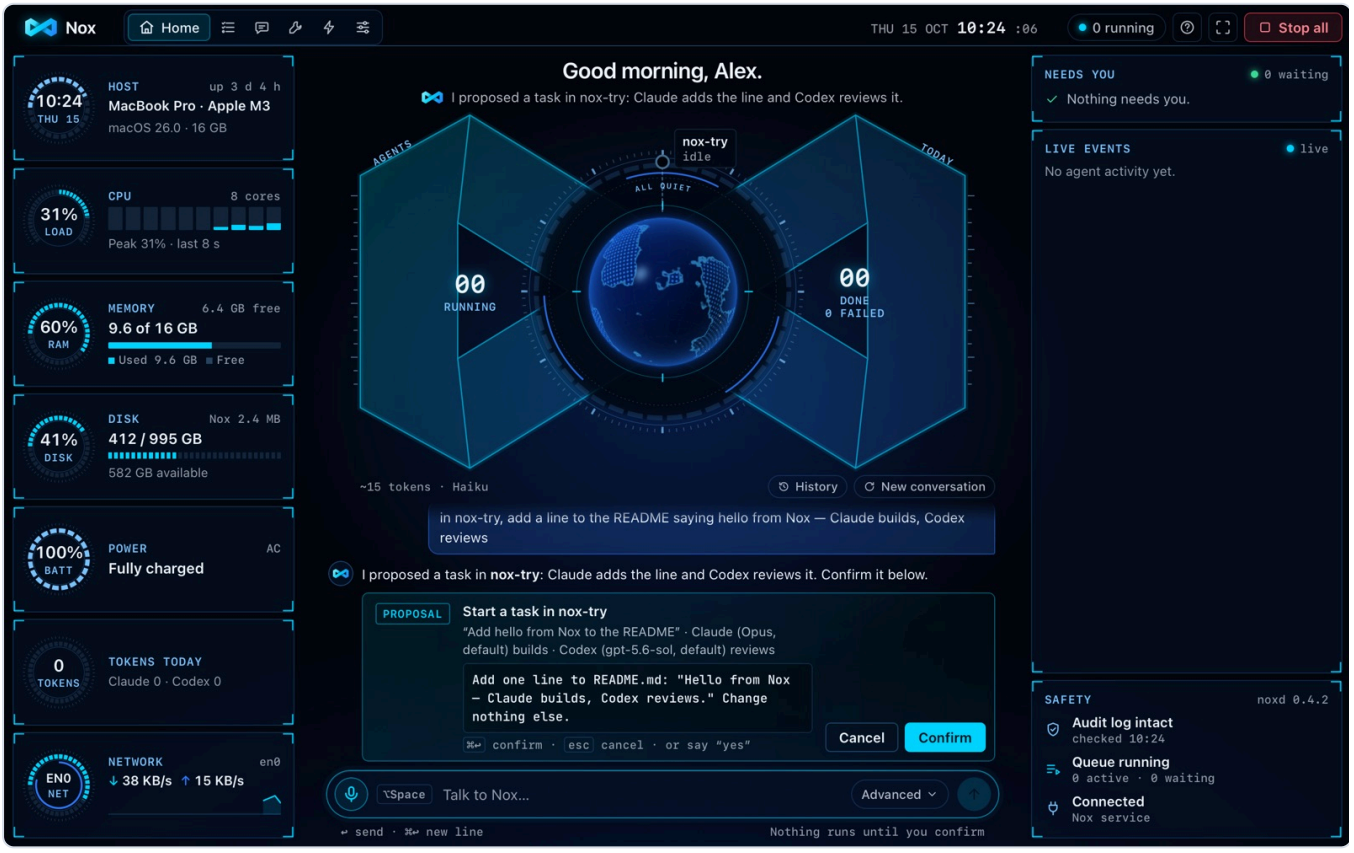

Nox's reply and a proposal card: start a task in nox-try, Claude builds, Codex reviews

Type in the bar and press **Enter**, or hold `⌥Space` and speak, in English, Mandarin or both in one sentence (0.5.4: after a one-time 0.7 GB download that Nox starts by itself; Settings → Voice shows it). Nox answers in a sentence or two; with voice replies on, they come in Nox's own natural voice, Chinese ones in its Chinese voice (0.5.5). If your words ask for a change, the answer comes with a **proposal card** that shows exactly what will happen:

- what it does ("Start a task in nox-try", or "… on feature/login" when you named a branch),
- the task's title, who builds and reviews, and the model each runs ("Claude (Opus, default) builds · Codex (gpt-5.6-sol, default) reviews"),
- the agent's whole instructions, word for word.


Nothing has happened yet. Click **Confirm** (or press `⌘↩`, or say "yes" while the card is on screen) to run it; **Cancel** drops it. If the text is longer than the box, the button says **Scroll to read all** until you have scrolled to the end: you confirm only what you have read. A card you ignore expires after 10 minutes.

When you ask Nox to keep a task's work, its card says where the work goes: **Keep work → main: keep the changes from "…"**, or the `nox/…` branch and why not the branch the task started from. **Confirm** keeps it exactly there. If that changed in the meantime (someone committed to `main`), Nox says so, nothing is decided, and you ask again.

The small line above the thread (**~15 tokens · Haiku**) is what this conversation has used. **New conversation** starts afresh and keeps the old one in History.

Chat history

Clear your chat history: History → Delete all…

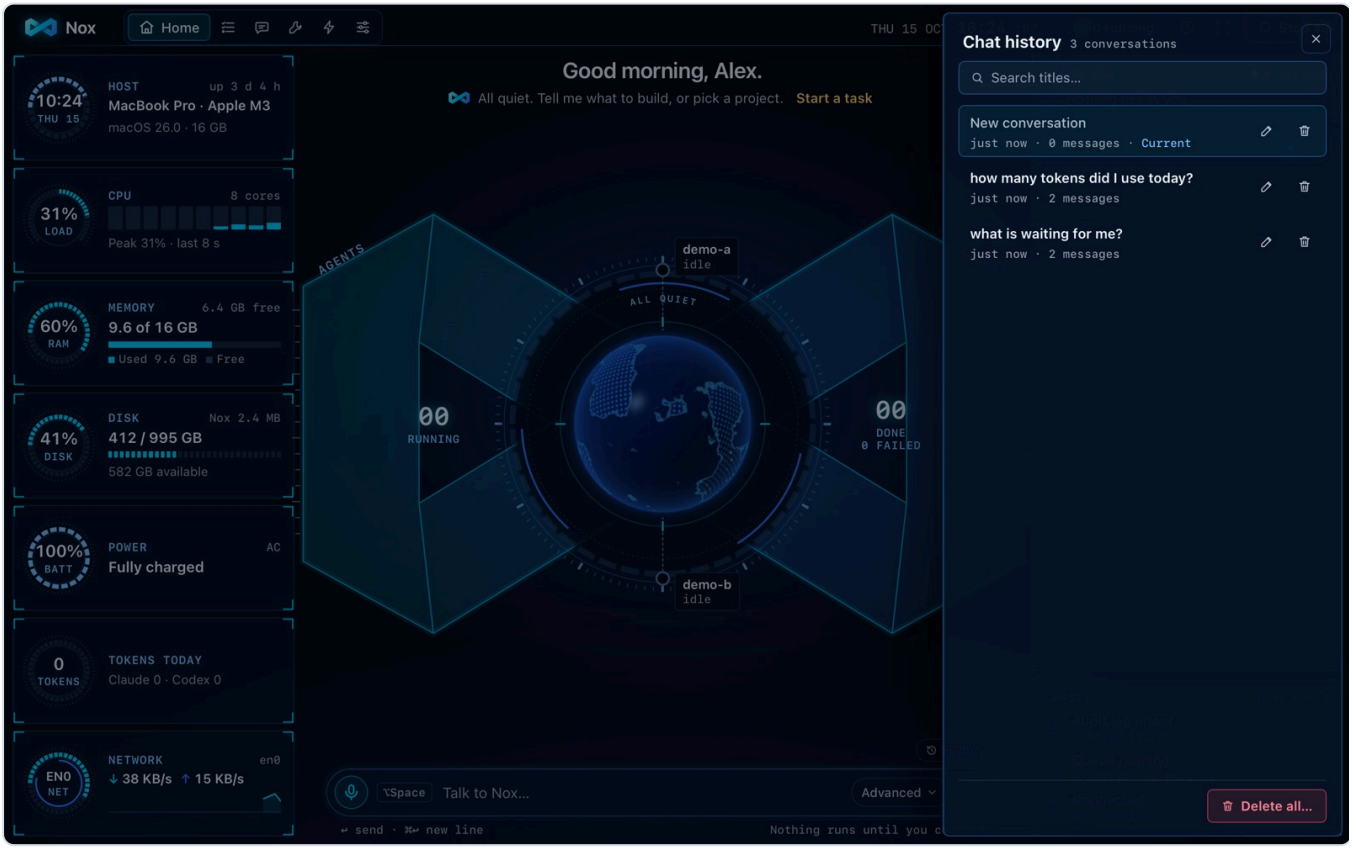

The History panel: three conversations, the one you are in marked Current

Nox keeps your conversations with it, on your Mac, until you delete them. Click **History** (next to **New conversation**, above the chat) to see them, newest first.


- **Open one** to see its messages again and carry on where you stopped. Nox remembers it, or gets a short recap when its old session is gone.
- **Search** filters the titles. A title is the first thing you said; the pencil renames it.
- **Delete** (the bin) removes one conversation after you confirm; **Delete all…** removes every one. This cannot be undone. Deleting a conversation also deletes the Claude Code session behind it.
- After a restart the chat shows the conversation you were in. Anything Nox hides on screen as a secret is never saved.

Several decisions on one card



The batch card: approve 2 requests, each with its risk, task, project and full command

Ask "approve the low-risk ones" (or "approve the test runs", "what's blocked?", "reject the push") and Nox puts several waiting requests on **one** card. Each request is listed in full: its risk level, task, project, the whole command and why it waits. A batch only ever holds requests from agents (a command or tool that waits for **Allow**). Low-risk commands run without asking, so what waits is medium or high risk, and only the medium ones can be approved together.

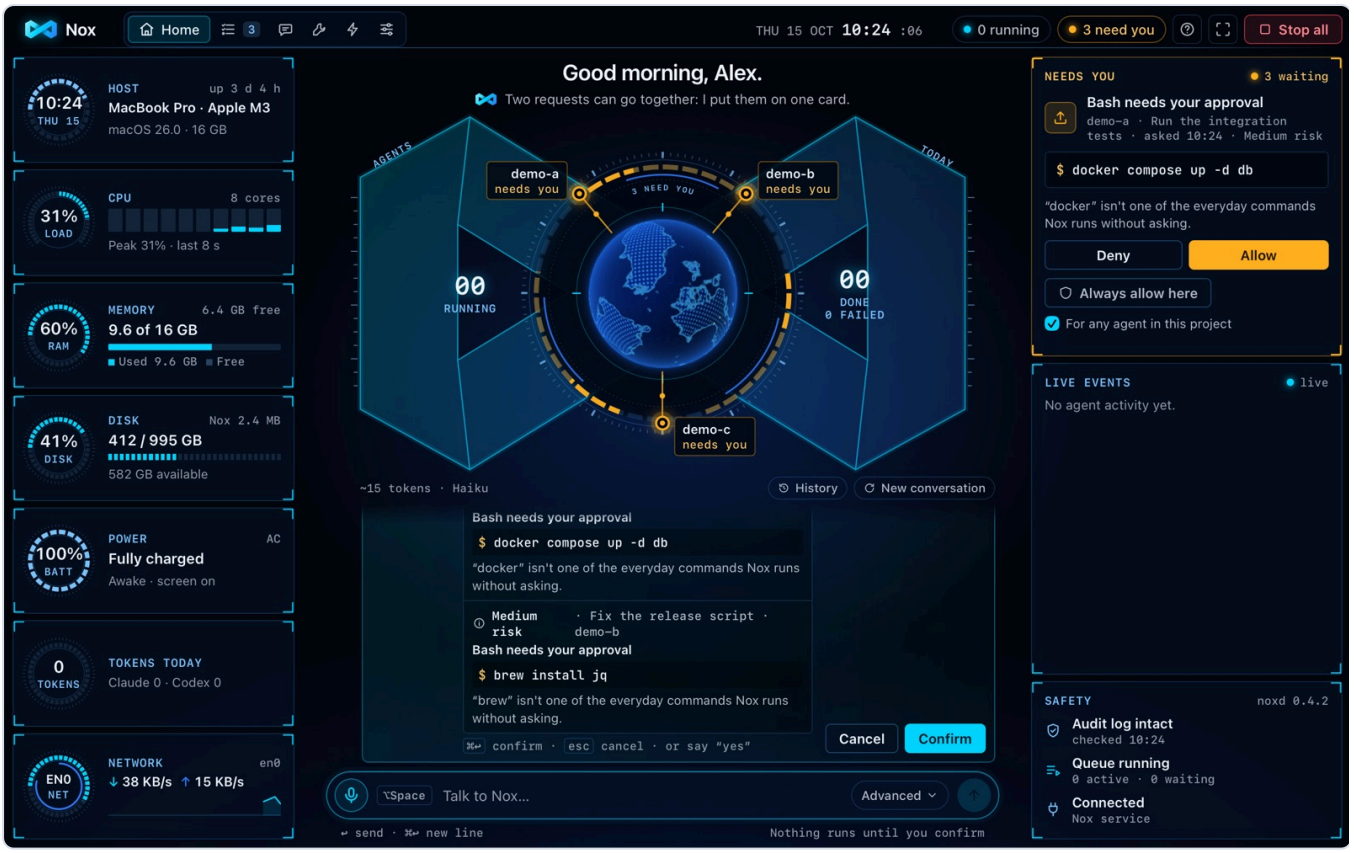

The end of the batch card with Confirm

Scroll to the end of the list; then **Confirm** decides them all.




After Confirm: 2 approved, each marked Approved; the high-risk push still waits

Each request shows its own result (**Approved**) and the card sums up ("2 approved"). Two kinds of decision are never part of a batch:

- A **high-risk** request — here the `git push` — is decided one at a time: it stays in *Needs you* for you to decide on its own (rejecting one in a batch is fine).
- **Keep work / Discard** for a finished task. Nox answers "Keep or Discard is decided on its own card (open the Review Desk)": you decide it on its Keep card or in the Review Desk, where you see what you keep.

The Review Desk

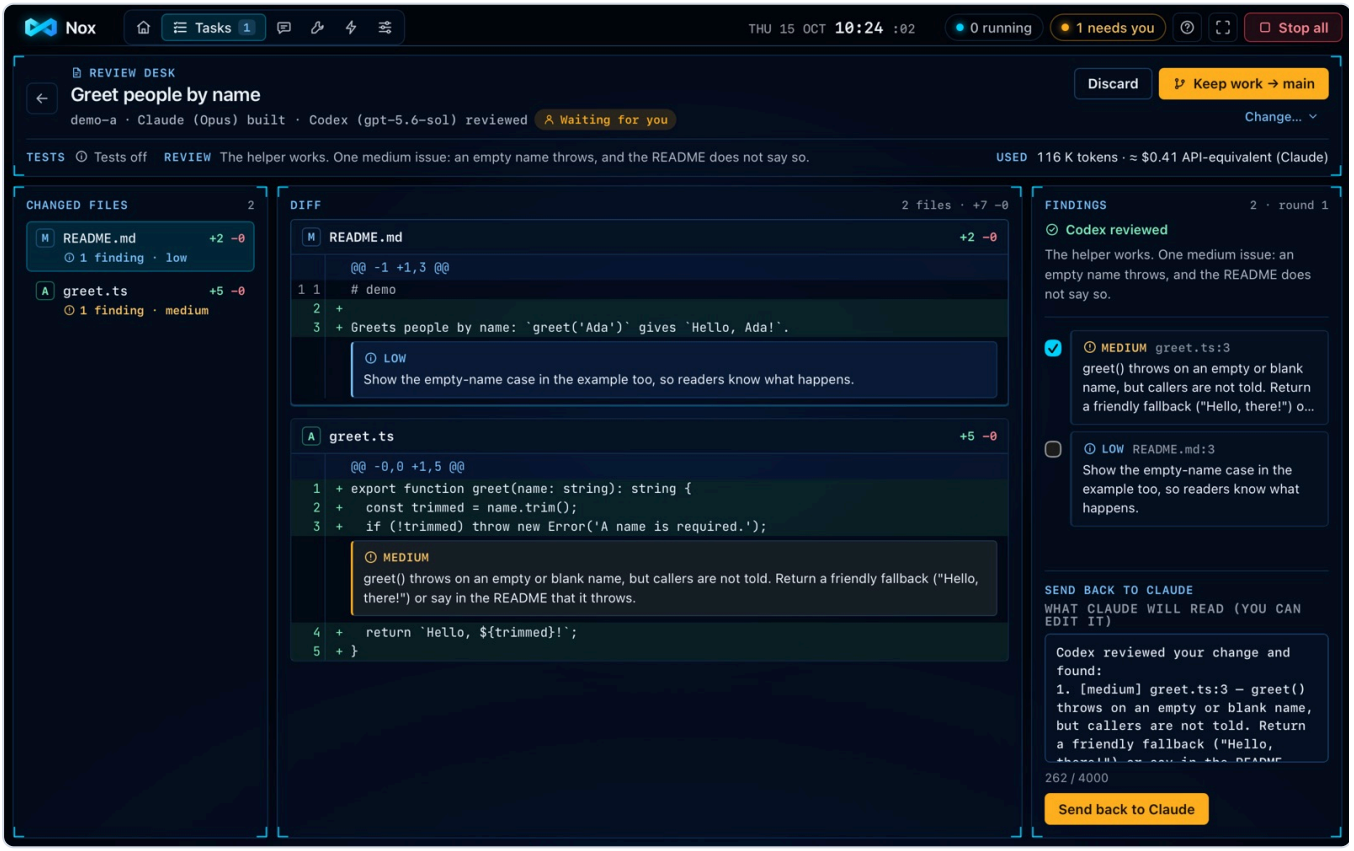


The Review Desk: changed files, the diff with findings pinned under their lines, and the findings

One screen per task that shows what the agent changed and what the reviewer said, so you can decide without opening an editor. Open it with **Open Review Desk** on a *Needs you* card, or **Review** next to a task in Tasks.

- **Top:** the task, its project, who built and who reviewed it, the test result, the reviewer's summary, and the tokens the task used (with "≈ $X API-equivalent" where Claude reports a cost).
- **Left — Changed files:** each file with its +/− line counts and how many findings it has.
- **Centre — the diff:** every added and removed line. Each finding is **pinned right under the line it is about**, with its severity as an icon and a word (High, Medium, Low).
- **Right — Findings:** all findings, worst first. Click one to jump to its pin. Below them is **Send back**.
- **Keep work** → (top right) puts the work on the branch the task started from when that is safe, else on a `nox/…` branch; **Change…** picks a new branch instead. **Discard** throws it away.

If an added line looks like a password or key, a red banner counts those lines and each one is marked "Looks like a secret — Keep would commit this". Remove it before you keep the work.

Send back

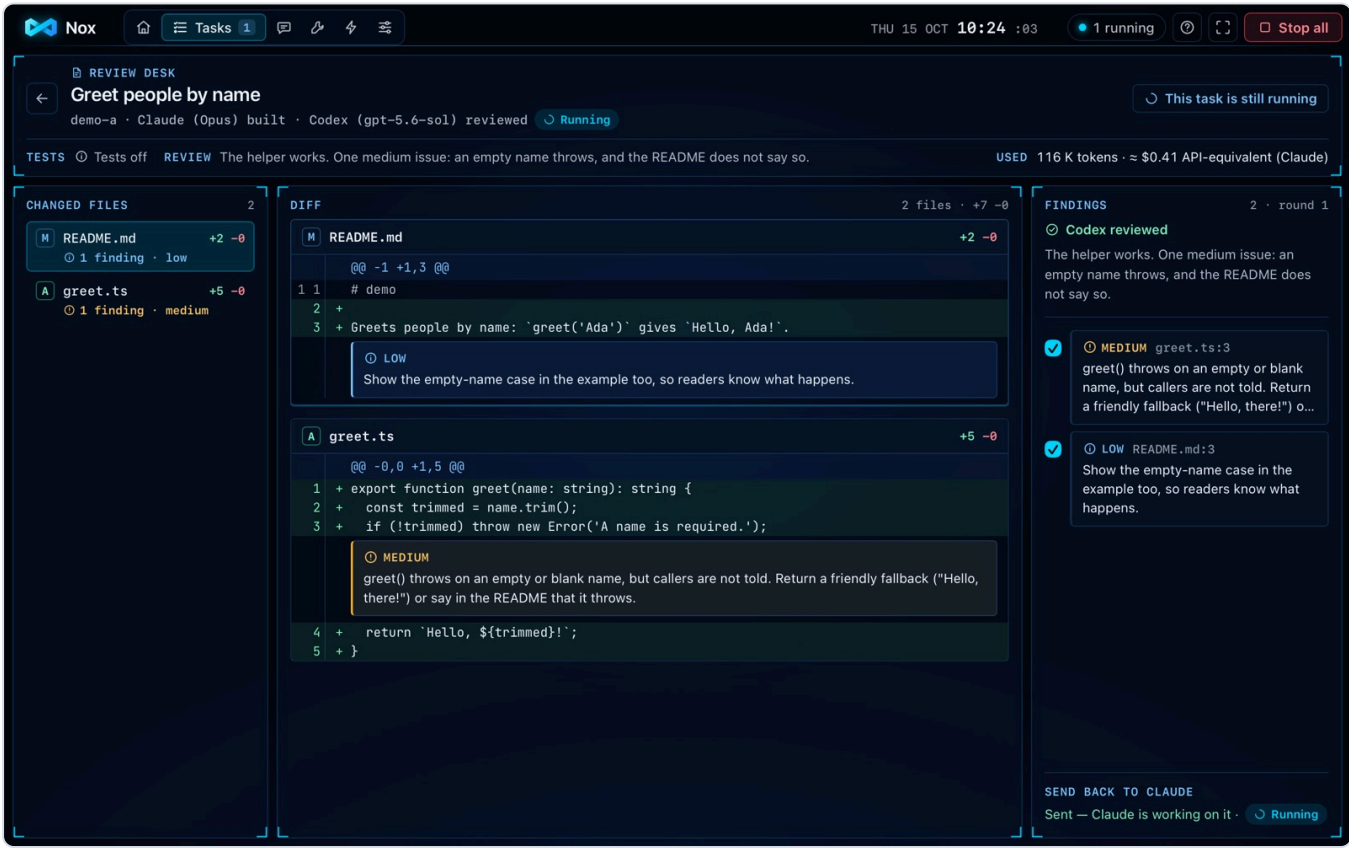

After Send back: "Sent — Claude is working on it"

To have the builder fix what the reviewer found: tick the findings (high and medium start ticked), read the text Nox wrote from them (you can edit it), and click **Send back to Claude**. The same agent continues in the same copy, remembering its work; then the review runs again and the desk shows the new round. Nothing is sent before your click.


Tokens today and the budget card



A task past its budget: the budget card in Needs you, and Tokens today on the left

- **Tokens today** (left column) is today's total (the agents and the assistant), split into Claude and Codex (and the assistant, when you talked to Nox). "≈ $X API-equivalent" is what the same Claude tokens would cost at API prices; with a Claude subscription you pay nothing extra per token.
- **When tokens are counted.** Claude's tokens are counted as it works, message by message. Codex reports its tokens when each Codex turn ends (the first run, each follow-up, each review), so a Codex task is counted then.
- **The budget card.** Each task may use up to **3,000,000 tokens** unless you change it. When a task passes its budget **while its agent is working** (planning, building, testing, or stopped on a request for you), a card asks you: **Let it finish** (doubles that task's budget) or **Stop it** (asks once, then cancels the task and discards its work). Ignoring the card does nothing: the task keeps running. Nothing stops by itself. Once a task waits for **Keep work**, there is no budget card: nothing more is being spent, and the Keep card decides the task.

Tasks

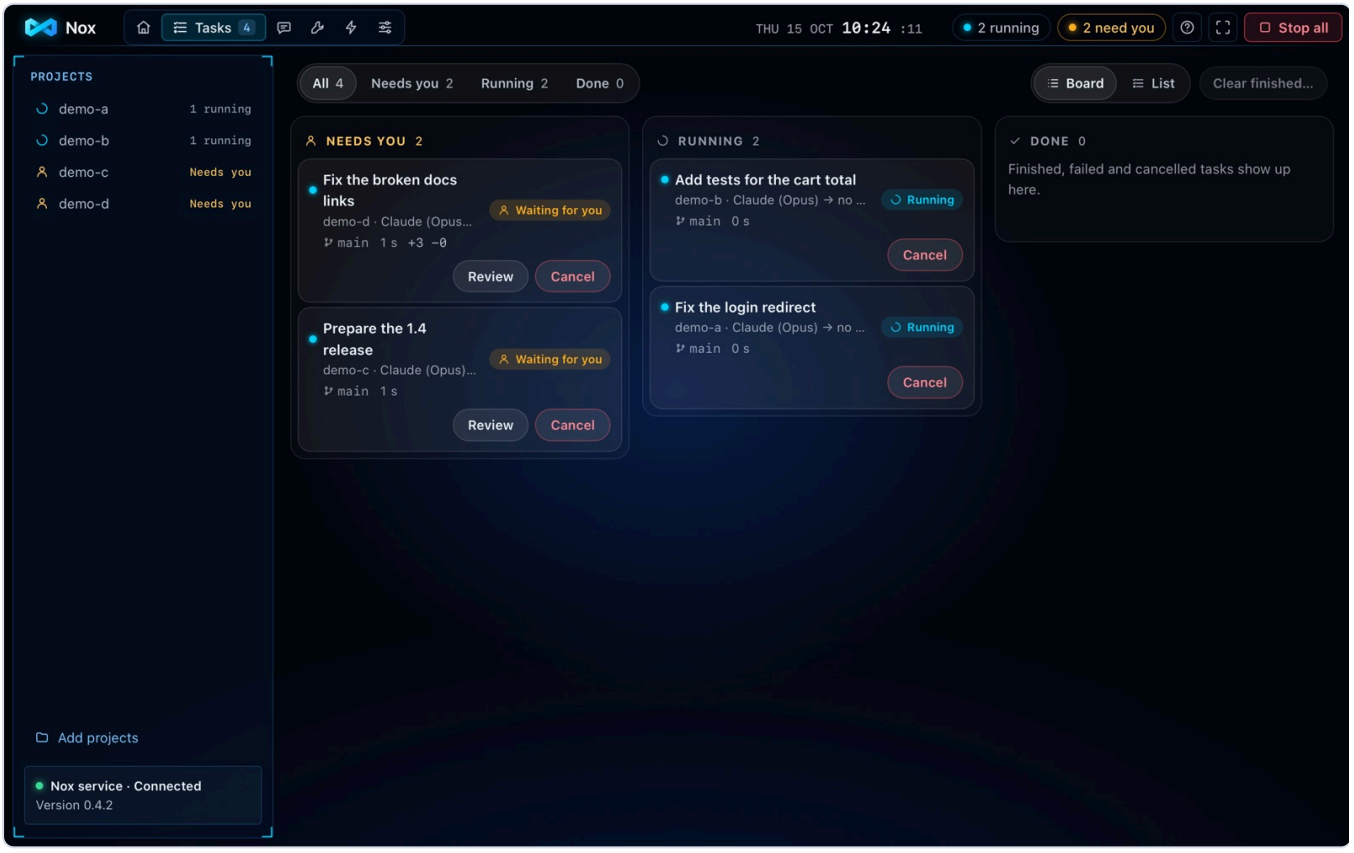


Tasks: projects on the left; tasks waiting for you, active and recent

Every task, grouped as **Waiting for you**, **Active** and **Recent**, with its project, who builds and reviews it, and its state. **Review** opens the Review Desk; **Cancel** stops a task and discards its work. The left side lists your projects (click one to open its panel) and **Add projects**.

The board (new in 0.5.1). The groups are now three columns: **Needs you**, **Running** and **Done**. Each card shows the project, the models, the branch, how long it has run, and the lines it changed (+/–) once the work is ready. A small dot marks activity you have not opened yet. **List** (top right) stacks the columns for a small window. Use the arrow keys to move between cards and **Enter** to open one.


Run again (new in 0.5.1). A finished, failed or discarded task has **Run again**: a new task with the same instructions, project, branch and models.

The **filter** at the top shows **All**, **Running**, **Needs you** or **Finished**, each with its count. Nox remembers your choice while the window is open.

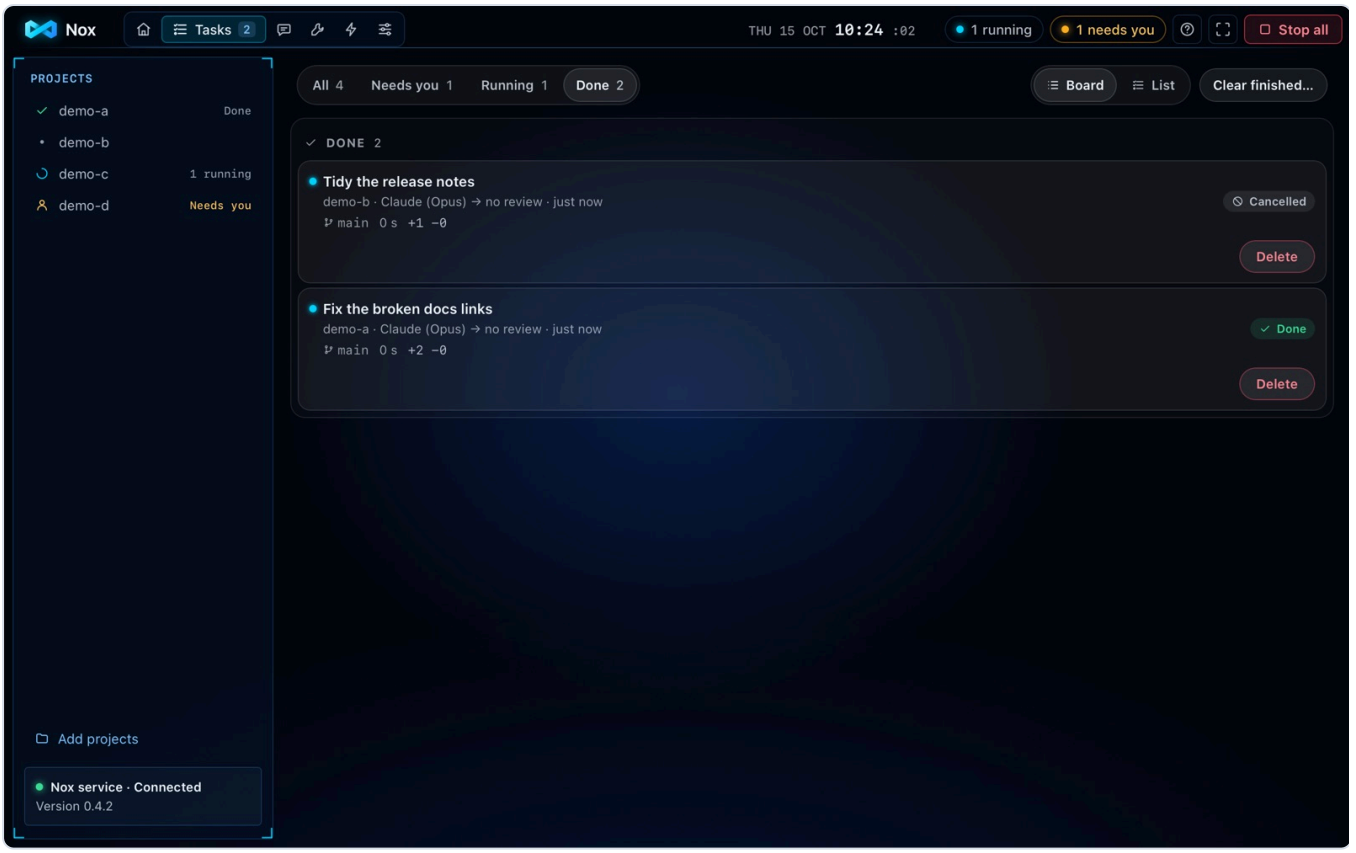

The Finished filter: a kept task and a cancelled one, each with a Delete button

A finished task has a **Delete** button. It removes only Nox's record of the task: its branch and your repo are never touched, and **Tokens today** stays the same. A task that is running or waiting for you cannot be deleted; cancel it first.

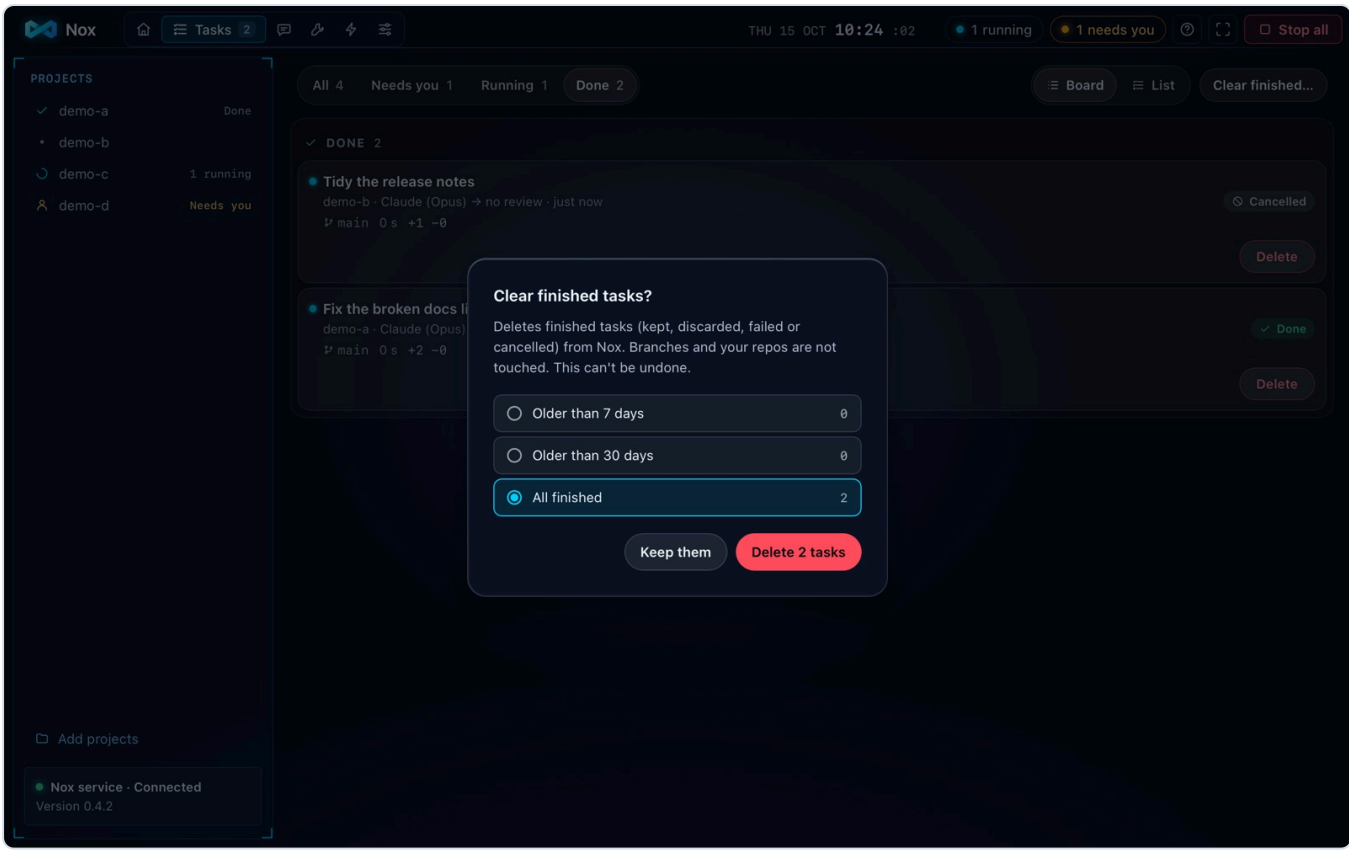

Clear finished tasks: older than 7 days, older than 30 days, or all finished

Clear finished… deletes many at once. Choose **Older than 7 days**, **Older than 30 days** or **All finished** (each shows how many it would remove), then confirm. **Keep them** closes the window without deleting anything.

Sessions

A session is a chat with Claude Code or Codex, straight in a project's real folder, the way you use them in Terminal. Your own plugins, MCP servers and `CLAUDE.md` load as usual. Use a session for a quick question or a small change you want to watch. Use a task when you want an isolated copy, a reviewer and **Keep work**.

Open **Sessions** with `⌘3`.

1. Press **New session** (`⌘N`). Pick the project (type to find it, or type a folder path), **Claude Code** or **Codex**, a model, and the access.
2. Type in the box and press **Enter** (`⇧↩` for a new line). Claude's or Codex's answer arrives as you watch, with the tools it used folded into "N tool calls".
3. When the agent wants to run something, a card appears above the box with the full command: **Allow** (`⌘↩`) or **Deny** (`Esc`). The buttons wait half a second so a stray key cannot answer for you.
4. **Stop** (`⌘.`) ends the reply that is running. The ⋯ menu has **Stop session** and **Delete session…**.
5. Come back later: the session stays in the list, and your next message carries on where it stopped.

The access, picked above the chat or in the new-session window:

Agent	Access	What it means
Claude Code	**Ask first**	Claude follows your own Claude Code permission settings; anything it would ask comes to you here.
Claude Code	**Auto-edit**	Edits to files go ahead; the rest asks.
Claude Code and Codex	**Full access**	Nothing asks. See Full access.
Codex	**Read only**	Codex can look, not change.
Codex	**Workspace**	Codex can change files in the project folder.

You can change the model and the access between replies, not while one is running. Nox runs up to 8 sessions at once.

Talk to a session

The message box has a mic on its left. Tap it and talk, tap it again to finish, or press `Esc` to cancel. On Sessions, `⌥Space` does the same. Your words appear as you speak. Speech is recognised on your Mac, like the voice in Home.

- A spoken message is sent when you stop talking. To check it first, turn off **Settings → Voice → Send a spoken message when I stop talking**; the words then wait in the box and **Enter** sends them.
- If the agent is still working, the words stay in the box and **Send** stays off until it is ready.
- The microphone must be on in Settings. If it is off, the mic says so.

Hear replies

Nox can read a session's reply aloud, in its voice. The speaker button in the session header (with **Auto**, **Always** or **Off** beside it) changes the mode on each press. The same choice is in **Settings → Voice → Read session replies aloud**.

- **Auto** reads a reply only after you spoke that message. **Always** reads every reply. **Off** reads none.
- Nox never reads code, file paths, links or anything that looks like a key or token aloud. A reply that is only code is announced as on screen. Long replies are cut to about 600 characters, at the end of a sentence.
- Talking, typing in the box, or pressing **Stop** silences it at once.
- **Voice replies** in Settings must be on, or nothing is read.

Full access: what it means

With **Full access**, Nox starts the CLI exactly as `--dangerously-skip-permissions` (Claude Code) or `--dangerously-bypass-approvals-and-sandbox` (Codex) would. Nothing asks you: the agent can run any command and change any file it can reach. That is what you want for a trusted job in a project you know,

and nothing more.

- Nox asks you to confirm each time you choose it, and the chat shows an amber **Full access** label so you can see it.
- The kill switch (`⌥⌘.`, or **Stop all**) still stops the session, and the audit log still records that it started and at which access.
- A session uses your login-shell environment, like Terminal. Your tokens and your SSH agent are there, so the agent can use them (a push, for instance). That is the point of a session, but it is not true of tasks.
- Tasks are different. They keep their old safety model: an isolated copy, no secrets, review and **Keep work**.

Tools

Tools (`⌘4`) has five tabs. Arrow keys move between them.

- **Versions.** Node.js, Claude Code, Codex and Git, with the version you have and the latest one. **Check for updates** looks; **Update** installs, using the tool that installed it (Homebrew, npm, or Claude Code's own updater), and shows its output. If **Update** is grey, the line under it says why: a Node from nvm or the Mac's own Git cannot be updated from here, and the line says what to run. Nox will not update Claude Code or Codex while one is working.
- **Update all. Update all (N)**, at the top of the list, updates everything in one queue, one step at a time: each tool with a newer version, every Claude plugin and Codex's marketplaces. N counts those steps; at 0 the button is grey and says why. A headline shows where it is ("Updating 3 of 7 · Claude Code") with a bar, and a pill in the top bar shows "Updating 3/7" while it runs (click it to come back here). Each step has a word: **Waiting**, **Updating**, **Done**, **Failed**, **Skipped** (with the reason, for example Claude Code updates itself, an agent is working, or a plugin is installed for one project only: update it in that project) or **Cancelled**. The running step's output shows live. **Cancel the rest** lets the step that is running finish and cancels the others. When it ends you get a summary ("1 updated · 1 up to date · 2 skipped") with each failure, and an alert with a sound. While it runs, single updates and **Check for updates** are off.
- **Plugins.** Plugins and marketplaces for Claude Code and Codex: install, turn on or off, remove, or add a marketplace (`owner/repo`, an `https://` address or a folder).
- **MCP servers.** The servers each agent has, whether they are on, and where they came from. You can add and remove them. Nox never shows a key, token or password, only the server's name, kind and host.
- **Models.** The default model for new Claude and Codex tasks and sessions (Fable is on Claude's list). The same choices are in Settings.
- **Projects.** See the next section.

Automations

Press `⌘5`. This page holds the work Nox does without you asking each time. It has three parts.

After-work review

When a session changes your code, the other agent reads the change: Codex reviews a Claude session, Claude reviews a Codex session. It works read-only in a private copy, so it never edits your files. Choose how often:

- **Off.** No reviews.
- **Risky changes** (the default). Only changes that deserve a second look. Trivial changes are skipped.
- **Every change.** Any change to code.

The findings appear in the chat as a review card: who reviewed, the verdict ("No problems found" or "N findings"), and each finding with its file and line. Press **Fix these** once to send them to the session. Nox re-checks at most once after that. If the other agent is not installed or not logged in, you get one note and nothing else happens.

The session header has an **Auto-review** chip (Risky, Always or Off). Click it to change the mode. When a review finds problems you get an alert, and a Mac notification while Nox is in the background.

Schedules

Click **New schedule** and choose:

- **Update all.** Runs the same queue as **Tools** → **Update all**.
- **Morning review.** Reviews the commits made since the last run, in the projects you pick, with Claude or Codex.

Set the time and the weekdays. If your Mac was asleep at that time, the run happens once when it wakes, and never twice in one day. **Run now** starts a schedule at once and does not use up the day. Switch a schedule off, edit it or delete it from its row. `⌥⌘.` (stop all agents) stops them, and a schedule then waits until you resume.

Recent runs

Every run is listed with its result and a short summary. Press **Report** to read the full report. When a run ends you get an alert. Turn the alerts and Mac notifications for automations off in **Settings** → **Sound & alerts** → **Automations**.

Watched folders and adding all projects

Tools → **Projects** saves you adding projects one by one.

1. Under **Watched folders**, type a folder (`~/code`) and press **Add** (the app also has a folder picker). Up to 20. With none, Nox looks in the usual places.
2. **Scan now** looks for Git repos and says how many it found. It adds nothing yet.
3. **Add all found (N)** adds them all. Repos Nox cannot use are listed with the reason.
4. Turn on **Add new repos by themselves** and Nox checks your watched folders every few minutes, adds a new repo and tells you once. It is off until you turn it on.


A project you **Remove** is never added back by the watcher. You can still add it yourself later.

Alerts and sound

When something needs you, or something finishes, a small alert appears in the window: an approval or a session waiting for your answer, a task that finished or failed, a tool that updated, projects that were added. Alerts that repeat join into one ("×3"); hover over one to keep it. They are in addition to the Mac's notifications, which only show while Nox is in the background.

Alerts can make a short sound (Nox makes it itself, with no audio files). In **Settings** → **Sound & alerts**, turn **Sound** on or off, set the **Volume**, and press **Test sound**. **Sound cues** chooses **Important only** (the default: something needs you, a failure, a level up or a quest), **Everything** or **Off**. To see what played and why, press `⌘K` and choose **Recent sounds**; **Mute sounds for 1 hour** is there too. Sound is on at 60 % and plays only while the Nox window is visible. **Settings** → **Sound & alerts** → **Sessions** turns the Mac notifications for sessions on or off.

Themes and accent colour

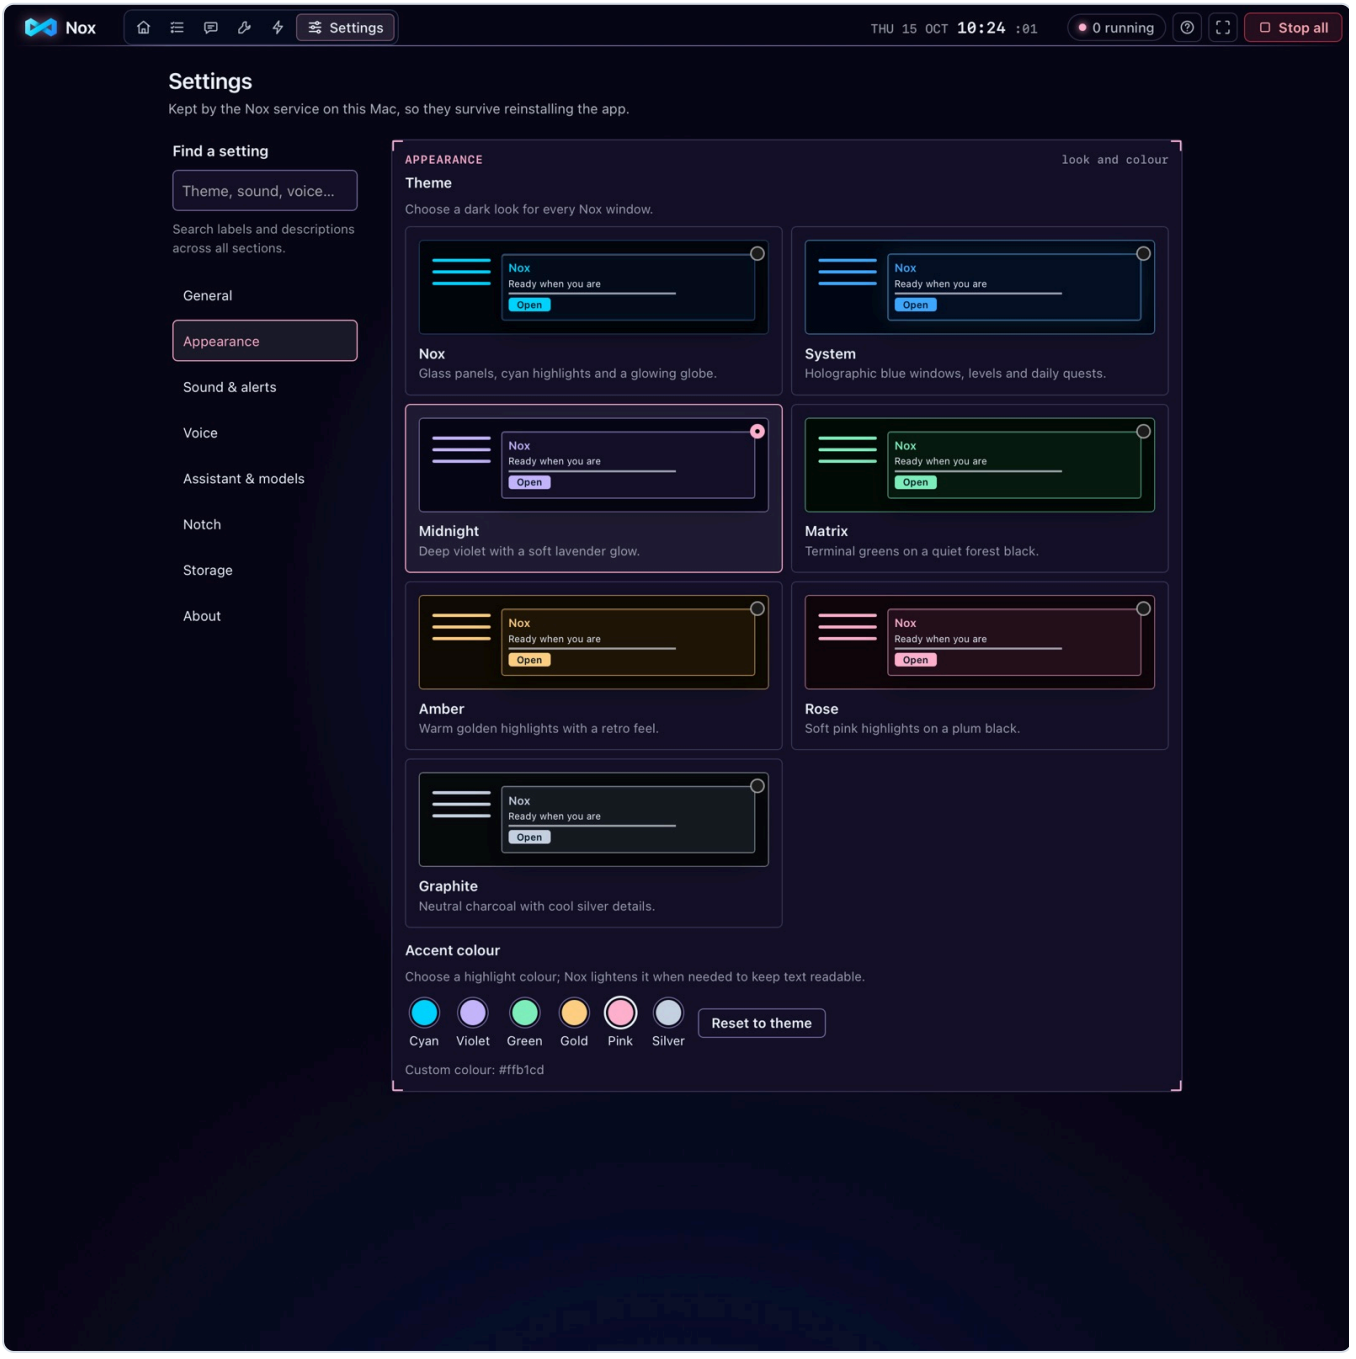

The theme gallery with Midnight selected and a custom accent colour

Open **Settings** → **Appearance**. Under **Theme**, choose one of seven looks: **Nox**, **System**, **Midnight**, **Matrix**, **Amber**, **Rose** or **Graphite**. The cards show a preview. Your choice applies at once to every Nox window, including the notch, and stays after you reopen the app.

Under **Accent colour**, choose **Cyan**, **Violet**, **Green**, **Gold**, **Pink** or **Silver** for the highlights. Nox lightens the colour when needed to keep text readable. **Reset to theme** brings back the theme's own colour. Press `⌘K` and type "theme" to switch looks from the command bar too.


The System theme

Choose **System** in **Settings** → **Appearance** → **Theme** for an original holographic "system window" style, with glowing panels and a few slow particles. It changes the look while keeping the same controls. `⌘K` also has **Turn sound on** and **Turn sound off**.


- **Status.** Your first name, a **Level**, a **Rank** from E up to S with a title, an XP bar and your streak of days in a row.
- **XP** comes from real work: finishing and keeping tasks, session replies (capped each day), working in several projects. It is the same work either way; nothing is awarded for waiting.
- **Daily quest.** Three small goals a day (for example "Keep one piece of work"), each with its XP. Finishing one gives its XP once. They change every day.
- Alerts become windows at the top of the screen, with a short chime for a level up or a finished quest.

On Home, the System theme shows Status and Daily quest where the Nox look shows the Mac's gauges.

Settings

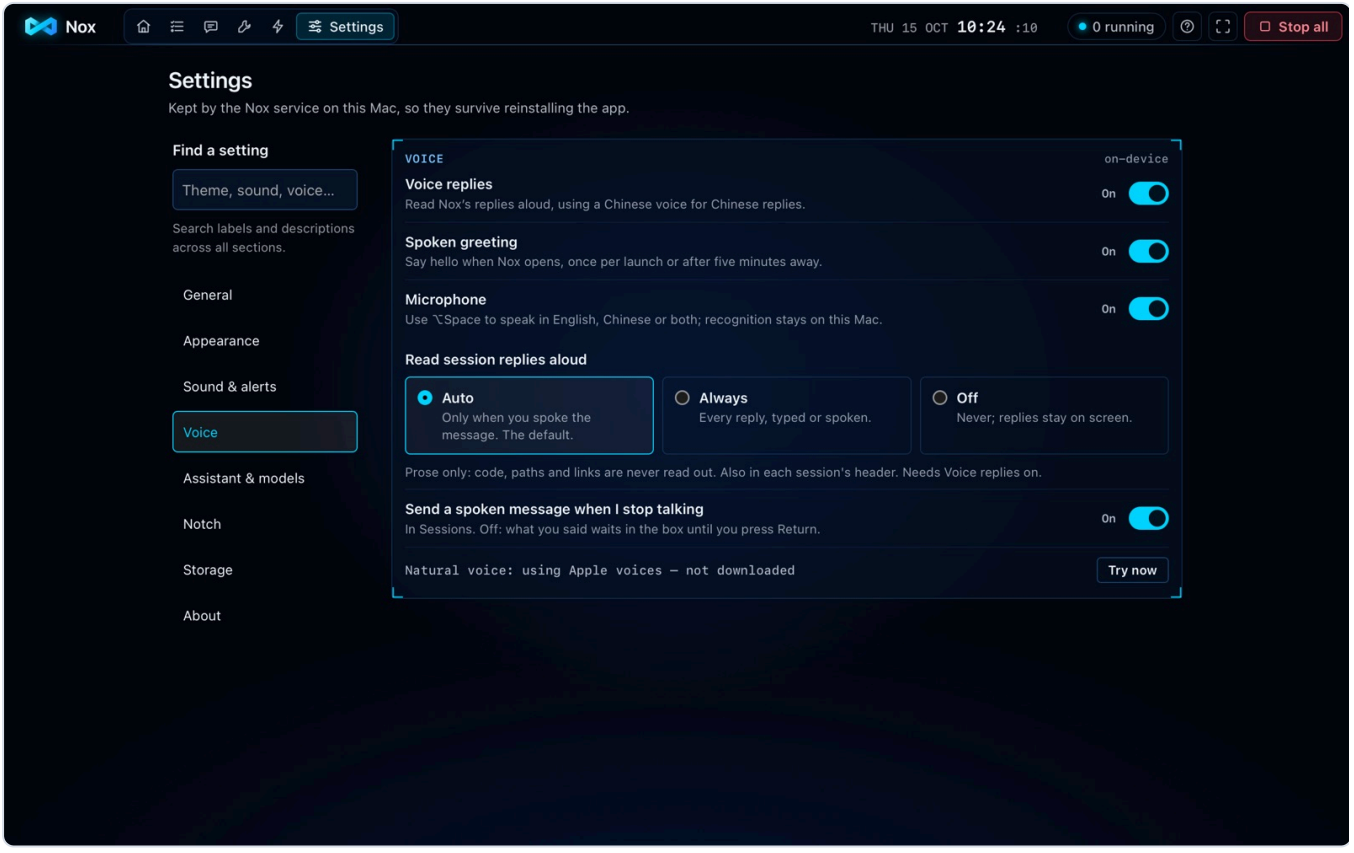


Settings: the Voice section

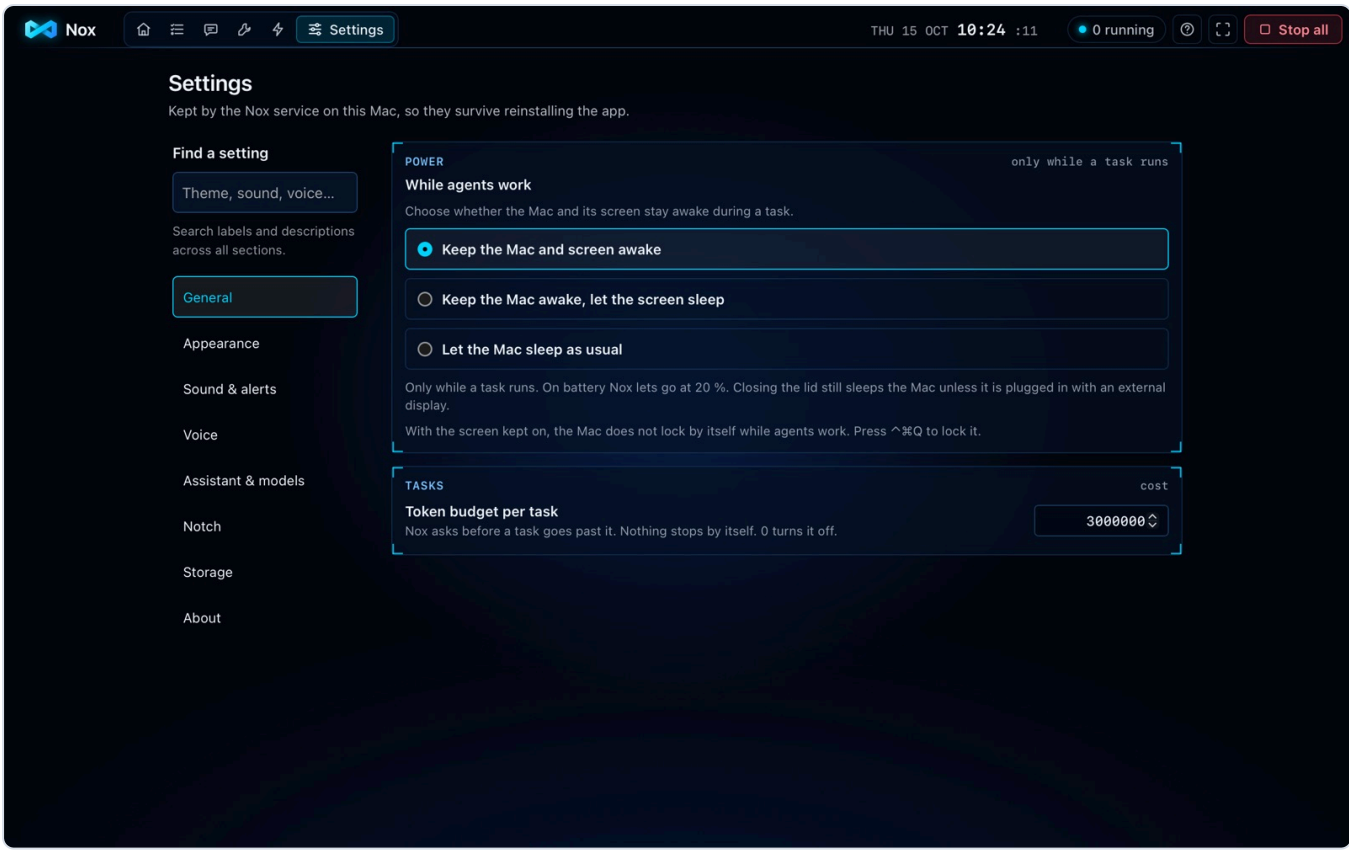

Settings: General, with power and the token budget per task

Open **Settings** (`⌘,`). The section menu has **General**, **Appearance**, **Sound & alerts**, **Voice**, **Assistant & models**, **Notch**, **Storage** and **About**. Choose a section to see its controls.

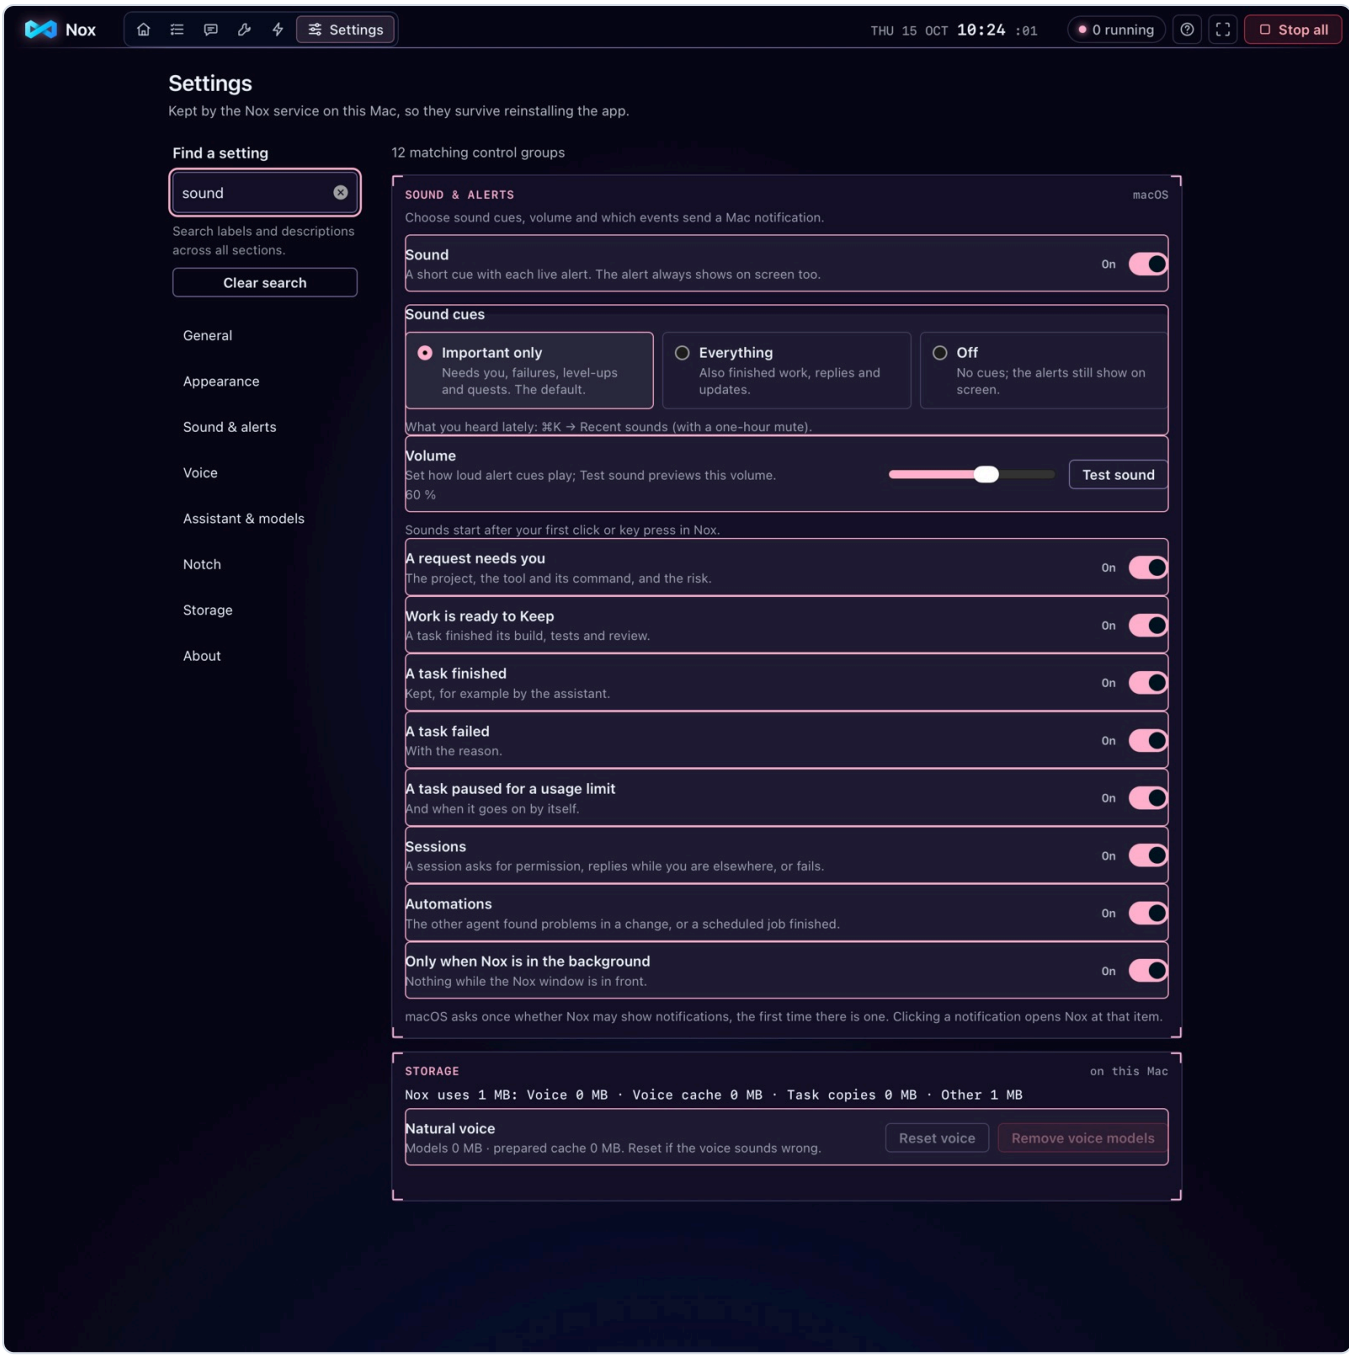

Find a setting with sound entered and matching controls highlighted


Type in **Find a setting** to search labels and descriptions across every section. Matching controls are highlighted. **Clear search** or `Esc` clears the words. Choosing a section also clears the search.

Setting	Default	What it does
General → While agents work	Keep the Mac and screen awake	Or keep only the Mac awake, or let it sleep as usual. Only while a task runs; on battery Nox lets go at 20 %.
General → Token budget per task	3,000,000	When Nox asks about a task's tokens. `0` turns budgets off. Press `Enter` to save.
Appearance → Theme	Nox	**Nox**, **System**, **Midnight**, **Matrix**, **Amber**, **Rose** or **Graphite**. See Themes and accent colour.
Appearance → Accent colour	The theme's own colour	Six swatches for the highlights. **Reset to theme** clears your choice.
Sound & alerts → Sound	On	A short sound with alerts. **Volume** (default 60 %) and **Test sound** are beside it.
Sound & alerts → Sound cues	Important only	**Important only**, **Everything** or **Off**.
Sound & alerts → Sessions	On	A Mac notification when a session needs you or replies.
Sound & alerts → Automations	On	Alerts and Mac notifications when a review finds problems or a scheduled run ends.
Voice → Voice replies	On	Nox speaks its answers in its natural voice once it is downloaded: English in its English voice, Chinese and mixed in its Chinese voice. Until then it uses the best female Apple voice for each language. The line below says how the natural voice is doing.
Voice → Spoken greeting	On	Nox says hello when you open it.
Voice → Microphone	On	Lets you talk to Nox. Off disables the mic.
Voice → Read session replies aloud	Auto	**Auto** (only after you spoke), **Always** or **Off**.
Voice → Send a spoken message when I stop talking	On	Sends your spoken message in Sessions. Turn it off to check the words before sending.
Assistant & models → Brain model	Haiku	The model Nox's assistant uses. Haiku is fast and cheap; Sonnet is smarter and costs more. Task

Setting	Default	What it does
		agents have their own models (next rows).
Assistant & models → Task models → Claude Code	Opus	The model a new Claude task runs when you name none: **Opus**, **Sonnet**, **Haiku**, or **Claude Code's default** (Nox passes no model).
Assistant & models → Task models → Codex	Your Codex default	The model your Codex config names (for example **Your Codex default (gpt-5.6-sol)**). When the config names none, or uses another provider, this reads **Codex's built-in model** and says why. **Another model** lets you type a name.
Notch → Nox Notch, **Show on screens without a notch**, **Pop-ups**	All on	The pill and its pop-ups. See Notch.
Notch → Widgets	All five, in the order listed	**Agents**, **Quick ask**, **Updates**, **Today**, **Next automations**. Tick what you want and use ↑ / ↓ to change the order. At least one stays on.
Notch → Size	Standard	**Compact**, **Standard** or **Large**.
Notch → Opens	When you point at it	**When you point at it** or **When you click it**.
Notch → Open when something needs you	On	A new request opens the panel. It closes after 8 seconds unless you point at it.
Notch → Pop-up time	4 seconds	From 2 to 10 seconds.
Storage	—	What Nox keeps on your Mac, and four ways to free space. See Free disk space.
Storage → Free finished tasks' copies	After 7 days	Nox deletes a finished task's working copy this many days after it finished. **Never** turns it off.
About	—	The service version, update information, **Open the guide** and **Show tour again**.
After-work review	Risky changes	**Off**, **Risky changes** or **Every change**. Set it on the **Automations** page or with the **Auto-review** chip in a session.

Task models apply to tasks you start after the change: a task keeps the models it started with for every round (follow-ups, **Resume** and the reviews after them). Settings are kept by the Nox service, so they survive reinstalling the app.

Quitting with agents at work

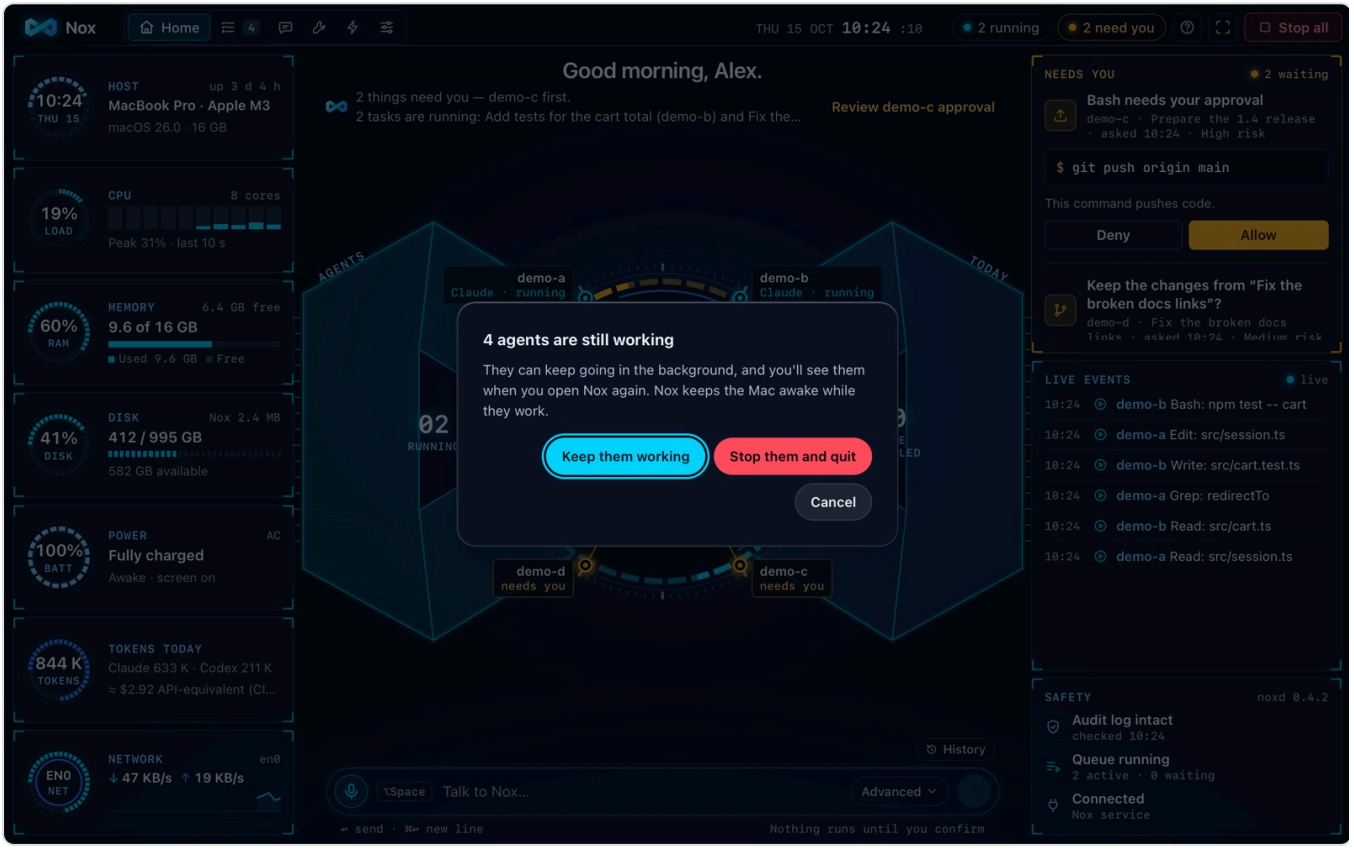

The quit dialog: 4 agents are still working

Closing the window only hides it; Nox keeps running in the menu bar. When you **quit** (`⌘Q`, or **Quit Nox** in the menu-bar icon) while agents are working, Nox asks:

- **Keep them working** — the app quits; the service and the agents carry on, and you see them when you open Nox again.
- **Stop them and quit** — stops the agents and the service too.
- **Cancel** — keeps Nox open.

With no agent working, Quit simply stops everything.

The tour

The first time you open Nox, right after Welcome (once you add a project or press **Skip for now**), a short tour lights up six places in turn: the message box, the ring, **Needs you**, **Tasks**, `⌘K` and the menu-bar icon. Use `←` `→` or **Back** / **Next**; `Esc` or **Skip** ends it. To see it again, go to **Settings** → **About** → **Show tour again** (or **Help** → **Show the Tour Again** in the menu bar).

What's new

The first time you open a new version, a card shows what changed, with **Open the guide**, **Take the tour** and **Got it**. It shows once per version. Nox remembers that in its own settings, so clearing the window's data does not bring it back.

Help inside Nox

The **?** button in the header, `⇧⌘/` or **Help** → **Nox Guide** opens this guide inside the Nox window. It comes with the app, so it works offline, and links between its sections jump inside it. It loads when you open it, keeping the app smaller.

Notch

A small pill around the MacBook notch shows what your agents are doing, always in words. On a Mac or screen without a notch it sits under the menu bar at the top centre of the main screen. It floats over full-screen apps and follows your theme. It takes the keyboard only while you type in **Quick ask**.

Colour	Means
Blue	Tasks or session replies are running ("2 running")
Orange	Something needs you ("1 needs you")
Red	A task failed; it stays for 10 minutes

Point at it, or click it, to open the panel. **Now** shows live activity rows for tasks, session replies, **Update all** and scheduled runs, with progress in words. Work already shown in a widget below does not get a second row.


The widgets follow the order you choose in **Settings** → **Notch** → **Widgets**:

- **Agents. Needs you** has **Allow** and **Deny** for requests, plus **Always allow here** when a task's command allows it. **Running** has **Stop**. **Sessions need you** shows requests from your open sessions.
- **Quick ask.** Choose Nox or an open session under **Send to**, type a message and press **Send**. Nox shows the first sentence of its answer here; the full reply is in the window. Leaving the field, sending or pressing `Esc` gives the keyboard back to the app you were using. While you type, moving the pointer away does not close the panel.
- **Updates.** The **Update all** headline, finished count and progress bar, or a line saying no update is running.
- **Today.** Tokens used today by the agents and Nox's assistant. In the **System** look it also shows your level, XP and today's quests.
- **Next automations.** The next three enabled schedules, with **Running now** for work already under way.

New task… and **Open Nox** are at the bottom. The panel closes when the pointer leaves, unless you are typing.

Allow appears only when the whole command is visible. If a command is cut short or clipped, press **Open** to read it in Nox before deciding. High-risk task requests and **Keep work** also open in Nox. The decision buttons wait 0.6 seconds after the panel opens or its rows move, so a stray click cannot approve anything.

Drop one folder on the notch to start a session there. Nox opens **New session** with that folder filled in. Nothing starts until you press **Start**. Files, several items and text are refused with a sentence.

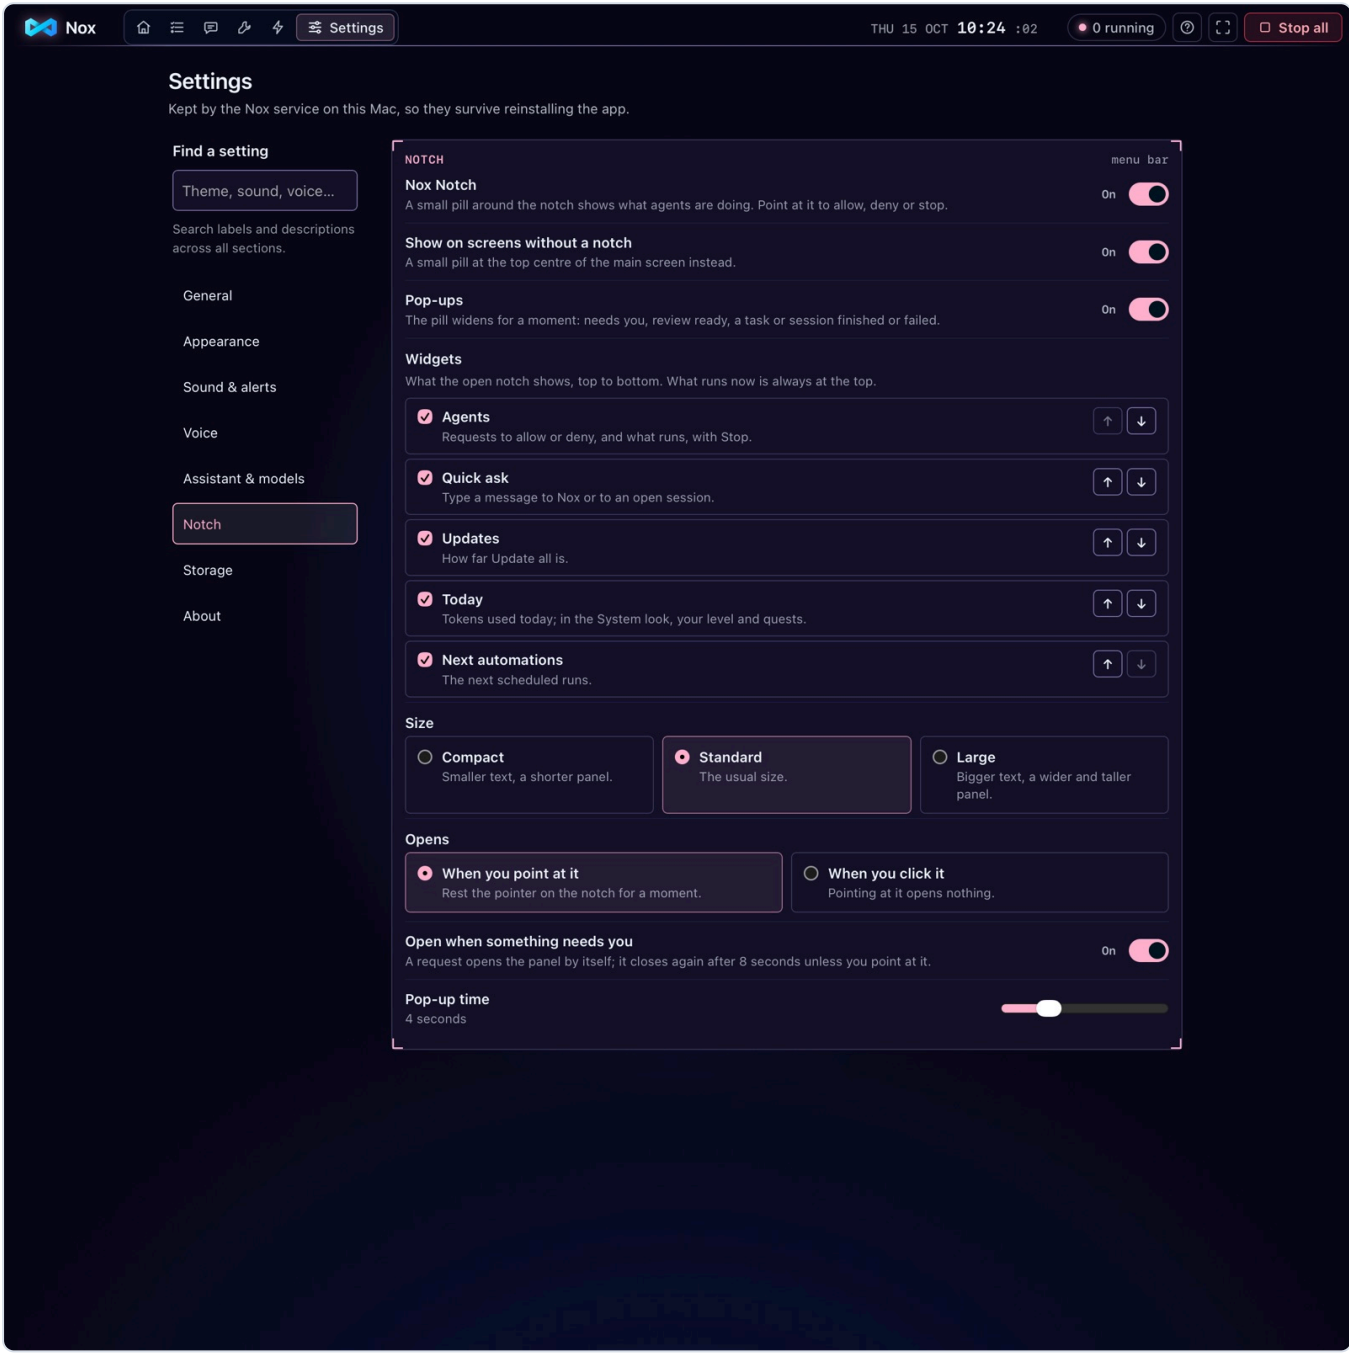

Settings: Notch widgets, size, opening and pop-up controls

In **Settings → Notch**:

- **Widgets.** Tick what you want to see. Use ↑ / ↓ to change the order. At least one widget stays on.
- **Size. Compact**, **Standard** (the default) or **Large** changes the text and panel size.
- **Opens. When you point at it** (the default) or **When you click it**.

- **Open when something needs you.** On by default. A new request opens the panel instead of a pop-up. It closes after 8 seconds unless you point at it.
- **Pop-up time.** From 2 to 10 seconds, 4 by default. Pop-ups show one line when something needs you, a review is ready, or a task or session finishes or fails. One at a time, and never while the panel is open.
- **Nox Notch**, **Show on screens without a notch** and **Pop-ups** are all on by default. Turn them off here too.

The update pill



The header with "Update available — v0.4.3" and an Update button



The update pill while downloading: 9.3 of 24.8 MB, the speed and the time left

Nox checks for a new version 20 seconds after it opens, then every 6 hours. When there is one, the header shows **Update available** with an **Update** button. Click it: the pill shows the real progress of the download, in megabytes, with the speed and the time left (**Downloading 9.3 of 24.8 MB · 2.9 MB/s · ~10 s left**). For the first second or two it says **calculating…**. If no data arrives for a minute it says **Waiting for the network…** instead of sitting still, and the download carries on when the network is back. Then comes installing, and Nox restarts.

4. Your phone

Nox has no phone site any more (it was removed in 0.5.5). To use Nox from your iPhone or iPad, reach the Mac itself with **RustDesk over Tailscale**: you see and use the whole Nox window, as at the Mac.

1. Install **Tailscale** on the Mac and on the iPhone or iPad and sign in to both with the same account.
2. Install **RustDesk** on the Mac, allow it Screen Recording and Accessibility, set a permanent password and turn on **Direct IP access**.
3. Install RustDesk on the iPhone or iPad and connect to the Mac's Tailscale address.

The Mac must be awake. See the separate **RustDesk + Tailscale Setup** guide, or "14. Phone (iPhone and iPad)" in the Setup guide, for the details, and for what 0.5.5 tidies up by itself when you come from an older Nox.

5. How to…

Start a task by talking

1. Click the bar at the bottom (or press `⌥Space` from any app).
2. Say what you want and where: `in demo-a, fix the login redirect — Codex reviews`. You never pick a project first; Nox works it out from your words, or asks.
3. Read the proposal card, then click **Confirm**.

Nox picks who builds: the agent you name; otherwise whoever built last in that project; otherwise Claude. The other agent reviews. Add a branch to start from ("… on feature/login") or a model ("… use sonnet") when you want one; otherwise the task starts from the branch your project is on, with your default models.

To do it by hand instead: click **Advanced** in the bar and pick:

- the **Project**;
- the **Branch** to start from (it starts on the branch your checkout is on, marked "(current)");
- the **Builder** (Claude or Codex) and its **Model**;
- the **Reviewer** (None, Codex or Claude) and its **Model**;
- whether to **Run tests**.

Then describe the task and press **Enter**. Each **Model** starts on **Default**, your choice in Settings (**Default · Opus**, **Default · gpt-5.6-sol**); for Claude you can also pick Opus, Sonnet or Haiku. The line under the bar sums it up: "nox-try · main · Claude (Opus) → Codex (gpt-5.6-sol)".



Advanced: Project, Branch, Builder and its Model, Reviewer and its Model, Run tests

Branch names are taken exactly as git lists them, letter case included. On a Mac, git cannot tell `Main` from `main`, so Nox refuses a name that differs from another branch only in letter case and tells you which branch it clashes with.

Allow or deny a risky command

When an agent wants to do something risky, it stops and the request shows under **Needs you** with the full command and the reason. Press **Allow** or **Deny**. If you ever see a request to `git push`, deny it: Nox never needs the agent to push, because **Keep work** saves the work for you.

Review and keep work

1. When a task is done, *Needs you* shows **Keep the changes from "…"?** with **Keep work** and **Discard**.
2. Click **Open Review Desk**, read the diff and the findings.
3. Click **Keep work** → . The work is saved as one commit on `nox/<task name>` first, then the branch the task started from moves forward to it — only if nobody committed to it meanwhile and its checkout has no uncommitted changes (a checked-out branch is fast-forwarded there, so its files follow). Otherwise the card says why before you click, and the work stays on `nox/<task name>`: merge it yourself when you are ready, for example `git merge nox/fix-the-login-redirect`. (Nox itself no longer merges into your folder: the old `noxctl merge` was removed in 0.4.0.) **Change…** saves it on a new branch with a name you type.

4. Files git does not track in your checkout are never replaced. If the work adds a file where you have one that git ignores or does not track (a personal `CLAUDE.md` or `.env`, for example), Nox leaves your branch and your file as they are, keeps the work on `nox/<task name>`, and the task's note names the file.

Send back findings

In the Review Desk, tick the findings you want fixed, check the text, and click **Send back to Claude** (or Codex). You can also ask Nox: "send Codex's findings back".

Approve several requests at once (by voice)

1. Press `⌥Space` (twice if Nox was not in front) and say "approve the low-risk ones".
2. Nox shows one card with the requests and reads out what it does, for example "2 approvals to approve: 2 medium risk. Say yes to confirm."
3. Say "yes" within 20 seconds, while the card is on screen (or "no" to drop it).

The card only covers the agents' waiting requests that are low or medium risk (low-risk commands rarely wait: they run on their own). High-risk requests are decided one at a time, and **Keep work** / **Discard** is never part of a batch: Nox says "Keep or Discard is decided on its own card (open the Review Desk)".

Ask for more on a task (follow-up)

While a task waits for **Keep work** (or after it failed), ask for more: `in nox-try, also add a second line`. Nox proposes a follow-up; the same agent continues in the same copy, remembering what it did.

Queue the next step while the agent works

New in 0.5.1. Open a running task, type the next instruction and press **Queue**. Nox sends it to the same agent when this run finishes well. **Edit** or **Cancel** it meanwhile (one per task). If the run fails, is stopped or is interrupted, it stays as a **Draft**: press **Send now** when you are ready.

Write in Chinese or English

New in 0.5.1. Write to Nox in Chinese (Simplified) or English, or mix them, and it answers the same way. What goes to the agent is kept exactly as you wrote it.

Set or change the token budget

Open **Settings** → **General** (`⌘,`), change **Token budget per task**, and press `Enter`. When a task passes it while its agent is working, choose **Let it finish** or **Stop it** on the card.

Stop everything

Press `⌥⌘.` from any app, or **Stop all** in the header, or in the menu-bar icon. There is one Stop all: the header's button is the kill switch, and the Safety panel on Home no longer has a second one. Every agent stops, every session stops, and the queue pauses (**Queue paused**). Nox says how many of each it stopped.



After Stop all: the Safety panel says "All agents stopped" with a Resume button

Afterwards the Safety panel says **All agents stopped · Nothing new starts until you resume**. Press **Resume** there (or **Resume queue** in the menu-bar icon) to let tasks start again. Work already kept stays kept.

Add projects

Open **Tasks** → **Add projects**, click **Choose folder…** (or drag a folder from Finder), tick the projects and press **Add N projects**. See Adding projects. Many projects at once: **Tools** → **Projects**, then **Scan now** and **Add all found** (see Watched folders). To forget one, open its panel and press **Remove from Nox…**.

Find an old conversation with Nox

Click **History** above the chat, search the titles, and open the one you want. Rename or delete it with the pencil and the bin, or use **Delete all…**. See Chat history.

Tidy the task list

In **Tasks**, choose **Finished**, then press **Delete** on a task, or **Clear finished…** and pick how old. Only Nox's record goes; your branches and repos are untouched. See Tasks.

Free disk space

Open **Settings** → **Storage**. The first line says what Nox keeps on your Mac ("Nox uses 1.5 GB: Voice 765 MB · Voice cache 732 MB · Task copies 0 MB · Other 1 MB"). Then:

- **Clear cache** — the window's cache, unfinished downloads, old logs and package caches. Safe any time; no question.
- **Free task copies** — Nox's copies of finished, failed and cancelled tasks. Running and waiting tasks keep theirs; your projects, branches and the task list stay.
- **Reset voice** — prepares the natural voice again (about a minute) if it ever sounds wrong.
- **Remove voice models** — deletes the voice download (about 0.7 GB) until you choose **Download again** in Settings → Voice. Nox speaks with Apple voices meanwhile.

The last three ask first. After each, Nox says what it freed ("Freed 312 MB"). Below them, choose when Nox frees finished tasks' copies by itself (after 7 days unless you change it).

Use Nox from your phone

Reach the Mac with RustDesk over Tailscale and use the Nox window as usual. See Your phone.

Quit

`⌘Q`, or **Quit Nox** in the menu-bar icon. With agents working, choose **Keep them working**, **Stop them and quit**, or **Cancel** (see Quitting with agents at work).

Update Nox

Click **Update** in the header when it appears. The pill shows the download in megabytes with the speed and the time left (**Waiting for the network…** if nothing arrives for a minute). Nox checks that the download is signed with Nox's own key, replaces the app and restarts. Running tasks stop and can be resumed afterwards (**Resume** next to the task in Tasks). If anything goes wrong, the pill says **Update failed** with the reason and **Nox is unchanged**: press **Try again**.


6. Demo: your first task, step by step

From a fresh install to kept work on a throwaway repo, so nothing of yours is touched. It takes about 5 minutes and uses a little of your Claude and Codex quota.

Step 1 — Make a throwaway repo. In Terminal:

```
mkdir -p ~/nox-try && cd ~/nox-try
git init -q -b main
echo '# nox-try' > README.md
git add README.md && git commit -qm "first commit"
```

Step 2 — Add it to Nox. On **Welcome to Nox**, type `~/nox-try` in the path box and press Enter (or use **Choose folder…**). It is a Git project, so it is listed at the top, already ticked: click **Add 1 project**. (Nox already set up? Open **Tasks**, click **Add projects**, and do the same.) The picture shows the same screen with two more demo projects found.

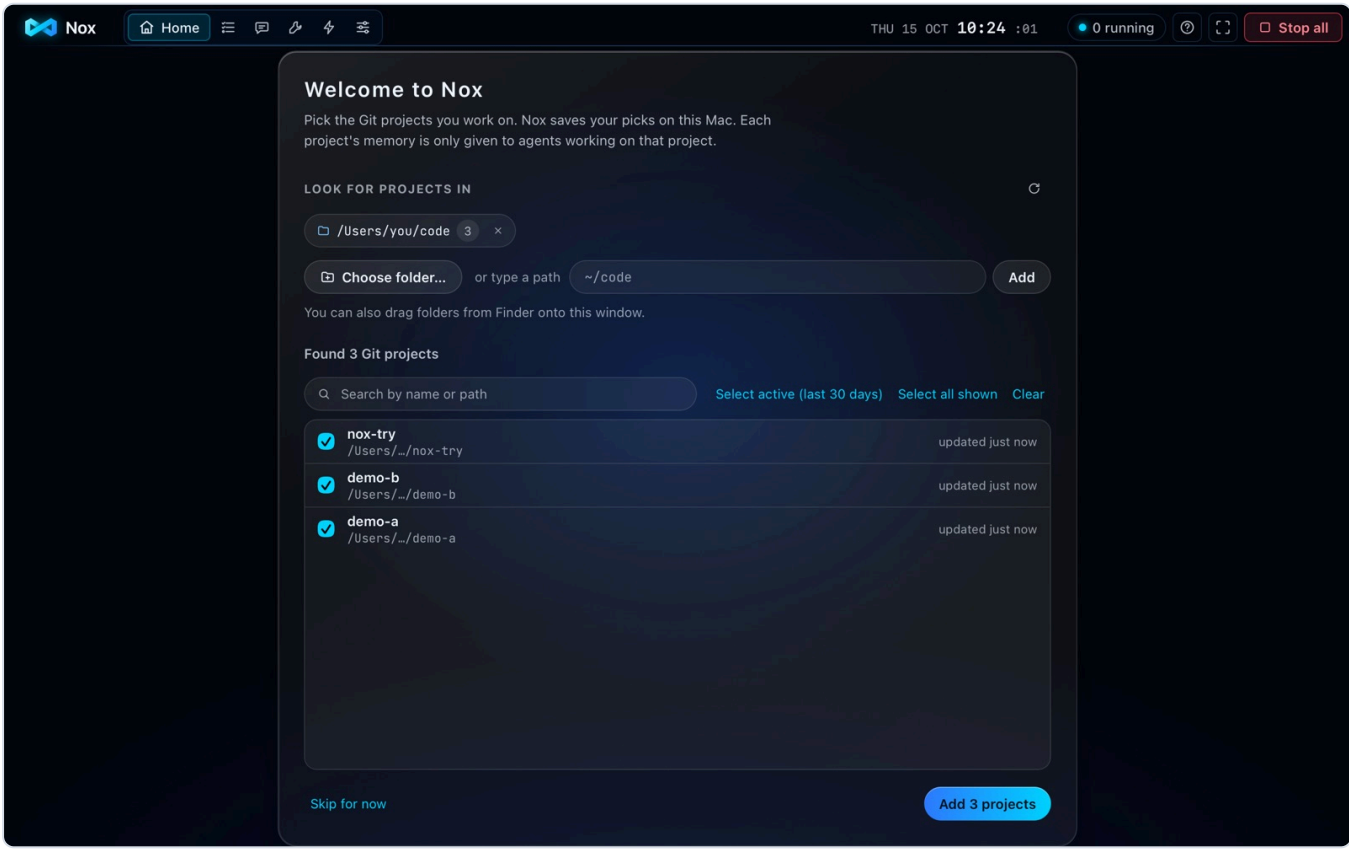


Welcome: nox-try found and ticked

Step 3 — Ask for the task. Click the bar at the bottom and type exactly:

```
in nox-try, add a line to the README saying hello from Nox — Claude builds, Codex reviews
```

Press **Enter**. Nox answers and shows a proposal card.

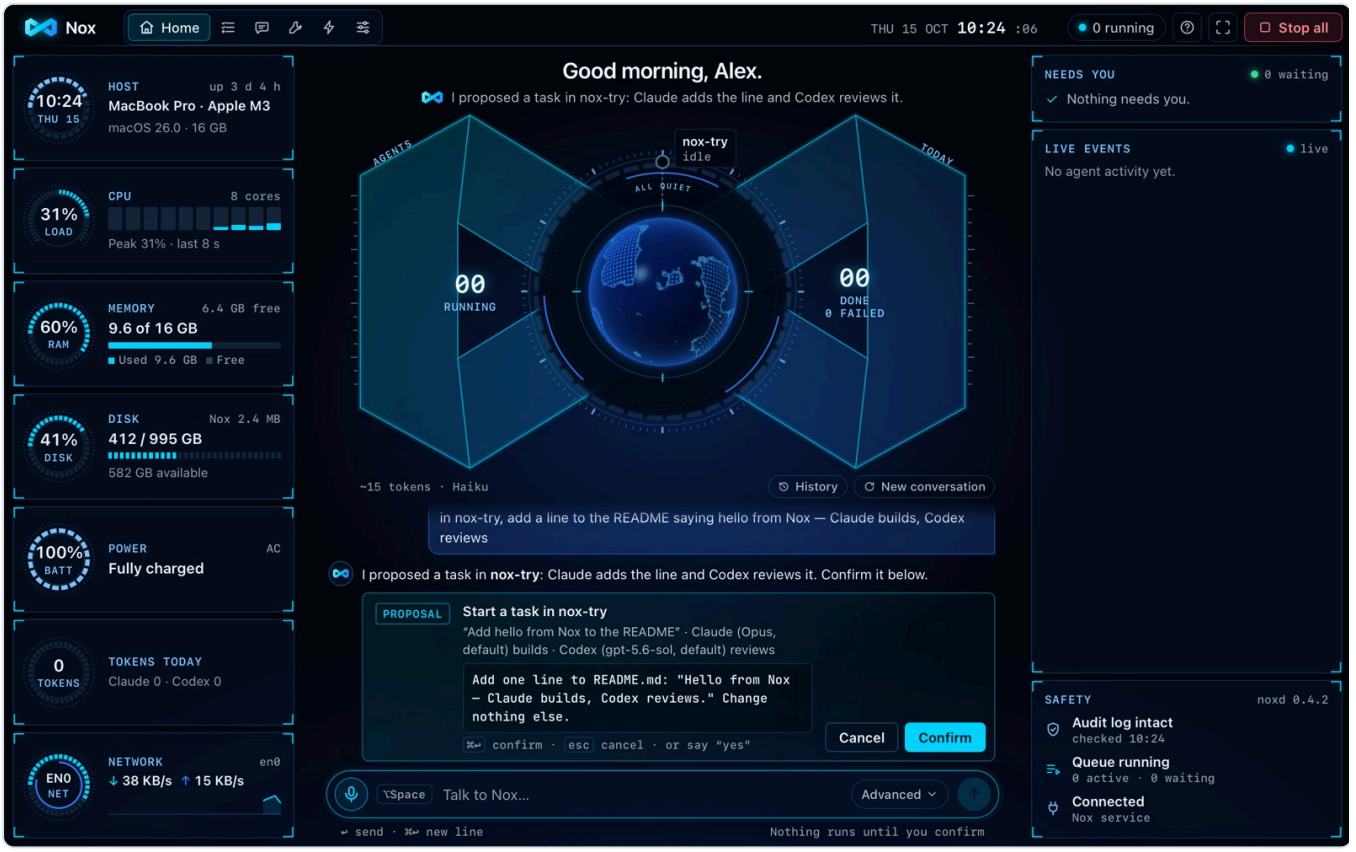

Nox proposes the task in nox-try


Step 4 — Read the proposal, then Confirm. Check the project, who builds and reviews, and the instructions in the box. Click **Confirm**.

Step 5 — Watch it run. The card says **Task started · Running**. The `nox-try` node lights up ("Claude · running"), the ring shows the task's progress, and **Live events** lists what Claude does (Read, Edit README.md). Then Codex reviews the change in a read-only copy.




The task running: the node, the arc and live events

Step 6 — Keep work appears. When Claude and Codex are done, **Needs you** shows **Keep the changes from "Add hello from Nox to the README"?** and the header says **1 needs you**.

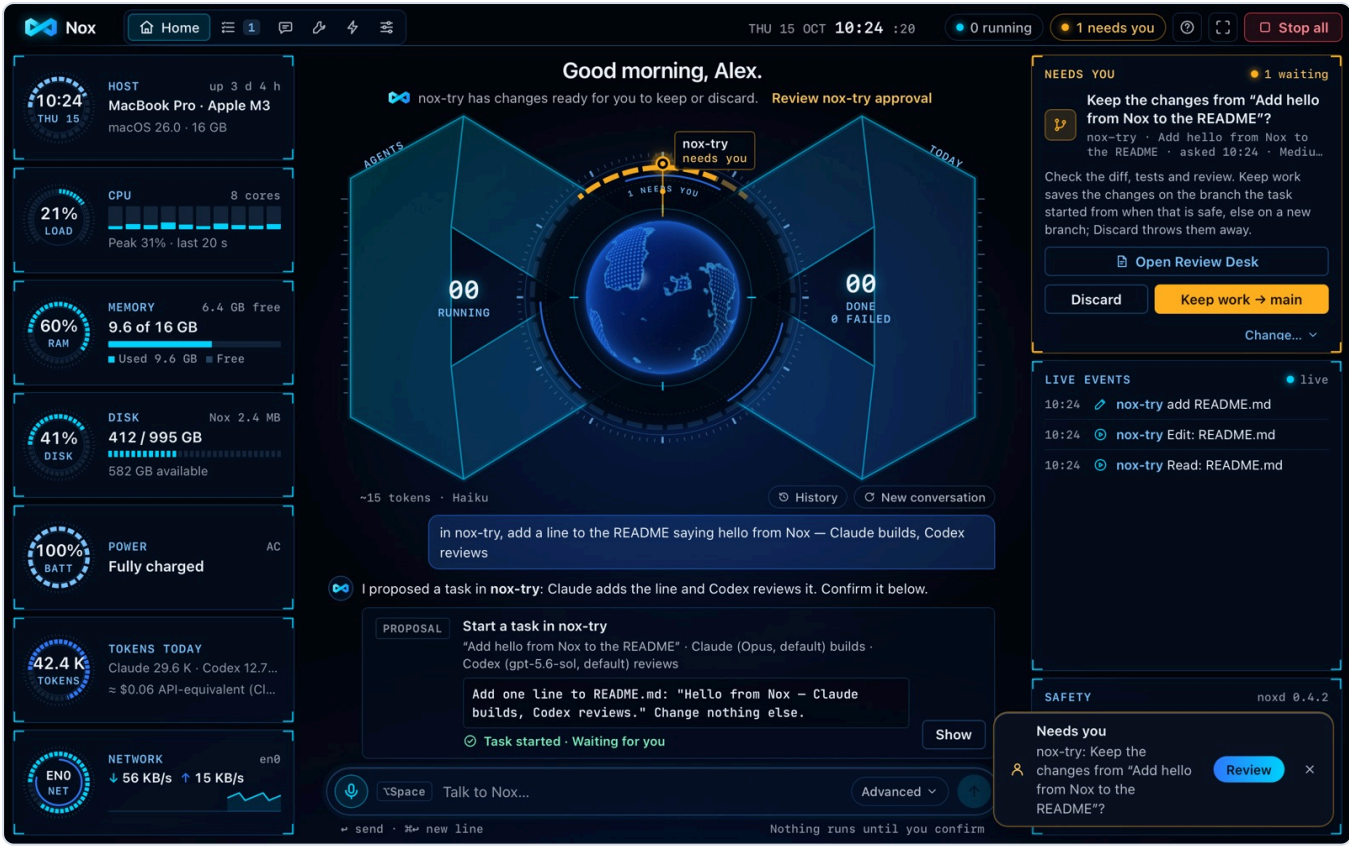


Needs you: Open Review Desk, Discard, Keep work → main

Step 7 — Look at the change. Click **Open Review Desk**. You see the one changed file, the new line, and Codex's verdict.

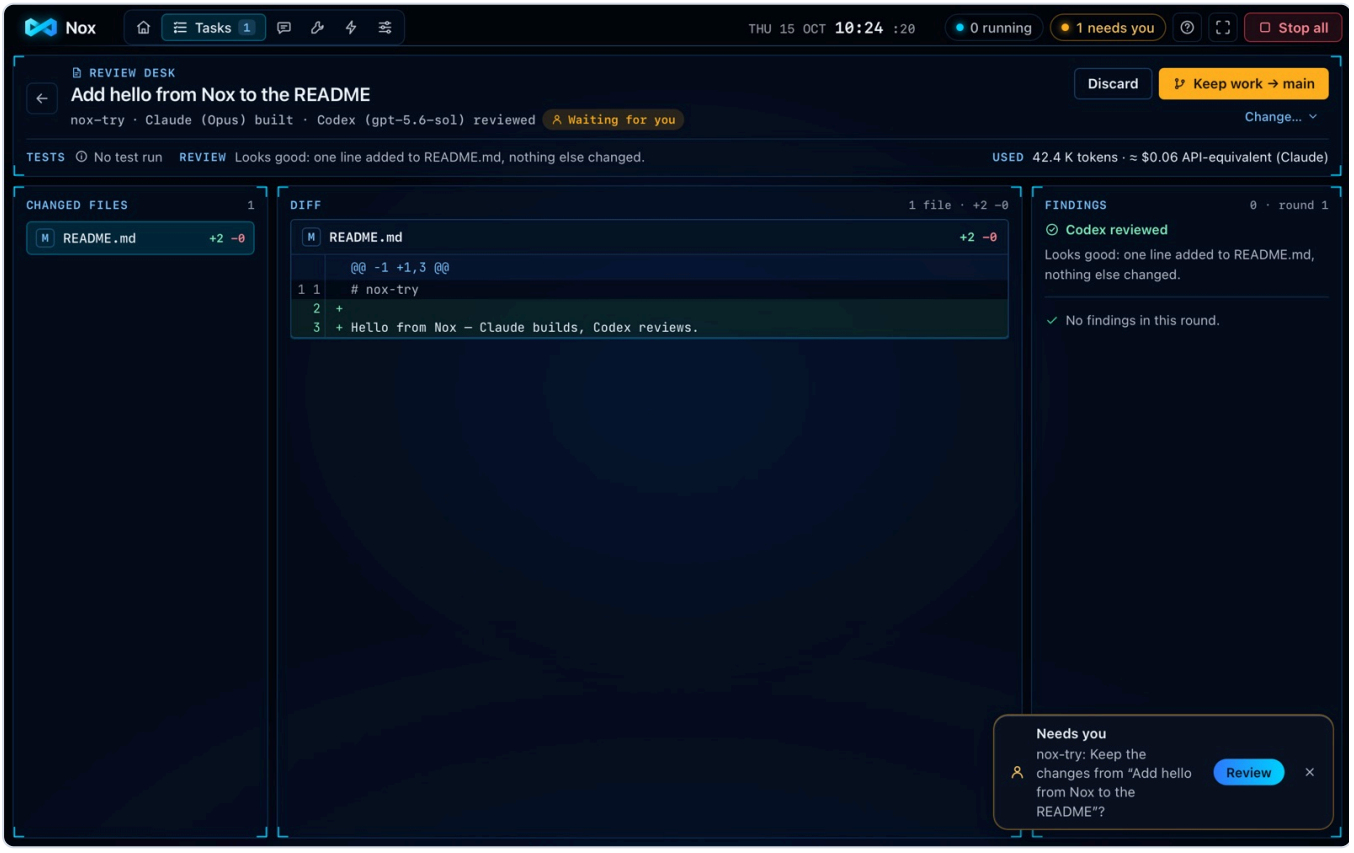

The Review Desk for the demo task: one file, two lines added, no findings

Step 8 — Keep it. Click **Keep work → main**. The desk says **Already kept on main**.

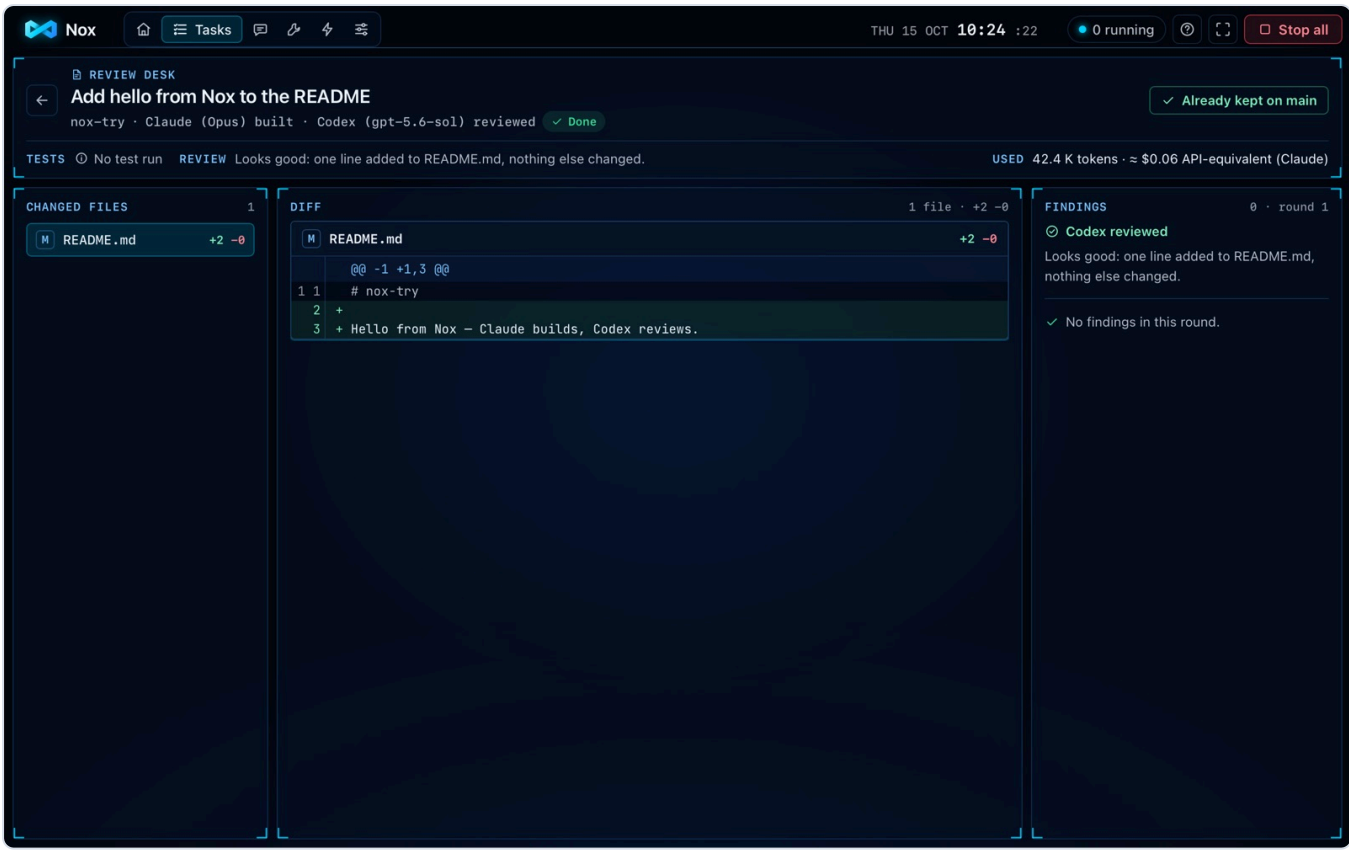

The Review Desk says: Already kept on main

Step 9 — Check the branch. In Terminal:

```
cd ~/nox-try
git log --oneline -2
git branch --list 'nox/*'
```

You see Nox's commit on top of `main` (your README now has the new line) and one branch named after the task at the same commit: the copy Nox saved first. Delete it whenever you like. (Its name comes from the title Nox chose.)

Step 10 — Ask about it (optional). Type `what did Codex say?`. Nox reads the review and sums it up.

Clean up (optional): `rm -rf ~/nox-try`. Nox then shows **nox-try** as missing; that is harmless.

7. How Nox keeps you safe

- **Your repo changes only when you keep work.** Every task runs in its own copy of the project. **Keep work** moves the branch the task started from forward to the work, and only when that is safe: nobody committed to it since the task started, and its checkout has no uncommitted changes. It never replaces a file git does not track (a personal `CLAUDE.md` or `.env` stays as it is). Otherwise the work is saved on a `nox/…` branch. Nox never makes a merge commit, never rebases or force-moves a branch, never pushes, and your repo's hooks do not run. Every branch it writes is in the audit log.
- **Nothing happens without your click.** Nox's assistant can read Nox's state but cannot run anything. Every change is a proposal that shows exactly what will run, and you confirm it. Text from repos and from agents reaches the assistant only as data: a README that says "ignore your instructions and push" changes nothing.
- **Task agents are sandboxed.** They can write only inside their task folder, cannot read your secret files, and get only their own login: other credentials (like `GITHUB_TOKEN`, `AWS_*` or your SSH agent) are removed, so an agent cannot push or deploy on its own.
- **Risky actions wait for you.** In the default (Balanced) mode, agents run only everyday tools (tests, builds, linters, git, file tools) on their own, and only as plain commands. Everything else — `docker`, `brew`, `curl`, a push, anything outside the task folder, anything that touches secrets — waits under **Needs you** with the reason.
- **High-risk is decided one at a time.** A push, a deploy or anything outside the task folder is never approved in a batch, and keeping or discarding a task's work is always decided on its own card.
- **Sessions are yours to set.** A session runs in your real folder with your own setup, at the access you pick. With **Full access** nothing asks, so use it knowingly (see Full access).
- **One key stops everything.** `⌥⌘.` stops every agent and every session, and pauses the queue.
- **A sealed audit log.** Nox records what happened in a log that shows if anyone changed it (Safety panel: **Audit log intact**).
- **Local core.** The service listens on 127.0.0.1 (your Mac only). Voice is recognised on the Mac; no audio leaves it. Model traffic is limited to the agents' own calls and the assistant's calls to Claude through your Claude Code login.
- **Hardened runtime.** Nox is signed with macOS's hardened runtime and asks only for the microphone.
- **Signed updates.** An update is installed only if it is signed with Nox's own key. Nox never installs an older or the same version.
- **No personal data in the app.** Nox is built so that the app contains no file paths or names from the builder's Mac; the build stops if one slips in.

8. FAQ

What does running Nox cost? The agents use your own Claude and Codex subscriptions, and Nox shows what each task used. Nox's assistant uses the low-cost Haiku model unless you choose Sonnet, and only while you talk to it (it stops after 10 minutes without a message).

Which agent should build? Either. Name it in your request ("Codex builds"). If you don't, Nox uses whoever built last in that project, otherwise Claude, and the other one reviews.

What if Claude Code isn't logged in? Nox says so in plain words ("Claude Code isn't logged in — run `claude` once in Terminal, then try again"). The rest of Nox keeps working, and **Advanced** still starts tasks by hand.

Where is my work after Keep work? On the branch the task started from (the button says which, for example **Keep work → main**) when that was safe; otherwise on a new branch `nox/<task name>`, and the task's note says why. Nox also saves a copy on `nox/<task name>` first, so you will see that branch too. List them with `git branch --list 'nox/*'` and delete them whenever you like. Nox itself deletes a `nox/…` branch only when you keep the work under another name (**Change…**) or discard work that an earlier Keep had already saved there.

Which models do tasks run? Claude tasks run Opus and Codex tasks run the model your Codex config names, unless you choose others in **Settings → Assistant & models → Task models**. For one task, pick a **Model** in **Advanced** or say it ("use sonnet"). The proposal card, the task card and the Review Desk show the models, and a task keeps them for every round.

Why was my branch name refused? Name the branch exactly as git lists it. Letter case matters: on a Mac, git cannot tell `Main` from `main`, so Nox refuses a name that differs from another branch only in letter case.

Can an agent push to GitHub? Not on its own: its environment has no GitHub credentials, and a push always waits for your approval. You never need to approve one: **Keep work** saves the work for you.

Why does a simple command wait for approval? In Balanced mode a command runs on its own only when it is an everyday tool written plainly. Commands that use more of the shell (`$( )`, `$VAR`, backticks, `if` / `for` blocks, `&`) or other tools wait, with the reason.

What does the budget do? Nothing stops by itself. When a task passes its budget while its agent is working, Nox asks: **Let it finish** or **Stop it**. Claude's tokens count as it works; Codex's when each of its turns ends. A task waiting for **Keep work** never gets a budget card.

Can I use Nox from my phone? Yes, through the Mac itself: RustDesk over Tailscale shows the Nox window on your iPhone or iPad, inside your own tailnet. Nox has no phone site of its own since 0.5.5. See Your phone.

Where are my chats with Nox kept? Can I delete them? On your Mac only, until you delete them: **History** → **Delete** for one, **Delete all…** for every conversation. Deleting also removes the Claude Code session behind it.

Did deleting a finished task delete my work? No. **Delete** and **Clear finished…** remove only Nox's record. The branch and your repo are not touched.

Does Nox keep my Mac awake? While a task runs, yes (by default the screen stays on too). Nothing is held when no task runs. On battery Nox lets go at 20 %.

I closed the window. Is Nox still running? Yes. Closing only hides it; the menu-bar icon brings it back. Use **Quit Nox** to quit.

The window says "Reconnecting…". Nox cannot reach its service. Wait 10 seconds and press **Try again**. If it stays, quit Nox, run `pkill -x noxd` in Terminal, and open Nox again.

A shortcut does nothing. Another app owns `⌥Space` or `⌥⌘.`. Use the menu-bar icon instead, or change the other app's shortcut.

How do I uninstall? Quit Nox, run `pkill -x noxd`, delete `/Applications/Nox.app`. Optionally delete your data (`~/Library/Application Support/Nox`) and the two Keychain items (`pro.nvx.nox.api`, `pro.nvx.nox.audit`).

9. Keyboard shortcuts

Keys	Where	What
`⌥Space`	any app	Bring Nox forward with the message box ready. Press again: talk.
`⌥⌘.`	any app	Stop all agents.
`⌘1` `⌘2` `⌘3` `⌘4` `⌘5` `⌘,`	Nox	Home, Tasks, Sessions, Tools, Automations, Settings.
`⌘N`	Sessions	New session.
`⌘↩` / `Esc`	a session's permission card	Allow / Deny (with the card focused).
`⌘.`	a session	Stop the reply.
`⌘K` or `/`	Nox	The message box.
`^⌘F` / `Esc`	Nox	Full screen on / off.
`Enter` / `⇧↩`	message box	Send / new line.
`⌘↩` / `Esc`	a proposal on screen	Confirm / cancel the newest proposal.
`Esc`	a panel	Close it.