

### My Github URL

# W13-P1: Get 3 menu data from /api/data\_xx.json

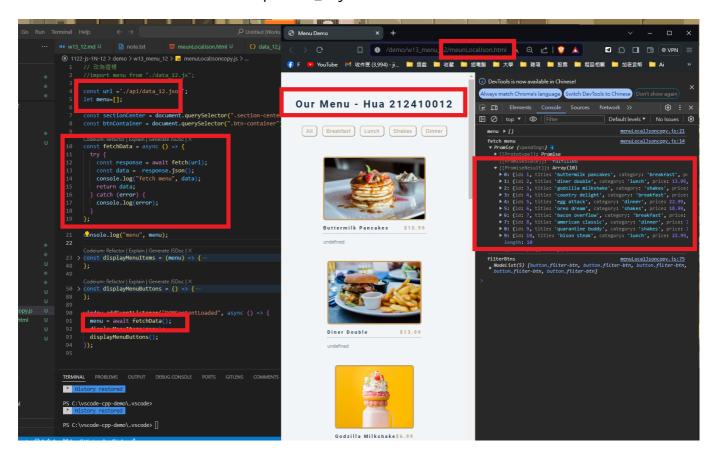


W13-P2: Create 3 menu data from Supabase


=> create menu\_xx table, and add 1 menu data

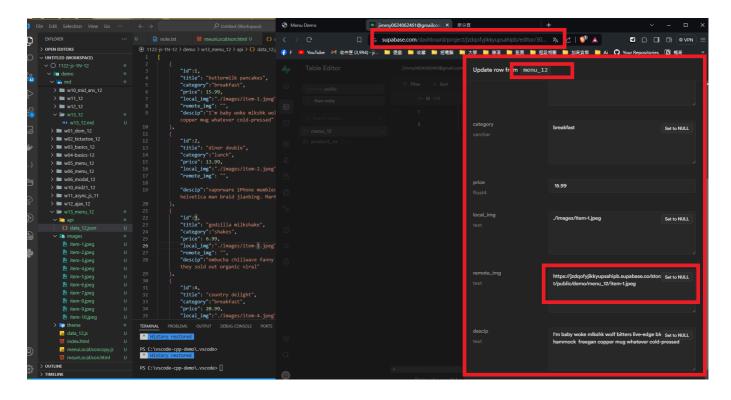


### => add RLS read policy for public access

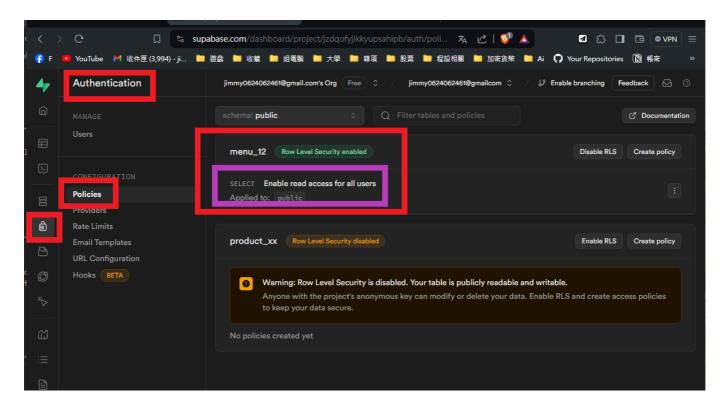

=> add two more menu data from SQL command

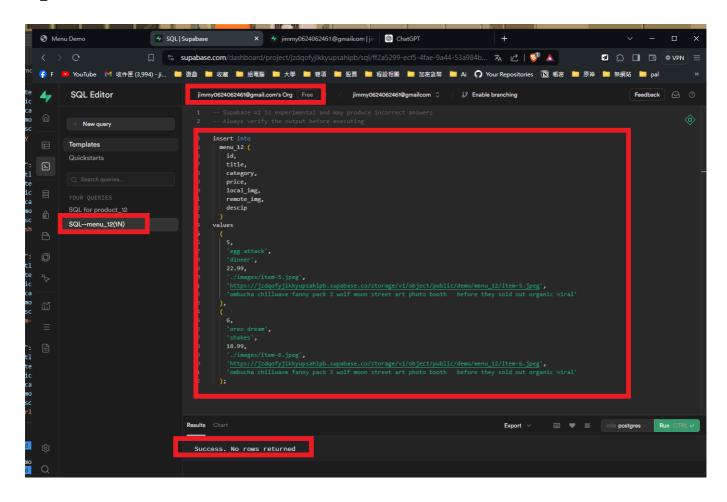


#### => show 3 menu data from menu\_xx table

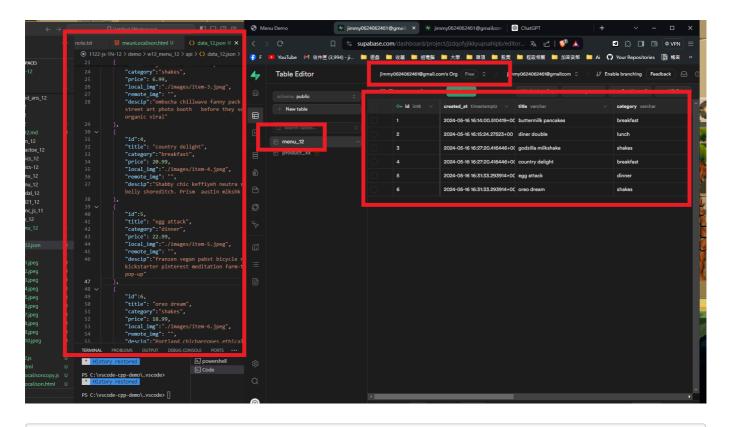


6573e66 jimmyhua123 data from Supabase

Fri May 17 15:39:15 2024 +0800 W13-P2: Create 3 menu

# W13-P3: Use menuSupa.html, menuSupa.js to get 3 menu data from Supabase

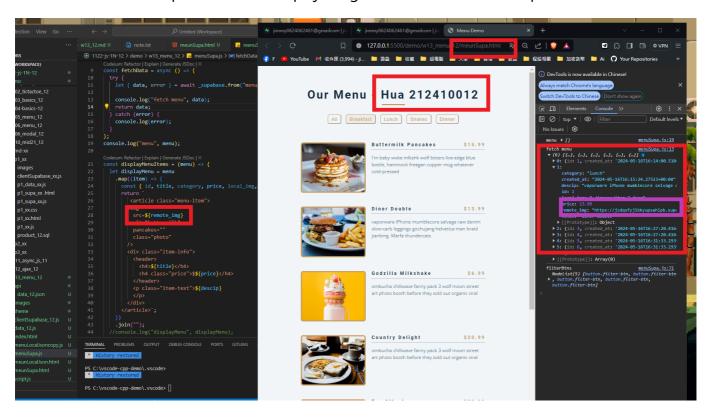


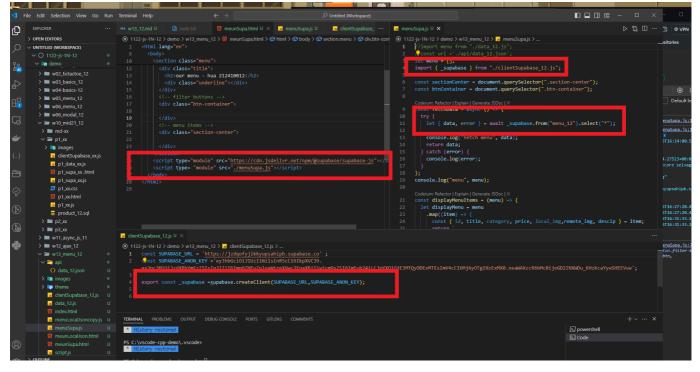


c9aa599 jimmyhua123 Fri May 17 15:39:58 2024 +0800 W13-P3: Use menuSupa.html, menuSupa.js to get 3 menu data from Supabase

W13-P4: Create company\_xx and store\_xx tables, and insert all data

=> data in store\_xx table

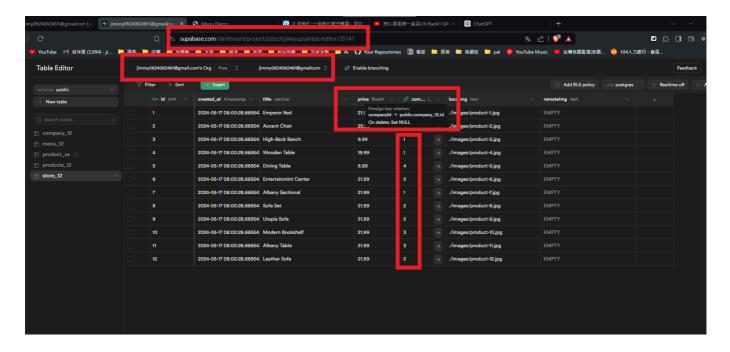

#### => data in company\_xx table

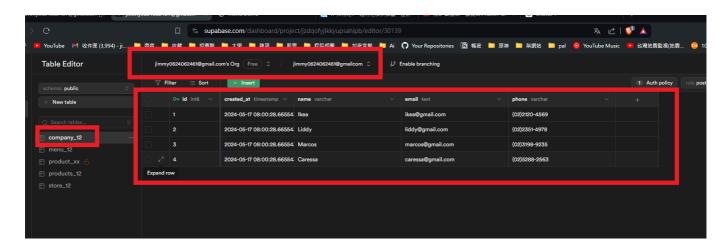

## W13-P5: git logs for W13

```
1c8b02d jimmyhua123 Fri May 17 16:08:23 2024 +0800 W13-P4: Create company_xx and store_xx tables, and insert all data c9aa599 jimmyhua123 Fri May 17 15:39:58 2024 +0800 W13-P3: Use menuSupa.html, menuSupa.js to get 3 menu data from Supabase 6573e66 jimmyhua123 Fri May 17 15:39:15 2024 +0800 W13-P2: Create 3 menu data from Supabase ce104f3 jimmyhua123 Fri May 17 15:38:24 2024 +0800 W13-P1: Get 3 menu data from /api/data_xx.json
```