
Angular Modules



Deborah KurataCONSULTANT | SPEAKER | AUTHOR

@deborahkurata | blogs.msmvps.com/deborahk/



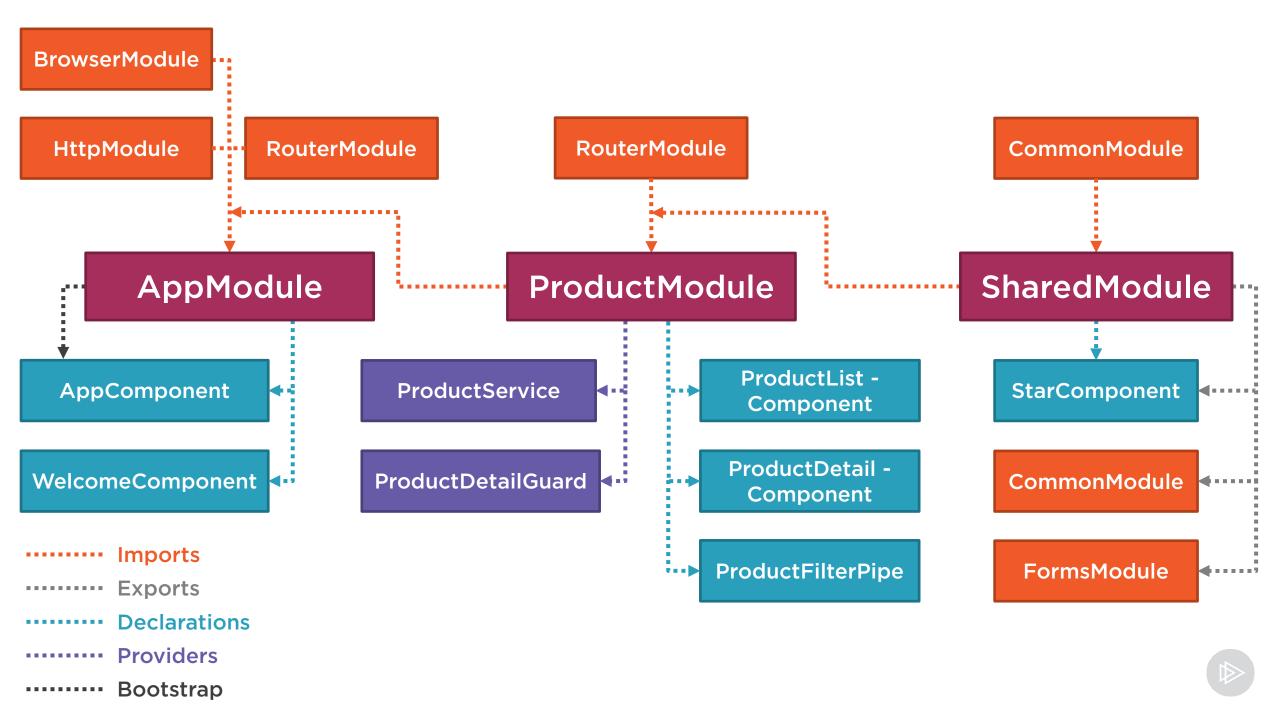

Module Overview



What Is an Angular Module?
Angular Module Metadata
Creating a Feature Module
Defining a Shared Module
Revisiting AppModule



What Is an Angular Module?




A class with an NgModule decorator

Its purpose:

- Organize the pieces of our application
- Arrange them into blocks
- Extend our application with capabilities from external libraries
- Provide a template resolution environment
- Aggregate and re-export



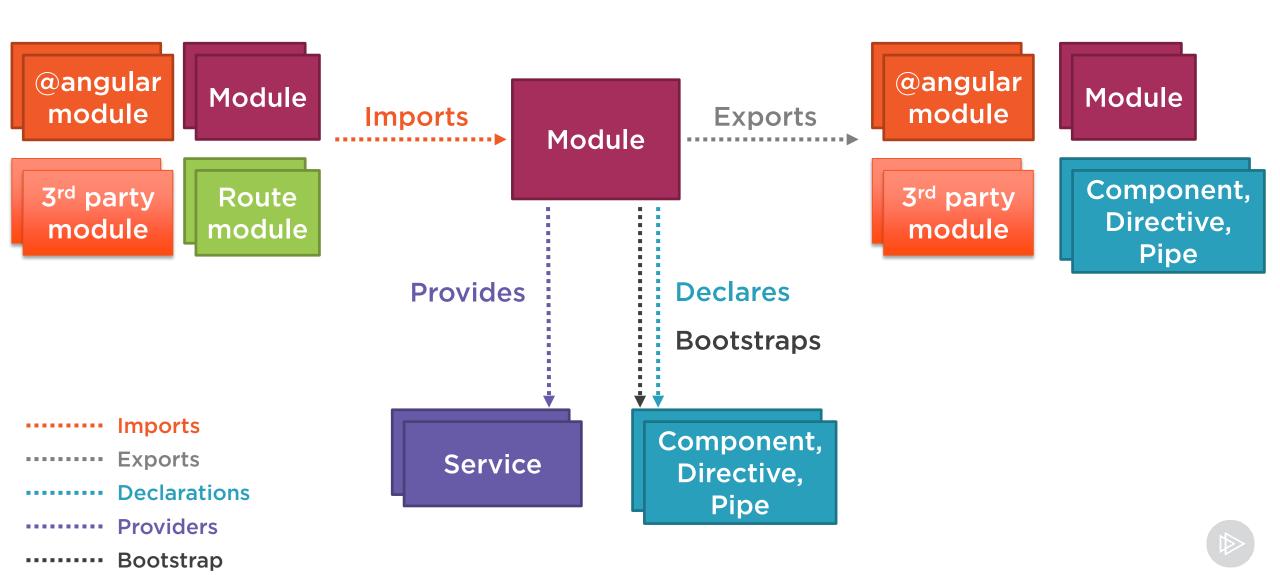

ProductList - Component

ProductDetail - Component

WelcomeComponent

```
...
<a [routerLink]="['/welcome']">
        Home</a>
<a [routerLink]="['/products']">
        Product List</a>
...
<router-outlet></router-outlet>
...
```

Angular

RouterModule


RouterModule

ProductList - Component

ProductDetail - Component

WelcomeComponent

Module



RouterModule


ProductList - Component

ProductDetail - Component

WelcomeComponent

Module

erModule



ProductFilterPipe

RouterModule

Module

erModule

ProductList - Component

ProductDetail - Component

WelcomeComponent





ProductFilterPipe

RouterModule


1odule

ProductList -Component

ProductDetail -Component

WelcomeComponent

```
StarComponent
                                               odule
<ai-star
 [rating]='product.starRating'
 (ratingClicked)='onRatingClicked($event)'>
</ai-star>
```



ProductList - Component

ProductDetail - Component

WelcomeComponent

ProductFilterPipe


StarComponent

RouterModule


FormsModule

BrowserModule

HttpModule



Template Resolution Environment

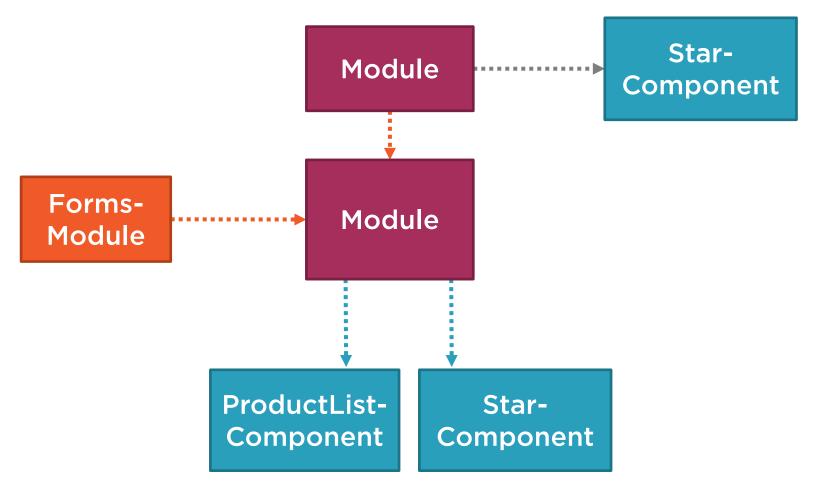

Imports


Exports

Providers

Bootstrap

Declarations

Bootstrap Array

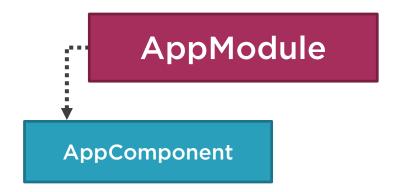

```
app.module.ts
```

```
bootstrap: [ AppComponent ]
```



Bootstrap Array Truth #1

Every application must bootstrap at least one component, the root application component.




Bootstrap Array Truth #2

The bootstrap array should only be used in the root application module, AppModule.



Declarations Array

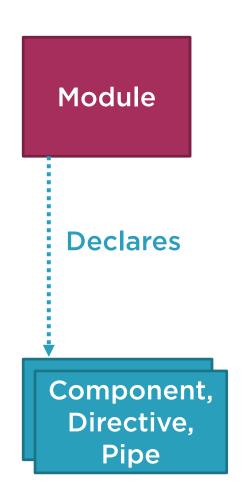

app.module.ts

```
declarations: [
    AppComponent,
    WelcomeComponent,
    ProductListComponent,
    ProductDetailComponent,
    ProductFilterPipe,
    StarComponent
]
```

Declarations




Every component, directive, and pipe we create must belong to one and only one Angular module.



Only declare components, directives and pipes.



Never re-declare components, directives, or pipes that belong to another module

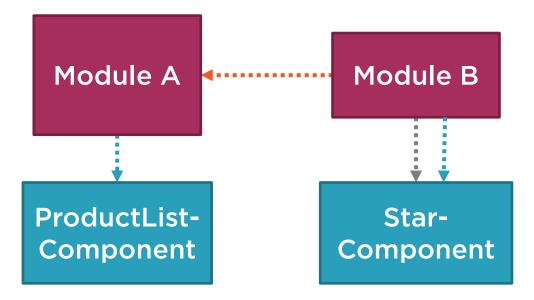






All declared components, directives, and pipes are

private by default.

They are only accessible to other components, directives, and pipes declared in the same module.







The Angular module provides the template resolution environment for its component templates.


product-list.component.html

```
<ai-star ...> </ai-star>
```

star.component.ts


```
@Component({
    selector: 'ai-star',
    template: ...
})
```

The Angular module provides the template resolution environment for its component templates.

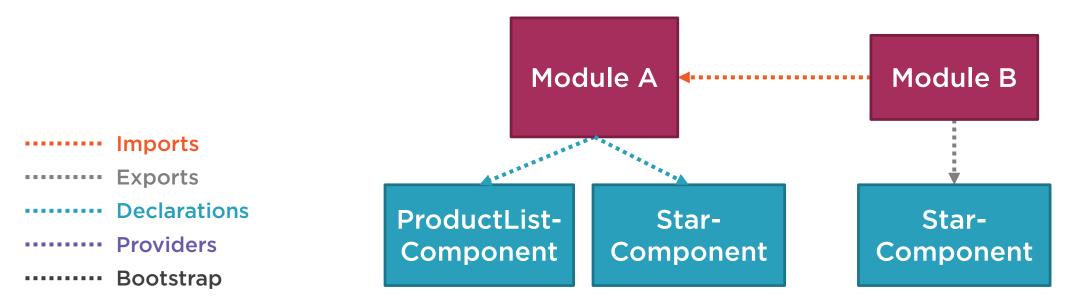



Exports Array

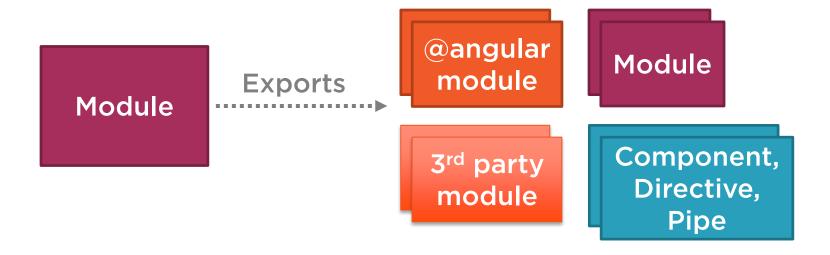

Imports
Exports
Declarations
Providers
Bootstrap



Export any component, directive, or pipe if another components need it.




Re-export modules to re-export their components, directives, and pipes.




We can re-export something without importing it first.







Never export a service.

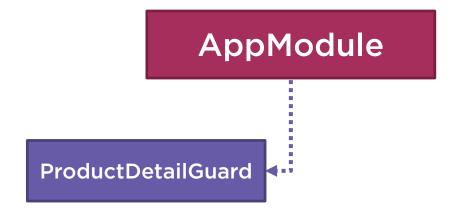

ImportsExportsDeclarationsProviders

Bootstrap



@angular Module module 3rd party Route module module **Imports** Module


Imports Array

app.module.ts

```
imports: [
  BrowserModule,
  FormsModule,
  HttpModule,
  RouterModule.forRoot([...])
]
```



Importing a module makes available any exported components, directives, and pipes from that module.









Only import what this module needs.



Importing a module does NOT provide access to its imported modules

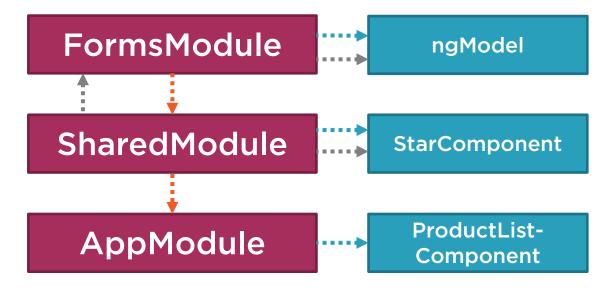

Providers Array

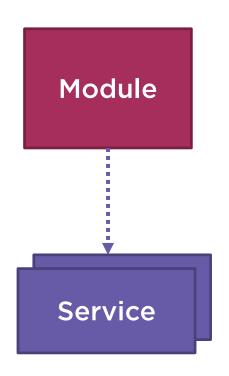

```
app.module.ts
```

```
providers: [ ProductDetailGuard ]
...
```


```
Imports
Exports
Declarations
Providers
Bootstrap
```



Providers Array Truth #1

Any service provider added to the providers array is registered at the root of the application.







Providers Array Truth #2

Don't add services to the providers array of a shared module.


Consider building a CoreModule for services and importing it once in the AppModule.




Providers Array Truth #3

Routing guards must be added to the providers array of an Angular module.



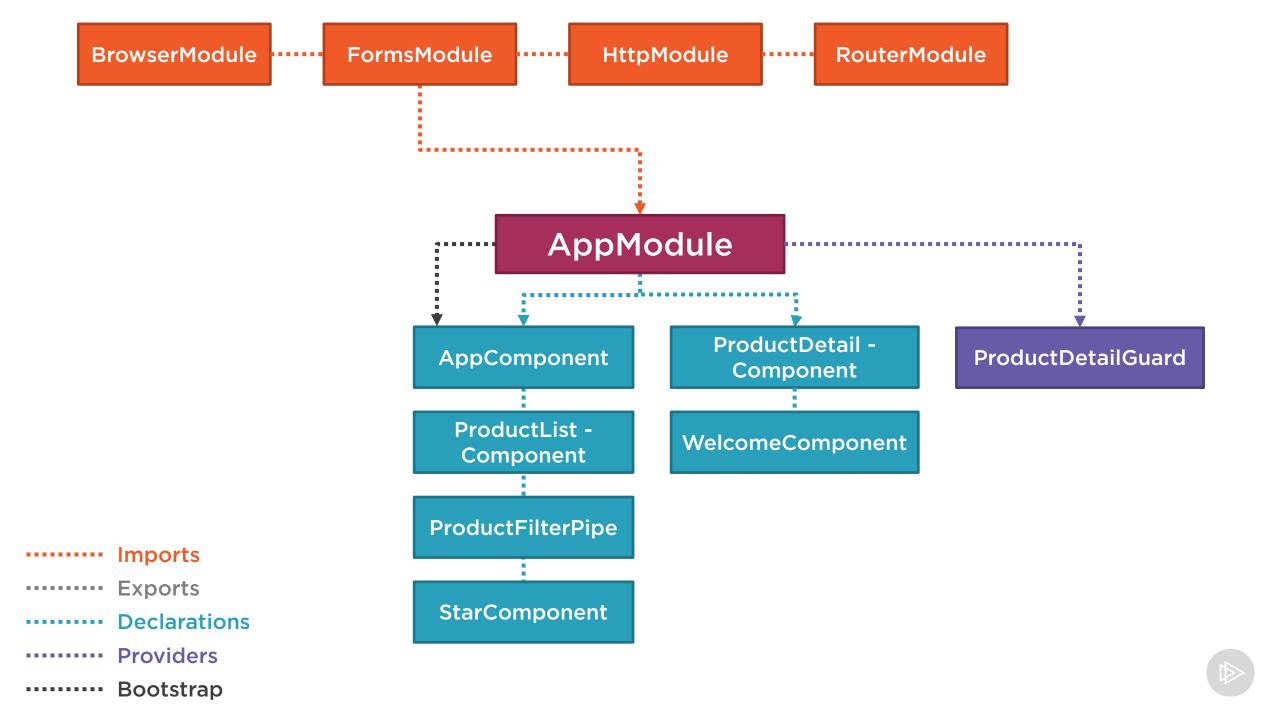


Defining a Feature Module

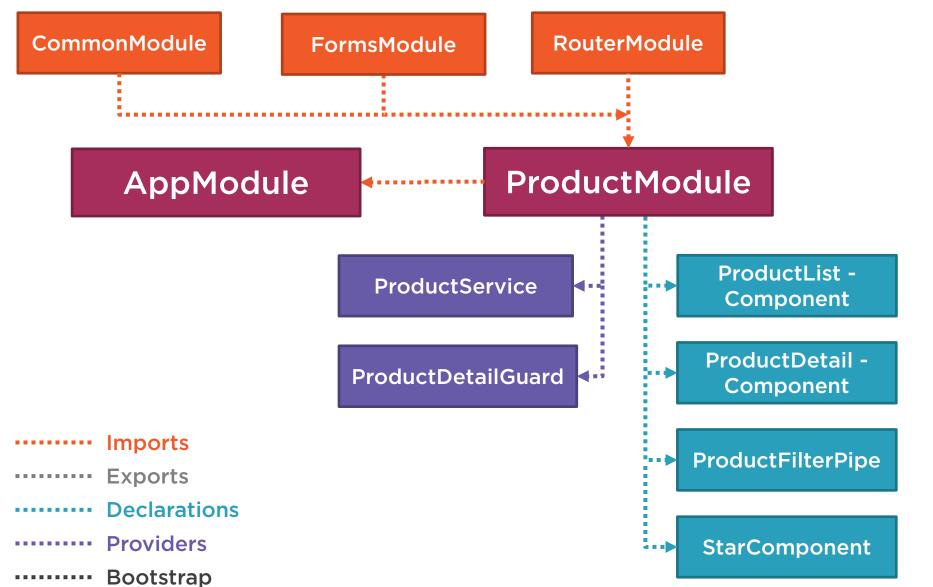




Defining a Shared Module

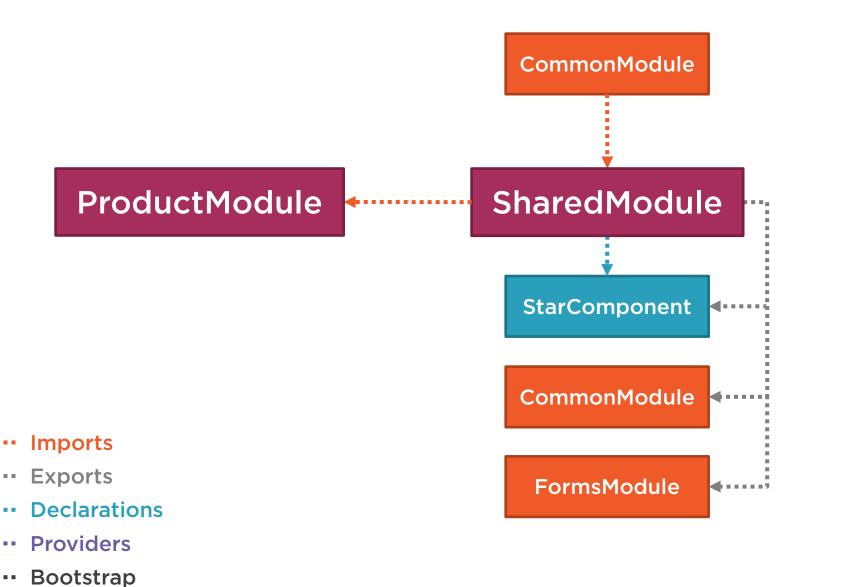




Revisiting AppModule

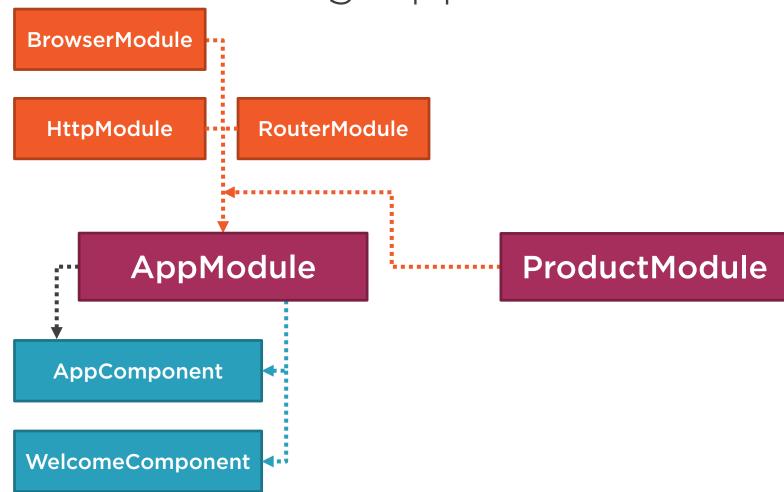

ExportsDeclarationsProvidersBootstrap

Imports



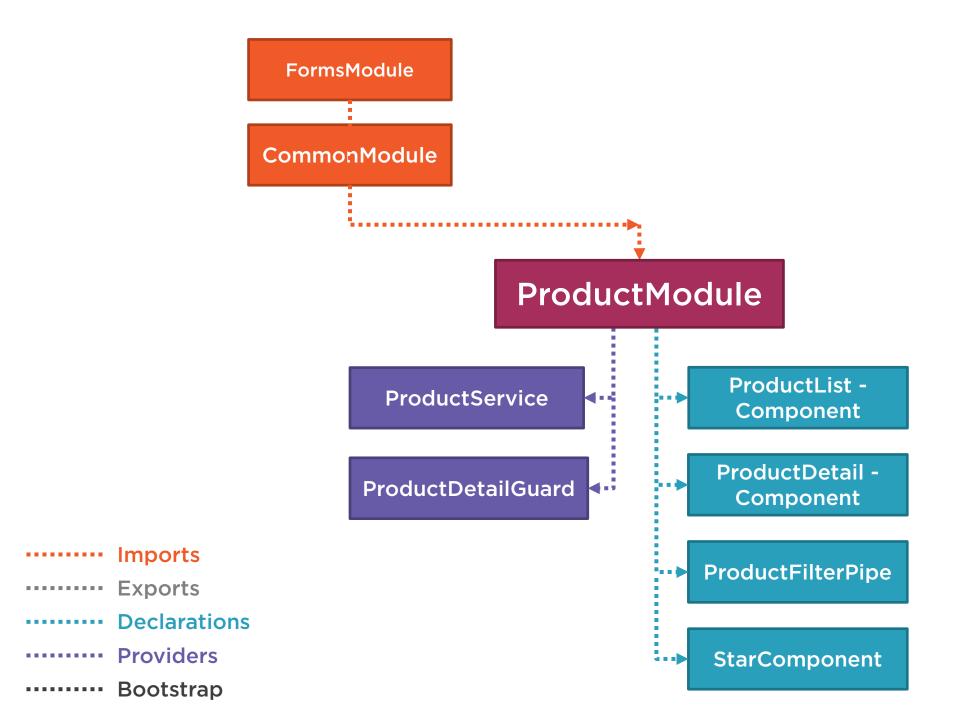



Application Routing Module

app-routing.module.ts

```
import { NgModule } from '@angular/core';
import { RouterModule } from '@angular/router';
import { WelcomeComponent } from './home/welcome.component';
@NgModule({
  imports: [
    RouterModule.forRoot([
      { path: 'welcome', component: WelcomeComponent },
      { path: '', redirectTo: 'welcome', pathMatch: 'full'},
      { path: '**', redirectTo: 'welcome', pathMatch: 'full' }
 exports: [ RouterModule ]
export class AppRoutingModule { };
```

Using the Routing Module

app.module.ts

```
@NgModule({
  imports: [
    BrowserModule,
    HttpModule,
    ProductModule,
    AppRoutingModule
  declarations: [ AppComponent, WelcomeComponent ],
  bootstrap: [ AppComponent ]
})
export class AppModule { }
```

Feature Routing Module

product-routing.module.ts

```
import { NgModule } from '@angular/core';
import { RouterModule } from '@angular/router';
import { ProductListComponent } from './product-list.component';
import { ProductDetailComponent } from './product-detail.component';
import { ProductDetailGuard } from './product-guard.service';
@NgModule({
 imports: [
    RouterModule.forChild([
      { path: 'products', component: ProductListComponent },
      { path: 'product/:id', canActivate: [ ProductDetailGuard],
        component: ProductDetailComponent }
  exports: [ RouterModule ]
export class AppRoutingModule { };
```

Using the Routing Module

product.module.ts

```
@NgModule({
  imports: [
    SharedModule,
    ProductRoutingModule
  declarations: [
    ProductListComponent,
    ProductDetailComponent,
    ProductFilterPipe
  providers: [
    ProductService,
    ProductDetailGuard
export class ProductModule {}
```

Angular Module Checklist: Module Structure



Root application module (AppModule)

Feature modules

Shared module (SharedModule)

Core module (CoreModule)

Routing modules



Angular Module Checklist: NgModule Metadata



Bootstrap: Startup component(s)

Declarations: What belongs to this module

Exports: What an importing module can use

Imports: Supporting modules

Providers: Service providers





Summary



What Is an Angular Module?
Angular Module Metadata
Creating a Feature Module
Defining a Shared Module
Revisiting AppModule



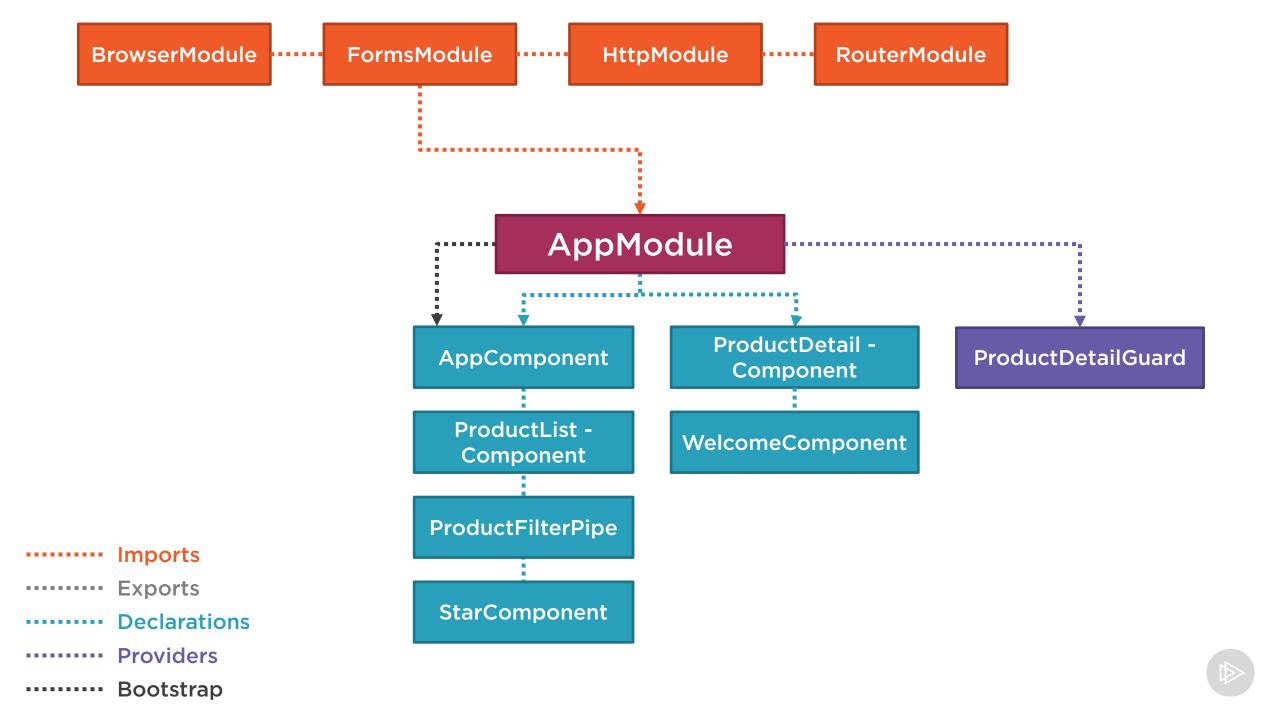

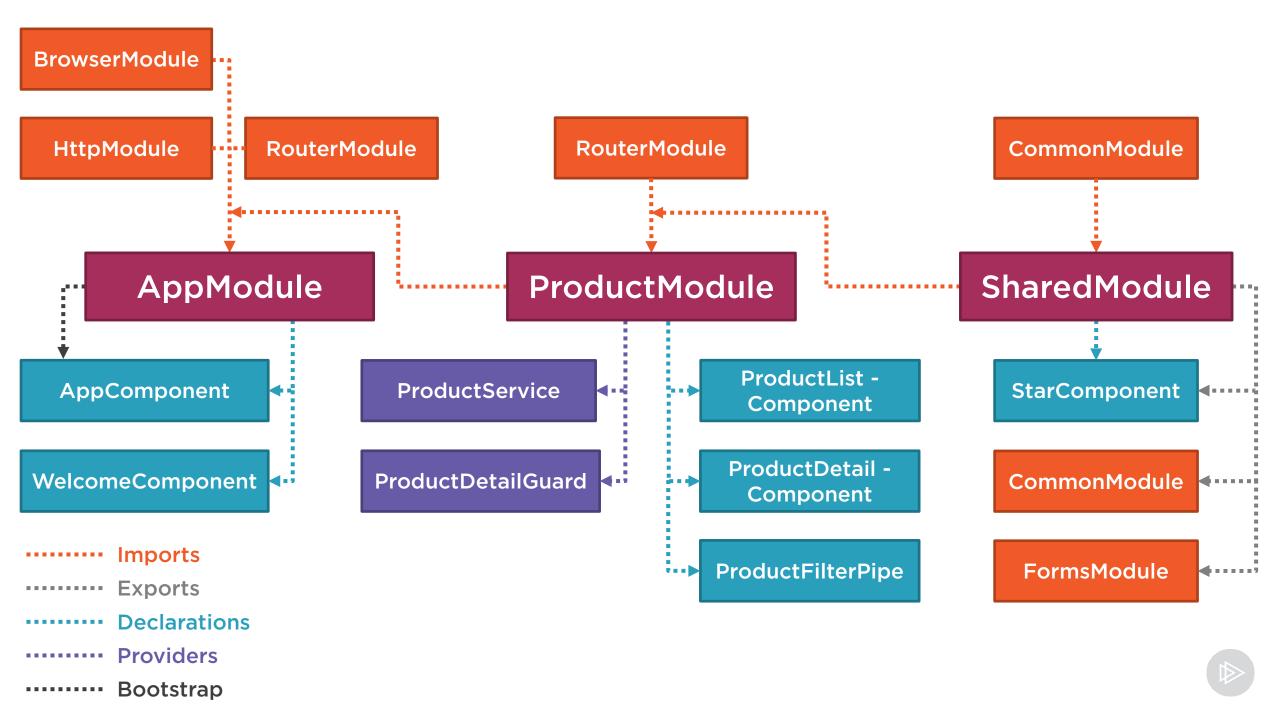

Up Next





❈

ij.

EXPLORER

▶ OPEN EDITORS

▲ APM

- ▶ .vscode
- ▶ api
- ▶ app
- ▶ node_modules
- typings

favicon.ico

index.html

package.json

readme.md

systemjs.config.js

tsconfig.json

tslint.json

typings.json

