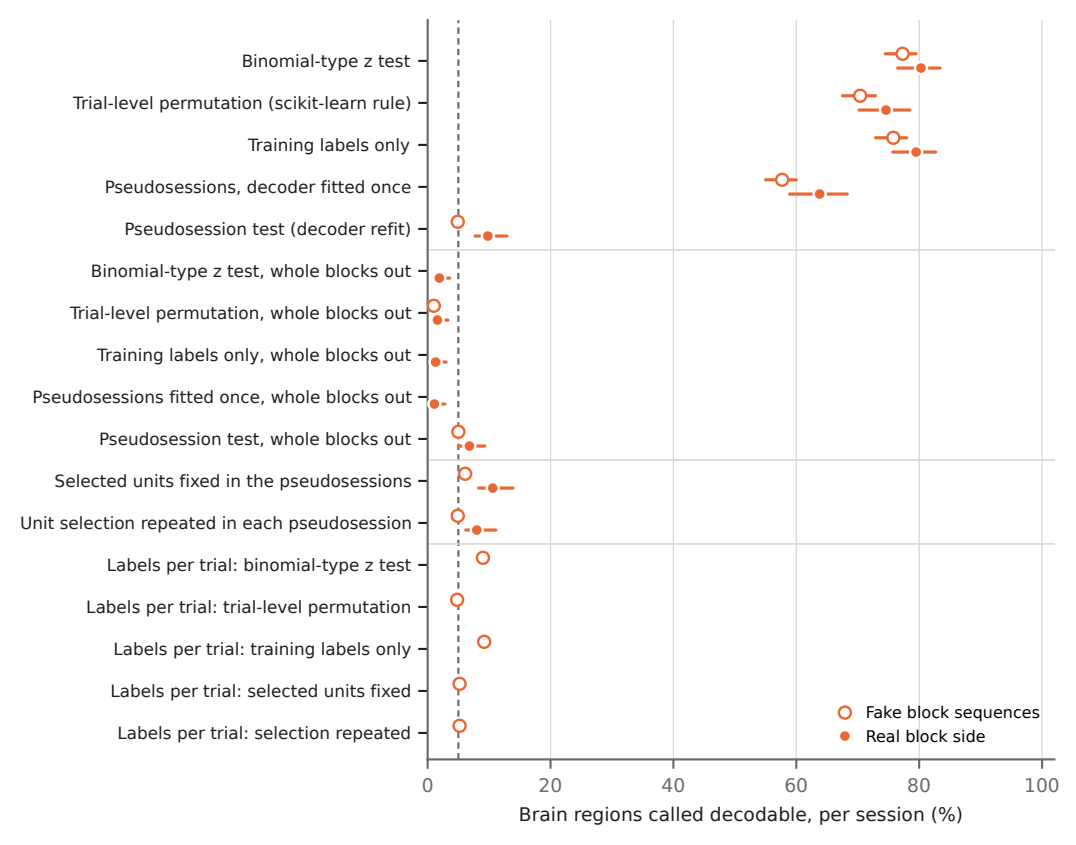
Binomial-type z test
Trial-level permutation (scikit-learn rule)
Training labels only
Pseudosessions, decoder fitted once
Pseudosession test (decoder refit)
Binomial-type z test, whole blocks out
Trial-level permutation, whole blocks out
Training labels only, whole blocks out
Pseudosessions fitted once, whole blocks out
Pseudosession test, whole blocks out
Selected units fixed in the pseudosessions
Unit selection repeated in each pseudosession
Labels per trial: binomial-type z test
Labels per trial: trial-level permutation
Labels per trial: training labels only
Labels per trial: selected units fixed
Labels per trial: selection repeated
Fake block sequences
Real block side
0
20
40
60
80
100
Brain regions called decodable, per session (%)