

CSC1003 Practice 5

I/O

Split

Write a program that reads in a string in the format " $x_1 + x_2 + \cdots + x_n$ " where x_i is a positive integer and calculate its result.

Input:

```
1+2+5+99
```

Output:

```
107
```

Hint: if `String.split("+")` does not work, try `String.split("\\+")` (That's because "+" is a special character of regex).

● OJ link: https://oj.cuhk.edu.cn/d/csc1003_2025_fall/p/P1010

Read Float

Write a program that reads in floating-point numbers (as many as the user enters) from standard input and:

(a) prints the maximum and minimum values

(b) prints the mean value (average value)

Hint: To specify the end of the stream, use <Ctrl-d> (Standard for decades) / <Ctrl-z> (Windows)

Input:

1.6

5.24

7.8

-9


Output:

7.8 1.41

● OJ link: https://oj.cuhk.edu.cn/d/csc1003_2025_fall/p/P1011

Piping

- Write a Java program RandomSeq to generate some random double values and use piping to connect the output of RandomSeq to the input of your program of Read Float.
- An example of Piping:

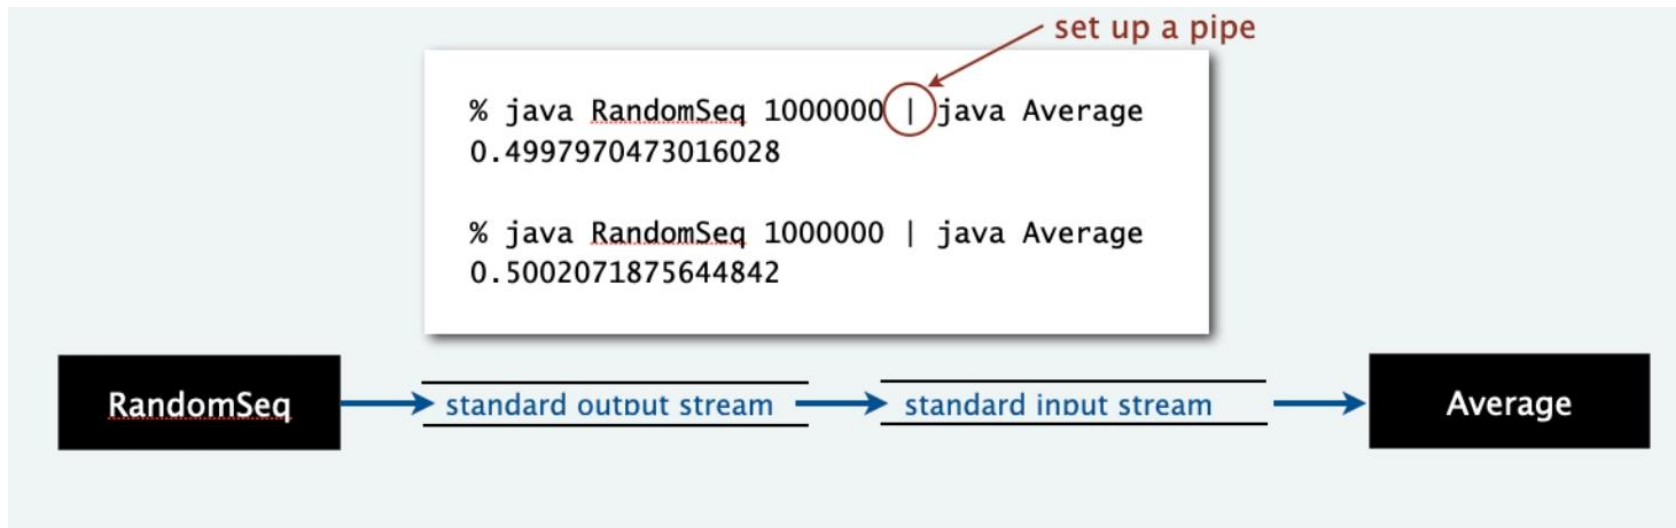

Redirection

- Write a program that reads in a sequence of integers from a text file, and prints the integers, removing repeated values that appear consecutively.

- Hint: An example redirecting from a file to standard input:

```
% java Redirection < data.txt
```

- Input:

1 2 2 1 5 1 1 7 7 7 7 1 1

- Output:

1 2 1 5 1 7 1

Q&A