

BSidesOdisha

Godfather Of Recon

Godfather Of Recon

- Build your setup for hunting Tools , Extensions , Etc...
- Quick Orwa Methodology 2023
- SQL Injection
- #BugBountyTips

—\$ whoami

Orwa Atiyat (OrwaGodfather) from Jordan

**Full time bug hunter
(Starting bug bounty 2020)**

**Bugcrowd P1 Warrior Rank: Top 3
550+ critical/high bug submitted
HOF: Meta / Google / Microsoft /**

**Hack Cup Winner 2022/2023
LevelUpX Champion 2022/2023**


10+ 0Days/CVEs



Why all the time Orwa talked about
Recon , Recon , Recon



Build your setup for hunting System (Windows OS + Linux)

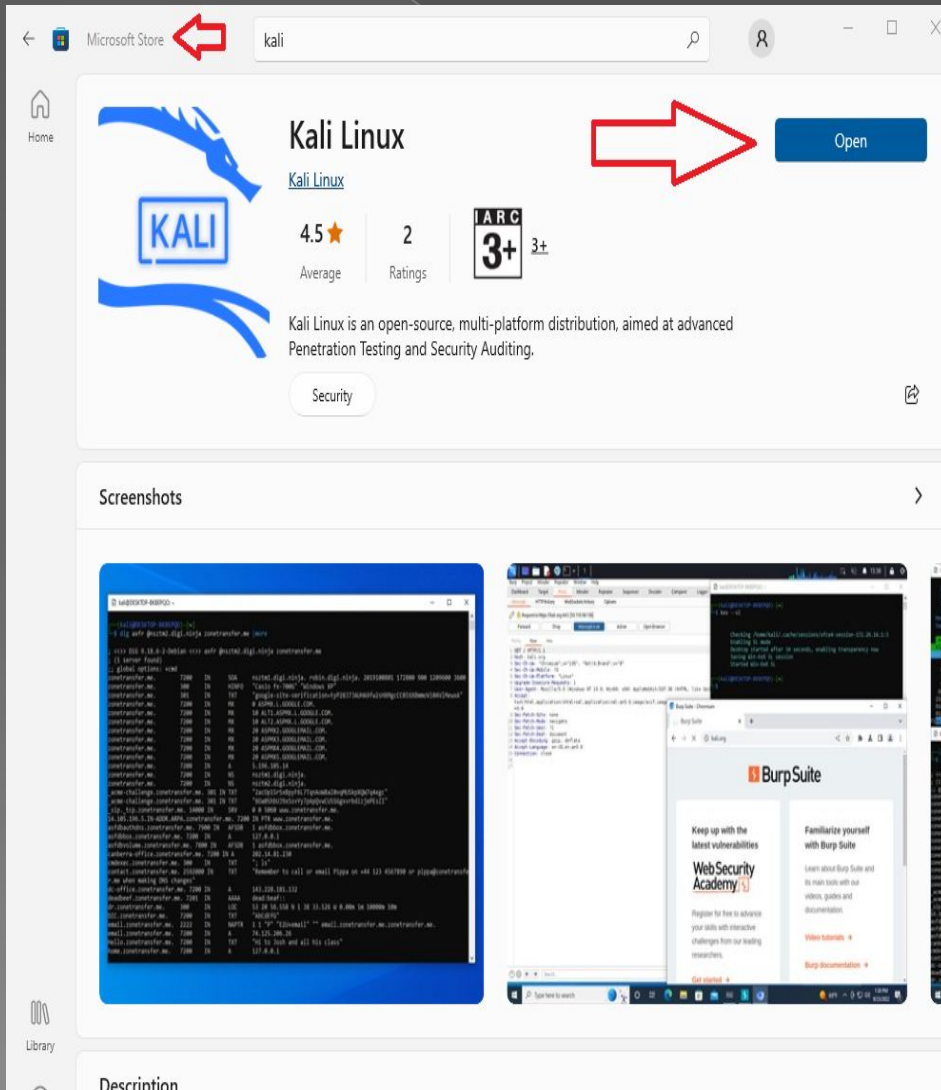

Microsoft Store

kali

Kali Linux

[Kali Linux](#)

4.5 ★ Average Ratings


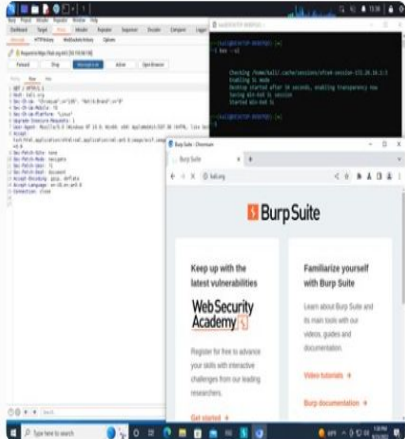

2 Ratings

ARC 3+


Kali Linux is an open-source, multi-platform distribution, aimed at advanced Penetration Testing and Security Auditing.

Security

Screenshots



Description

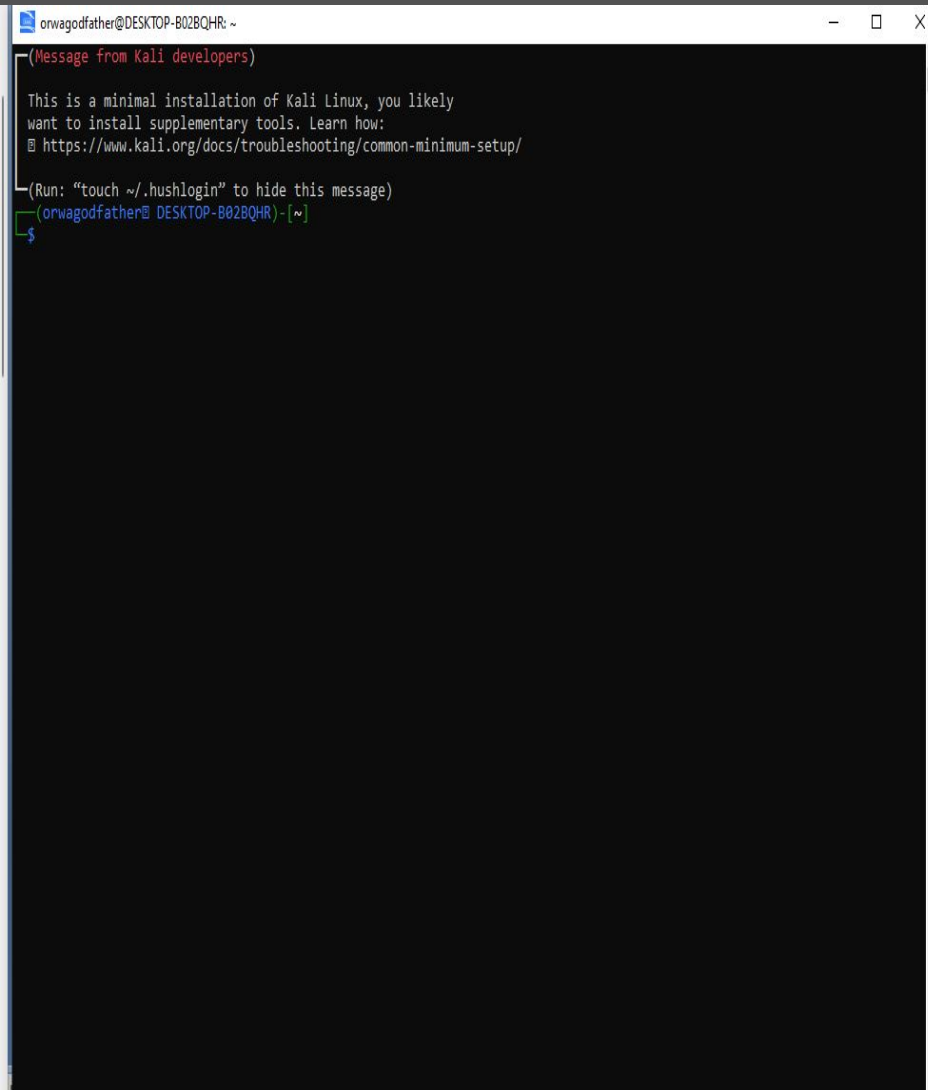

```
orwagodfather@DESKTOP-B02BQHR: ~  
(Message from Kali developers)  
  
This is a minimal installation of Kali Linux, you likely  
want to install supplementary tools. Learn how:  
  https://www.kali.org/docs/troubleshooting/common-minimum-setup/  
  
(Run: "touch ~/.hushlogin" to hide this message)  
orwagodfather@DESKTOP-B02BQHR-[-~]  
$
```


Build your setup for hunting

Windows Software's/Tools

1 WinSCP

Session

File protocol: **FTP** Encryption: No encryption


Port number: 21

User name: Password:

☐ Anonymous login

Save Advanced...

Login Close Help

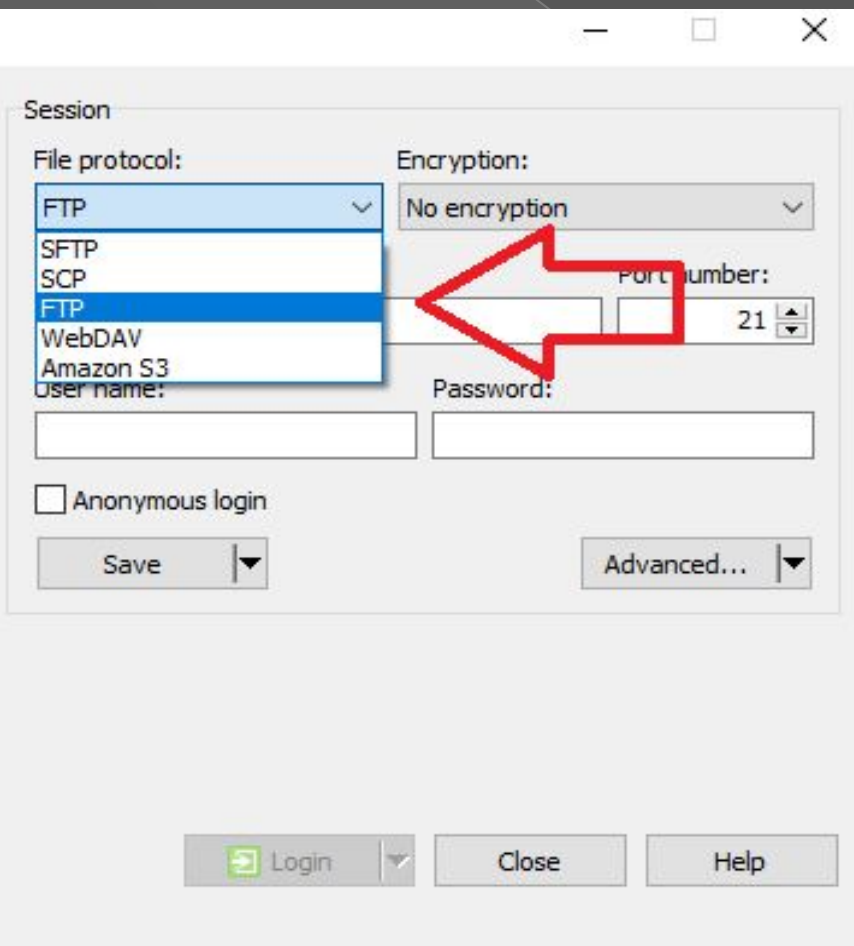The image shows the WinSCP session configuration window for an FTP connection. The 'File protocol' dropdown is set to 'FTP', and the 'Encryption' dropdown is set to 'No encryption'. The 'Port number' is set to 21. There are empty text boxes for 'User name' and 'Password'. An 'Anonymous login' checkbox is unchecked. At the bottom, there are 'Save' and 'Advanced...' buttons. The 'Login' button at the very bottom is highlighted with a red arrow.

Session

File protocol: Amazon S3 Encryption: TLS/SSL Implicit encryption


Host name: s3.amazonaws.com Port number: 443

Access key ID: Secret access key:

☐ Credentials from AWS CLI: General


Save Advanced...

Login Close Help

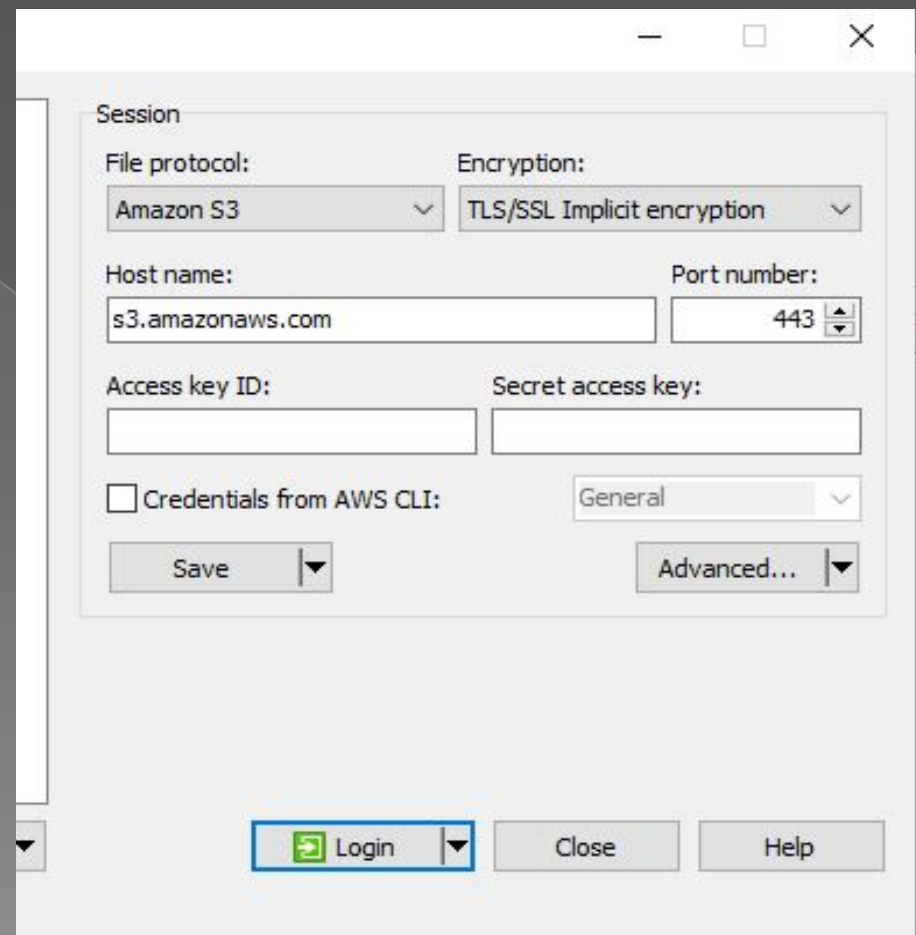The image shows the WinSCP session configuration window for an Amazon S3 connection. The 'File protocol' dropdown is set to 'Amazon S3', and the 'Encryption' dropdown is set to 'TLS/SSL Implicit encryption'. The 'Host name' is set to 's3.amazonaws.com' and the 'Port number' is set to 443. There are empty text boxes for 'Access key ID' and 'Secret access key'. An unchecked checkbox for 'Credentials from AWS CLI' is followed by a 'General' dropdown menu. At the bottom, there are 'Save' and 'Advanced...' buttons. The 'Login' button at the very bottom is highlighted with a blue box.

Build your setup for hunting

Windows Software's/Tools 2 MySQL Workbench

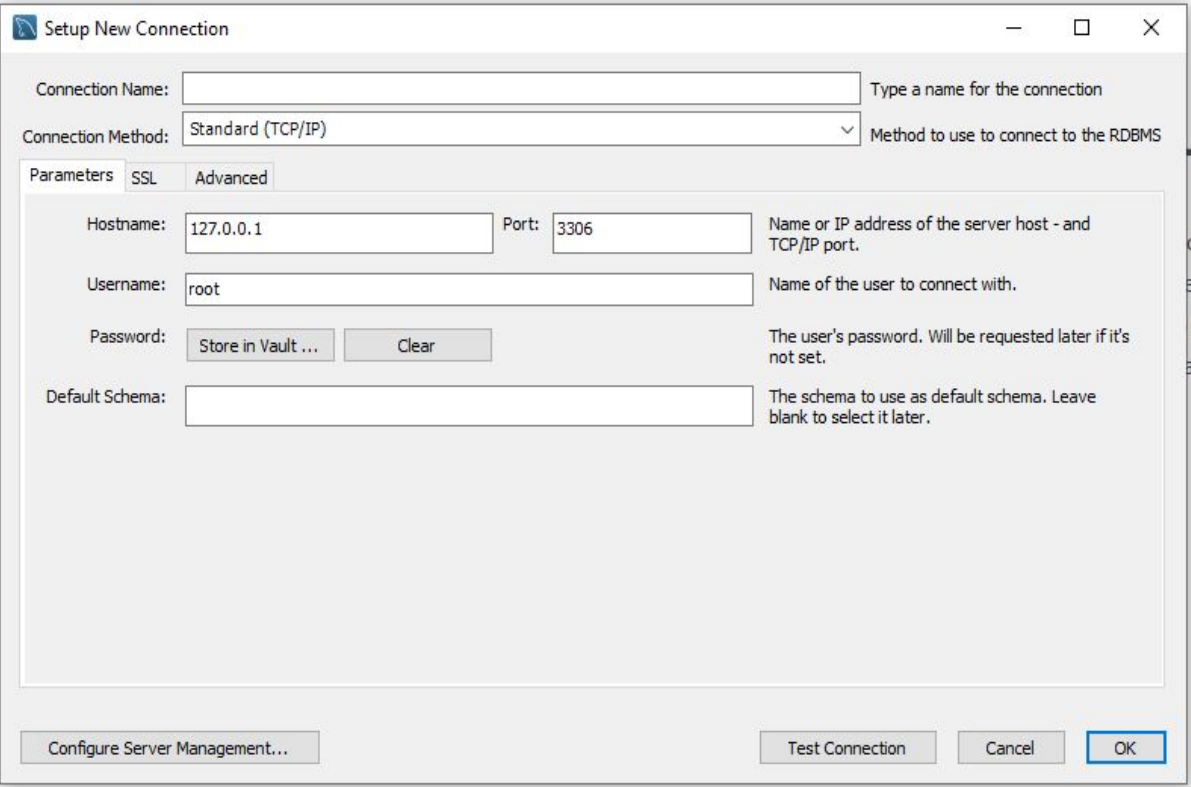

The screenshot shows the MySQL Workbench application window with the 'Setup New Connection' dialog box open. The dialog box has a title bar with standard window controls. It contains several input fields and tabs. The 'Parameters' tab is selected, showing fields for Hostname (127.0.0.1), Port (3306), Username (root), Password (with 'Store in Vault...' and 'Clear' buttons), and Default Schema. To the right of these fields are descriptive labels. At the bottom of the dialog are buttons for 'Configure Server Management...', 'Test Connection', 'Cancel', and 'OK'.

MySQL Workbench

File Edit View Database Tools Scripting Help

Setup New Connection

Connection Name: Type a name for the connection

Connection Method: Standard (TCP/IP) Method to use to connect to the RDBMS

Parameters SSL Advanced

Hostname: 127.0.0.1 Port: 3306 Name or IP address of the server host - and TCP/IP port.

Username: root Name of the user to connect with.

Password: Store in Vault ... Clear The user's password. Will be requested later if it's not set.

Default Schema: The schema to use as default schema. Leave blank to select it later.

Configure Server Management... Test Connection Cancel OK

Workbench


ol for MySQL. It allows you to design,
e objects and insert data as well as
migrate schemas and data from other
atabase.

[Discuss on the Forums >](#)

Build your setup for hunting


Windows Software's/Tools

3 DBeaver

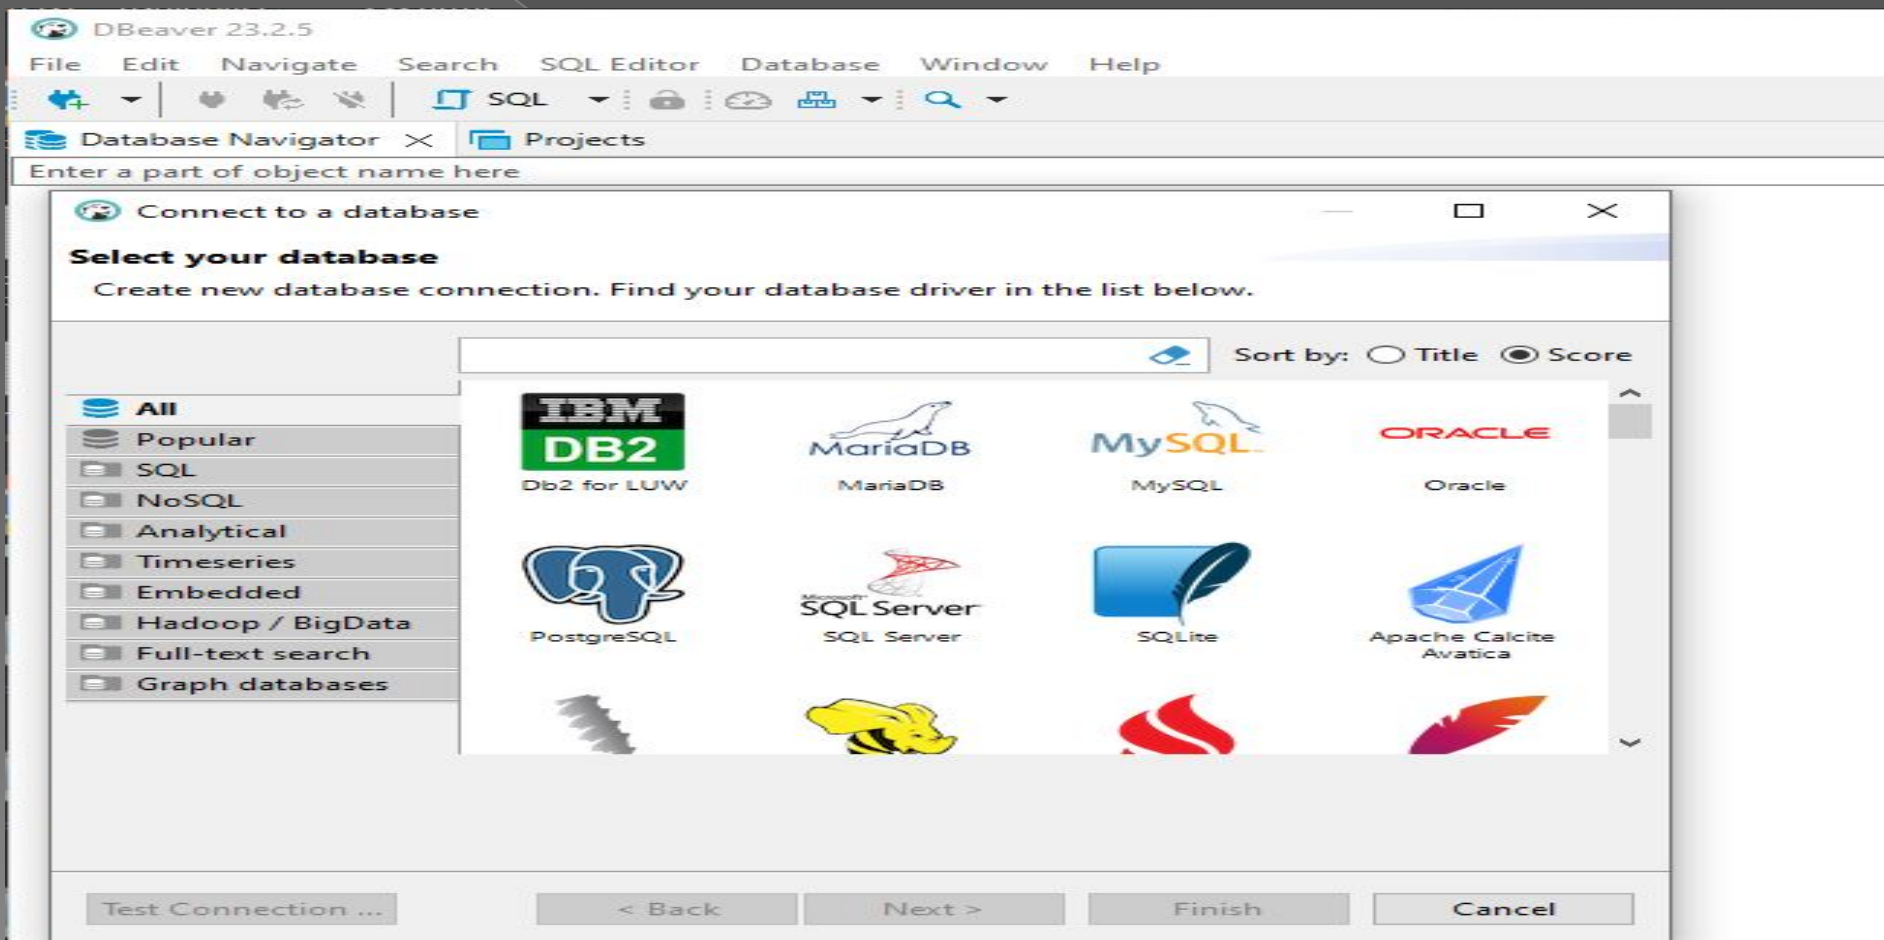

Build your setup for hunting

Windows Software's/Tools 4 Nmap – Zenmap GUI

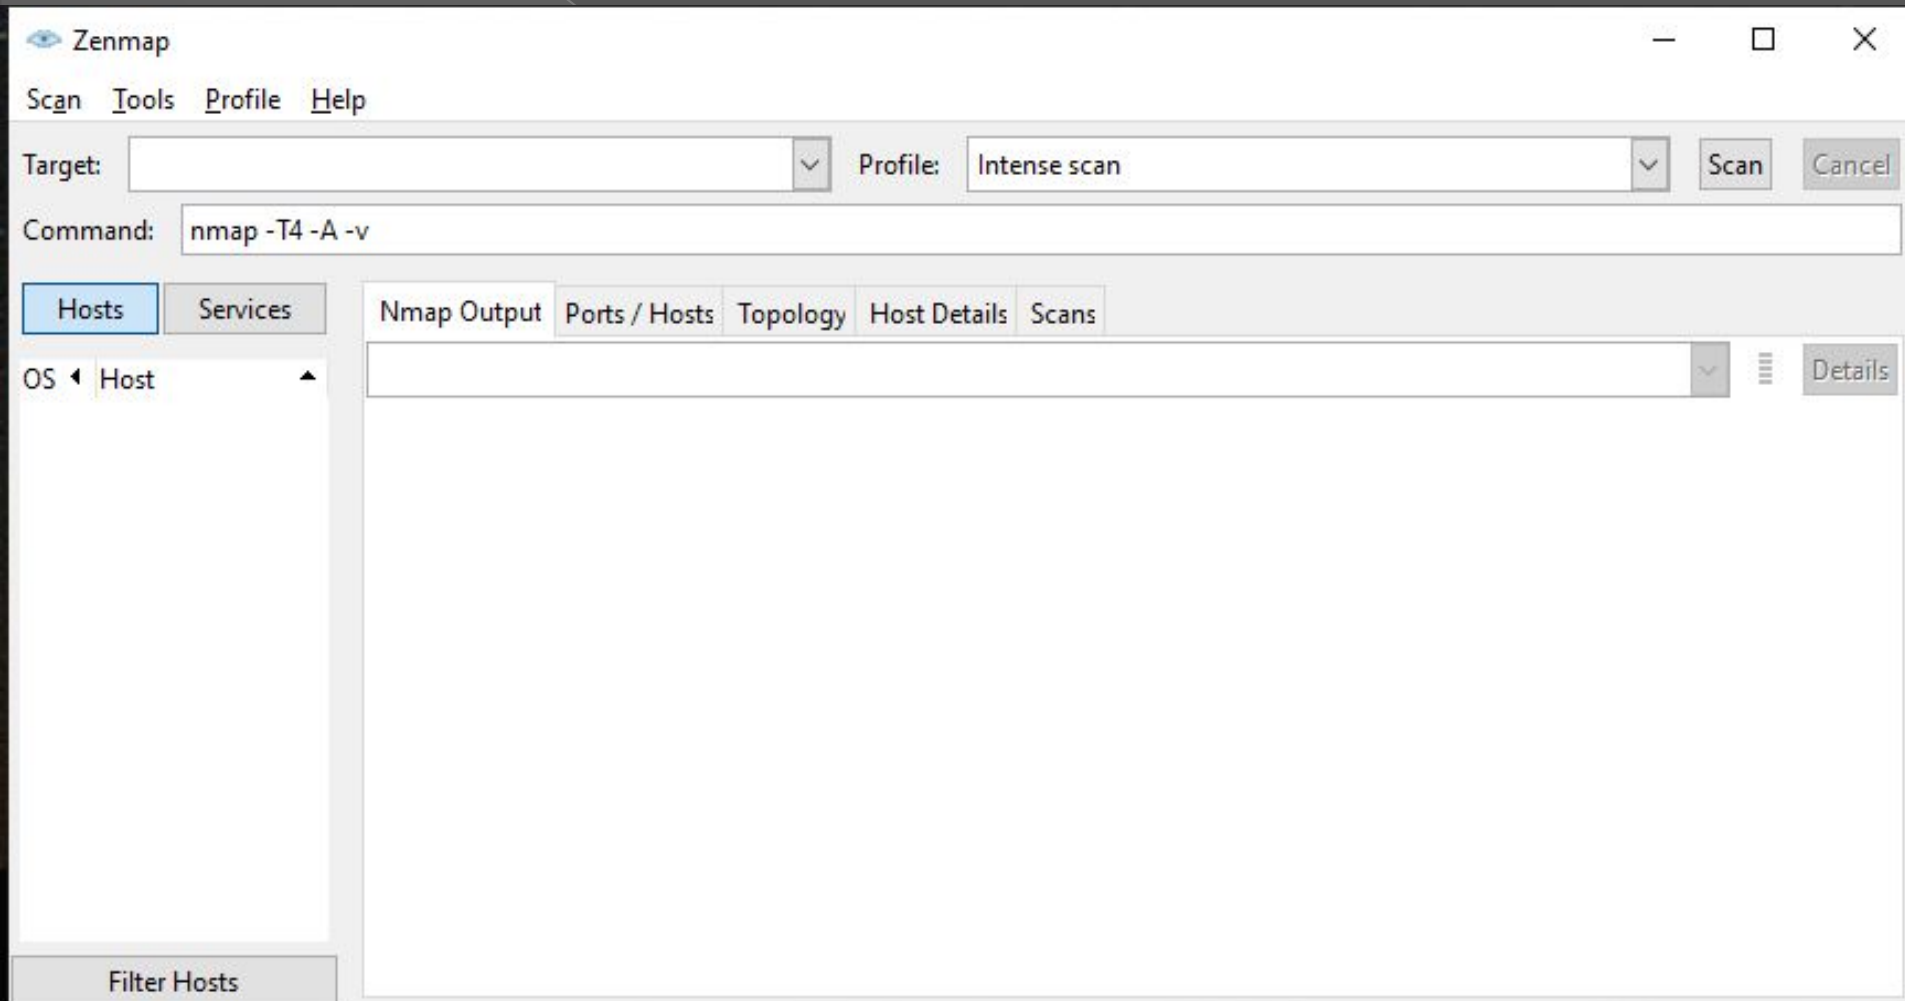

Build your setup for hunting

Windows Software's/Tools

5 Notepad++

6 Visual Studio Code

7 JetBrains dotPeek

8 virustotal

9 Burp Suite (with following extensions)

(403 Bypasser , 5GC API Parser , Active Scan++ , Backslash Powered Scanner , CO2 , IP Rotate , J2EEScan , JS Link Finder , JS Miner , Logger++ , Log Viewer , GAP , Distribute Damage , IIS Tilde , Look Over There , Param Miner , Software Vulnerability Scanner , SAML Raider , Authorize , Encode IP , Asset Discovery)

Build your setup for hunting

MobSF & Free Docker

- ~ `docker pull opensecurity/mobile-security-framework-mobsf`
- ~ `docker run -it --rm -p 8000:8000 opensecurity/mobile-security-framework-mobsf:latest`

<https://labs.play-with-docker.com/>

The screenshot shows the 'labs.play-with-docker.com' web interface. The browser address bar displays the URL 'labs.play-with-docker.com/p/clj3tpcsnmng009b78i0#clj3tpcs_clj3tsksnmng009b78ig'. The interface has a dark blue sidebar on the left with a digital clock showing '03:59:43', a 'CLOSE SESSION' button, and a list of instances with one instance named 'node1' at IP '192.168.0.13'. The main panel shows details for the selected instance 'clj3tpcs_clj3tsksnmng009b78ig', including its IP '192.168.0.13', memory, CPU, and SSH access details. There are buttons for 'OPEN PORT', 'DELETE', and 'EDITOR'. At the bottom, a terminal window shows a warning message and a shell prompt.

← → ↻ labs.play-with-docker.com/p/clj3tpcsnmng009b78i0#clj3tpcs_clj3tsksnmng009b78ig

Shodan Search Engi... uber - Censys 10 Recon Tools For... https://www.merca... https://cbu2an.cbp... am-dr.emg.sprint.c... The resource canno... 403 - Forbidden

03:59:43

CLOSE SESSION

Instances 🔧 ⚙️

+ ADD NEW INSTANCE

192.168.0.13
node1

clj3tpcs_clj3tsksnmng009b78ig

IP
192.168.0.13 OPEN PORT

Memory CPU

SSH
ssh ip172-18-0-98-clj3tpcsnmng009b78i0@direct.labs.play-📄

DELETE EDITOR


```
#####  
#                               WARNING!!!!                               #  
# This is a sandbox environment. Using personal credentials                #  
# is HIGHLY! discouraged. Any consequences of doing so are                 #  
# completely the user's responsibilities.                                   #  
#                                                                           #  
# The PWD team.                                                            #  
#####  
[node1] (local) root@192.168.0.13 ~  
$
```

Build your setup for hunting

Browser Extensions

1 Wappalyzer (checking webapp technologies)

2 EditThisCookie

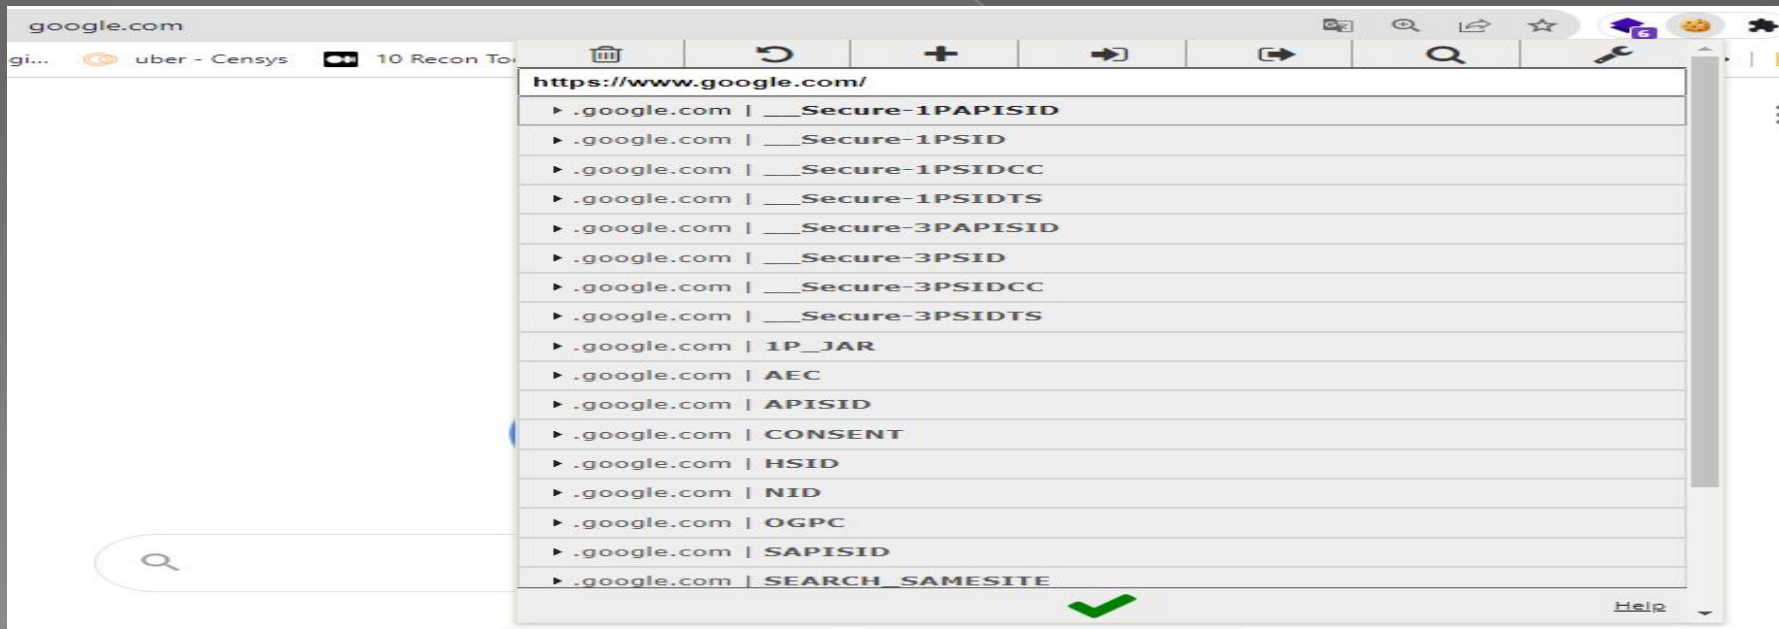

Build your setup for hunting

Example from shodan



SSL Certificate

Issued By:

- Common Name:

[Redacted]

Validation: **[Redacted]**

- Organization:

[Redacted]

Issued To:

- Common Name:

HTTP/1.1 **200** OK

Set-Cookie: **[Redacted]**pttaap16;


X-XSS-Protection: 1; mode=block

X-Frame-Options: SAMEORIGIN

Content-Security-Policy: default-src 'self'; script-src 'self' 'unsafe-inline' 'u

Build your setup for hunting


3 DotGit (orwa.com/.git/config)

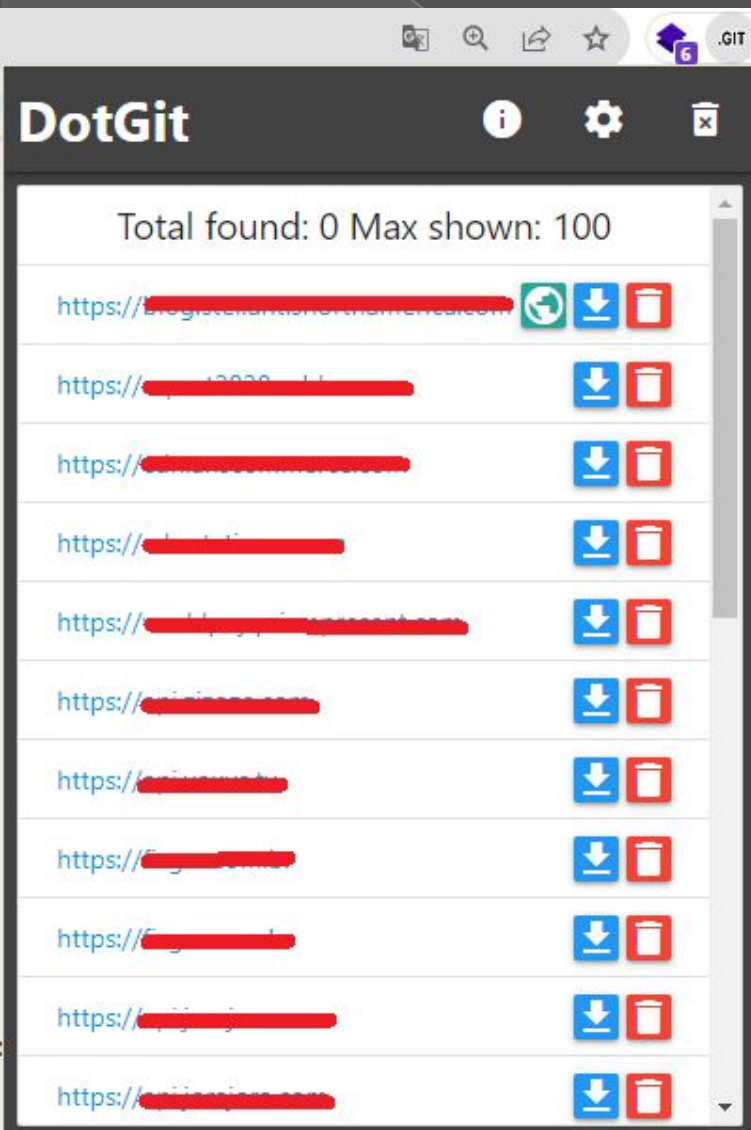

n] Due To Accessible .git Repository	\$1,500	Comments 6
to accessible .git Repository	\$2,500 20 points	Comments 7
Accessible [.git Repository] porators	\$750 10 points	Comments 6
.git Repository	\$3,000	Comments 10
due to accessible .git Repository	\$150 10 points	Comments 2


Build your setup for hunting

4 Shodan

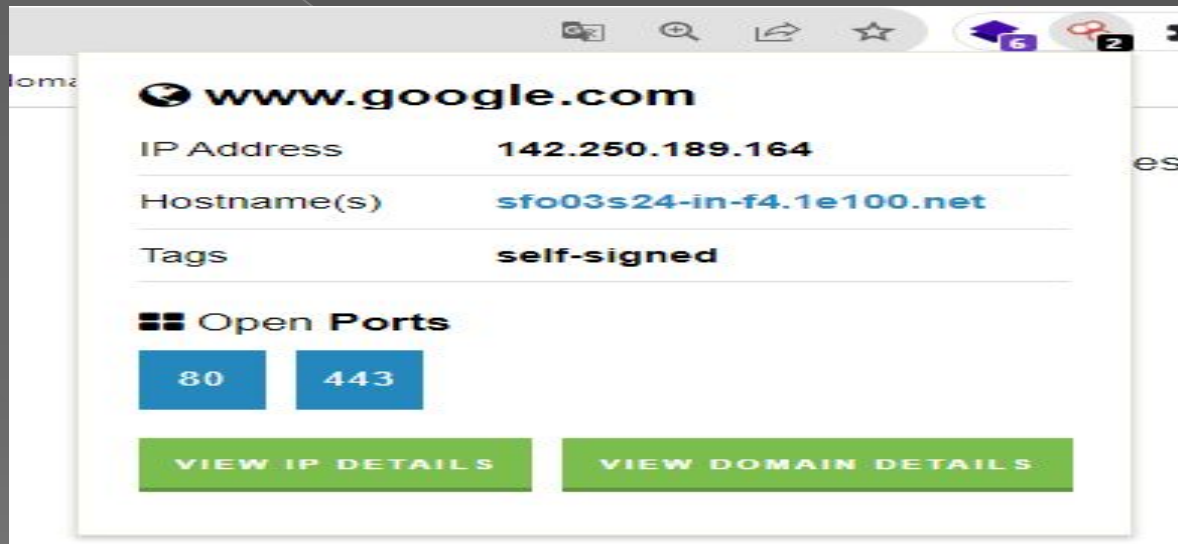

Build your setup for hunting

5 Trufflehog

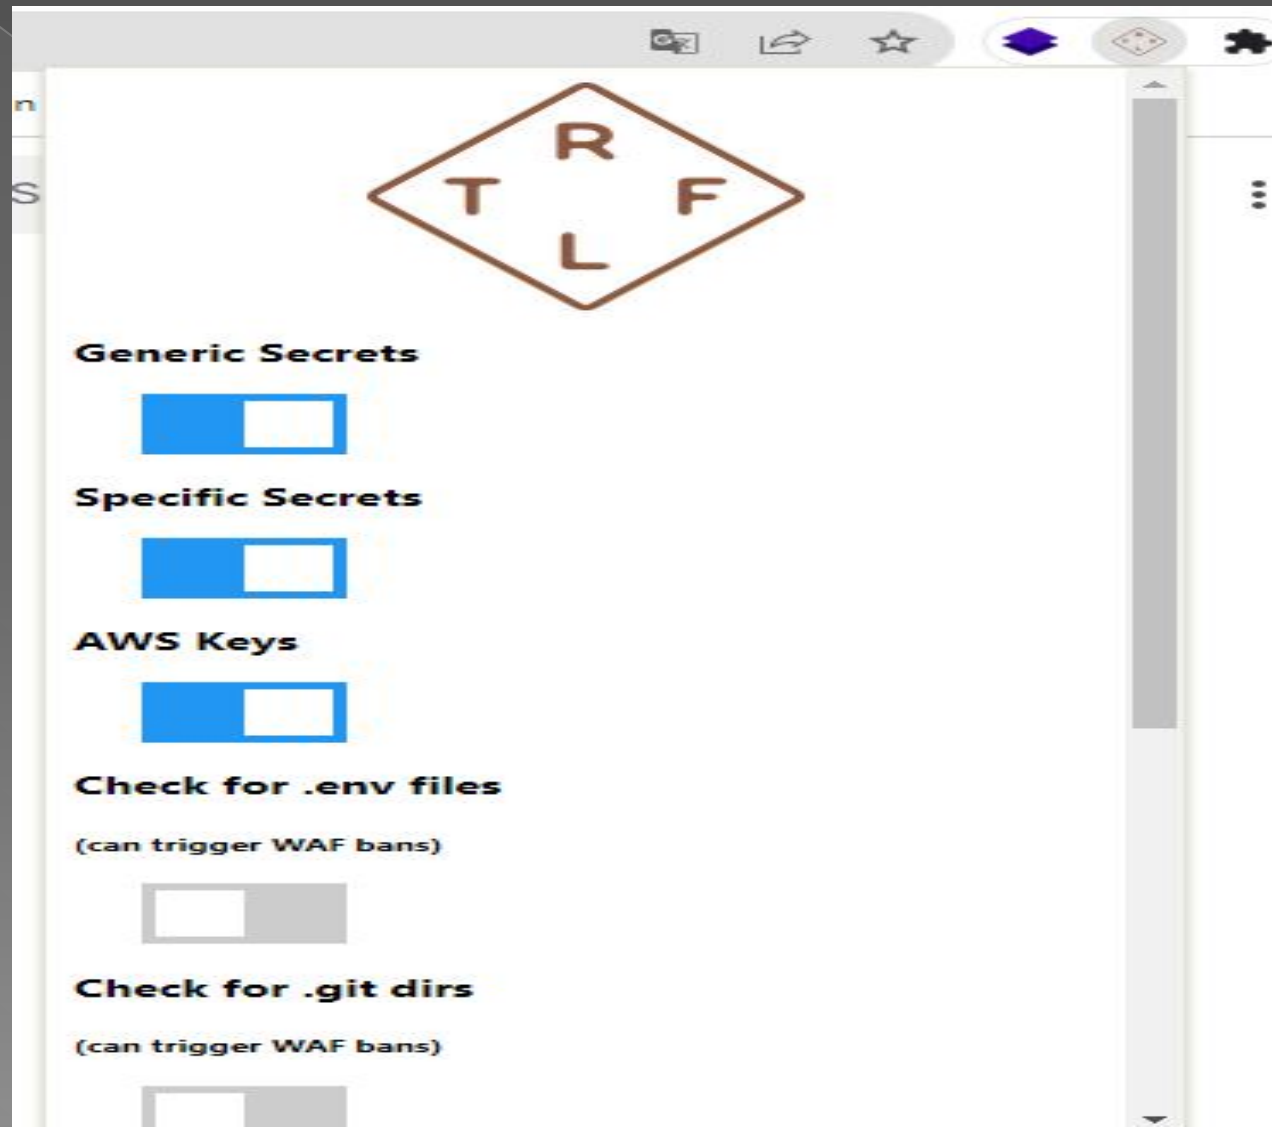

Build your setup for hunting

Kali Tools

ReconFTW (Cover lot of tools and fix missing in kali)

Amass & Httpx & Naabu

FFUF & Waymore & Arjun

SqlMap & Shodan Cli & GitTools

Metasploit & TplMap & Aem-Hacker

Setup Is Ready To Hunt

Don't ask how I will go to the recon , Ask
how the recon will came to me....



Orwa Methodology 2023

Program (A)

Scope

dev.orwa.com

sso.orwa.com/admin/login

Program (B)

Scope

*.orwa.com

Program (C)

Scope

Anything Owned By Orwa Inc. In Scope

Orwa Methodology 2023

Program (A)

Scope

dev.orwa.com

sso.orwa.com/admin/login

(1) scan full port 1 time per day

(2) collect all endpoints for *.orwa.com and create a wordlist by all of this endpoints and tested on program scope

Orwa Methodology 2023

(3) Check program scope endpoint on ...

Ex

- <https://urlscan.io/search/#dev.orwa.com>
- [https://web.archive.org/cdx/search/cdx?url=*.dev.orwa.com
&fl=original&collapse=urlkey](https://web.archive.org/cdx/search/cdx?url=*.dev.orwa.com&fl=original&collapse=urlkey)
- https://otx.alienvault.com/api/v1/indicators/domain/orwa.com/url_list?limit=100&page=1 ****private tip****
- Bing & Google Dorking: [site:dev.orwa.com]
- Github checking: dev.orwa.com

Orwa Methodology 2023

(4) Search for dev-uat-prod-test apps

Ex

sso-dev.orwa.com

ssouat.orwa.com

prod-sso.orwa.com

(5) Search for leaked creds for orwa.com and tested on sso.orwa.com (moving from out of scope to in scope)

(6) FuZZ webapp (fuff in bugbountytips part)

Orwa Methodology 2023

Remember , burp all the time on and proxy is connected

When you done from everything back and check your burp and start looking for interesting stuff

Orwa Methodology 2023

Program (B)

Scope

*.orwa.com

1) Collect sub domain

- reconFTW
- Amass

~amass enum -passive -norecursive -noalts -d orwa.com -o sub-list.txt

- CrtSH <https://crt.sh/?q=%25.orwa.com>

- Securitytrails https://securitytrails.com/list/apex_domain/orwa.com

- Shodan

<https://www.shodan.io/search?query=Ssl.cert.subject.CN%3A%22target.com%22>

Orwa Methodology 2023

There are a lot of other recourses such as (github , fofa urlscan , etc...) , use everything add everything to one list , remove duplicate by

```
~cat everything.txt | sort -u > sub-list.txt
```

(2)
Send *sub-list.txt* to httpx & naabu

```
~cat sub-list.txt | httpx -o live-sub.txt
```

Top 1000 port

```
~naabu -list sub-list.txt -top-ports 1000 -exclude-ports 80,443,21,22,25 -o ports.txt
```

Full Port

```
~naabu -list sub-list.txt -p - -exclude-ports 80,443,21,22,25 -o ports.txt
```

Orwa Methodology 2023

(3) shodan checking for IPs & Origin IPs

`Ssl.cert.subject.CN:"orwa.com"`

Origin IP and Waf bypass via
(match and replace in burp)
Explained in BsideAhmedabad Slides

(4) Start with Program(A) Method

Orwa Methodology 2023

Program (C)

Scope

Anything Owned By Orwa Inc. In Scope

1) Collect domains

On crt.sh Orwa Inc.

On Shodan "ssl:Orwa Inc."

Threes lot of other recourses to get domains

Send all domains from all recourses to 1.txt file

Remove duplicate

```
~cat 1.txt | sort -u > domains.txt
```

Orwa Methodology 2023

Extract sub domains via amass by use -df (domains file)

```
~amass enum -passive -norecursive -noalts -df domin.txt -o subs-1.txt
```

Get more sub domains from subs-1.txt

```
~amass enum -passive -norecursive -noalts -df subs-1.txt -o all-sub.txt
```

Sent all-sub.txt to httpx & naabu

(2) Search for Creds/PII/Endpoints from Google Sheets&Groups

```
site:docs.google.com/spreadsheets "Orwa Inc."  
site:groups.google.com "Orwa Inc" **Amazing Tip**
```


Orwa Methodology 2023

(3) Check my Method about discovering more domains & 3rd party's & Endpoints
In BsidesAhmedabad Slides

(4) Start with Program(B) Method

(5) Start with Program(A) Method

Orwa Methodology 2023

Don't forget, burp all the time on and proxy is connected

BE CAREFUL



SQL Injection

Error Based & Blind

POST /wp-adminX/admin-ajax.phpX HTTP/1.1

Accept: */*

Referer: https://orwa.com/

Cookie: wp-wpml_current_language=enX;

cmplz_consented_services=X; cmplz_policy_id=14X;

cmplz_functional=allowX

Accept-Encoding: gzip,deflate,br

User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64)

AppleWebKit/537.36 (KHTML, like Gecko) Chrome/117.0.0.0

Safari/537.36X

Host: orwa.com

Connection: Keep-alive

Content-Type: application/x-www-form-urlencoded

Content-Length: 70

action=loadMorePostsX¬_show=xxxxX&posts_page=6X&se
arch_argument=xxxxxxX

SQL Injection

Target Positions Payloads Options

? Payload Positions

Start attack

Configure the positions where payloads will be inserted into the base request. The attack type determines the way in which payloads are assigned to payload positions - see help for full details.

Attack type: Sniper

```
POST /wp-admin$$/admin-ajax.php$$ HTTP/1.1
Accept: */*
Referer: https://orwa.com/
Cookie: wp-wpml_current_language=$en$; cmplz_consented_services=$$; cmplz_policy_id=$14$
Accept-Encoding: gzip,deflate,br
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/117.0.0.0 Safari/537.36$$
Host: orwa.com
Connection: Keep-alive
Content-Type: application/x-www-form-urlencoded
Content-Length: 70

action=$loadMorePosts$&not_show=$xxxx$&posts_page=$6$&search_argument=$xxxxxx$
```

Add \$

Clear \$

Auto \$

Refresh

?

<

+

>

Type a search term

0 matches

Clear

10 payload positions

Length: 525

SQL Injection

POST /wp-admin/admin-ajax.php HTTP/1.1

Accept: */*

Referer: https://orwa.com/

Cookie: wp-wpml_current_language=en; cmplz_consented_services=; cmplz_policy_id=14

Accept-Encoding: gzip, deflate, br

User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/117.0.0.0 Safari/537.36

Host: orwa.com

Connection: Keep-alive

Content-Type: application/x-www-form-urlencoded

Content-Length: 70

action=loadMorePosts¬_show=xxxx&posts_page=6&search_argument=xxxxxxx\$\$

SQL Injection

Change body encoding

The screenshot displays the Burp Suite interface. On the left, the 'Request' tab is active, showing an HTTP POST request to `/wp-admin/admin-ajax.php`. The request body contains a JSON payload with various WordPress settings, including `cmplz_preferences=deny` and `cmplz_banner-status=dismissed`. The bottom of the request body shows `action=loadMorePosts¬_show=xxxx&posts_page=6&search_argument=xxxxxx`. On the right, a context menu is open, listing various actions. The 'Change body encoding' option is highlighted with a red rectangle.

Request

Raw Params Headers Hex

POST /wp-admin/admin-ajax.php HTTP/1.1
Accept: */*
Referer: https://orwa.com/
Cookie: wp-wpml_current_language=en; cmplz_consented_services=; cmplz_policy_id=1
cmplz_preferences=deny; cmplz_banner-status=dismissed
Accept-Encoding: gzip, deflate, br
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML,
Host: orwa.com
Connection: Keep-alive
Content-Type: application/x-www-form-urlencoded
Content-Length: 70

action=loadMorePosts¬_show=xxxx&posts_page=6&search_argument=xxxxxx

Send to Spider
Do an active scan
Send to Intruder Ctrl+I
Send to Repeater Ctrl+R
Send to Sequencer
Send to Comparer
Send to Decoder
Request in browser
Send request to Authorize
Send Cookie header to Authorize
Send Authorization header to Authorize
Send to Backup Finder
Send to SQLMapper
Send to Laudanum
Send to Upload Scanner
Guess params
Param Miner
Run JS Auto-Mine (check everything)
Run all passive scans
Config
Scans
Log
Engagement tools
Change request method
Change body encoding
Copy URL
Copy as curl command
Copy to file

SQL Injection

Change body encoding

Request

Raw Params Headers Hex

```
POST /wp-admin/admin-ajax.php HTTP/1.1
Accept: */*
Referer: https://orwa.com/
Cookie: wp-wpml_current_language=en; cmplz_consented_services=; cmplz_policy_id=14; cmplz_functional=allow; cmplz_marketing=deny; cmplz_statistics=deny; cmplz_preferences=deny; cmplz_banner-status=dismissed
Accept-Encoding: gzip,deflate,br
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/117.0.0.0 Safari/537.36
Host: orwa.com
Connection: Keep-alive
Content-Type: multipart/form-data; boundary=-----50442952
Content-Length: 345

-----50442952
Content-Disposition: form-data; name="action"

loadMorePosts
-----50442952
Content-Disposition: form-data; name="not_show"

xxxx
-----50442952
Content-Disposition: form-data; name="posts_page"

6
-----50442952
Content-Disposition: form-data; name="search_argument"

xxxxxxx
-----50442952--
```


SQL Injection

Change body encoding

Attack type: Sniper

```
cmplz_banner-status=dismissed
Accept-Encoding: gzip,deflate,br
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/117.0.0.0 Safari/537.36
Host: orwa.com
Connection: Keep-alive
Content-Type: multipart/form-data; boundary=-----50442952
Content-Length: 345

-----50442952
Content-Disposition: form-data; name="action"

loadMorePosts$$
-----50442952
Content-Disposition: form-data; name="not_show"

xxxx$$
-----50442952
Content-Disposition: form-data; name="posts_page"

6$$
-----50442952
Content-Disposition: form-data; name="search_argument"

xxxxxxx$$
-----50442952--
```

SQL Injection

Quick check for SQL Error

Id=1' Id=1" Id=1''' Id=1"" symbol

Wordlist for intruder checking

<https://github.com/orwagodfather/SQL-Wordlist>

In SQL wordlist replace

xxx.burpcollaborator.net with your burp/server

SQL Injection

Add * in the request to when you try inject that location via sqlmap

Ex

```
POST /wp-admin*/admin-ajax.php HTTP/1.1
Referer: https://orwa.com/
Cookie: wp-wpml_current_language=en; cmplz_consenteds_services=; cmplz_policy_id=14
Accept-Encoding: gzip,deflate,br
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko)
Chrome/117.0.0.0 Safari/537.36
Host: orwa.com
Connection: Keep-alive
Content-Type: application/x-www-form-urlencoded
Content-Length: 70

action=loadMorePosts&not_show=xxxx&posts_page=6&search_argument=xxxxx
```

Don't forget clear */* from Accept

Bug Bounty Tips & Resources

1) all the time on all requests check
PUT & DELETE Methods

With **PUT** Method You can create files on server
such as (stored XSS Files , Shell to RCE)

With **DELETE** Method you can delete any file on
directory and that led sometimes to take down
the full app

Bug Bounty Tips & Resources

2) All the time try to add for your request
X-Forwarded-For Header & **Referer** Header
And try inject that with (**SQL injection** payload or
Blind XSS payload

3) Use this extension to create a wordlist from
burp site map

<https://github.com/ldcvanderpoel/Burp-Wordlist-Generator>

Bug Bounty Tips & Resources

Ffuf

Normal and best command

ffuf -w /wordlist -u app/FUZZ

Matcher: Response status: 200-299,301,302,307,401,403,405,500

□

[Status: 403, Size: 312, Words: 17, Lines: 7, Duration: 86ms]

Don't use -mc xxx or -fc xxx

Remove the duplicates by other -f filters

EX...

Size use -fs 312 / Words use -fw 17 / Liens use -fl 7

Bug Bounty Tips & Resources

Amazing Books I read when i start bug bounty
And still read it till today

<https://drive.google.com/file/d/1ZPK5ln4lULal0nwSdQTWA3ccUttayAj1/view?usp=sharing>

<https://drive.google.com/file/d/1UVJJpfYZ4X8vKEKM3QpCdFe2bcskYbta/view?usp=sharing>

<https://drive.google.com/file/d/1Oh8AxcHir8AC4Ueflvgc5LI5IDjRfnXV/view?usp=sharing>

<https://drive.google.com/file/d/1xwoG5N8UmWUdcMBfqeZ2HZsA3dz1la5w/view?usp=sharing>

Orwa Resources

BsidesAhmedabad Talk slides

https://docs.google.com/presentation/d/1AA0gX2-SI_9ErTkBhtW0b-5BH70-1B1X/edit#slide=id.p1

The Power Of Shodan

https://youtu.be/WgMGLlpznao?si=MNHlABqzEvb_gt4o

IWCON Talk about Recon skills

<https://youtu.be/z1rOMrCOGA0?si=mKVIWviplZBzzR9>

How to write excellent reports, techniques

<https://www.bugcrowd.com/resources/levelup/how-to-write-excellent-reports-techniques-that-save-triagers-time-and-mistakes-that-should-be-avoided-in-reports/>

Medium Writes

<https://orwaatyat.medium.com>

End Of Topic

THANK YOU

**THANK YOU VERY
MUCH**