


E:/github/ffmpeg/compat
/atomics/win32/stdatomic.h

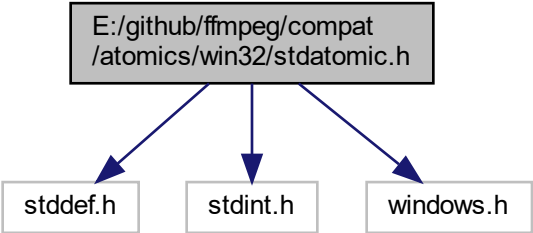

```
graph TD; A["E:/github/ffmpeg/compat<br/>/atomics/win32/stdatomic.h"] --> B["stddef.h"]; A --> C["stdint.h"]; A --> D["windows.h"];
```

The diagram illustrates the preprocessor directives at the top of the file `stdatomic.h`. A central box represents the source file, with three arrows pointing downwards to three separate boxes, each representing an included header file: `stddef.h`, `stdint.h`, and `windows.h`.

`stddef.h`

`stdint.h`

`windows.h`