Ex. No. 7	WORKING WITH JQUERY
Date of Exercise	11.09.2026
GitHub Host Link	https://jinto-joseph.github.io/WEB_TECH_LAB/11_09_2k26_Exp_7/index.html

Aim

To create a website using JQuery actions.

Description

jQuery is a fast, small, and feature-rich JavaScript library. It makes things like HTML document traversal and manipulation, event handling, animation, and Ajax much simpler with an easy-to-use API that works across a multitude of browsers. With a combination of versatility and extensibility, jQuery has changed the way that millions of people write JavaScript.

The basic syntax of jQuery is as follows:

```
$(document).ready(function(){
$(&amp;quot;p&amp;quot;).click(function(){
$(this).hide();
});
});
```

Sample JQuery Code

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
<script
    src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js">
```


```
</script>

<script>
        $(document).ready(function(){
                $('#btn').click(function(){
                        let num1 = parseInt($('#t1').val());
                        let num2 = parseInt($('#t2').val())
                        let sum = num1 + num2;
                        $('#result').val(sum);
                        $('#box').html("Result: " + sum);
                })
        })
</script>
</head>
<body>
        Number1: <input type="text" id="t1"><br><br>
        Number2: <input type="text" id="t2"><br><br>
        <button id="btn">Addition</button><br><br>
        Result: <input type="text" id="result" readonly><br><br>
        <div id="box" style="background-color:blue;color:white;width:300px;">
        </div>
</body>
</html>
```

Sample questions

1) Create a web application to develop the following Budget Calculator using HTML, CSS, and JQuery as given below. Here, the room rent, accessories, emergency and saving get as percentage (%), then divide the given amount based on the percentage and display each value in the place provided when the "Evaluate My Money" button. If the amount is not able to divide by the given percentage values, then show an alert message.

Program

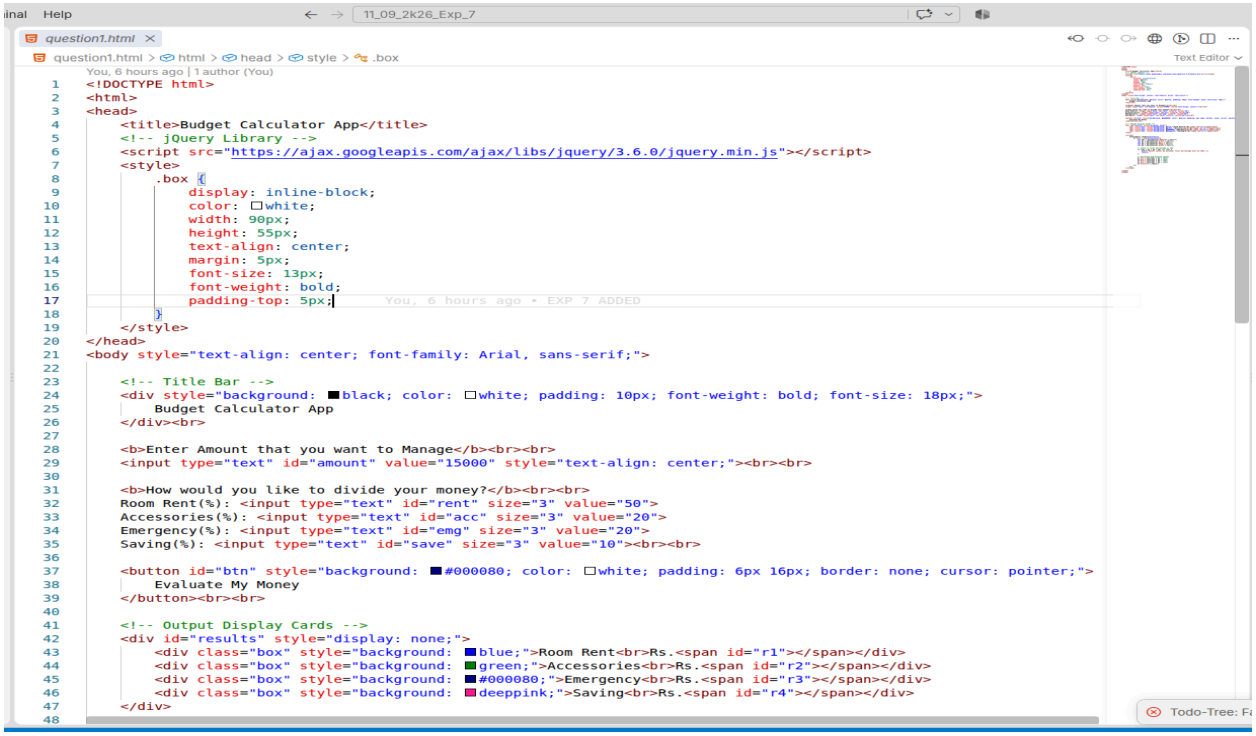

```
<!DOCTYPE html>
<html>
<head>
    <title>Budget Calculator App</title>
    <!-- jQuery Library -->
    <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script>
    <style>
        .box {
            display: inline-block;
            color: white;
            width: 90px;
            height: 55px;
            text-align: center;
            margin: 5px;
            font-size: 13px;
            font-weight: bold;
            padding-top: 5px;
        }
    </style>
</head>
<body style="text-align: center; font-family: Arial, sans-serif;">

    <!-- Title Bar -->
    <div style="background: black; color: white; padding: 10px; font-weight: bold; font-size: 18px;">
        Budget Calculator App
    </div><br>

    <b>Enter Amount that you want to Manage</b><br><br>
    <input type="text" id="amount" value="15000" style="text-align: center;"><br><br>

    <b>How would you like to divide your money?</b><br><br>
    Room Rent(%): <input type="text" id="rent" size="3" value="50">
    Accessories(%): <input type="text" id="acc" size="3" value="20">
    Emergency(%): <input type="text" id="emg" size="3" value="20">
    Saving(%): <input type="text" id="save" size="3" value="10"><br><br>

    <button id="btn" style="background: #000080; color: white; padding: 6px 16px; border: none; cursor: pointer;">
        Evaluate My Money
    </button><br><br>

    <!-- Output Display Cards -->
    <div id="results" style="display: none;">
        <div class="box" style="background: blue;">Room Rent<br>Rs.<span id="r1"></span></div>
        <div class="box" style="background: green;">Accessories<br>Rs.<span id="r2"></span></div>
        <div class="box" style="background: #000080;">Emergency<br>Rs.<span id="r3"></span></div>
        <div class="box" style="background: deeppink;">Saving<br>Rs.<span id="r4"></span></div>
    </div>
```



```
    </div>


    <script>
        $(document).ready(function(){
            $('#btn').click(function(){
                let amt = parseInt($('#amount').val());
                let p1 = parseInt($('#rent').val());
                let p2 = parseInt($('#acc').val());
                let p3 = parseInt($('#emg').val());
                let p4 = parseInt($('#save').val());

                // Check if total percentage is 100
                if ((p1 + p2 + p3 + p4) !== 100) {
                    alert("Amount cannot be divided! Total percentage must be 100%.");
                    return;
                }

                // Calculate and display values
                $('#r1').text(amt * p1 / 100);
                $('#r2').text(amt * p2 / 100);
                $('#r3').text(amt * p3 / 100);
                $('#r4').text(amt * p4 / 100);
                $('#results').show();
            });
        });
    </script>


</body>
</html>
```

Output

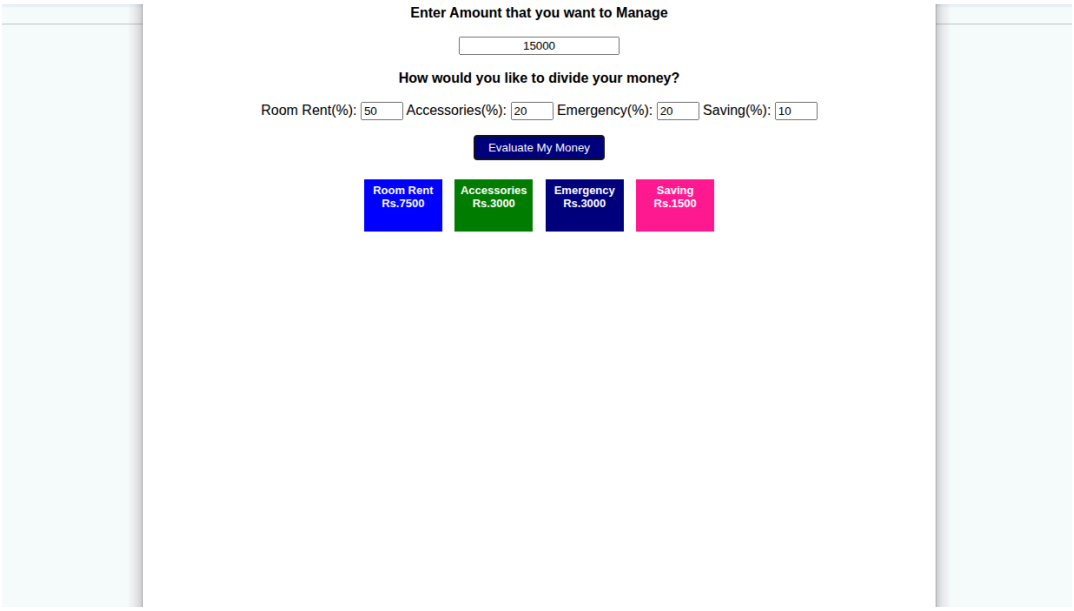

2) Design a webpage using HTML, CSS and JQuery as per the following design and perform the Cake order calculation using JQuery actions.

Program

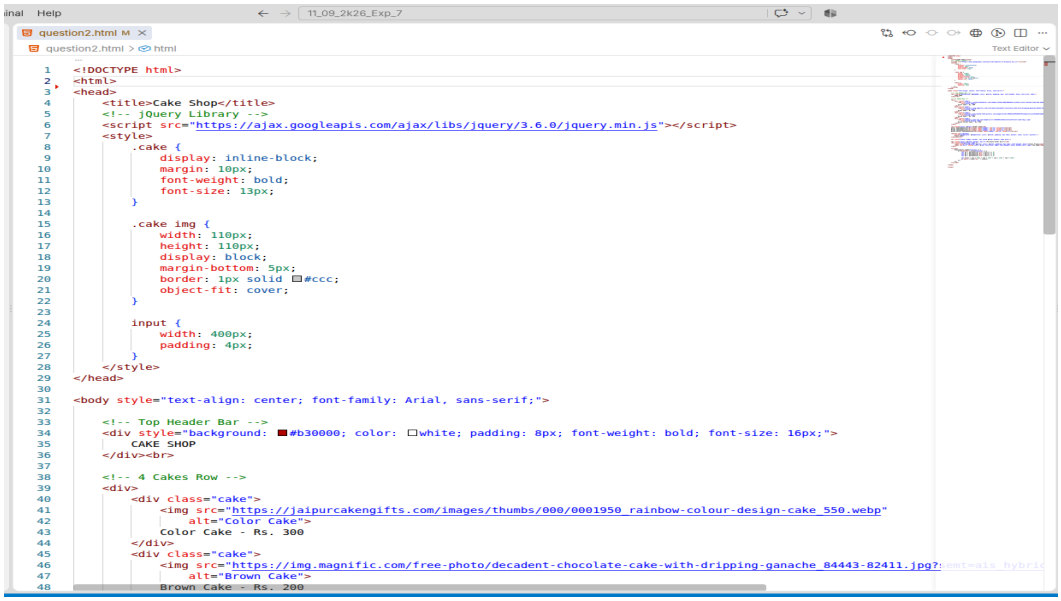

```
<!DOCTYPE html>
<html>
<head>
    <title>Cake Shop</title>
    <!-- jQuery Library -->
    <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script>
    <style>
        .cake {
            display: inline-block;
            margin: 10px;
            font-weight: bold;
            font-size: 13px;
        }


        .cake img {
            width: 110px;
            height: 110px;
            display: block;
            margin-bottom: 5px;
            border: 1px solid #ccc;
            object-fit: cover;
        }

        input {
            width: 400px;
            padding: 4px;
        }
    </style>
</head>

<body style="text-align: center; font-family: Arial, sans-serif;">

    <!-- Top Header Bar -->
    <div style="background: #b30000; color: white; padding: 8px; font-weight: bold; font-size: 16px;">
        CAKE SHOP
    </div><br>

    <!-- 4 Cakes Row -->
    <div>
        <div class="cake">
            <img src="https://jaipurcakengifts.com/images/thumbs/000/0001950_rainbow-colour-design-cake_550.webp"
                alt="Color Cake">
            Color Cake - Rs. 300
        </div>
        <div class="cake">
            <img src="https://img.magnific.com/free-photo/decadent-chocolate-cake-with-dripping-ganache_84443-82411.jpg?
                alt="Brown Cake">
            Brown Cake - Rs. 200
```

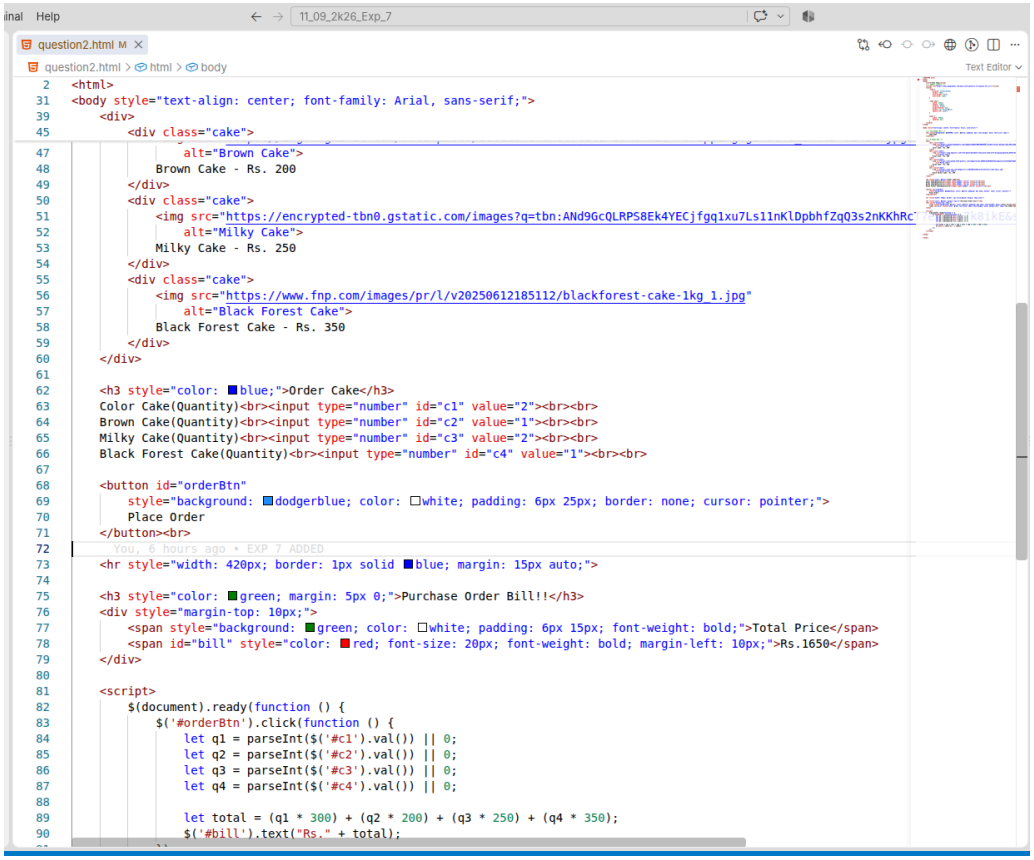

```
<html>
<body style="text-align: center; font-family: Arial, sans-serif;">
    <div>
        <div class="cake">
            alt="Brown Cake">
            Brown Cake - Rs. 200
        </div>
        <div class="cake">
            <img src="https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcQLRPS8Ek4YECjfgq1xu7Ls11nKlDpbhfZqQ3s2nKKhRc
                alt="Milky Cake">
            Milky Cake - Rs. 250
        </div>
        <div class="cake">
            <img src="https://www.fnp.com/images/pr/l/v20250612185112/blackforest-cake-1kg_1.jpg"
                alt="Black Forest Cake">
            Black Forest Cake - Rs. 350
        </div>
    </div>


    <h3 style="color: blue;">Order Cake</h3>
    Color Cake(Quantity)<br><input type="number" id="c1" value="2"><br><br>
    Brown Cake(Quantity)<br><input type="number" id="c2" value="1"><br><br>
    Milky Cake(Quantity)<br><input type="number" id="c3" value="2"><br><br>
    Black Forest Cake(Quantity)<br><input type="number" id="c4" value="1"><br><br>

    <button id="orderBtn"
        style="background: dodgerblue; color: white; padding: 6px 25px; border: none; cursor: pointer;">
        Place Order
    </button><br>
    You, 6 hours ago • EXP 7 ADDED
    <hr style="width: 420px; border: 1px solid blue; margin: 15px auto;">

    <h3 style="color: green; margin: 5px 0;">Purchase Order Bill!!</h3>
    <div style="margin-top: 10px;">
        <span style="background: green; color: white; padding: 6px 15px; font-weight: bold;">Total Price</span>
        <span id="bill" style="color: red; font-size: 20px; font-weight: bold; margin-left: 10px;">Rs.1650</span>
    </div>

    <script>
        $(document).ready(function () {
            $('#orderBtn').click(function () {
                let q1 = parseInt($('#c1').val()) || 0;
                let q2 = parseInt($('#c2').val()) || 0;
                let q3 = parseInt($('#c3').val()) || 0;
                let q4 = parseInt($('#c4').val()) || 0;

                let total = (q1 * 300) + (q2 * 200) + (q3 * 250) + (q4 * 350);
                $('#bill').text("Rs." + total);
```

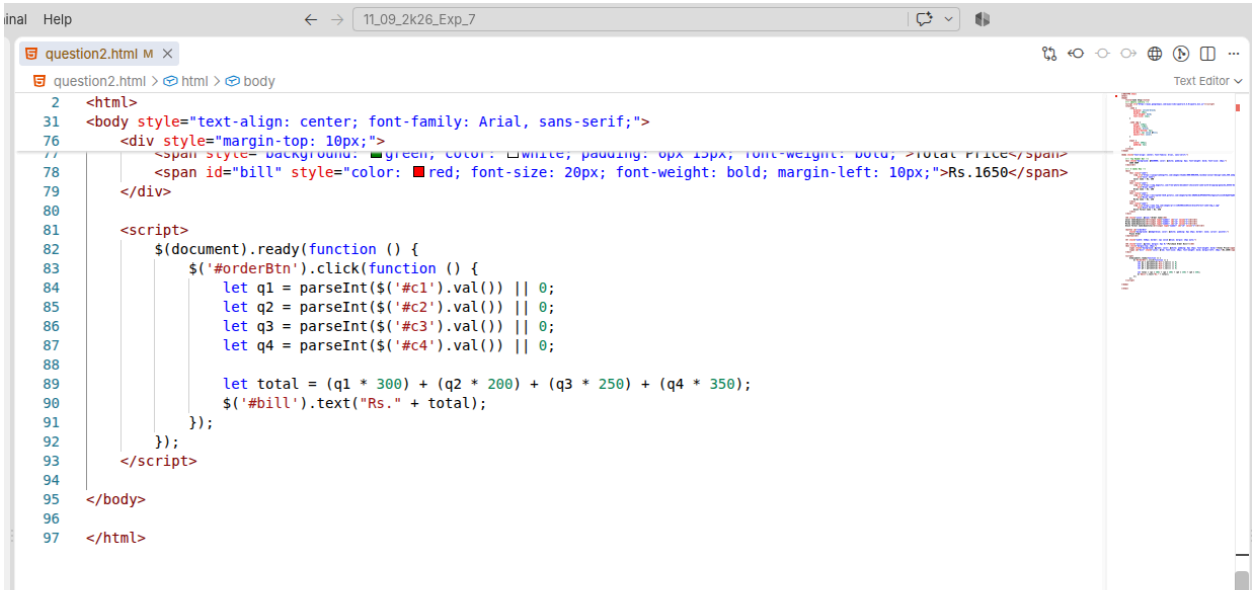

```
<html>
<body style="text-align: center; font-family: Arial, sans-serif;">
    <div style="margin-top: 10px;">
        <span id="bill" style="color: red; font-size: 20px; font-weight: bold; margin-left: 10px;">Rs.1650</span>
    </div>


    <script>
        $(document).ready(function () {
            $('#orderBtn').click(function () {
                let q1 = parseInt($('#c1').val()) || 0;
                let q2 = parseInt($('#c2').val()) || 0;
                let q3 = parseInt($('#c3').val()) || 0;
                let q4 = parseInt($('#c4').val()) || 0;

                let total = (q1 * 300) + (q2 * 200) + (q3 * 250) + (q4 * 350);
                $('#bill').text("Rs." + total);
            });
        });
    </script>

</body>


</html>
```

Output

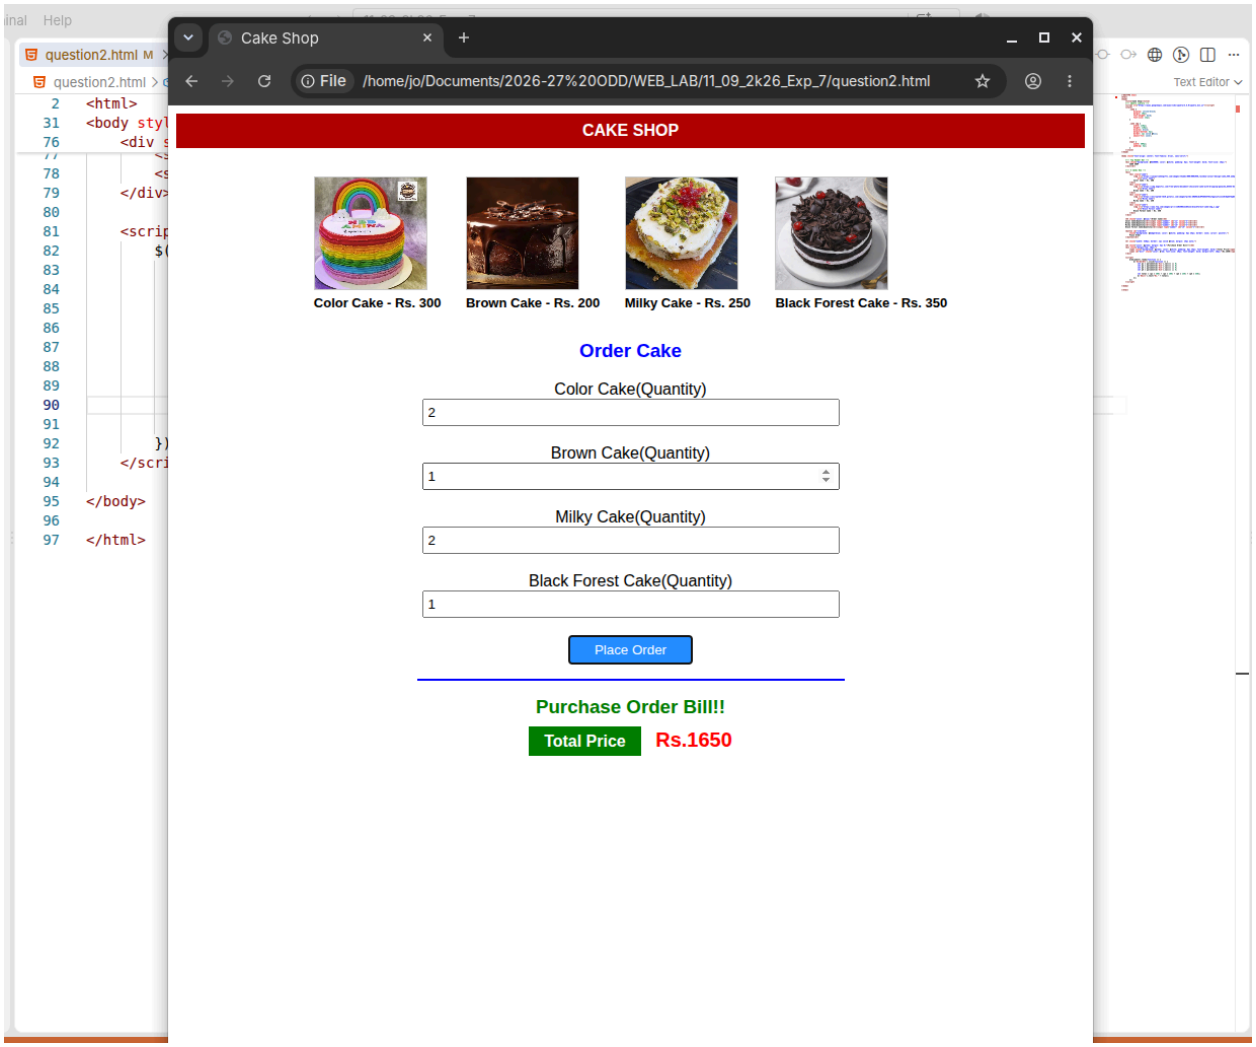

3) Create a car body workshop using JQuery where in you should be able to change the color of the car, glass tint, size of the tyres.


Program

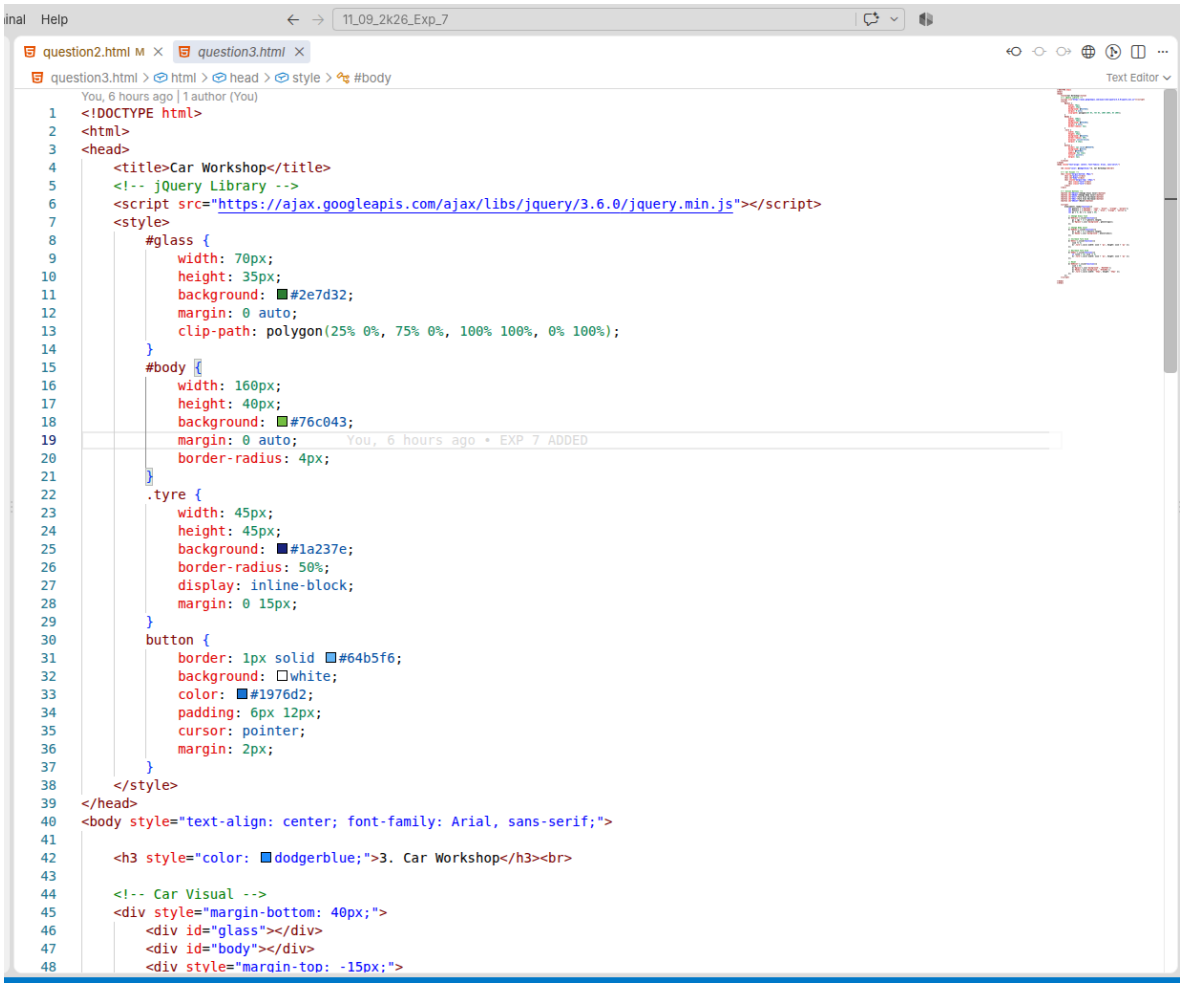

```
<!DOCTYPE html>
<html>
<head>
    <title>Car Workshop</title>
    <!-- jQuery Library -->
    <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script>
    <style>
        #glass {
            width: 70px;
            height: 35px;
            background: #2e7d32;
            margin: 0 auto;
            clip-path: polygon(25% 0%, 75% 0%, 100% 100%, 0% 100%);
        }
        #body {
            width: 160px;
            height: 40px;
            background: #76c043;
            margin: 0 auto;
            border-radius: 4px;
        }
        .tyre {
            width: 45px;
            height: 45px;
            background: #1a237e;
            border-radius: 50%;
            display: inline-block;
            margin: 0 15px;
        }
        button {
            border: 1px solid #64b5f6;
            background: white;
            color: #1976d2;
            padding: 6px 12px;
            cursor: pointer;
            margin: 2px;
        }
    </style>
</head>
<body style="text-align: center; font-family: Arial, sans-serif;">

    <h3 style="color: dodgerblue;">3. Car Workshop</h3><br>

    <!-- Car Visual -->
    <div style="margin-bottom: 40px;">
        <div id="glass"></div>
        <div id="body"></div>
        <div style="margin-top: -15px;">
```

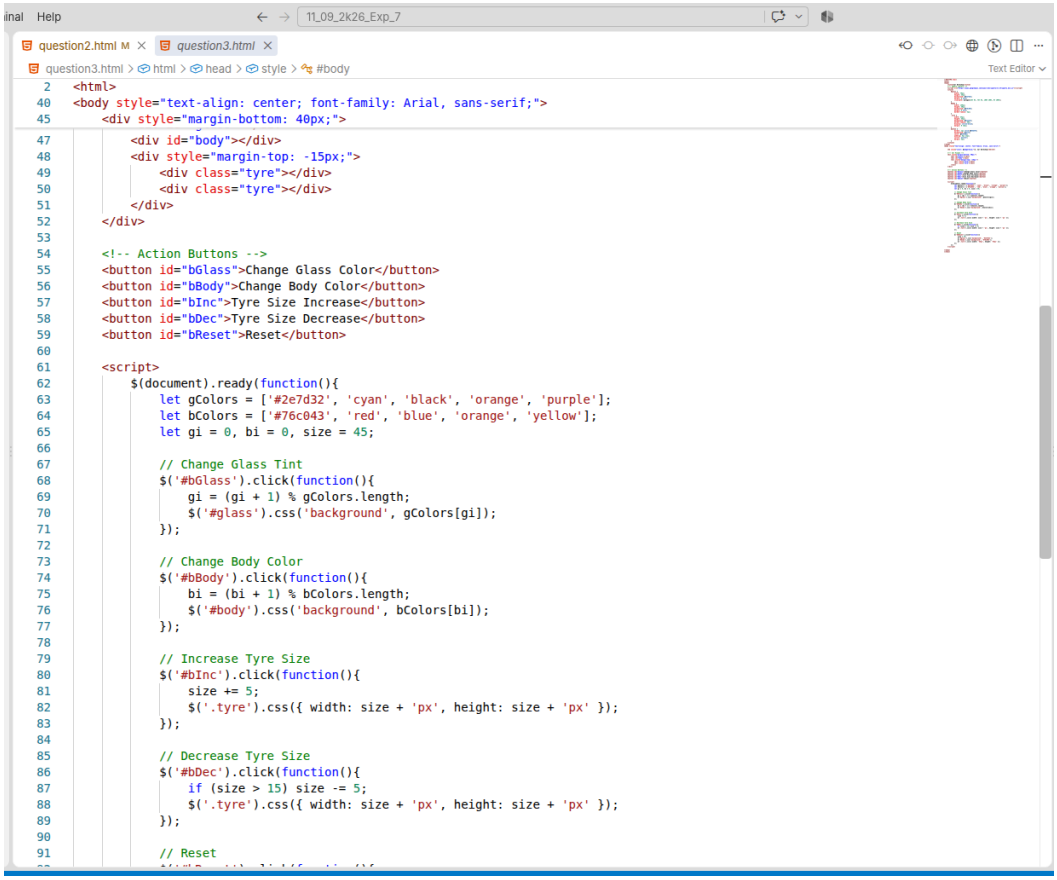

```
<html>
<body style="text-align: center; font-family: Arial, sans-serif;">
    <div style="margin-bottom: 40px;">
        <div id="body"></div>
        <div style="margin-top: -15px;">
            <div class="tyre"></div>
            <div class="tyre"></div>
        </div>
    </div>

    <!-- Action Buttons -->
    <button id="bGlass">Change Glass Color</button>
    <button id="bBody">Change Body Color</button>
    <button id="bInc">Tyre Size Increase</button>
    <button id="bDec">Tyre Size Decrease</button>
    <button id="bReset">Reset</button>

    <script>
        $(document).ready(function(){
            let gColors = ['#2e7d32', 'cyan', 'black', 'orange', 'purple'];
            let bColors = ['#76c043', 'red', 'blue', 'orange', 'yellow'];
            let gi = 0, bi = 0, size = 45;

            // Change Glass Tint
            $('#bGlass').click(function(){
                gi = (gi + 1) % gColors.length;
                $('#glass').css('background', gColors[gi]);
            });

            // Change Body Color
            $('#bBody').click(function(){
                bi = (bi + 1) % bColors.length;
                $('#body').css('background', bColors[bi]);
            });

            // Increase Tyre Size
            $('#bInc').click(function(){
                size += 5;
                $('.tyre').css({ width: size + 'px', height: size + 'px' });
            });

            // Decrease Tyre Size
            $('#bDec').click(function(){
                if (size > 15) size -= 5;
                $('.tyre').css({ width: size + 'px', height: size + 'px' });
            });

            // Reset
```




```
<html>
<body style="text-align: center; font-family: Arial, sans-serif;">
    <script>
        $(document).ready(function(){
            $('#bInc').click(function(){
            });


            // Decrease Tyre Size
            $('#bDec').click(function(){
                if (size > 15) size -= 5;
                $('.tyre').css({ width: size + 'px', height: size + 'px' });
            });

            // Reset
            $('#bReset').click(function(){
                size = 45;
                $('#glass').css('background', '#2e7d32');
                $('#body').css('background', '#76c043');
                $('.tyre').css({ width: '45px', height: '45px' });
            });
        });
    </script>

</body>
</html>
```

Output

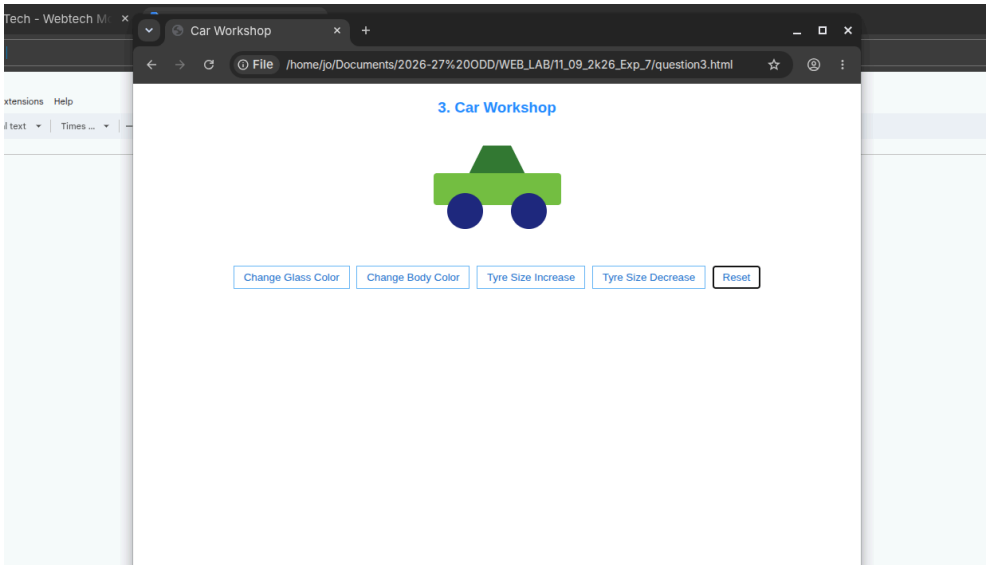

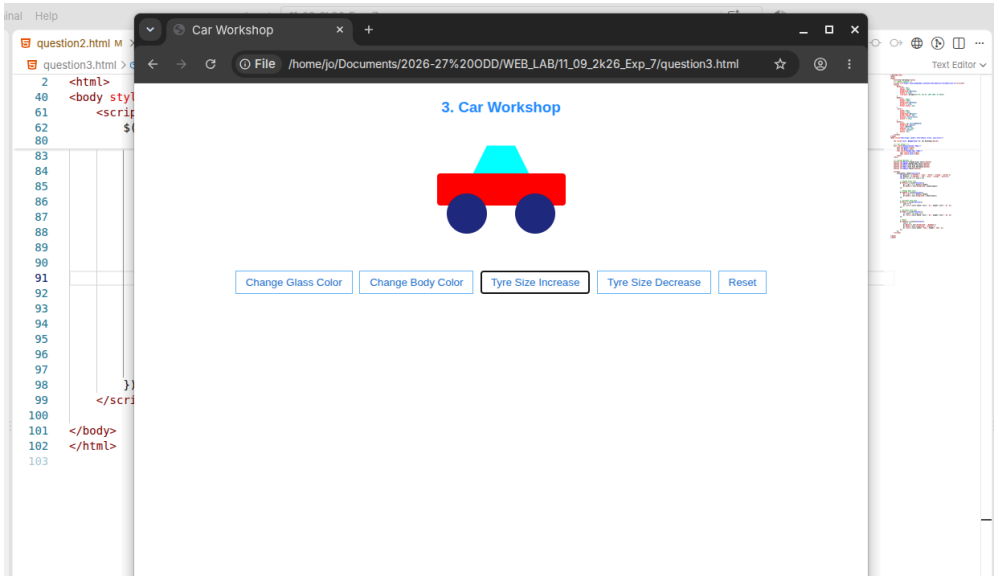

Result

Thus, all three jQuery programs were successfully implemented and executed, demonstrating various jQuery operations such as effects, calculations, DOM manipulation, employee management, and element traversing.