
1 Free the old array of y. `y.grades` still holds its address

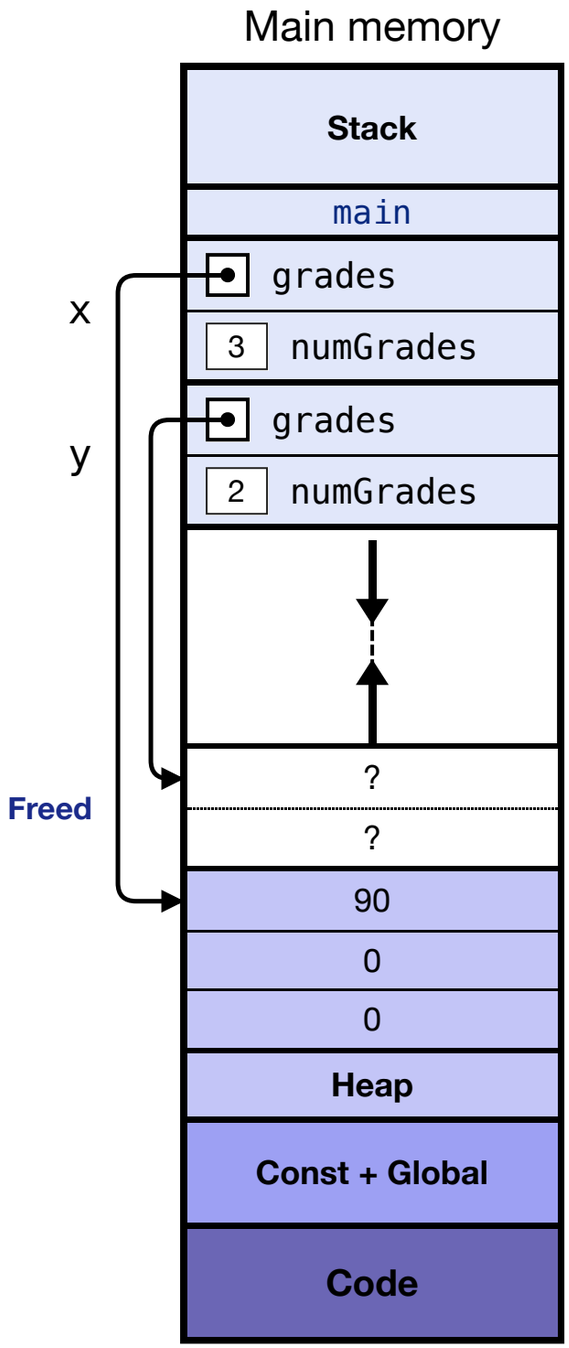


```
class Student {
  private:
    int* grades;
    int numGrades;
  public:
    Student(int n) {
      numGrades = n;
      grades = new int[numGrades];
      // ... set all grades to 0
    }
    Student& operator=(const Student& rhs) {
      if (this == &rhs) {
        return *this;
      }
      delete[] grades;
      numGrades = rhs.numGrades;
      grades = new int[numGrades];
      // ... copy each grade
      return *this;
    }
    ~Student() {
      delete[] grades;
    }
};

int main(void) {
  Student x(3);
  x.setGrade(0, 90);
  Student y(2);
  y = x;
  return 0;
}
```