


Bookly API Documentation

1. Contract Table

Item	Description
API Name	Get Products API
HTTP Method	GET
Route	/api/products
Purpose	Retrieve all products or filter products by category
Query Parameter	category (optional)
Request Example	/api/products?category=fiction
Success Status Code	200 OK
Error Status Code	500 Internal Server Error
Request Headers	Content-Type: application/json
Request Body	None
Response Format	JSON
Success Response Example	{ "success": true, "data": [...] }
Error Response Example	{ "success": false, "error": "Internal Server Error" }
Data Source	project.json
Validation Rule	Category query is converted to lowercase before comparison
Business Logic	If category exists → filter products by category, otherwise return all products

2. Sequence Diagram

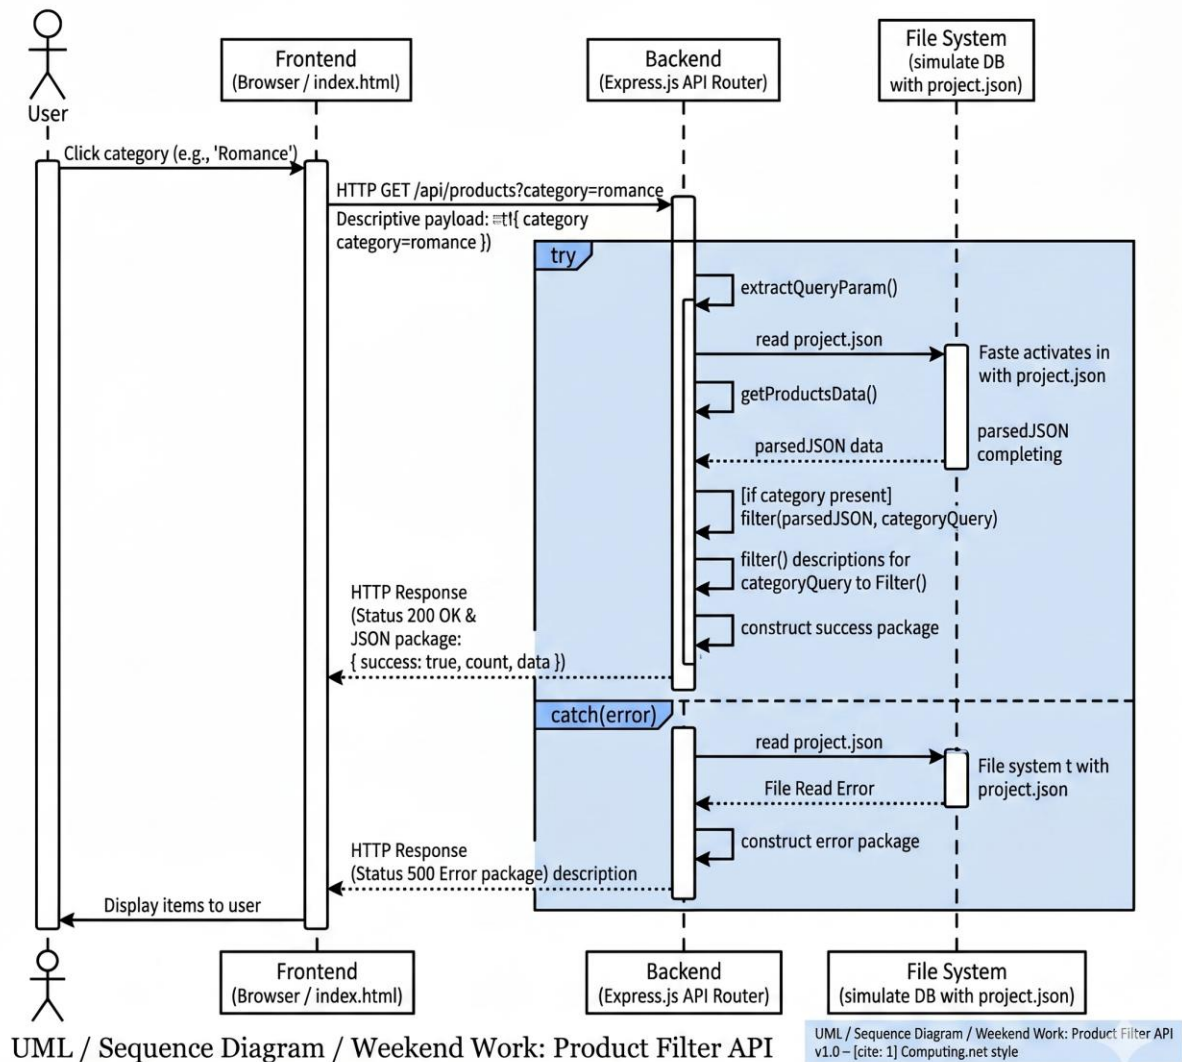

3. GenAI Prompt :

Create an Express.js API route for a product system.

Requirements:

1. Create a GET route at `/api/products`.
2. Accept an optional query parameter named `category`.
3. Read product data from `project.json` using `fs.promises.readFile`.

4. Parse the JSON data safely.

5. If the `category` query exists:

- Filter products by category.
- Comparison should be case-insensitive.

6. If no category is provided:

- Return all products.

7. Return a JSON response in this format:

```
{  
  success: true,  
  data: [...]  
}
```

8. Handle file or parsing errors with:

```
{  
  success: false,  
  error: "Internal Server Error"  
}
```

9. Use Express Router.

10. Use async/await.