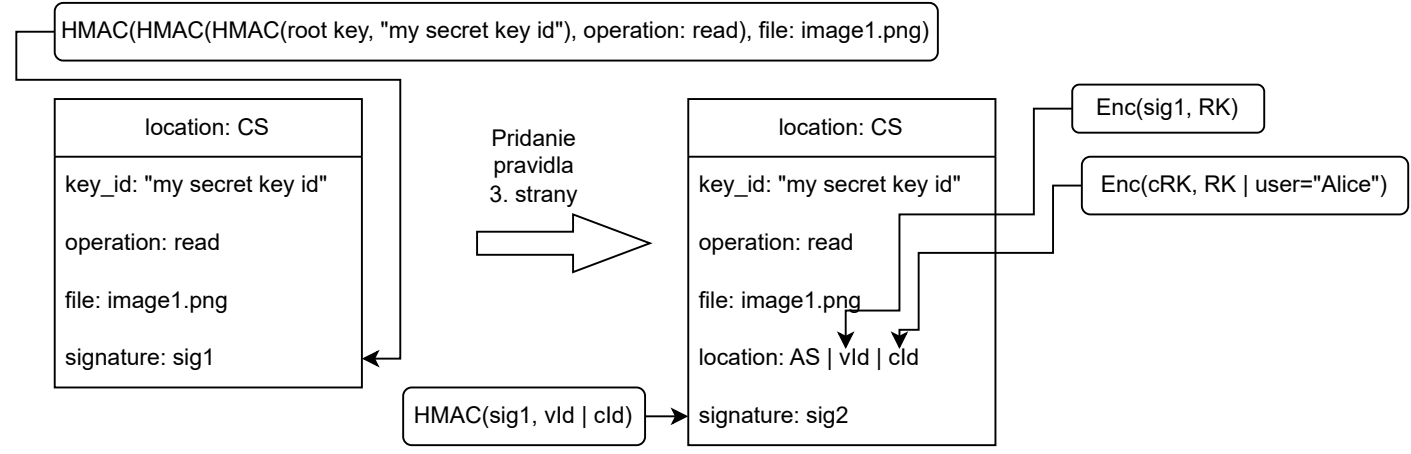
HMAC(HMAC(HMAC(root key, "my secret key id"), operation: read), file: image1.png)
location: CS
key_id: "my secret key id"
operation: read
file: image1.png
signature: sig1
Pridanie
pravidla
3. strany
location: CS
key_id: "my secret key id"
operation: read
file: image1.png
location: AS | vId | cId
signature: sig2
Enc(sig1, RK)
Enc(cRK, RK | user="Alice")
HMAC(sig1, vId | cId)