


Discriminator pipeline for importance-weight guidance in block diffusion

① Example construction

② BDDiscriminator $D(x | A_scn)$

③ Objective and the two uses

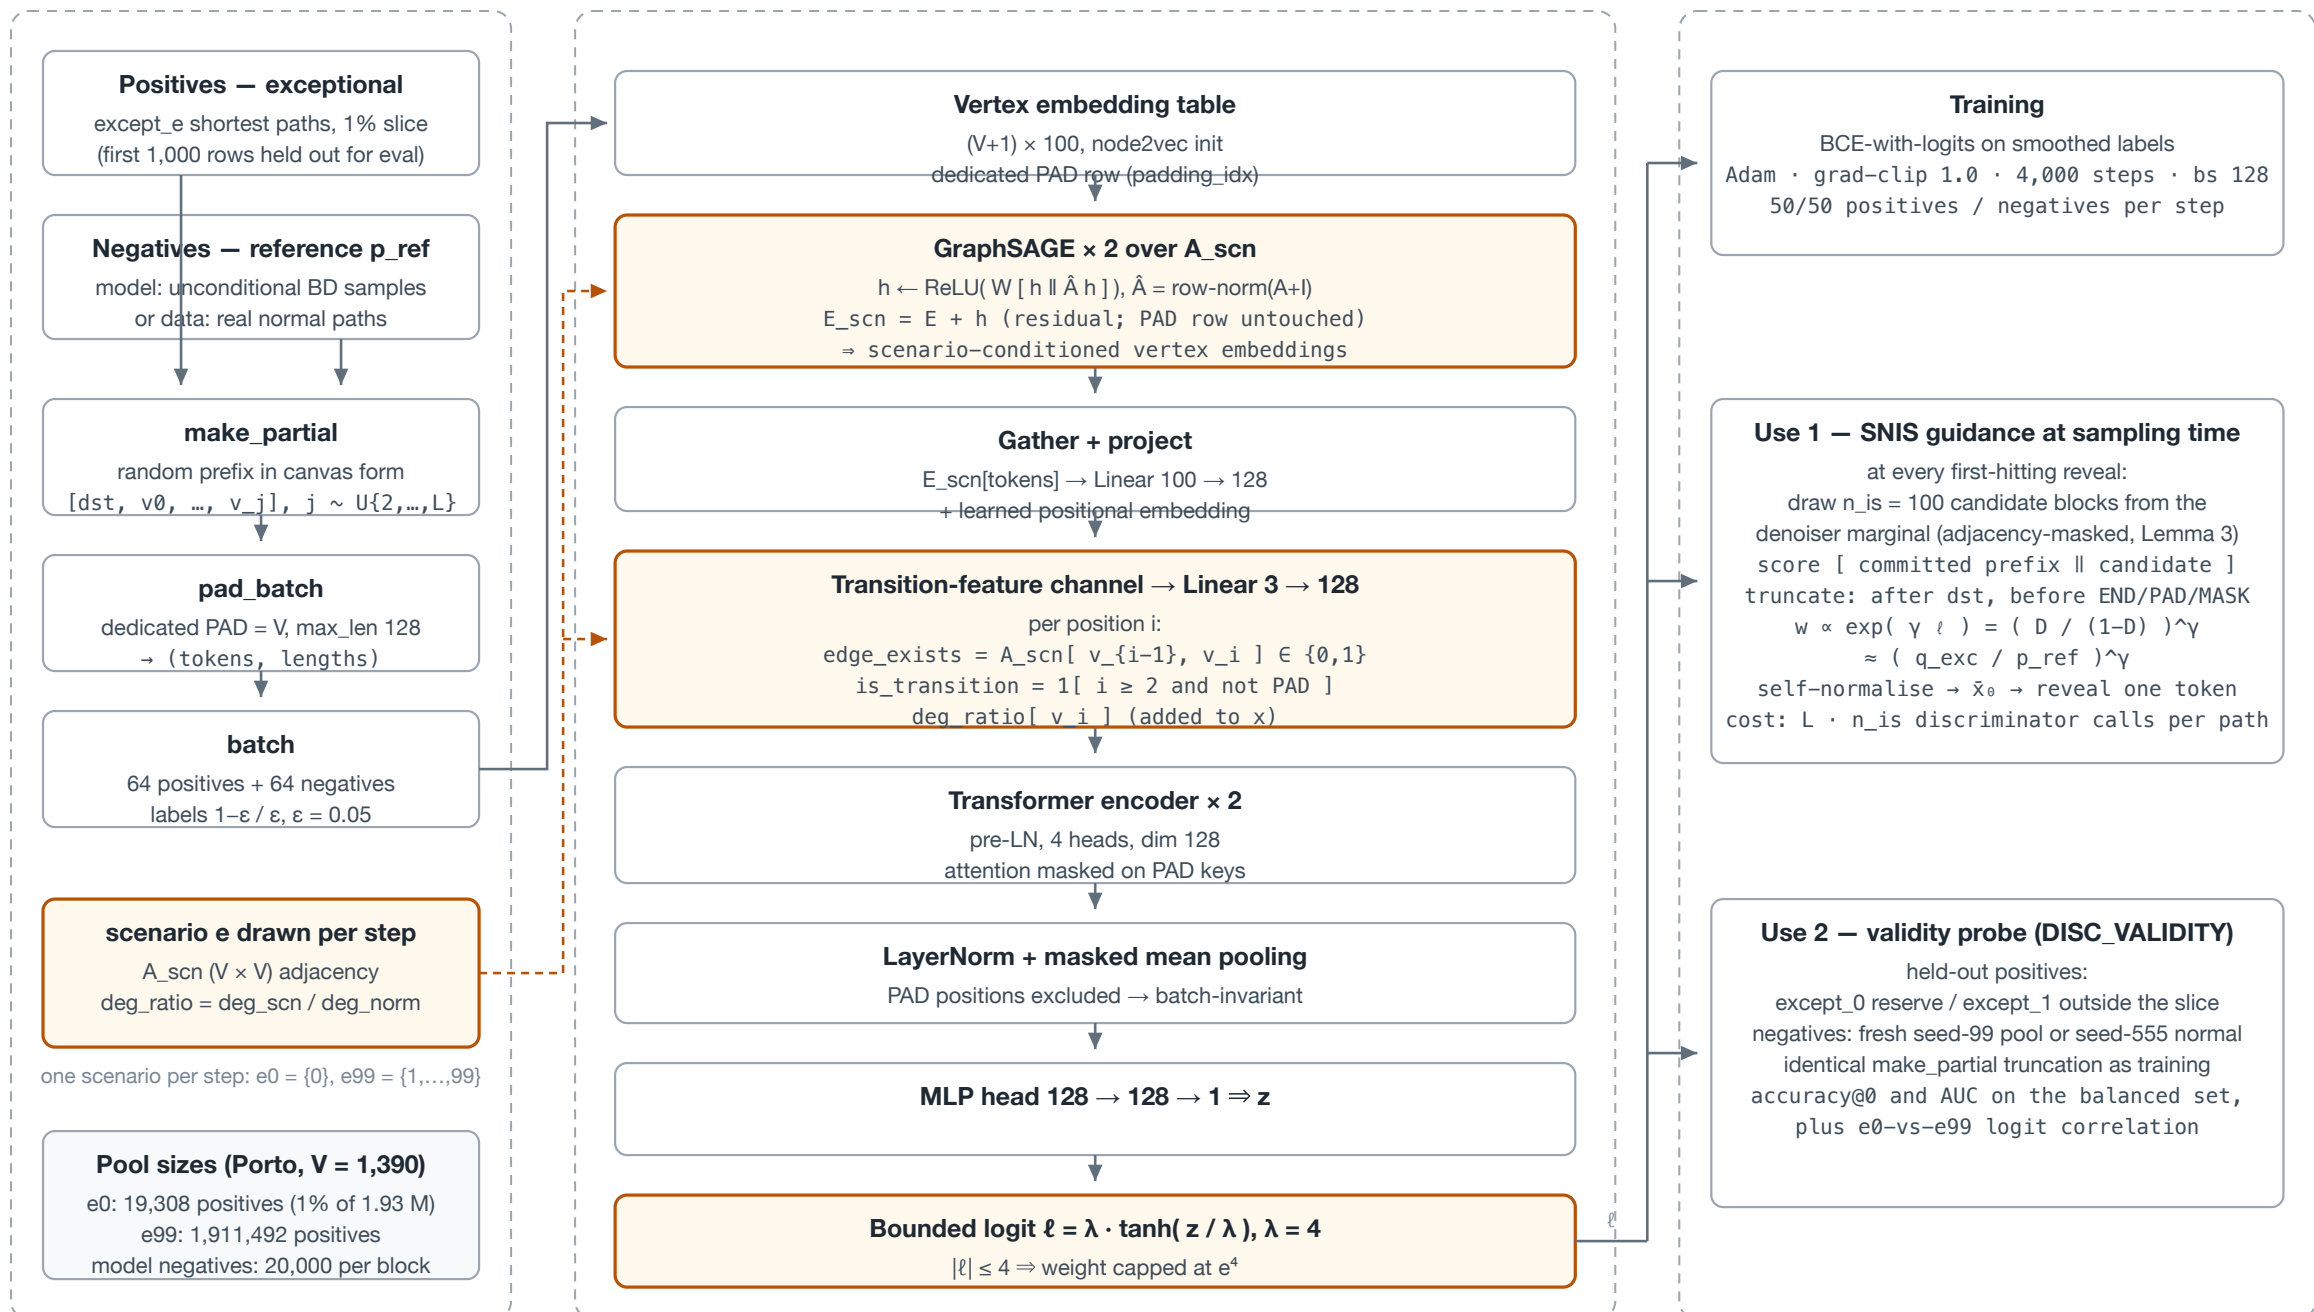

----- scenario input: A_scn, deg_ratio

models_seq/bd_disc.py · train_bd_disc.py · bd_models.py::denoise_block_mask_guided · disc_gen_eval.py

The scenario enters at exactly two places (amber): the GraphSAGE embedding and the edge-existence / degree-ratio channel. Both read the adjacency as an input rather than memorising it, which is why a discriminator trained on except 1–99 transfers zero-shot to the unseen except_0 scenario.