

JAVA WORKSPACE

```
package mongodb;
import com.mongodb.client.*;
import com.mongodb.client.model.Filters;
import com.mongodb.client.model.Updates;
import org.bson.Document;
public class MongoCRUExample {
    public static void main(String[] args) {
// Connect to MongoDB
        MongoClient mongoClient = MongoClient.create("mongodb://localhost:27017");
// Access database
        MongoDB database = mongoClient.getDatabase("CollegeDB");
// Access collection
        MongoCollection<Document> collection = database.getCollection("Students");

// =====
// CREATE (Insert)
// =====
        Document student = new Document("id", 101)
        .append("name", "John")
        .append("department", "CSE")
        .append("cgpa", 8.7);
        collection.insertOne(student);
        System.out.println("Document Inserted Successfully");

// =====
// READ (Find)
// =====
        System.out.println("\nStudent Records:");
        FindIterable<Document> students = collection.find();
        for (Document doc : students) {
            System.out.println(doc.toJson()); }
// =====
// UPDATE
// =====
        collection.updateOne(
            Filters.eq("id", 101),
            Updates.set("cgpa", 9.2) );
        System.out.println("\nDocument Updated Successfully");
```

```
// =====
// READ Updated Record
// =====
Document updatedStudent =
collection.find(Filters.eq("id", 101)).first();
System.out.println("\nUpdated Record:");
System.out.println(updatedStudent.toJson());

// =====
// DELETE
// =====
collection.deleteOne(Filters.eq("id", 101));
System.out.println("\nDocument Deleted Successfully");

// Close connection
mongoClient.close(); } }
```

```
workspace - Java - mongodb/src/mongodb/MongoCRUDExample.java - Eclipse
File Edit Source Refactor Navigate Search Project Run Window Help

Package Explorer
  jdbc
  mongo
  mongodb
    src
      MongoCRUDExample.java
  JRE System Library [JavaSE-1.8]
  Referenced Libraries
    mongo-java-driver-3.12.14.jar - C:\Users\jijaa\Downloads
  MYSQL_CRUD

MongoCRUDExample.java
20 .append("department", "CSE");
21 .append("cgpa", 8.7);
22 collection.insertOne(student);
23 System.out.println("Document Inserted Successfully");
24
25 // =====
26 // READ (Find)
27 // =====
28 System.out.println("\nStudent Records:");
29 FindIterable<Document> students = collection.find();
30 for (Document doc : students) {
31 System.out.println(doc.toJson()); }
32 // =====
33 // UPDATE
34 // =====
35 collection.updateOne(
36 Filters.eq("id", 101),
37 Updates.set("cgpa", 9.2));
38 System.out.println("\nDocument Updated Successfully");
39
40 // =====
41 // READ Updated Record
42 // =====
43 Document updatedStudent =
44 collection.find(Filters.eq("id", 101)).first();
45 System.out.println("\nUpdated Record:");
46 System.out.println(updatedStudent.toJson());
47
48 // =====
49 // DELETE
50 // =====
51 collection.deleteOne(Filters.eq("id", 101));
52 System.out.println("\nDocument Deleted Successfully");
53
54 // Close connection

Problems Javadoc Declaration Console
<terminated> MongoCRUDExample [Java Application] C:\Program Files\Java\jre1.8.0_221\bin\javaw.exe (03-Jun-2026, 6:36:32 PM)
Document Inserted Successfully

Student Records:
{"_id": {"$oid": "6a2026d81e395740678cbe43"}, "id": 101, "name": "John", "department": "CSE", "cgpa": 8.7}

Document Updated Successfully

Updated Record:
{"_id": {"$oid": "6a2026d81e395740678cbe43"}, "id": 101, "name": "John", "department": "CSE", "cgpa": 9.2}

Document Deleted Successfully
```

FOR MANY-

// insert

package mongodb;

import com.mongodb.client.*;

import org.bson.Document;

import java.util.Arrays;

import java.util.List;

public class MongoCRUExample {

public static void main(String[] args) {

MongoClient mongoClient =

MongoClients.create("mongodb://localhost:27017");

MongoDatabase database =

mongoClient.getDatabase("CollegeDB");

MongoCollection<Document> collection =

database.getCollection("Students");

List<Document> students = Arrays.asList(

new Document("id", 101)

.append("name", "John")

.append("department", "CSE")

.append("cgpa", 8.7),

new Document("id", 102)

.append("name", "Rahul")

.append("department", "CSE")

.append("cgpa", 8.2),

new Document("id", 103)

.append("name", "Amit")

.append("department", "ECE")

.append("cgpa", 7.9),

new Document("id", 104)

.append("name", "Priya")

.append("department", "IT")

.append("cgpa", 8.5),

```

        new Document("id", 105)
            .append("name", "Neha")
            .append("department", "CSE")
            .append("cgpa", 9.1),

        new Document("id", 106)
            .append("name", "Arjun")
            .append("department", "MECH")
            .append("cgpa", 7.5),

        new Document("id", 107)
            .append("name", "Karan")
            .append("department", "ECE")
            .append("cgpa", 8.0),

        new Document("id", 108)
            .append("name", "Riya")
            .append("department", "IT")
            .append("cgpa", 8.9),

        new Document("id", 109)
            .append("name", "Vikram")
            .append("department", "CSE")
            .append("cgpa", 7.8),


        new Document("id", 110)
            .append("name", "Sneha")
            .append("department", "CSE")
            .append("cgpa", 8.4)
    );

    collection.insertMany(students);

    System.out.println("10 Documents Inserted Successfully");

    mongoClient.close();
}
}

```

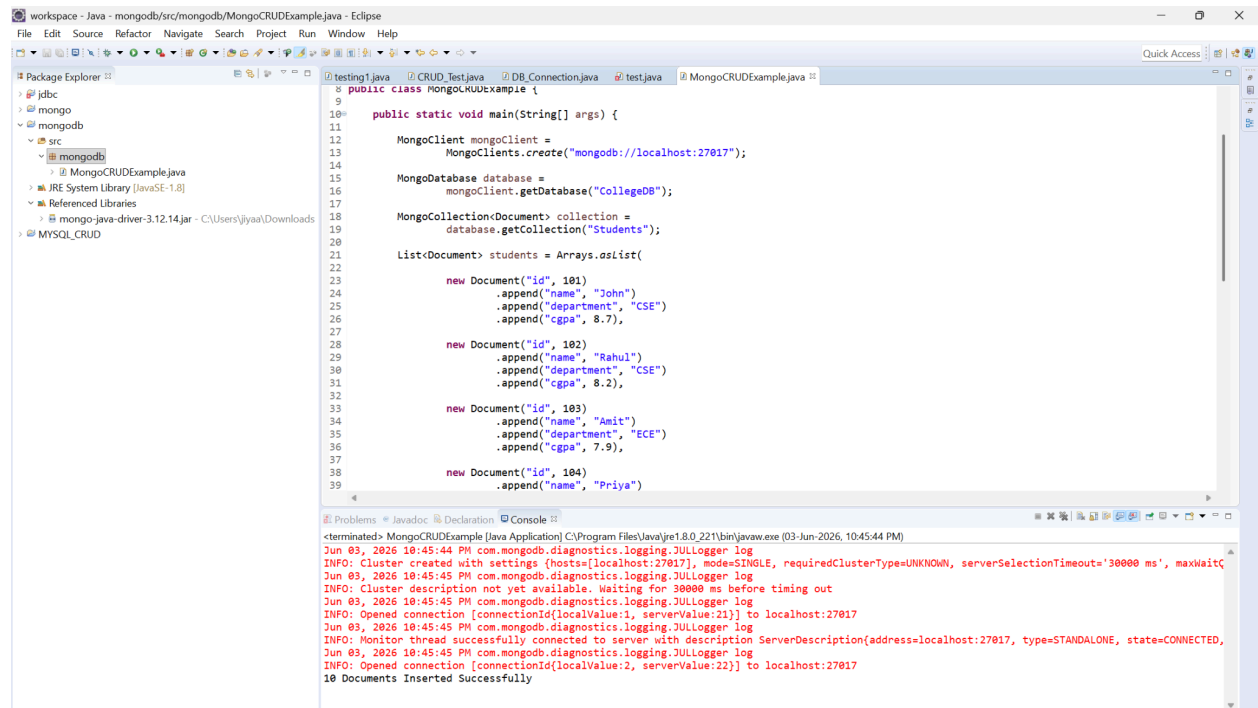

```
//update
```

```
import com.mongodb.client.*;
```

```
import com.mongodb.client.model.Filters;
```

```
import com.mongodb.client.model.Updates;
```

```
import org.bson.Document;
```

```
public class MongoCrudExample {
```

```
    public static void main(String[] args) {
```


```
        MongoClient mongoClient =
```

```
            MongoClient.create("mongodb://localhost:27017");
```

```
        MongoDB database =
```

```
            mongoClient.getDatabase("CollegeDB");
```

```
MongoCollection<Document> collection =  
    database.getCollection("Students");  
  
collection.updateMany(  
    Filters.eq("department", "CSE"),  
    Updates.set("department", "Computer Science")  
);  
  
System.out.println("Documents Updated Successfully");  
  
System.out.println("\nUpdated Records:");  
  
for (Document doc : collection.find()) {  
    System.out.println(doc.toJson());  
}  
  
mongoClient.close();  
}  
}
```

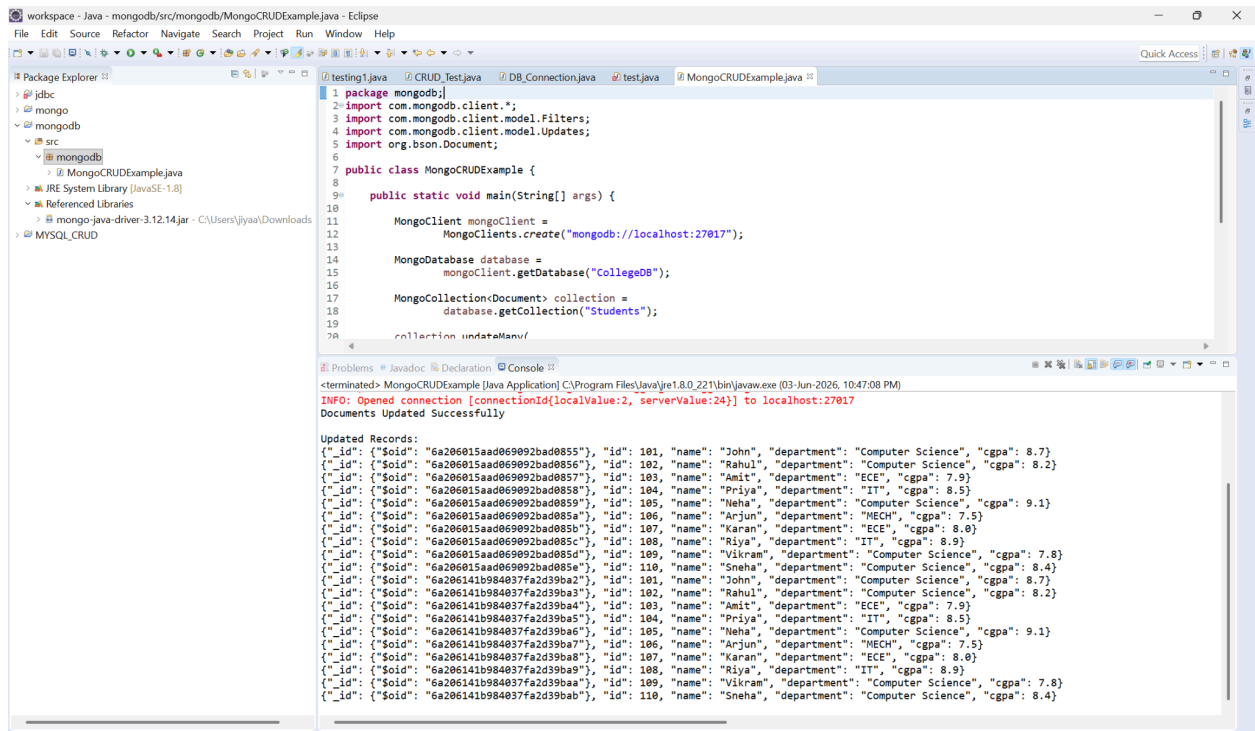

```
//delete
```

```
import com.mongodb.client.*;
```

```
import com.mongodb.client.model.Filters;
```

```
import org.bson.Document;
```

```
public class MongoCrudExample {
```

```
    public static void main(String[] args) {
```

```
        MongoClient mongoClient =
```

```
            MongoClient.create("mongodb://localhost:27017");
```

```
        MongoDB database =
```

```
            mongoClient.getDatabase("CollegeDB");
```

```
MongoCollection<Document> collection =  
    database.getCollection("Students");  
  
collection.deleteMany(  
    Filters.eq("department", "Computer Science")  
);  
  
System.out.println("Documents Deleted Successfully");  
  
System.out.println("\nRemaining Records:");  
  
for (Document doc : collection.find()) {  
    System.out.println(doc.toJson());  
}  
  
mongoClient.close();  
}  
}
```