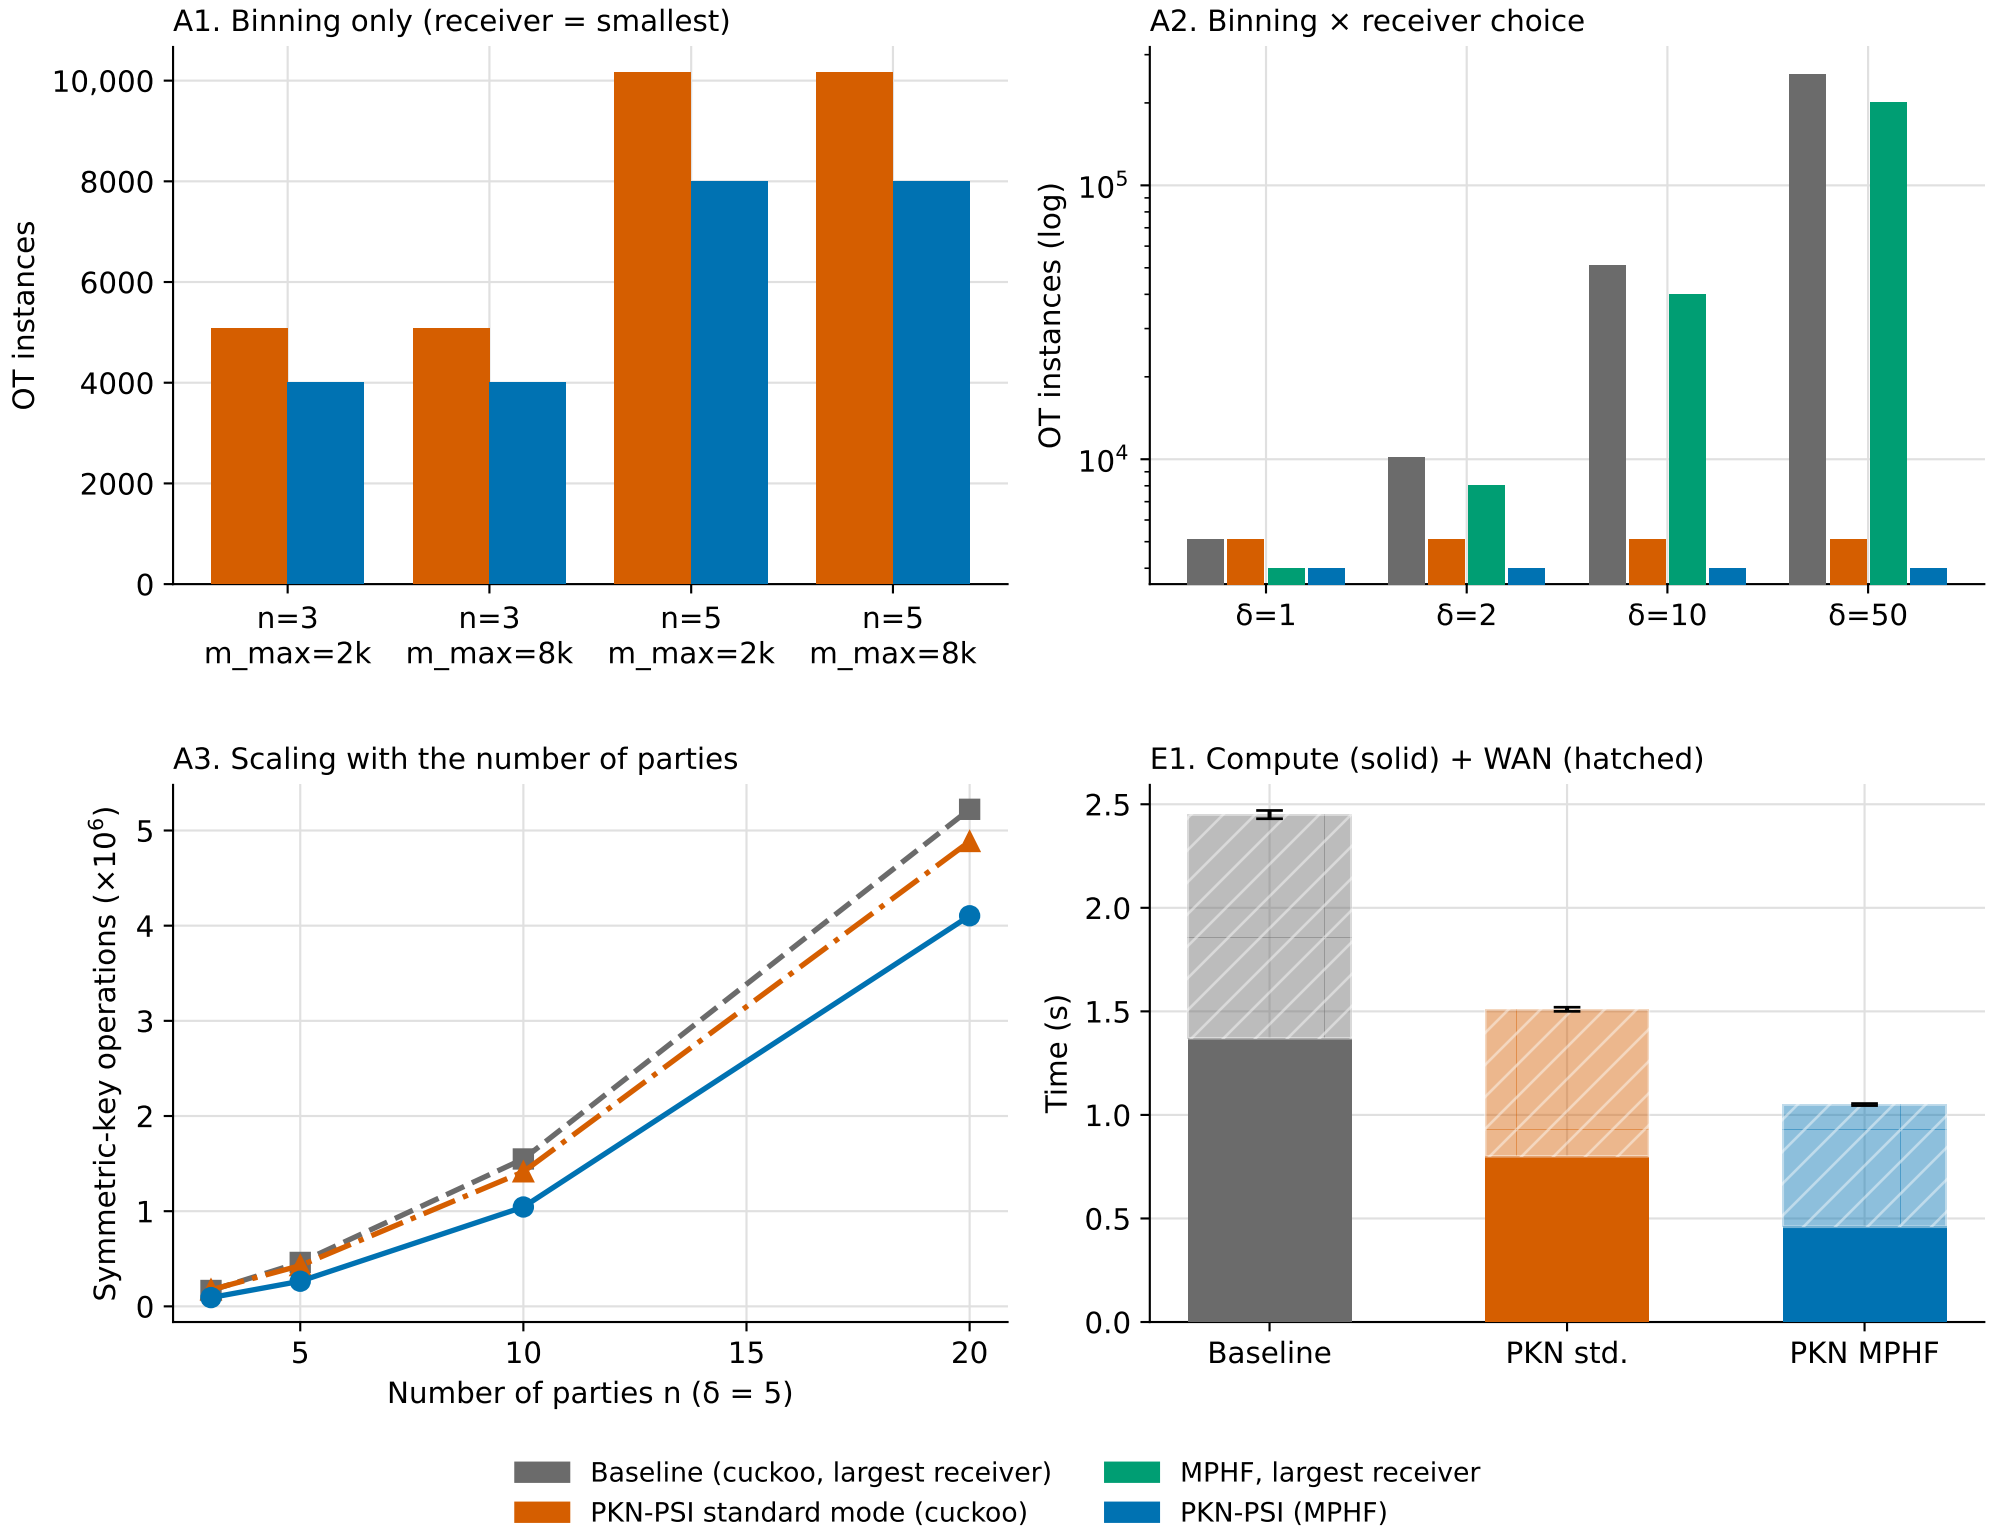
A1. Binning only (receiver = smallest)
OT instances
10,000
8000
6000
4000
2000
0
n=3 m_max=2k
n=3 m_max=8k
n=5 m_max=2k
n=5 m_max=8k
A2. Binning × receiver choice
OT instances (log)
10^5
10^4
δ=1
δ=2
δ=10
δ=50
A3. Scaling with the number of parties
Symmetric-key operations (×10^6)
0
1
2
3
4
5
5
10
15
20
Number of parties n (δ = 5)
E1. Compute (solid) + WAN (hatched)
Time (s)
0.0
0.5
1.0
1.5
2.0
2.5
Baseline
PKN std.
PKN MPHF
Baseline (cuckoo, largest receiver)
PKN-PSI standard mode (cuckoo)
MPHF, largest receiver
PKN-PSI (MPHF)