



MEM Sierra Employee Member Generative Agent Genesys Integration Design


Prepared by PTP

May 11, 2026

General Requirements

- Integrate to the employee member portal to allow chat with a Sierra Generative Agent (GA) BSC Employee
- Integrate Sierra into Genesys Cloud using the Genesys in-front methodology
- Use the Genesys Digital Bot Connector architecture to support the integration of Sierra Generative Agent
- Initiate Chat Interactions through the BSC web Portal
- Sierra Generative Agent will:
 - Initiate a Queued Call Back through Genesys
 - Offer Call Backs at specific points within Chat Conversations
 - Collect best call back Phone Number from Member
 - Provide a Conversation Summary for Call Backs
 - Tag interaction with Call Back tag
- Web Portal (BSC interface requirements) will:
 - Authenticate Members
 - Provide all active Plan Identifiers for members (Medical, Vision and or Dental)
 - Present all generated GA information to members and in correct format
 - Deliver each member's turn or question to GA for response
 - End chat at the conclusion of session or if member terminates chat to signify to GA the interaction is concluded

Overall Architecture

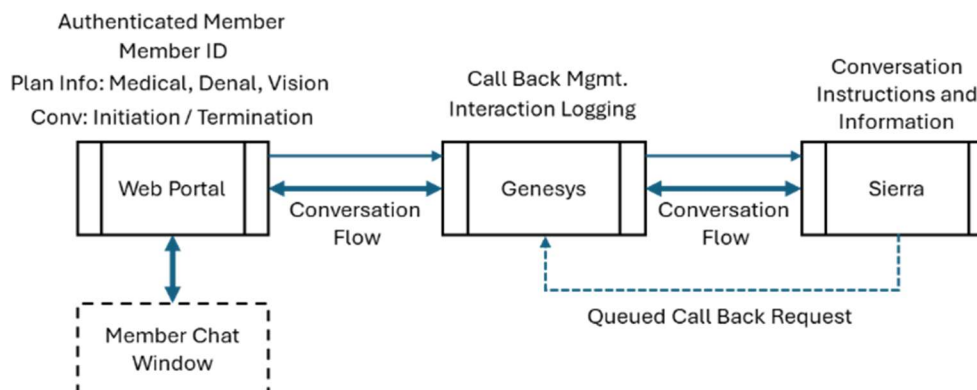

Web Portal Integration

The web portal will use a Genesys widget to deploy the end user chat (web messaging) interface for only Blue Shield Employees. The Genesys widget is deployed via a JavaScript snippet provided by Genesys for

integration. The details of that snippet will be made available to the portal developers at the appropriate time. The snippet contains security information in it that will not be shared in this document. The deployment id will be different from the existing Member, Broker, and Provider portal integrations.

Sample Integration JavaScript

Below is a sample of the JavaScript used for the integration of the portal to Genesys:

[illegible]

Data Collection from Web Portal

The Generative Agent will require the following data to be passed to Sierra:

- Subscriber id
- Name of the medical, vision, or dental plans that are active. This can be either the name or the product id, depending on what's available.

Genesys Widget Messenger Configuration

The Messenger widget is configured in Genesys Cloud based on the following parameters. Most of these parameters are matched to the existing Member, Broker, and Provider chat configuration.

Channel Setup

Configuration details	
Name	BSCWebMessagingSierraGA
Description	Sierra Benefits GA Interface
Channel types	Messaging, Co-browse
Appearance	
Color	#0071bc
Position	
Alignment :	Auto
Side spacing :	20px
Bottom spacing :	12px
User Interface	On
Homescreen	On
Launcher Button	Hide until triggered by business logic
Humanize Conversation	
Master toggle :	On
Bot Name :	Benefits
Clear Conversation	On
Conversation Disconnect	Display conversation status and disconnect session
Rich Text Formatting	On
Automatic Start	On
Attachments	On
Typing Indicators	
Agent typing :	On
User typing :	On
Authentication	Off
Notifications	Off
Guest session duration	3 days
Co-browse	
Allow agent control	Off
Allow agent navigation	Off
Allow drawings	On
Channels	Web Messaging
Language Support	Entries
Support Languages	English
Default Language	English

Genesys to Sierra Integration

The Genesys web messaging widget will be the “front-door” to the Sierra Generative Agent. The sections below describe the implementation of the Genesys Digital Bot Connector using aGenesys Cloud Architect Callflow for this integration.

Request a Callback

The Sierra transfer functionality will be used to offer the user a callback. The user will be prompted to accept a callback via a Yes / No block. If accepted, the user will be prompted for their telephone number. The callback will contain the following data:

Participant Data Key Name	Sample Values
The follow information will be returned from the GA to Genesys	
PhoneNumber	3415551212
summary	"Summary of GA conversation goes here"
sentiment	"positive"
intent	"benefits"
locale	"en-US"
<i>Additional Data for the Callback:</i>	
CallbackDate	2026-05-06
CallbackTime	12:34:56
OriginalConversationID	f38a5812-8193-41a8-ba04-4a3a330862c5

Callback Script View

The values above will be displayed to the agent when the callback to presented.

Genesys Bot Connector Configuration

This approach uses the Genesys messenger app for customer interactions with Sierra integrated via the Bot Connector Integration.

This integration has two parts:

- The postUtterance webhook to be used by the Bot Connector Integration
- Bot Connector Integration configuration and incorporation into a Genesys workflow


Webhook overview

Sierra's implementation of the postUtterance webhook is POST

<https://api.sierra.chat/genesys/chat/TokenGoesHere>

Bot Connector Authentication to Sierra

Credentials are passed from the Genesys Bot Connector to Sierra via headers. POST /genesys/chat converts headers with the prefix x-sierra-secret- to memory secrets. As an example, x-sierra-secret-vcgToken is passed to Sierra as the memory secret vcgToken.

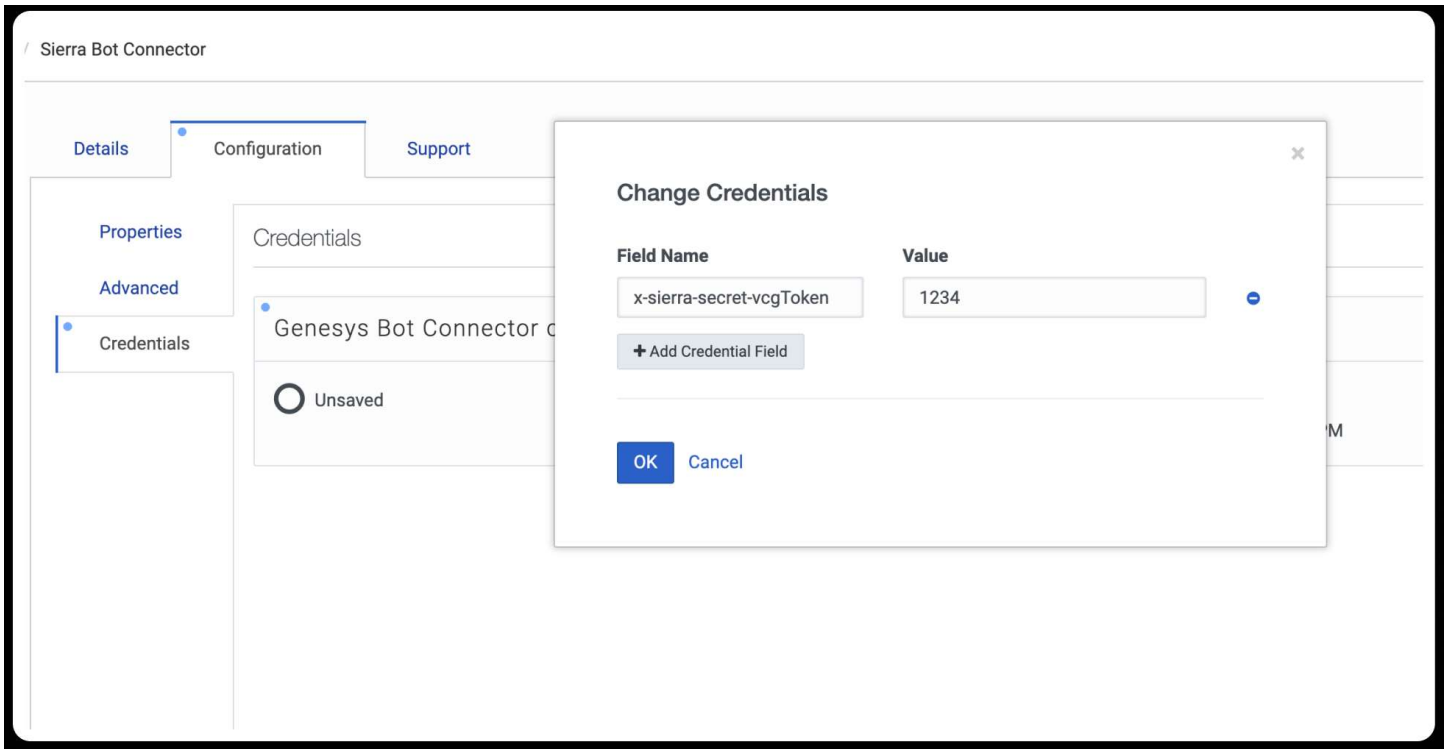

Bot Connector Interface

Request Body

The request body follows the Genesys API Spec. While not all fields are currently used, key ones are annotated below. The table is adapted from the API Spec with additional Sierra-specific notes.

Example request body

```
{
  "botId": "11095674-46cc-4a87-b0bb-385b317ad547",
  "botVersion": "Release",
  "inputMessage": {
    "type": "Text",
    "text": "message sent to bot",
    "content": [
      {
        "contentType": "ButtonResponse",
        "buttonResponse": {
          "type": "QuickReply",
          "text": "I want a cookie",
          "payload": "cookie"
        }
      }
    ]
  }
}
```

```
},  
  "languageCode": "en-us",  
  "botSessionId": "462064bd-820f-4806-a04b-8bdc915dba3e",  
  "botSessionTimeout": "4",  
  "genesysConversationId": "xxx",  
  "parameters": {  
    "parameter1": "value1",  
    "parameter2": "value2"  
  }  
}
```

Field descriptions

Field name (from Genesys)	Description (from Genesys)	Sierra notes
botId	The unique ID of the bot.	Not used.
botVersion	The version of the bot.	Not used.
inputMessage	The message sent to the bot.	Supported.
inputMessage.type	The type of message. Currently always text.	Not used. Not implemented by Genesys.
inputMessage.text	The plain text content of the message.	Supported.
inputMessage.content	An array of rich content (e.g., buttons, images, links).	Supported for ButtonResponse content.
inputMessage.content.contentType	The type of the content element.	Supported.
inputMessage.content[].content	The actual content (in string format).	Supported.
languageCode	The requested language code.	Not used. Sierra mirrors the user's language automatically.
botSessionId	The session ID for a back-and-forth with the bot.	Not used.
botSessionTimeout	The session timeout in minutes.	Not used. Sierra does not enforce time-based session limits.
genesysConversationId	The Genesys Conversation ID. Used for tracking and debugging.	Supported. Used to identify the ongoing conversation. Required to find or create the correct conversation for each stateless request.
parameters	Optional key-value pairs for custom behavior.	Supported. Mapped to Sierra memory variables.

Response body

The response body follows the Genesys API Spec. While not all fields are currently used, relevant ones are annotated below. The table is adapted from the Genesys documentation with additional Sierra-specific notes.

Example response body

```
{
  "replymessages": [
    {
      "type": "Text",
      "text": "Hello! How can I assist you today?"
    },
    {
      "type": "Structured",
      "content": [
        {
          "contentType": "Card",
          "card": {
            "title": "Explore Our Features",
            "description": "Check out what we have to offer!",
            "image": "https://example.com/image.jpg",
            "defaultAction": {
              "type": "Link",
              "url": "https://example.com/features"
            }
          },
          "actions": [
            {
              "type": "Postback",
              "text": "Learn More",
              "payload": "LEARN_MORE_PAYLOAD"
            },
            {
              "type": "Link",
              "url": "https://example.com/signup"
            }
          ]
        }
      ]
    }
  ]
}
```

```
],  
  "intent": "greeting",  
  "confidence": 0.95,  
  "botState": "COMPLETE",  
  "slotValues": {  
    "slotString": "example value",  
    "slotInteger": 42,  
    "slotDecimal": 3.14159,  
    "slotBoolean": true,  
    "slotDateTime": "2025-01-16T12:00:00Z",  
    "slotCurrency": {  
      "amount": "10.50",  
      "code": "USD"  
    }  
  },  
  "parameters": {  
    "user_id": "12345",  
    "session_id": "abcde-67890"  
  }  
}
```

Field descriptions

Root

Field name (from Genesys)	Description (from Genesys)	Sierra notes
replymessages	A list of messages to send back to the user. Can be null or empty.	Supported. See replymessages .
intent	The discovered intent. Bot Connector expects one intent. If multiple are returned, use the one with highest confidence. If none is returned, the failure path is taken.	Returned as <code>transfer</code> or <code>endconversation</code> and must be mapped in Genesys Architect. Unmapped intents are ignored. Repeating the same intent four times marks the bot as stuck but has no adverse effect.
confidence	A value between 0 and 1 indicating confidence in the intent. Optional. Null defaults to 1 on success, 0 on failure.	Always set to 1.0.
botState	One of COMPLETE, FAILED, or MOREDATA (if intent not fulfilled).	Supported.
slotValues	Key-value pairs associated with the intent.	Not used. Requires Genesys configuration.
errorInfo	Error details if botState is FAILED.	Returned only when botState = FAILED.
errorCode	The specific error code (e.g., NOT_FOUND or 404).	Returned only when botState = FAILED. Currently, the only value is <code>INTERNAL_ERROR</code> . Can be mapped as an output variable in Genesys workflow.
errorMessage	A detailed error description.	Returned with errorCode. Can be mapped as an output variable in Genesys workflow.
parameters	Map of string key-value pairs for custom behavior or tracking.	Returned only when intent = "transfer". Contains metadata for workflow and live agents (e.g., conversationSummary, sentiment, finalIntent, transferReason).

replymessages

Field name (from Genesys)	Description (from Genesys)	Sierra notes
type	The message type (text or future types).	Only text is supported.
text	The message text to send.	Supported.
content	A list of content fields to send.	Supported for carousels, cards, and quick replies.
content.contentType	The content type.	Supported alongside content.
content.content	The actual content string (e.g., URL).	Supported alongside content.

Transfer mechanism

The Transfer mechanism will be used to generate a user callback . A flow will prompt the user to accept a callback, and if accepted, for their phone number.

When Sierra needs to escalate to a live agent, it triggers a transfer event as a bot connector webhook "COMPLETE" response with the data necessary for routing via `output.send(type:transfer", data: { ... })`. Genesys will then direct to a workflow that is responsible for routing logic beyond those initial values, including sending a message in the case in which the contact center is closed.


Error messages

This is implemented in full according to the API Spec with the exception of HTTP 400 (SESSION_CLOSED), which is not implemented by design (see notes on Request Body botSessionTimeout).

Configure Genesys with the Digital Bot Connector

Install the Bot Connector integration

Install as shown below, using the Genesys Admin UI

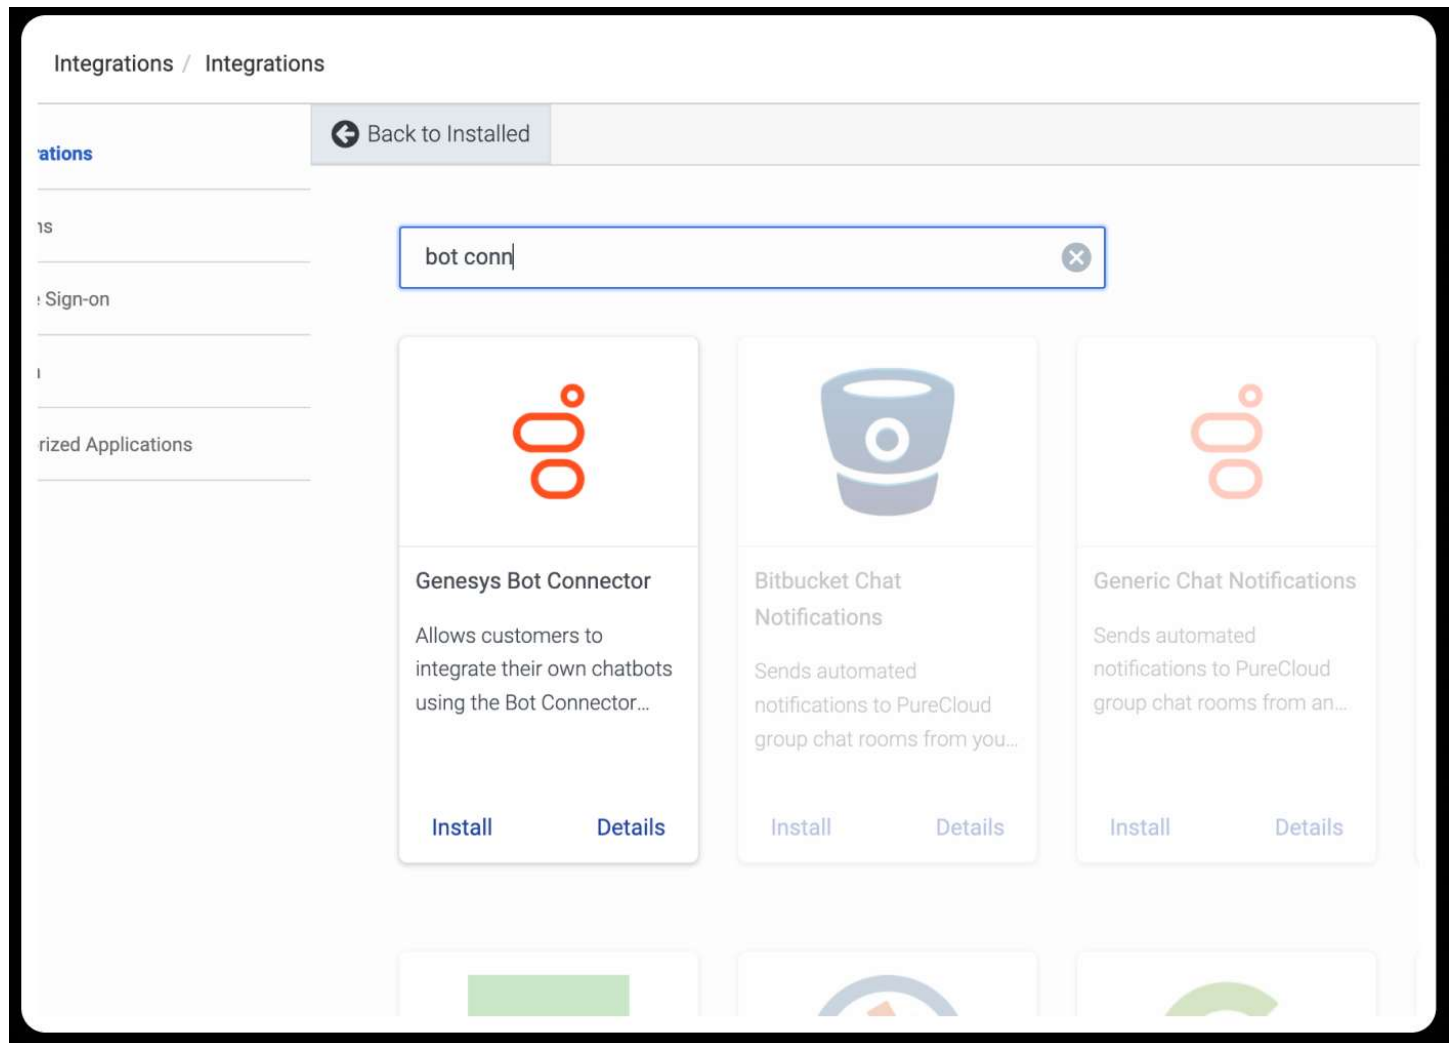


Configure the Bot Connector

Configure with a Utterance URI, i.e. postUtterance webhook

Set the endpoint URL: `https://api.sierra.chat/genesys/chat/TokenGoesHere`

Configure Bot Connector credentials

Configure the Genesys Bot Connector to pass memory secret headers to the endpoint. Any header with the prefix `x-sierra-secret-` is treated as a header to be converted to a memory secret.

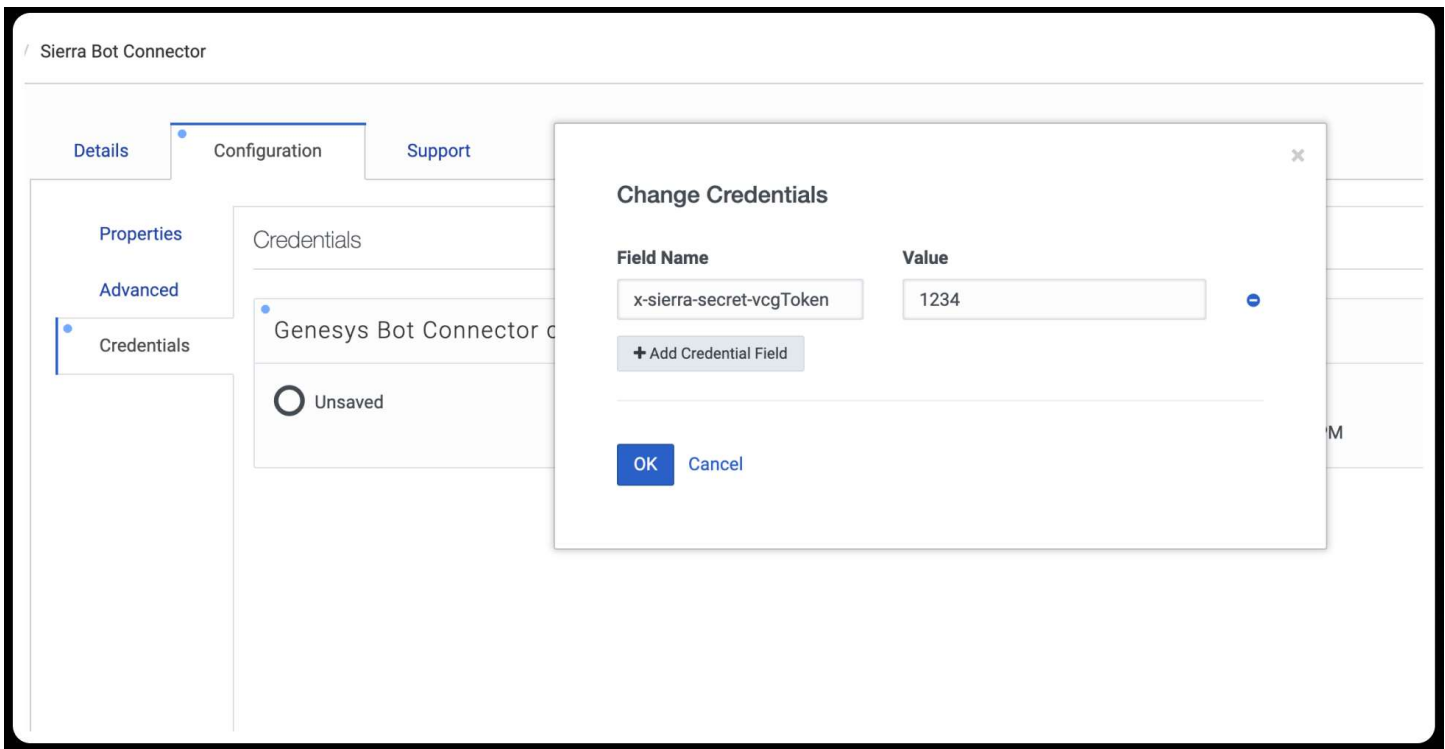

Register a bot for the Bot Connector integration


The Bot Connector needs to be registered so Genesys can route conversations to it. Using the Genesys API Explorer, call the PUT endpoint under Integrations > BotConnector to set a list of bots for the integration. The Integration ID from the Bot Connector configured in the previous step is needed, along with a name and UUID for the bot (any valid UUID will work).

For detailed instructions, see the Genesys bot registration guide. Alternatively, the PUT request can be made directly via the API, which requires an OAuth client with admin scopes to obtain a bearer token.

Incorporate the Bot Connector into a Genesys Workflow

Configure the Bot Connector to map the following intents to the appropriate next steps:

- **transfer:** Escalate to a live agent. Upon transfer, the postUtterance webhook can send a payload within the parameters field of the response body with values to be mapped to Participant Data. These values can include transfer reason, sentiment, summary, etc.
- **endConversation:** The conversation has come to a natural conclusion and should be closed out in Genesys.
- **Failure:** Something has gone wrong within the Sierra AI Agent and needs to be gracefully handled in Genesys.

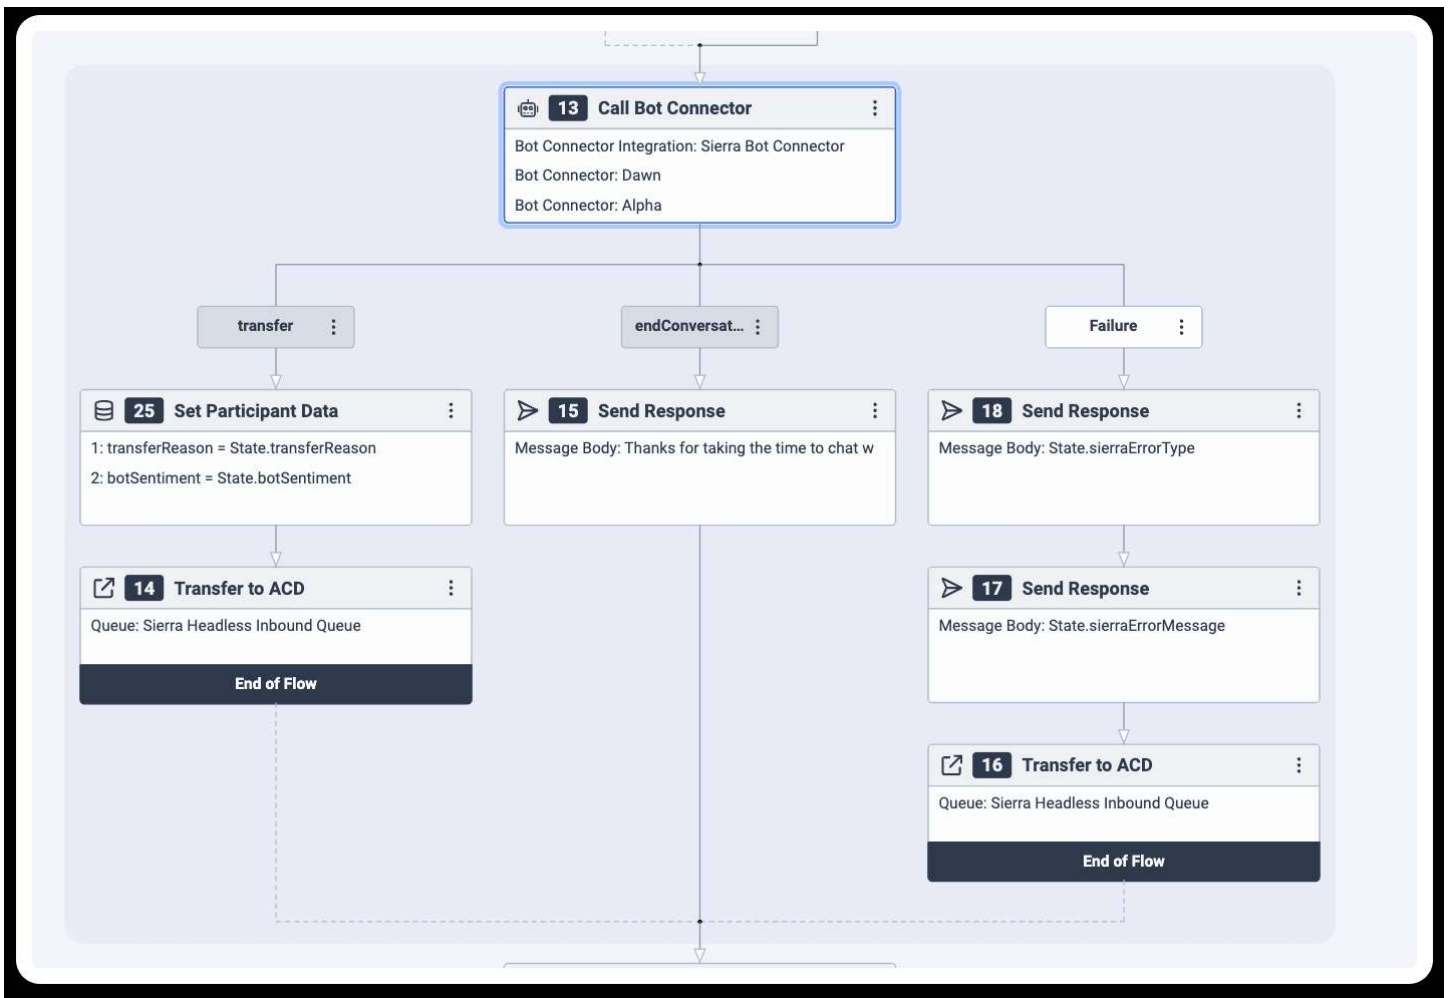

Increase the default Bot timeout

Requests to postUtterance from Bot Connector have timeouts that default to 11 seconds. To ensure the Sierra agent is not affected by this timeout, a Genesys support request will be submitted to increase the timeout to 60 seconds.

Configure Sierra

Sierra needs to enable Genesys integration for the organization.

To get initial connection, the presence of a Live Release is all that is needed and the integration will behave very much like a standard headless API integration.

Beyond basic configuration and to support many of the features described below, genesysConversationId needs to be added to the root store. The integration will set this value, so this is simply for type safety.

```
export type MyAgentRootStore = {
  genesysConversationId?: string;
};
```

Ingesting parameters

Bot Connector can send parameters to the postUtterance webhook. These parameters are made available to the Agent as memory variables.

Sending conversation data to Genesys

Genesys Customer Participant Data is the standard way to store information about the customer and the conversation. How Sierra sends this data to Genesys depends on whether the conversation is contained.

For escalated conversations

Upon transfer, the postUtterance webhook can send a payload within the parameters field of the response body with values to be mapped to Participant Data by the Genesys Workflow.

The transfer event data can be set as follows (the keys are just examples):

```
output.send({
  type: "transfer",
  data: {
    summary: "Customer would like to sign up.",
    sentiment: "positive",
    intent: "signup",
    locale: "en-US",
  },
});
```

For contained conversations

For any conversation that is not escalated, it may still be useful to tag the conversation with Participant Data. To do this, use the Genesys API in the Post-Conversation Hook to send these values to Genesys. It may be wise to skip this step if the conversation was previously transferred to avoid duplicating work or potentially overwriting data that has since been updated.

Test and Release

Genesys and Sierra system test

To verify that the integration is working as expected, it is recommended that a non-production Messenger Deployment and Configuration be created that points to the Inbound Message Workflow and embed the Deployment script in a non-production instance of the portal.

Sierra Agent via webhook

The webhook can be tested using curl, Postman, or any other API client. genesysConversationId can be set to any unique string. Any field not in use (for example, botSessionId) can be sent as an empty string.

Bot Connector constraints

There are several constraints within the Bot Connector Integration, most of which are enumerated here.

- Double messaging: Currently, the Bot Connector supports synchronous messaging only. If a customer sends multiple messages in a row, only the first message will be sent to the bot via the postUtterance webhook. Subsequent messages will show up in Interaction transcripts in Genesys.
- Rich text (markdown): Genesys has a different syntax for creating rich text using markdown than Sierra does.
- Image support: Image markdown tags (e.g. `! [image](https://example.com)`) are not rendered as images. They appear as plain text.
- Lists: Numbered and bulleted lists lack some formatting—list elements lack indentation and bullets appear as - instead of •.
- Receiving files from customers: There is no support for customers to upload images and files. Bot Connector will omit the media in its message to Sierra. This is true even when the file upload feature is enabled in the Genesys widget.
- Sending files to customers: Sierra can send media via cards, carousels, quick replies, and links.