

# A Note on the Period Enforcer Algorithm for Self-Suspending Tasks

Jian-Jia Chen<sup>1</sup> and Björn B. Brandenburg<sup>2</sup>

<sup>1</sup> TU Dortmund University, Germany

jian-jia.chen@cs.uni-dortmund.de

<sup>2</sup> Max Planck Institute for Software Systems (MPI-SWS)

bbb@mpi-sws.org

---

## Abstract

2012 ACM Subject Classification Author: Please fill in subclass macro

Keywords and phrases Author: Please fill in keywords macro

Digital Object Identifier 10.4230/LITES.xxx.yyy.p

Received Date of submission. Accepted Date of acceptance. Published Date of publishing.

Editor LITES section area editor

## 1 Introduction

This report revisits the *period enforcer* algorithm proposed by Rajkumar [9] to handle self-suspending real-time tasks. We briefly review the period enforcer algorithm, explain its underlying assumptions and limitations, and discuss how it may be analyzed to correctly determine the schedulability of self-suspending sporadic real-time tasks subject to period enforcement.

The main contributions of this paper are two observations that have not been previously reported in the real-time literature:

1. period enforcement can render self-suspending tasks sets unschedulable that are schedulable otherwise (i.e., period enforcement can induce deadline misses); and
2. with current techniques, schedulability analysis of the period enforcer algorithm requires a task set transformation that is subject to exponential time complexity.

### 1.1 Preliminaries

To date, the real-time literature on self-suspensions has focused on two task models: the *dynamic* and the *segmented* (or *multi-segment*) self-suspension model. The dynamic self-suspension sporadic task model characterizes each task  $\tau_i$  as a 4-tuple  $(C_i, S_i, T_i, D_i)$ :  $C_i$  denotes an upper bound on the total execution time of any job of  $\tau_i$ ,  $S_i$  denotes an upper bound on the total self-suspension time of any job of  $\tau_i$ ,  $T_i$  denotes the minimum inter-arrival time (or period) of  $\tau_i$ , and  $D_i$  is the relative deadline. The dynamic self-suspension model does not impose a bound on the maximum number of self-suspensions, nor does it make any assumptions as to where during a job's execution self-suspensions occur.

In contrast, the segmented sporadic task model extends the above 4-tuple by characterizing each self-suspending task as a (fixed) finite linear sequence of computation and suspension intervals. These intervals are represented as a tuple  $(C_i^1, S_i^1, C_i^2, S_i^2, \dots, S_i^{m_i-1}, C_i^{m_i})$ , which is composed of  $m_i$  computation segments separated by  $m_i - 1$  suspension intervals. For the simplicity of presentation, we assume that a task  $\tau_i$  always starts with a computation segment. The arguments can be easily extended to handle tasks that start with a self-suspension.



© Chen and Brandenburg;  
licensed under Creative Commons License CC-BY

Leibniz Transactions on Embedded Systems, Vol. XXX, Issue YYY, pp. 1–10



Leibniz Transactions on Embedded Systems

LITES Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl Publishing, Germany

The advantage of the dynamic model is that it is more flexible since it does not impose any assumptions on control flow. The advantage of the segmented model is that it allows for more accurate analysis. The period enforcer algorithm and its analysis fundamentally applies (only) to the segmented model.

The central notation in Rajkumar’s analysis [9] is a *deferrable task*, which matches our notion of multi-segment tasks. Specifically, Rajkumar states that:

With deferred execution, a task  $\tau_i$  can execute its  $C_i$  units of execution in discrete amounts  $C_i^1, C_i^2, \dots$  with suspension in between  $C_i^j$  and  $C_i^{j+1}$ . [9, Section 3]<sup>1</sup>

Central to Rajkumar’s analysis [9] is a *task set transformation* that splits each deferrable task with multiple segments into a corresponding number of single-segment deferrable tasks. In the words of Rajkumar [9, Section 3]:

Without any loss of generality, we shall assume that a task  $\tau_i$  can defer its entire execution time but not parts of it. That is, a task  $\tau_i$  executes for  $C_i$  units with no suspensions once it begins execution. Any task that does suspend after it executes for a while can be considered to be two or more tasks each with its own worst-case execution time. The only difference is that if a task  $\tau_i$  is split into two tasks  $\tau_i'$  followed by  $\tau_i''$ , then  $\tau_i''$  has the same deadlines as  $\tau_i'$ .

In other words, the transformation can be understood as splitting each self-suspending task into a matching number of non-self-suspending sporadic tasks subject to *release jitter*, which can be easily analyzed with classic fixed-priority response-time analysis [1].

It is well known that uncontrolled deferred execution (i.e., release jitter) can impose a scheduling penalty because of the potential for “back-to-back” execution [1]. That is, if a job of a deferrable task that maximally defers its execution is directly followed by a job that executes immediately without deferring its execution, then lower-priority tasks may suffer increased interference.

The purpose of the period enforcer algorithm is to reduce such penalties for lower-priority tasks without detrimentally affecting the schedulability of self-suspending, higher-priority tasks. The latter aspect — no detrimental effects for self-suspending tasks — is captured concisely by Theorem 5 in the original analysis of the period enforcer algorithm [9].

**Theorem 5:** A deferrable task that is schedulable under its worst-case conditions is also schedulable under the period enforcer algorithm. [9]


## 1.2 Questions answered in this paper

Theorem 5 in [9] provides a very positive result for the analysis of deferrable task sets subject to period enforcement: if the corresponding transformed task set can be shown to be schedulable under fixed-priority scheduling using *any* applicable analysis, then the period enforcer algorithm also yields a correct schedule.

However, we note that Theorem 5 in [9] applies only to the *transformed* task set: recall that, in the original analysis [9], deferrable tasks are assumed to defer their entire execution time either completely or not at all (but not parts of it). Therefore, if we would like to use the period enforcer algorithm to handle segmented self-suspending task sets, we first have to answer the following question: “Given a set of sporadic segmented self-suspending tasks, what is the corresponding set of (single-segment) deferrable tasks?” That is, how do we convert given self-suspension segments

---

<sup>1</sup> The notation has been altered here for the sake of consistency.

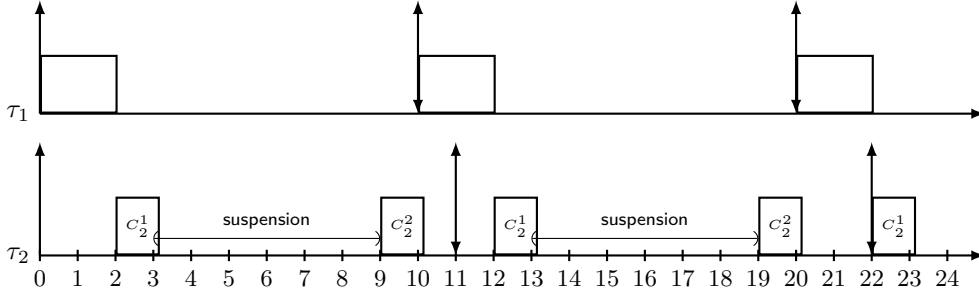

■ **Figure 1** An illustrative example of the original self-suspending task set (without period enforcement) assuming periodic job arrivals.

into equivalent bounds on release jitter such that we may apply Theorem 5 to conclude that the system remains schedulable despite period enforcement?

In this paper, which is motivated by the fact that the original proposal [9] does not provide an answer to this central question, we make two pertinent observations.

1. There exist sporadic segmented self-suspending task sets that are schedulable under fixed-priority scheduling without any enforcement, but the corresponding schedule by using the period enforcer algorithm is not feasible. This shows that Theorem 5 in [9] has to be used with care — it may be applied only in the context of the transformed single-segment deferrable task set, and not in the context of the original segmented self-suspending task set.
2. Deriving a single-segment deferrable task set corresponding to a given set of sporadic segmented self-suspending tasks in polynomial time is an open problem. Recent findings by Nelissen et al. [7] can be applied, but their method takes exponential time.

## 2 Period Enforcement Can Induce Deadline Misses


In this section, we demonstrate with an example that there exist sporadic segmented self-suspending task sets that both (i) are schedulable *without* period enforcement and (ii) are not schedulable with period enforcement.

To this end, consider a task system consisting of 2 tasks. Let  $\tau_1$  denote a sporadic task without self-suspensions and parameters  $C_1 = 2$  and  $T_1 = D_1 = 10$ , and let  $\tau_2$  denote a self-suspending task consisting of two segments with parameters  $C_{2,1} = 1$ ,  $S_{2,1} = 6$ ,  $C_{2,2} = 1$ , and  $T_2 = D_2 = 11$ . Suppose that we use the rate-monotonic priority assignment, i.e.,  $\tau_1$  has higher priority than  $\tau_2$ . This task set is schedulable without any enforcement since at most one computation segment of a job of  $\tau_2$  can be delayed by  $\tau_1$ :

- if the first segment of a job of  $\tau_2$  is interfered with by  $\tau_1$ , then the second segment resumes at most after 9 time units after the release of the job and the response time of task  $\tau_2$  is hence 10; otherwise,
- if the first segment of a job of  $\tau_2$  is not interfered with by  $\tau_1$ , then the second segment resumes at most 7 time units after the release of the job and hence the response time of task  $\tau_2$  is at most 10 even if the second segment is interfered with by  $\tau_1$ .

Figure 1 depicts an example schedule of the task set assuming periodic job arrivals.

Next, let us consider the same task set under control of the period enforcer algorithm. The period enforcer algorithm determines for each segment (i.e., for each converted single-segment deferrable task) an *eligibility time*. If a segment resumes (i.e., a job of a single-segment deferrable task arrives) before its eligibility time, the execution of the segment (i.e., the single-segment job) is delayed until the eligibility time is reached.

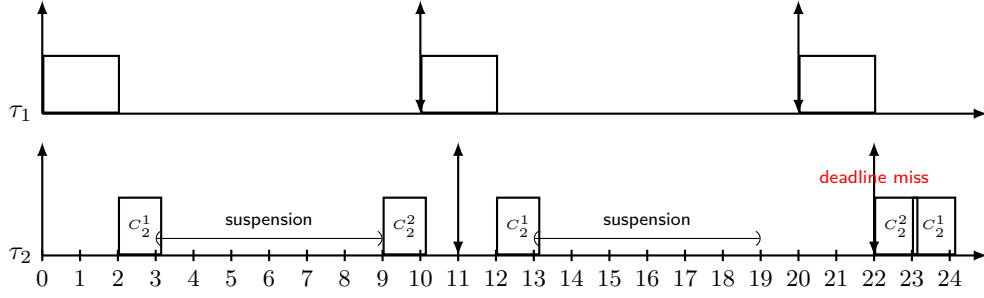

■ **Figure 2** An illustrative example demonstrating a deadline miss at time 22 under the period enforcer algorithm.

102 A segment's eligibility time is determined according to the following rule. Let  $ET_{i,j}^k$  denote the  
 103 eligibility time of the  $k^{\text{th}}$  segment of the  $j^{\text{th}}$  job of task  $\tau_i$ . Further, let  $a_{i,j}^k$  denote the segment's  
 104 arrival time.<sup>2</sup> Finally, let  $\text{busy}(\tau_i, t')$  denote the last time that a level- $i$  busy interval began on or  
 105 prior to time  $t'$ . According to Section 3.1 in [9], the period enforcer algorithm defines the segment  
 106 eligibility time of the  $k^{\text{th}}$  segment as

$$107 \quad ET_{i,j}^k = \max(ET_{i,j-1}^k + T_i, \text{busy}(\tau_i, a_{i,j}^k)), \quad (1)$$

109 where  $ET_{i,0}^k = -T_i$ .

110 Assuming this definition, Figure 2 shows the resulting schedule for a periodic release pattern.  
 111 The first job of task  $\tau_2$  (which arrives at time  $a_{2,1}^1 = 0$ ) is executed as if there is no period  
 112 enforcement since the definition  $ET_{2,0}^1 = ET_{2,0}^2 = -T_2$  ensures that both segments are immediately  
 113 eligible. Note that the first segment of  $\tau_2$ 's first job is delayed due to interference from  $\tau_1$ . As a  
 114 result, the second segment of  $\tau_2$ 's first job does not resume until time  $a_{2,1}^2 = 9$ . Thus, we have

$$115 \quad ET_{2,1}^1 = \max(-T_2 + T_2, \text{busy}(\tau_2, 0)) = 0 \text{ and}$$

$$116 \quad ET_{2,1}^2 = \max(-T_2 + T_2, \text{busy}(\tau_2, 9)) = 9.$$

118 In contrast to the first job, the second job of task  $\tau_2$  (which is released at time 11) is affected  
 119 by period enforcement. The first segment of the second job arrives at time  $a_{2,2}^1 = 11$ , is interfered  
 120 with for one time unit, and suspends at time 13. The segment second of the second job hence  
 121 resumes only at time  $a_{2,2}^2 = 19$ . Thus, we have

$$122 \quad ET_{2,2}^1 = \max(0 + 11, \text{busy}(\tau_2, 11)) = 11 \text{ and}$$

$$123 \quad ET_{2,2}^2 = \max(9 + 11, \text{busy}(\tau_2, 19)) = 20.$$

125 According to the rules of the period enforcer algorithm, the processor therefore remains idle at  
 126 time 19 because the segment is not eligible to execute until time  $ET_{2,2}^2 = 20$ . However, at time 20,  
 127 the third job of  $\tau_1$  is released. As a result, the second job of  $\tau_2$  incurs additional interference and  
 128 misses its deadline at time 22.

129 This example shows that there exist sporadic segmented self-suspending task sets that (i) are  
 130 schedulable under fixed-priority scheduling without any enforcement, but (ii) are not schedulable  
 131 under the period enforcer algorithm.

<sup>2</sup> A segment *arrives* when it becomes available for execution. The first segment arrives immediately when the job is released; the segment arrives when the job resumes from its self-suspension.

One may consider to enrich the period enforcer with the following power: when the processor becomes idle, a task immediately becomes eligible to execute regardless of its eligibility time. However, even with this extension, the above example remains valid by introducing one additional lowest priority task  $\tau_3$  with execution time  $C_3 = 13$  (to be executed from time 3 to time 9 and time 13 to time 20) and  $T_3 = D_3 = 100$ . With task  $\tau_3$ , the processor is always busy from time 0 to time 23 and consequently  $\tau_2$  still misses its deadline at time 22.

Furthermore, the example also demonstrates that the conversion to single-segment deferrable tasks does incur a loss of generality since it introduces pessimism: if we convert the two computation segments of task  $\tau_2$  into two deferrable tasks  $\tau_2^1$  and  $\tau_2^2$ , where task  $\tau_2^1$  never defers its execution and task  $\tau_2^2$  defers its execution by at most 9 time units, then it is immediately obvious that the resulting single-segment deferrable task set  $\{\tau_1, \tau_2^1, \tau_2^2\}$  is in fact not schedulable under a rate-monotonic priority assignment since we can time the release of a job of  $\tau_1$  to coincide with the arrival of a job of  $\tau_2^2$  after it has maximally deferred its execution, which clearly results in a deadline miss.

### 3 Deriving a Corresponding Deferrable Task Set

The example in Section 2 can be easily converted to a corresponding single-segment deferrable task set. However, in general, *precisely* converting a self-suspending task system into a corresponding single-segment deferrable task set is not an easy problem. We demonstrate the inherent difficulty by focusing on a special case.

Suppose that the system has  $k - 1$  ordinary sporadic tasks and only one segmented self-suspending task  $\tau_k$ . Converting a computation segment into a deferrable task requires to derive the *worst-case resume time of a computation segment*, denoted as  $R_k^j$  for the  $j^{\text{th}}$  computation segment of task  $\tau_k$ . Suppose that the worst-case response time of the  $j^{\text{th}}$  computation segment of task  $\tau_k$  is  $W_k^j$ . It is not difficult to see that  $R_k^1 = 0$  and  $R_k^j = W_k^{j-1} + S_k^{j-1}$  for  $j = 2, 3, \dots, m_k - 1$ . We therefore need to derive the worst-case response times of the computation segments of task  $\tau_k$ .

Based on these considerations, it appears that, at least for the simple example, the problem is basically identical to the worst-case response time analysis of segmented self-suspending task systems. However, it has been recently shown by Nelissen et al. [7] that calculating the worst-case response time in the above “simple” case is already a very challenging problem. In particular, Nelissen et al. [7] identified several misconceptions in prior analyses, and after correcting those misconceptions, observed that deriving the worst-case response time of a computation segment in pseudo-polynomial time seems to be a very challenging problem.

In the context of the period enforcer, we consequently observe that the only existing solution to derive the *precise* bound  $W_k^j$  (and hence  $R_k^j$ ), due to Nelissen et al. [7], has exponential time complexity (even for the special case above). Furthermore, as demonstrated with the example shown in Figure 2, even if the conversion is done precisely, the transformed single-segment deferrable task set can admit more pessimism than the original self-suspending task set with respect to schedulability.

### 4 Incompatibility with Suspension-Based Locking Protocols

A common source of self-suspensions in multiprocessor real-time systems are *binary semaphores*, i.e., suspension-based locks used to realize mutually exclusive access to shared resources. When a task tries to use a resource that has already been locked, it self-suspends until the resource becomes available. Such self-suspensions due to lock contention, just like any other self-suspension, result in deferred execution and thus can detrimentally affect the interference of lower-priority

tasks. It may thus seem natural to apply the period enforcer algorithm to control the negative effects of locking-induced self-suspensions.<sup>3</sup> However, as we demonstrate with two examples, it is actually not safe to combine the period enforcer algorithm with suspension-based locks.

#### 4.1 Combining Period Enforcement and Suspension-Based Locks

Whenever a task attempts to lock a shared resource, it may potentially block if the resource has already been locked by another task. In the context of the multi-segmented self-suspending task model, each lock operations hence marks the beginning of a new segment.

The period enforcer algorithm may therefore be applied to determine the eligibility time of each such segment (which, again, starts with a critical section). There is, however, one complication: when does the task actually *acquire* the lock? That is, if a task's execution is postponed due to the rules of the period enforcement algorithm, at which point is the lock request processed, with the consequence that the resource become unavailable to other tasks?

There are two possible interpretations.

1. When a task requires a shared resource, which implies the beginning of a new segment, its lock request is processed *only when its new segment would be eligible for execution*, as determined by the period enforcer algorithm.
2. Alternatively, when a task requires a shared resource, its request may be processed *immediately*.

As a consequence of the first rule, a task may find a required shared resource unavailable when its new segment becomes eligible for execution even though it was available when the prior segment finished. As a consequence of the second rule, a shared resource may be locked by a task that cannot use it for the time being because it is still ineligible to execute.

We believe that the first interpretation is the more natural one, as it does not make much sense to award resources to tasks that cannot yet use them. However, for the sake of completeness, we show that either interpretation leads to potentially unbounded worst-case response times.

#### 4.2 Alternative 1: Locking Takes Effect at Segment Eligibility Time


First, assume that the processing of lock requests is delayed until the point when a resuming segment would no longer be subject to any delay due to period enforcement). We show that this interpretation leads to a deadline miss in a task set that would otherwise be trivially schedulable.

To this end, consider a simple task set consisting of two tasks on two processors that share one resource. Task  $\tau_1$ , on processor 1, has a total execution cost of  $C_1 = 4$  and a period and deadline of  $T_1 = D_1 = 8$ . After one time unit of execution, jobs of  $\tau_1$  require the shared resource for two time units.  $\tau_1$  thus consists of two segments with cost  $C_{1,1} = 1$  and  $C_{1,2} = 3$ . Task  $\tau_2$ , on processor 2, has the same overall WCET ( $C_2 = 4$ ), a slightly shorter period ( $T_2 = D_2 = 7$ ), and requires the shared resource for one time unit after *two* time units of execution ( $C_{2,1} = 2$  and  $C_{2,2} = 2$ ).

A schedule of the two tasks assuming period job arrivals is depicted in Figure 3. We focus on the eligibility times  $ET_{2,1}^2, ET_{2,2}^2, ET_{2,3}^2, \dots$  of the second segment of  $\tau_2$ .

Since  $\tau_2$ 's first job requests the shared resource only after two time units of execution, it is blocked by  $\tau_1$ 's critical section, which commenced at time 1. At time 3,  $\tau_1$  releases the shared resource and  $\tau_2$  consequently resumes (i.e.,  $a_{2,1}^2 = 3$ ). According to the period enforcer rules [9],

<sup>3</sup> The combination of suspension-based locks and period enforcement has indeed been assumed in prior work [10] and suggested as a potential improvement elsewhere [5, 6].

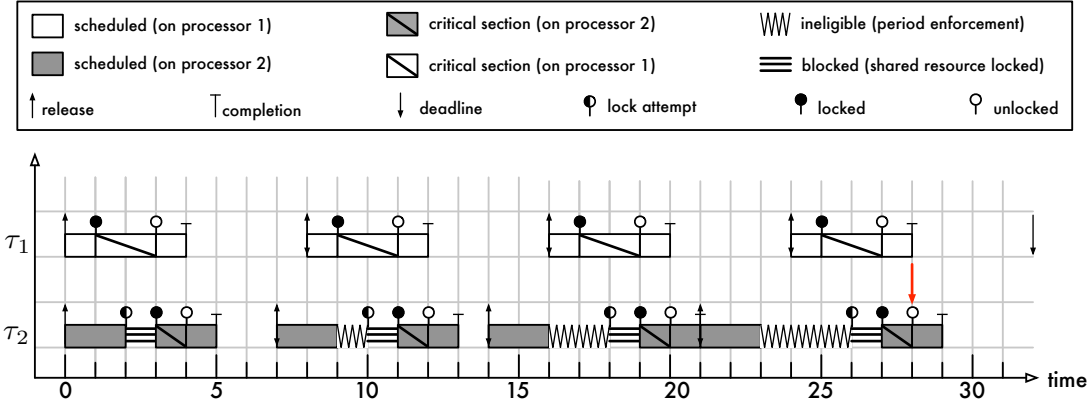

■ **Figure 3** Example schedule of two tasks  $\tau_1$  and  $\tau_2$  on two processors sharing one lock-protected resource. The example assumes that lock requests take effect only when the critical section segment becomes eligible to be scheduled according to the rules of the period enforcer algorithm. Under this interpretation, the fourth job of task  $\tau_2$  misses its deadline at time 28.

the second segment is immediately eligible because, according to Equation 1,

$$ET_{2,1}^2 = \max(ET_{2,0}^2 + T_2, \text{busy}(\tau_2, a_{2,1}^2)) = \max(-T_2 + T_2, 3) = 3.$$

(Recall that  $ET_{2,0}^2 = -T_2$ , and interpret  $\text{busy}(\tau_2, a_{2,1}^2)$  with respect to  $\tau_2$ 's processor.)

At time 7, the second job of  $\tau_2$  is released. Its first segment ends at time 9. However, its second segment is not eligible to be scheduled before time 10 since  $ET_{2,2}^2 \geq ET_{2,1}^2 + T_2 = 3 + 7 = 10$ . At time 9, the second job of  $\tau_1$ , released at time 8, can thus lock the shared resource without contention. Consequently, when  $\tau_2$ 's request for the shared resource takes effect at time 10, the resource is no longer available and  $\tau_2$  must wait until time  $a_{2,2}^2 = 11$  before it can proceed in its execution. We thus have

$$ET_{2,2}^2 = \max(ET_{2,1}^2 + T_2, \text{busy}(\tau_2, a_{2,2}^2)) = \max(10, 11) = 11.$$

The third job of  $\tau_2$  is released at time 14. Its first segment ends at time 16, but since  $ET_{2,3}^2 \geq ET_{2,2}^2 + T_2 = 11 + 7 = 18$ , the segment may not commence execution until time 18 and the shared resource remains available to other tasks in the meantime. The third job of  $\tau_1$  is released at time 16 and acquires the uncontested shared resource at time 17. Thus, the segment of  $\tau_2$  cannot resume execution before time  $a_{2,3}^2 = 19$ . Therefore

$$ET_{2,3}^2 = \max(ET_{2,2}^2 + T_2, \text{busy}(\tau_2, a_{2,3}^2)) = \max(18, 19) = 19.$$

The same pattern repeats for the fourth job of  $\tau_2$ , released at time 21: when its first segment ends at time 23, the second segment is not eligible to commence execution before time 26 since  $ET_{2,4}^2 \geq ET_{2,3}^2 + T_2 = 19 + 7 = 26$ . By then, however,  $\tau_1$  has already locked the shared semaphore again, and the second segment of the fourth job of  $\tau_2$  cannot resume before time

$$ET_{2,4}^2 = \max(ET_{2,3}^2 + T_2, \text{busy}(\tau_2, a_{2,4}^2)) = \max(26, 27) = 27.$$

However, this leaves insufficient time to meet the job's deadline: the second segment of  $\tau_2$  requires  $C_{2,2} = 2$  time units to complete, the deadline at time 28 is thus missed.

By construction, this example does not depend on a specific locking protocol; the effect occurs with both the MPCP [8] (based on priority queues) and the FMLP [2, 4] (based on FIFO queues).



However, the response-time analyses for both the MPCP [6, 3] and the FMLP [3] predict a worst-case response time of 6 for task  $\tau_2$  (i.e., four time units of execution, and at most two time units of blocking due to the critical section of  $\tau_1$ ). This demonstrates that adding period enforcement to suspension-based locks invalidates all existing blocking analyses. Furthermore, it is clear that the devised repeating pattern can be used to construct schedules in which the response time of  $\tau_2$  grows beyond any given implicit or constrained deadline.

Next, we show that the alternative interpretation of when a lock request takes effect also leads to unbounded response-time growth.

### 4.3 Alternative 2: Locking Takes Effect Immediately

From now on, assume that all lock requests are processed immediately when they are made, even if this causes the shared resource to be locked by a task that is not yet eligible to execute according to the rules of the period enforcer algorithm. We construct an example that demonstrates unbounded response-time growth.

To this end, consider two identical tasks hosted on two processors. Task  $\tau_1$  is hosted on processor 1;  $\tau_2$  is hosted on processor 2. Both tasks have a period of  $T_1 = T_2 = D_1 = D_2 = 8$  and a WCET of  $C_1 = C_2 = 4$ . They both access a single shared resource for two time units each per job. Both tasks request the shared resource after executing for *at most* one time unit. Both tasks thus have two segments each with parameters  $C_{1,1} = C_{2,1} = 1$  and  $C_{1,2} = C_{2,2} = 3$ . The example exploits that jobs may require *less* service than their specified worst-case costs.

Figure 4 shows an example schedule assuming periodic job arrivals and that, for an arbitrarily small, positive  $\epsilon < 1$ ,

- the first segment of the first job of  $\tau_2$  executes for only  $1 - \epsilon$  time units,
- the first segment of the second job of  $\tau_1$  executes for only  $1 - \epsilon$  time units,
- the first segment of the third job of  $\tau_2$  executes for only  $1 - \epsilon$  time units, and that
- all other segments must execute for their specified worst-case costs.

At time  $1 - \epsilon$ , the first job of  $\tau_2$  acquires the shared resource because  $\tau_1$  does not issue its request until time 1. Consequently,  $\tau_1$  is blocked until time  $a_{1,1}^2 = 3 - \epsilon$ , and we have

$$ET_{1,1}^2 = \max(ET_{1,0}^2 + T_1, \text{busy}(\tau_1, a_{1,1}^2)) = \max(-T_1 + T_1, 3 - \epsilon) = 3 - \epsilon$$

and

$$ET_{2,1}^2 = \max(ET_{2,0}^2 + T_2, \text{busy}(\tau_2, a_{2,1}^2)) = \max(-T_2 + T_2, 1 - \epsilon) = 1 - \epsilon.$$

The roles of the second jobs of both tasks are reversed: since the second job of  $\tau_1$  locks the shared resource already at time  $9 - \epsilon$ ,  $\tau_2$  is blocked when it attempts to lock the resource at time 9. However, according to the rules of the period enforcer algorithm, the second segment of the second job of  $\tau_1$  is not actually eligible to execute before time  $11 - \epsilon$  since


$$ET_{1,2}^2 = \max(ET_{1,1}^2 + T_1, \text{busy}(\tau_1, a_{1,2}^2)) = \max(3 - \epsilon + 8, 8) = 11 - \epsilon.$$

Consequently, even though the lock is granted to  $\tau_1$  already at time  $9 - \epsilon$ , the critical section is executed only starting at time  $11 - \epsilon$ , and  $\tau_2$  is thus delayed until time  $13 - \epsilon$ . At time  $13 - \epsilon$ ,  $\tau_2$  is immediately eligible to execute since

$$ET_{2,2}^2 = \max(ET_{2,1}^2 + T_2, \text{busy}(\tau_2, a_{2,2}^2)) = \max(1 - \epsilon + 8, 13 - \epsilon) = 13 - \epsilon.$$

The third jobs of both tasks are released at time 16. The roles are swapped again:  $\tau_2$  acquires the lock at time  $a_{2,3}^2 = 17 - \epsilon$ , before  $\tau_1$  can issue its request, because  $\tau_2$ 's first segment requires



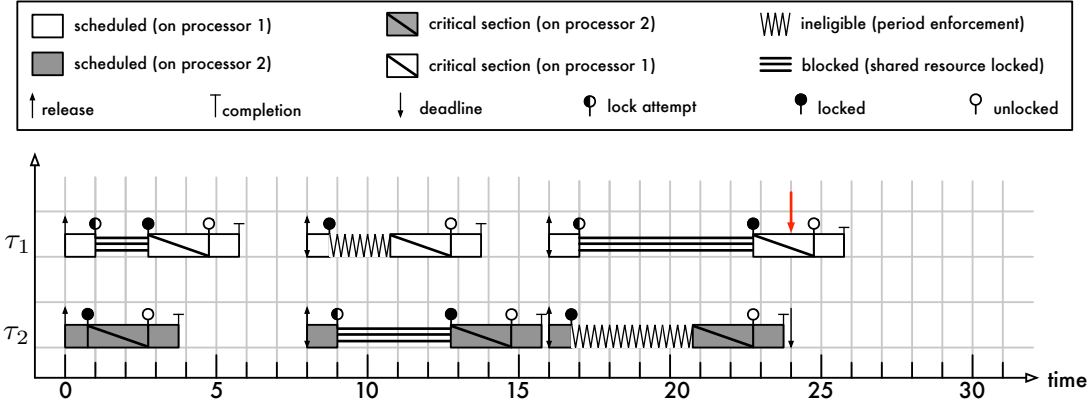

**Figure 4** Example schedule of two tasks  $\tau_1$  and  $\tau_2$  on two processors sharing one lock-protected resource. The example assumes that lock requests take effect immediately, even if the critical section segment is not yet eligible to be scheduled according to the rules of the period enforcer algorithm. Under this interpretation, the third job of task  $\tau_1$  misses its deadline at time 24.

only  $1 - \epsilon$  time units of service. However, according to the period enforcer algorithm's eligibility criterion,  $\tau_2$  cannot actually continue its execution before time  $21 - \epsilon$  since

$$ET_{2,3}^2 = \max(ET_{2,2}^2 + T_2, \text{busy}(\tau_2, a_{2,3}^2)) = \max(13 - \epsilon + 8, 16) = 21 - \epsilon.$$

This, however, means that  $\tau_1$  cannot use the shared resource before time  $23 - \epsilon$ , which leaves insufficient time to complete the second segment of  $\tau_1$ 's third job before its deadline at time 24.

However, as in the previous example, the response-time analyses for both the MPCP [3, 6] and the FMLP [3] predict a worst-case response time of 6 for both tasks (i.e., four time units of execution, and at most two time units of blocking). The example thus demonstrates that, if lock requests take effect immediately, then the period enforcer is incompatible with existing blocking analyses because it increases the effective lock-holding times.

#### 4.4 Discussion

While it is intuitively appealing to combine period enforcement with suspension-based locking protocols, we observe that this causes non-trivial difficulties. In particular, our examples show that the addition of the period enforcer algorithm invalidates all existing blocking analyses. They also suggest that devising a correct blocking analysis would be a substantial challenge due to the demonstrated feedback cycle between the period enforcer rules and blocking durations. Worse, such an analysis carries the risk of being an exercise in futility, as the examples show that substantial response time increases are possible—however, at which point is the period enforcer's sole benefit, namely reduced interference on lower-priority tasks, outweighed by its cost, namely the (possibly large) increases in response times of lock-using higher-priority tasks?

Fundamentally, the period enforcer algorithm's design implicitly rests on the assumption that a segment *can* execute as soon as it is eligible to do so. In the presence of locks, however, this assumption is invalidated. As demonstrated, the result can be a successive growth of self-suspension times until a deadline is missed. In a sense, the period enforcer algorithm, at least as defined in the existing literature, is therefore incompatible with suspension-based locking protocols.

## 5 Concluding Remarks

We have revisited the period enforcer algorithm proposed by Rajkumar [9] to handle segmented self-suspending real-time tasks. One key assumption in the original proposal [9] is that a deferrable task  $\tau_i$  can defer its entire execution time but not parts of it. This creates some mismatches between the original self-suspending task set and the corresponding deferrable task set, which we have demonstrated with an example that shows that Theorem 5 in [9] does not reflect the schedulability of the original self-suspending task system.

Furthermore, the original proposal [9] left open the question of how to convert a segmented self-suspending task system to a corresponding deferrable task system. Taking into account recent developments [7], we have observed that such a task set transformation is non-trivial in the general case.

Nevertheless, Theorem 5 in [9] can be useful for handling self-suspending task systems if there exist *efficient* schedulability tests for the corresponding deferrable task systems or the period enforcer algorithm. However, such tests have not been found yet and the development of a precise and efficient schedulability test for self-suspending tasks remains an open problem.

## References

- 1 N. Audsley, A. Burns, M. Richardson, K. Tindell, and A.J. Wellings. Applying new scheduling theory to static priority pre-emptive scheduling. *Software Engineering Journal*, 8(5):284–292, 1993.
- 2 A. Block, H. Leontyev, B. Brandenburg, and J. Anderson. A flexible real-time locking protocol for multiprocessors. In *Proceedings of the 13th IEEE Conference on Embedded and Real-Time Computing Systems and Applications*, pages 47–57, 2007.
- 3 B. Brandenburg. Improved analysis and evaluation of real-time semaphore protocols for P-FP scheduling. In *Proceedings of the 19th IEEE Real-Time and Embedded Technology and Applications Symposium (RTAS’13)*, pages 141–152, 2013.
- 4 B. Brandenburg and J. Anderson. An implementation of the PCP, SRP, D-PCP, M-PCP, and FMLP real-time synchronization protocols in LITMUS<sup>RM</sup>. In *Proceedings of the 14th IEEE Real-Time and Embedded Technology and Applications Symposium*, pages 185–194, 2008.
- 5 K. Lakshmanan. *Scheduling and Synchronization for Multi-core Real-time Systems*. PhD thesis, Carnegie Mellon University, 2011.
- 6 K. Lakshmanan, D. Niz, and R. Rajkumar. Co-ordinated task scheduling, allocation and synchronization on multiprocessors. In *Proceedings of the 30th IEEE Real-Time Systems Symposium*, pages 469–478, 2009.
- 7 G. Nelissen, J. Fonseca, G. Raravi, and V. Nelis. Timing Analysis of Fixed Priority Self-Suspending Sporadic Tasks. In *Euromicro Conference on Real-Time Systems (ECRTS)*, 2015.
- 8 R. Rajkumar. Real-time synchronization protocols for shared memory multiprocessors. *Proceedings of the 10th International Conference on Distributed Computing Systems*, pages 116–123, 1990.
- 9 R. Rajkumar. Dealing with suspending periodic tasks. Technical report, IBM T. J. Watson Research Center, 1991.
- 10 R. Rajkumar. *Synchronization In Real-Time Systems — A Priority Inheritance Approach*. Kluwer Academic Publishers, 1991.