

# 470th Gdelt Data Analysis

2017-07-26

## Contents


<b>1 Quad Class</b>	<b>1</b>
1.1 Quad Class Bar Graph . . . . .	2
1.2 Quad Class Article Tone . . . . .	3
<b>2 Event Code</b>	<b>3</b>
2.1 Event Code Bar Graph . . . . .	4
<b>3 New</b>	<b>4</b>

## 1 Quad Class


**QuadClass** : (integer) The entire CAMEO event taxonomy is ultimately organized under four primary classifications: Verbal Cooperation, Material Cooperation, Verbal Conflict, and Material Conflict. This field specifies this primary classification for the event type, allowing analysis at the highest level of aggregation. The numeric codes in this field map to the Quad Classes as follows: 1=Verbal Cooperation, 2=Material Cooperation, 3=Verbal Conflict, 4=Material Conflict.

## 1.1 Quad Class Bar Graph

Number of Events by Quad Class

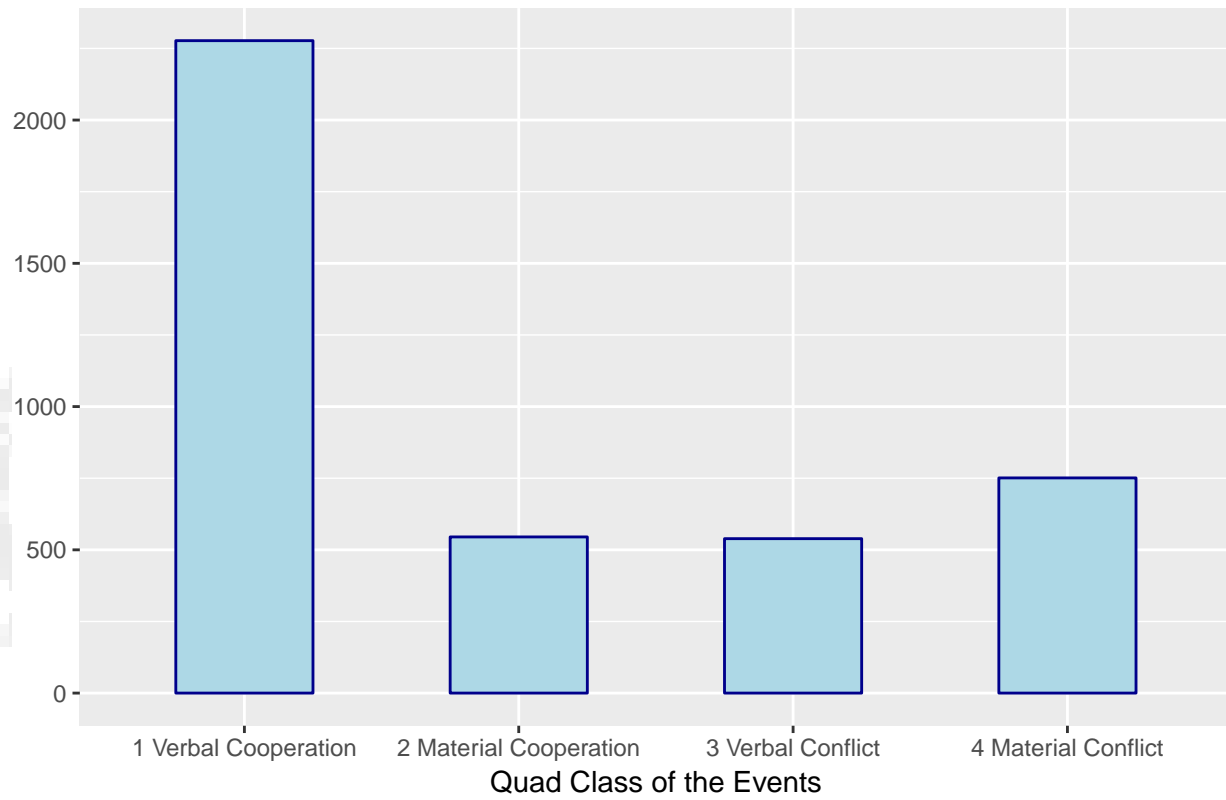

## 1.2 Quad Class Article Tone

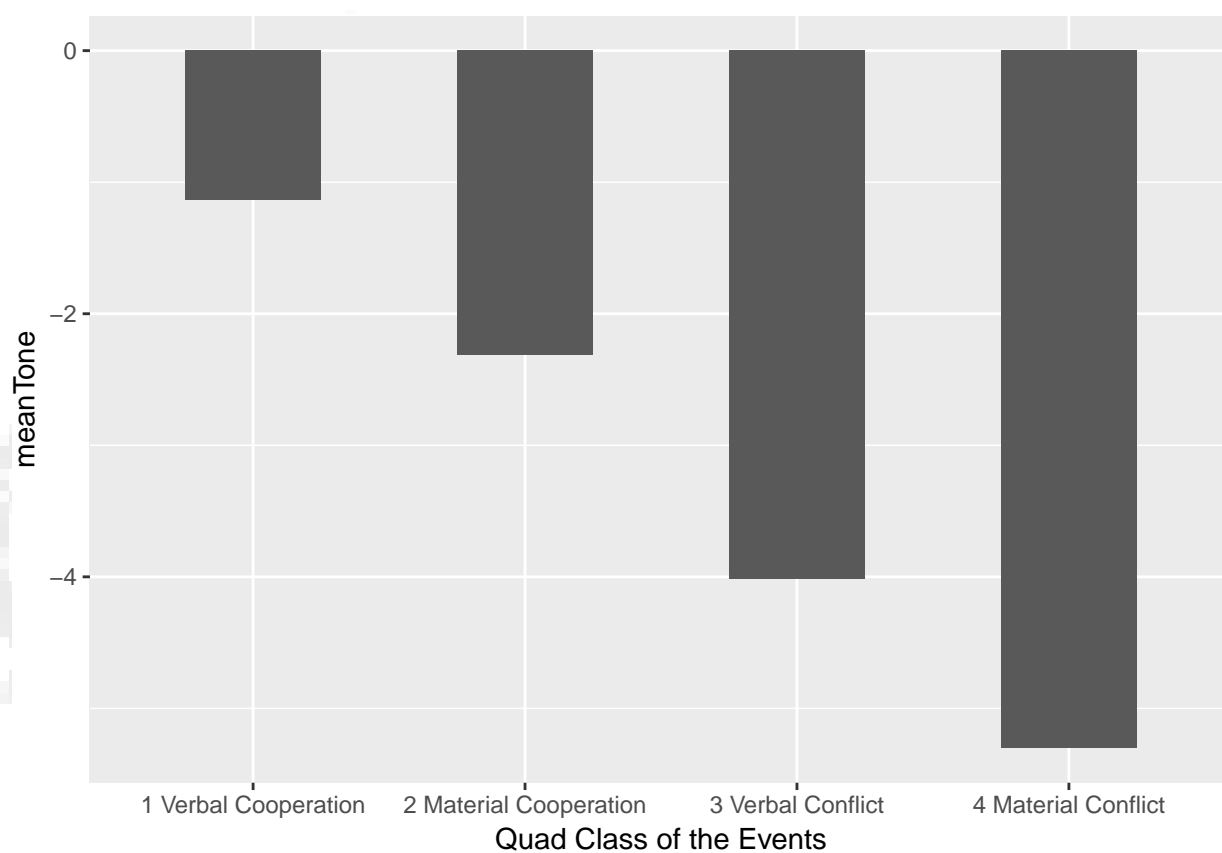


## 2 Event Code

**EventBaseCode:** (string) CAMEO event codes are defined in a three-level taxonomy. For events at level three in the taxonomy, this yields its level two leaf root node. For example, code “0251” (“Appeal for easing of administrative sanctions”) would yield an EventBaseCode of “025” (“Appeal to yield”). This makes it possible to aggregate events at various resolutions of specificity. For events at levels two or one, this field will be set to EventCode. NOTE: it is strongly recommended that this field be stored as a string instead of an integer, since the CAMEO taxonomy can include zero-leaded event codes that can make distinguishing between certain event types more difficult when stored as an integer.

## 2.1 Event Code Bar Graph

Number of Events by Event Code

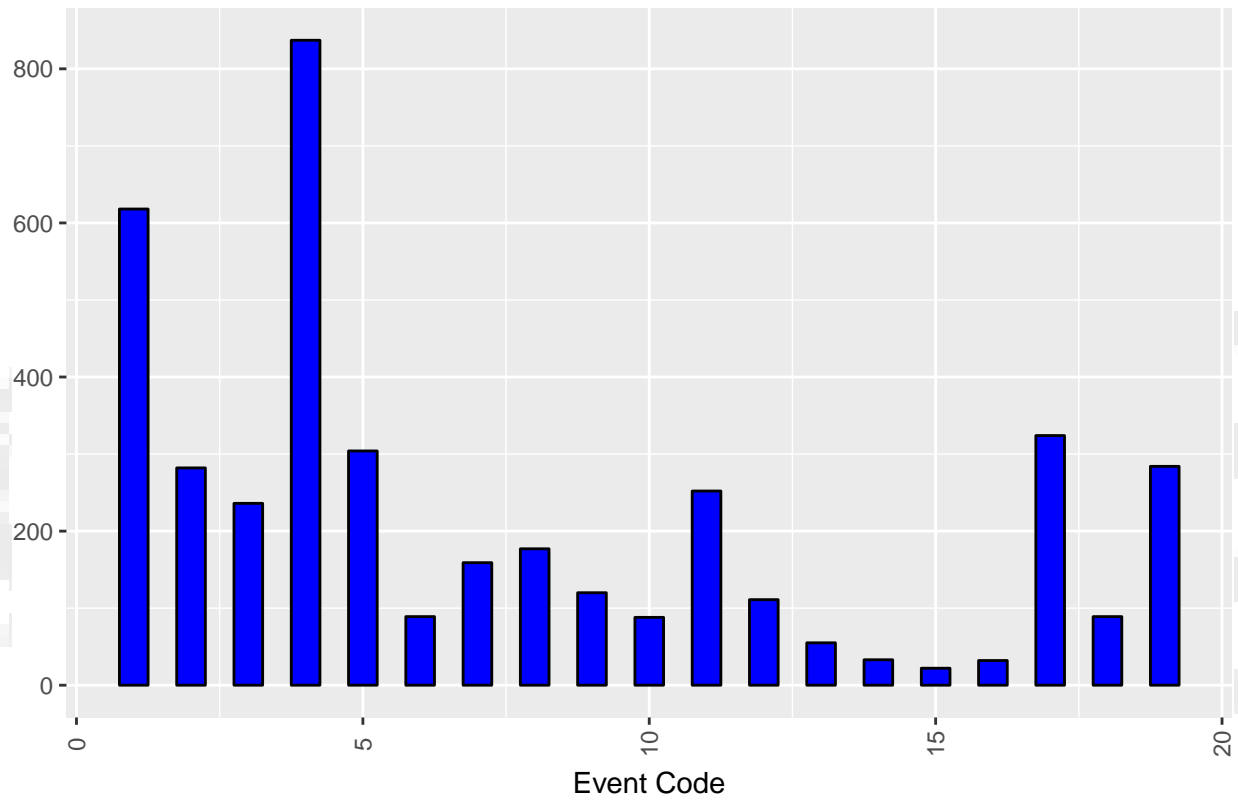

3 New