

LAB 2: AGILE BACKLOG CREATION & SPRINT SIMULATION IN JIRA

Problem statement -Patient Health Record Consent Management System

Name: Jose Tanmay Jerripothu
SRN: PES1UG24CS200

1. Objective

The objective of this lab is to convert the functional requirements of the Patient Health Record Consent Management System into Agile Epics and User Stories, prioritize and estimate the backlog, simulate two one-week sprints in Jira, and analyse progress using the Sprint board and Burndown Chart.

2. Epics and User Stories

The five functional requirements from Lab 1 were represented as five Epics. The Jira backlog was populated with eight User Stories.

Epic 1 – Grant Time-Bounded Record Access (FR-01)

- SLPF-6 Patient Login – 3 points
- SLPF-7 Grant Record Access – 8 points

Epic 2 – Access Revocation Confirmation (FR-02)

- SLPF-8 Revocation Confirmation – 3 points

Epic 3 – View Available Medical Records (FR-03)

- SLPF-9 View Available Medical Records – 3 points

Epic 4 – Doctor Access Request (FR-04)

- SLPF-10 Request Record Access – 5 points
- SLPF-12 Access Diagnostic Records – 5 points

Epic 5 – Revoke Record Access (FR-05)

- SLPF-11 Revoke Record Access – 5 points
- SLPF-13 Record Consent and Access Audit Trail – 5 points

Total backlog estimate: 37 story points. The Jira backlog uses Fibonacci-style story-point values of 3, 5 and 8.

3. Jira Backlog and Story Points

Figure 1 shows the Jira backlog containing the eight User Stories, their Epic associations, statuses and story-point estimates.

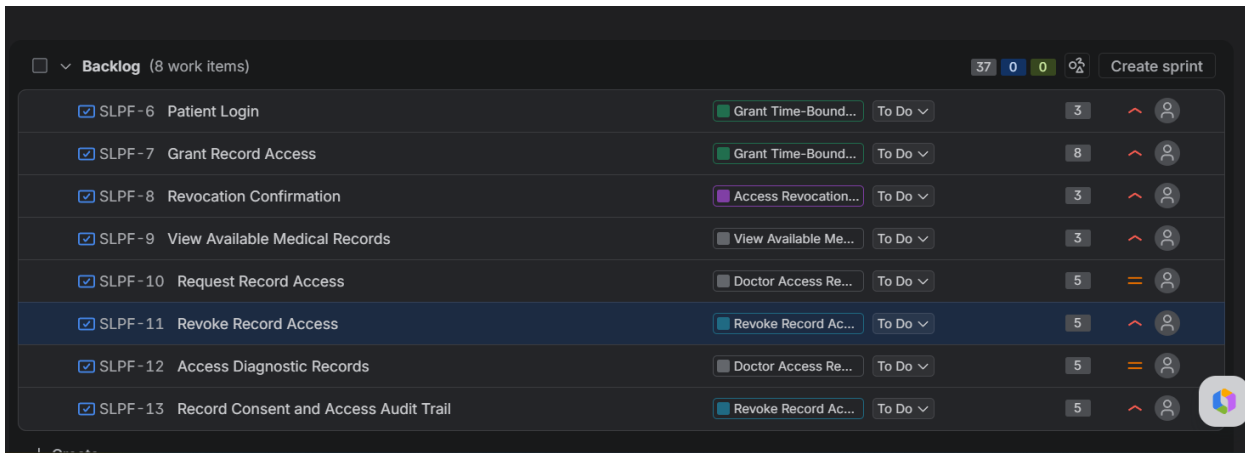


Figure 1: Jira backlog showing User Stories, Epic associations, status and story points.

4. Sprint Simulation

Two one-week sprints were simulated. Sprint 1 contained four stories totalling 19 story points.

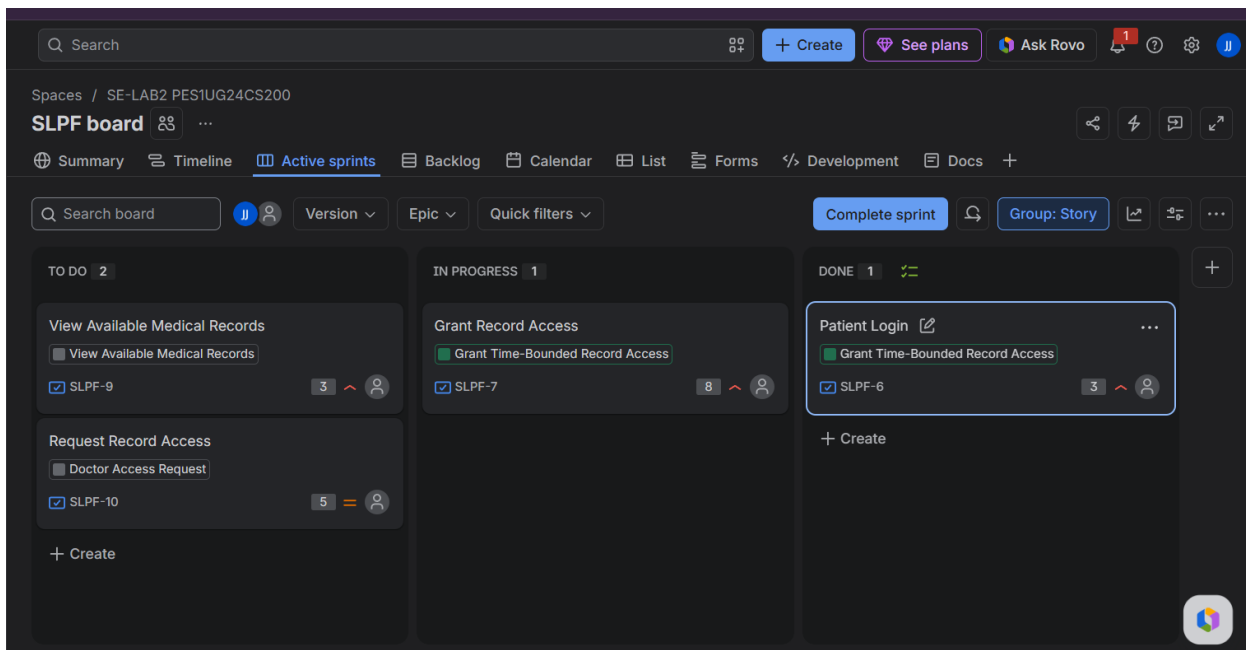


Figure 2: Sprint 1 Active Sprint board.

Sprint 2 contained the remaining four stories with a total estimate of 18 story points.

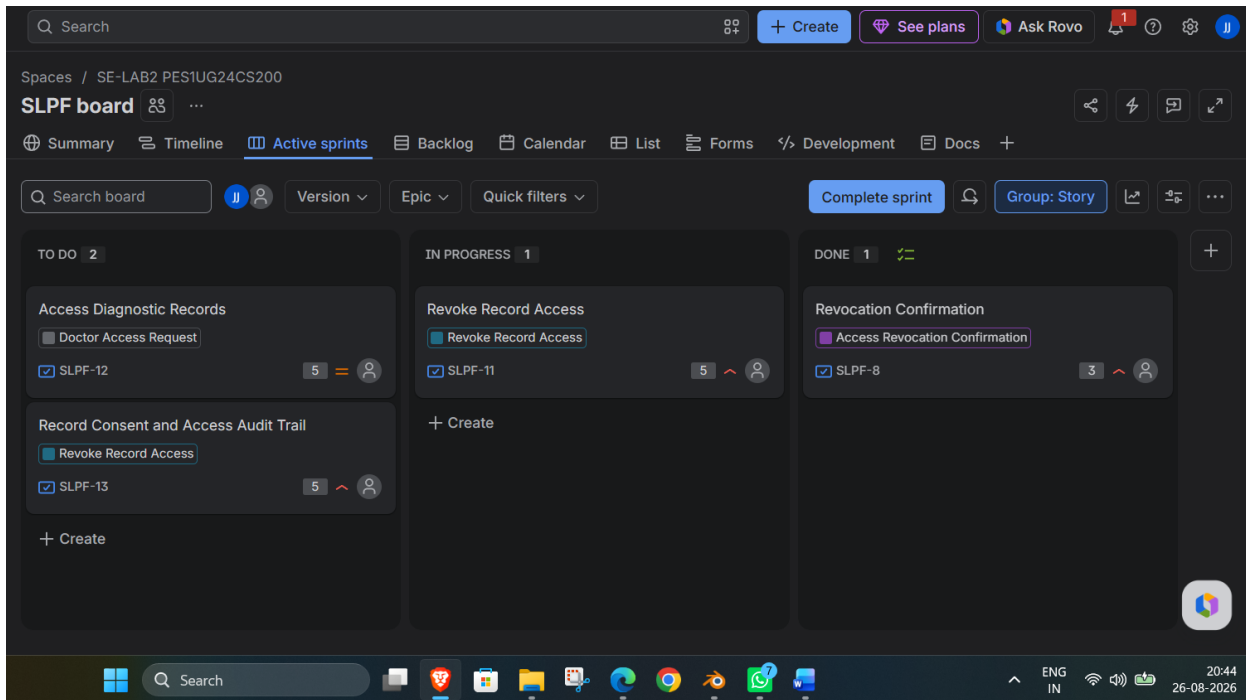


Figure 3: Sprint 2 Active Sprint board.

5. Burndown Chart

The Burndown Chart displays story points against time and compares the planned guideline with remaining work. It shows the Sprint 2 work decreasing from the initial 18-point estimate toward zero.

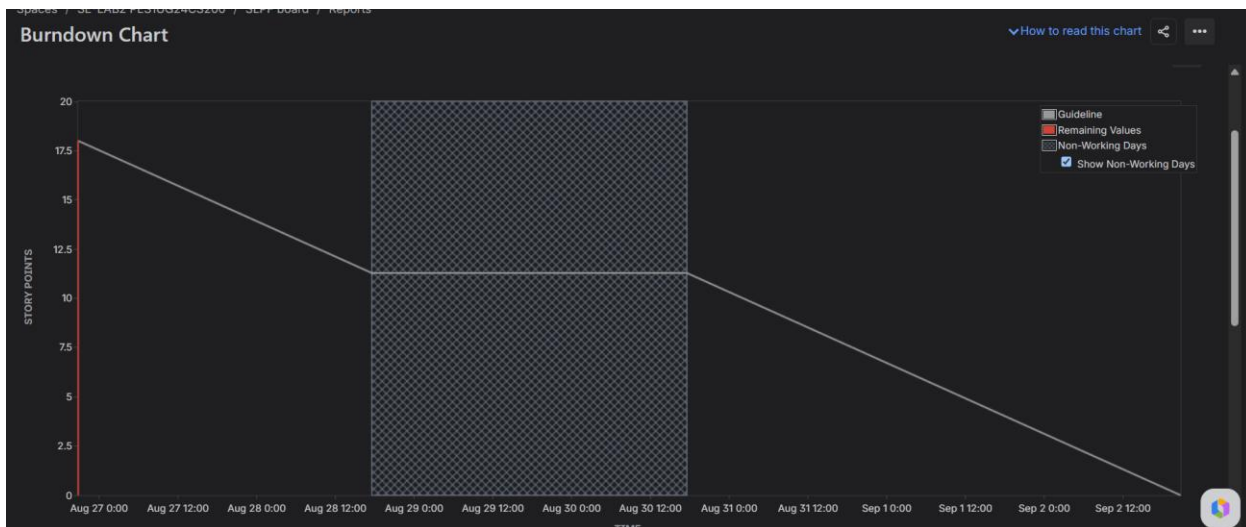


Figure 4: Jira Burndown Chart showing remaining story points.

6. Reflection

1. Did your estimations reflect the actual effort?

The estimates provided a reasonable representation of relative effort. The stories were assigned 3, 5 or 8 points according to their apparent complexity. The Sprint 2 workload was 18 points. Since this was a simulated lab, the estimates mainly served to compare relative complexity and sprint capacity.

2. Was your backlog well-prioritized?

Yes. The backlog was organized around the functional requirements and the core patient-consent workflow. The grant-access and access-control functions were treated as the main functional areas, with viewing, requesting and revocation capabilities grouped under their corresponding Epics.

3. How did your simulated sprint align with your plan?

The simulation followed the planned Scrum workflow. Sprint 1 was created as a one-week sprint, and the selected stories were progressed across To Do, In Progress and Done. After Sprint 1, the remaining four stories were placed into Sprint 2, also planned as a one-week sprint.

4. What insights did the burndown chart give about your team's capacity?

The burndown chart provided a visual indication of remaining story points over time. The planned guideline decreased steadily toward zero, while the remaining work reflected when work was completed. This helps identify whether progress matches the expected rate and whether the committed workload is realistic.

7. Conclusion

The Jira exercise converted the Lab 1 functional requirements into an Agile backlog, organized the work into Epics and User Stories, assigned story points, simulated two one-week sprints, and generated a Burndown Chart. The resulting evidence demonstrates the Scrum workflow and provides a basis for evaluating sprint progress and capacity.