Biomedical Text Embeddings Weakly Capture Chromatin Accessibility Similarity: A Large-Scale Measurement Study

[TODO: author names]
[TODO: department and institution]
[TODO: city, country]
[TODO: corresponding author email]

***Abstract*—Text metadata is the most readily available description of public chromatin accessibility data, but it is not known how well it reflects similarity between the underlying chromatin profiles. We compared pairwise cosine similarity matrices from 12 embedding types across 32,245 human assay for transposase-accessible chromatin with sequencing (ATAC-seq) experiments from ChIP-Atlas. The embeddings were two chromatin representations (Atacformer and regulatory potential, RP), three biomedical language models and one general-domain model applied to full metadata and to cell-type names alone, term frequency-inverse document frequency (TF-IDF), and a random baseline. We measured agreement with Spearman rank correlation, Mantel permutation tests, and top-k neighborhood overlap. On the full dataset, text embeddings correlated with Atacformer similarity at $\rho = 0.20$ to 0.30. This agreement was driven mostly by experiments with few called peaks, which consist largely of promoter peaks (median 69 to 75% within 1 kb of a transcription start site for experiments with 100 to 10,000 peaks) and therefore look alike in both chromatin representations regardless of cell type. Among the 17,232 experiments with at least 5,000 peaks, the correlation with Atacformer fell to $\rho = 0.011$ to 0.016, with less than 0.1% of top-5 neighbors shared. Agreement with RP was weak but persisted ($\rho = 0.06$ to 0.10; 28 to 35% of top-5 neighbors shared), consistent with both capturing coarse cell-type identity. Most of the full-dataset text signal came from sample titles, which mainly identify the submission and sequencing platform. TF-IDF matched or exceeded the language models in every correlation comparison. Text metadata is at best a coarse proxy for chromatin similarity, and peak count should be controlled whenever chromatin representations are compared across public repositories.**

***Index Terms*—genomics, bioinformatics, chromatin, natural language processing, transformers, feature extraction, correlation, similarity measures**

I. Introduction

The rapid growth of epigenomics databases such as ChIP-Atlas [1], Encyclopedia of DNA Elements (ENCODE) [2], and Roadmap Epigenomics [3] has produced tens of thousands of ATAC-seq experiments across diverse human cell types and conditions. Organizing, retrieving, and comparing these experiments requires similarity measures that reflect the underlying biology. A natural question is how far the text metadata attached to each experiment (cell-type labels and descriptions, and sample titles) can serve as a proxy for chromatin accessibility similarity.

This question has direct practical implications. If text embeddings of experimental metadata closely approximate chromatin-based similarity measures (such as those derived from Atacformer or RP), they could enable natural-language retrieval and annotation of ATAC-seq data without access to the raw signal, which would make large epigenomics repositories easier to use. If agreement is limited, the results instead point to fundamental limits on what text can capture and motivate investment in chromatin-specific representation learning.

Recent advances in biomedical natural language processing have produced powerful text encoders pretrained on large biomedical corpora. PubMedBERT [4] is pretrained from scratch on PubMed abstracts and full-text articles. SapBERT [5] and MedCPT [6] are both initialized from a pretrained PubMedBERT checkpoint and further fine-tuned for different objectives: SapBERT through self-alignment on Unified Medical Language System (UMLS) synonym pairs, and MedCPT through contrastive learning on PubMed search logs. These models perform well on biomedical entity recognition, relation extraction, and information retrieval, yet whether their representations capture the biological relationships encoded in chromatin accessibility data has not been systematically evaluated.

Atacformer [7] is a transformer trained on ATAC-seq data with a triplet margin loss so that its embeddings cluster by cell type and chromatin state. Regulatory potential (RP) [8] is a simpler, gene-centered alternative in which each gene is scored by the peaks near its transcription start site (TSS), weighted by their distance from it.

We compare pairwise cosine similarity matrices from 12 embedding types (two chromatin representations, four language models applied to full metadata and to cell-type names, TF-IDF, and a random baseline) across 32,245 curated human ATAC-seq experiments, treating both agreement and disagreement as informative findings. Public repositories mix experiments of very different quality, so we also examine how the number of called peaks affects these comparisons, and we base our primary analysis on experiments with at least 5,000 peaks.

The key findings are:

- Peak count strongly shapes similarity in both chromatin

representations. Experiments with few peaks consist mostly of promoter peaks, and they inflate apparent text-chromatin agreement on the full dataset.
- In experiments with at least 5,000 peaks, text barely tracks Atacformer similarity and tracks RP only weakly, mostly through coarse cell-type identity.
- TF-IDF matches all four language models. On the full dataset, most of the text signal comes from sample titles, which reflect data provenance more than biology.

II. Methods

Fig. 1 summarizes the study design. Chromatin-based embeddings (Atacformer, RP) and text-based embeddings (language models, TF-IDF, and a random baseline) are computed for each experiment, converted into pairwise similarity matrices at the cell-type and experiment levels, and compared using the metrics described in Section II-E.

A. Dataset

We obtained 48,822 human ATAC-seq experiments from ChIP-Atlas (hg38 assembly) [1]. We removed 16,567 experiments with corrupted or empty BED files and 10 experiments producing zero regulatory potential signal near gene TSSs, leaving a curated set of 32,245 experiments spanning 1,108 cell types.

We used the ChIP-Atlas peak calls at $q < 10^{-10}$. The number of peaks per experiment ranges from 1 to 181,134 (median 6,287; interquartile range 780 to 19,836), and 8,964 experiments have fewer than 1,000 peaks. Because experiments with few peaks retain mostly promoter peaks (Section III-A), our primary analysis uses the 17,232 experiments with at least 5,000 peaks, which we call *well-covered* experiments. We use peak count as a proxy for sequencing depth and library quality, which were not part of the metadata we used. Results on all 32,245 experiments (the *full dataset*) are reported for comparison.

B. Atacformer Embeddings

We encoded each experiment using databio/atacformer-base-hg38 (AtacformerForCellClustering) [7], a transformer trained with a triplet margin loss. Peak BED files were tokenized using the gtars Tokenizer with a vocabulary of 890K genomic regions. Up to 1,024 randomly sampled peak tokens were mean-pooled to produce a 192-dimensional embedding per experiment.

C. Regulatory Potential Embeddings

We computed RP for each experiment using a LISA2-style exponential decay model [8]. Each peak's contribution to a gene is weighted by $w(d) = e^{-d/10\,\mathrm{kb}}$, where d is the distance to the gene's TSS, and peaks overlapping annotated exons receive a fixed weight of 1.0 instead. Summing over all peaks gives a per-gene RP score, and stacking these scores over all hg38 autosomal gene TSSs maps each experiment to a 40,772-dimensional vector.

D. Text Embeddings

For each experiment we built a metadata string by concatenating the available fields: {cell_type}. {cell_type_class}. {cell_type_description}. {title}. The description is the ChIP-Atlas cell-type description (for example, primary tissue and diagnosis), and the title is the experiment title from the sequencing archive record. We embedded this string with four encoders, each producing 768-dimensional embeddings. Three are biomedical models: PubMedBERT [4] (microsoft/BiomedNLP-BiomedBERT-base-uncased-abstract-fulltext, mean pooling), SapBERT [5] (cambridgeltl/SapBERT-from-PubMedBERT-fulltext, classification token (CLS) pooling), and MedCPT [6] (ncbi/MedCPT-Query-Encoder, mean pooling). The fourth is a general-domain sentence encoder [10] (sentence-transformers/all-mpnet-base-v2, mean pooling), which we call General. We refer to the four encoders as language models (LMs). To isolate the contribution of cell-type identity, we also encoded the cell-type name alone with all four models (name-only variants). We additionally computed TF-IDF embeddings (top 2,048 features, sublinear term frequency, 2,048-dimensional) and a random Gaussian baseline (192-dimensional, seed 42).

E. Similarity Matrices and Comparison Metrics

For each embedding type we built pairwise cosine similarity matrices at two levels.

Cell-type level. Experiment embeddings were mean-pooled within each cell type to give one vector per cell type. A corpus mean vector, computed from an arbitrary subset of 10,000 experiment embeddings, was subtracted from each cell-type vector. For every pair of cell types (i, j), the cosine similarity between their centered vectors was stored in entry (i, j), giving a symmetric matrix ($1{,}108 \times 1{,}108$ for the full dataset) with ones on the diagonal.

Experiment level. The same centering was applied to individual experiment embeddings, and the cosine similarity between every pair of experiments (i, j) was stored in entry (i, j) ($32{,}245 \times 32{,}245$ for the full dataset).

Corpus centering corrects for anisotropy in transformer mean-pooled representations. Without it, embeddings tend to occupy a narrow cone, which inflates all cosine similarities and hides relative differences between pairs. The centering vector was estimated from individual experiments rather than from cell-type means, so that it does not depend on the level of aggregation.

We compared each text-embedding similarity matrix with each chromatin reference (Atacformer and RP) in three ways. The main measure was the Spearman rank correlation (ρ) between upper-triangle entries, with bootstrap 95% confidence intervals (CIs) from 1,000 resamples of cell types or experiments (50,000 randomly sampled pairs per resample). At the cell-type level we also ran one-sided Mantel permutation tests (1,000 permutations). Finally, we measured top-k neigh-

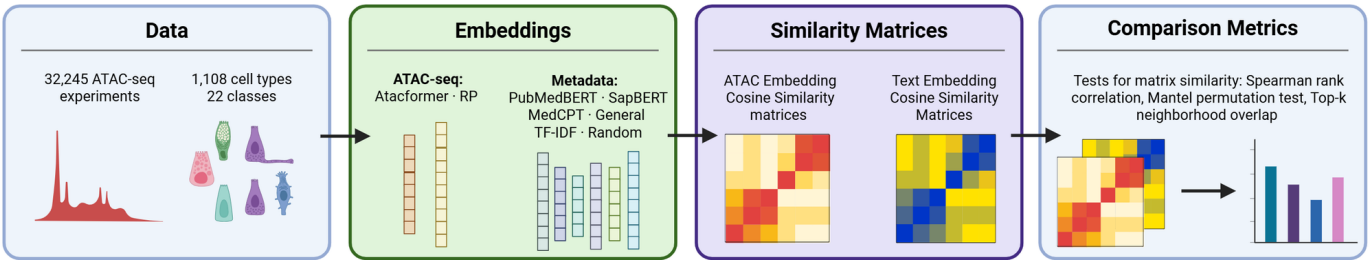


Fig. 1. Study design. ATAC-seq experiments are embedded with chromatin-based models (Atacformer, RP), text encoders (biomedical and general-domain language models, TF-IDF), and a random baseline. Pairwise cosine similarity matrices are computed at the cell-type and experiment levels and compared using Spearman rank correlation, Mantel permutation tests, and top-k neighborhood overlap. Created with BioRender.com [9].

borhood overlap, the mean fraction of shared top-k nearest neighbors, for $k \in \{5, 10, 20, 50\}$.

For the primary analysis, cell-type vectors were recomputed from well-covered experiments only (954 cell types), and experiment-level matrices were restricted to the 17,232 well-covered experiments. The corpus mean used for centering was unchanged, and experiment-level correlations were computed on 2×10^6 randomly sampled pairs.

F. Technical Covariates and Sensitivity Analyses

For each experiment we recorded the number of peaks in its BED file and the fraction of peaks whose midpoint lies within 1 kb of an annotated RefSeq TSS (the hg38 annotation used for RP). For a pair of experiments with n_i and n_j peaks, we defined *depth match* as $-|\log_{10} n_i - \log_{10} n_j|$ and *mean depth* as $(\log_{10} n_i + \log_{10} n_j)/2$. On the full dataset we used these quantities in four analyses: (i) Spearman correlations within peak-count strata, using pairs in which both experiments have fewer than 1,000, 1,000 to 5,000, 5,000 to 10,000, or at least 10,000 peaks; (ii) partial Spearman correlations controlling for depth match and mean depth, and separately for indicators of shared cell type and shared cell-type class, computed by regressing the covariate ranks out of each variable's ranks; (iii) a title-only TF-IDF embedding with the same settings, fit on the title field alone and corpus-centered, to isolate the contribution of sample titles; and (iv) recomputation of the Atacformer, RP, full-text LM, and TF-IDF similarities without corpus centering. Uncertainty for partial correlations was estimated with an experiment-level block bootstrap (1,000 resamples of experiments, 200,000 pairs each).

G. Comparing Language Models with TF-IDF

To test whether the LMs capture information related to chromatin similarity beyond vocabulary overlap, we compared the full-text LM embeddings with TF-IDF in three ways.

Pairwise similarity scatter. On the full dataset, we sampled 25,000 random experiment pairs, plotted TF-IDF similarity against LM similarity, and colored each point by Atacformer similarity. Points above the diagonal are pairs that the LM scores higher than TF-IDF. We also computed the Spearman correlation between the TF-IDF and LM similarities on the same pairs.

Partial correlation. We computed the partial Spearman correlation of each LM similarity matrix with each chromatin reference, controlling for TF-IDF. For Atacformer (AC), this is

$$\rho_{LM,AC|TF} = \frac{\rho_{LM,AC} - \rho_{LM,TF}\,\rho_{AC,TF}}{\sqrt{(1-\rho_{LM,TF}^2)(1-\rho_{AC,TF}^2)}}, \qquad (1)$$

where $\rho_{X,Y}$ is the Spearman correlation between the upper-triangle entries of matrices X and Y, estimated on 2×10^6 random pairs (out of about 148 million pairs for well-covered experiments and 520 million for the full dataset). A positive value means that the LM similarity is associated with chromatin similarity beyond what TF-IDF explains. A value near zero or below means that TF-IDF accounts for the LM's agreement with the reference.

Cross top-k overlap. For each LM, we computed the mean fraction of its top-k nearest neighbors that are also top-k TF-IDF neighbors ($k \in \{5, 10, 20, 50\}$ on the full dataset and $k = 5$ in well-covered experiments). High overlap means that the LM's local structure largely reproduces TF-IDF.

III. Results

A. Peak Count Inflates Apparent Text-Chromatin Agreement

Experiments with few peaks consist mostly of promoter peaks (Fig. 2a). In every peak-count bin between 100 and 10,000 peaks, the median experiment had 69 to 75% of its peaks within 1 kb of a TSS. The fraction fell to 57% at 10,000 to 20,000 peaks, 39% at 20,000 to 50,000 peaks, and 24% above 50,000 peaks. The 1,689 experiments with fewer than 100 peaks were an exception (median 42%). Promoters of broadly expressed genes are accessible in most cell types, so experiments that retain mainly promoter peaks tend to resemble one another whatever their cell type.

Peak count is also strongly associated with similarity in both chromatin representations. On the full dataset, Atacformer similarity correlated with depth match (Section II-F) at $\rho = 0.66$ and RP similarity at $\rho = 0.59$, more strongly than any text embedding correlated with either reference. After controlling for depth match and mean depth, the experiment-level correlation between Atacformer and RP dropped from 0.22 to -0.02. Peak count matters within cell types as well. Across 406 cell types with at least 10 experiments, mean within-cell-type Atacformer similarity was lower in cell types with a

wider spread of peak counts (Spearman $\rho = -0.77$ against the standard deviation of $\log_{10}$ peak count; RP: $\rho = -0.71$).

Text-Atacformer agreement on the full dataset comes mostly from low-peak experiments (Fig. 2b). When both experiments in a pair have fewer than 1,000 peaks, text embeddings correlate with Atacformer at $\rho = 0.38$ to 0.41. The correlation drops to 0.08 to 0.09 at 1,000 to 5,000 peaks, 0.02 to 0.04 at 5,000 to 10,000 peaks, and 0.007 to 0.012 at 10,000 peaks or more. Agreement with RP behaves differently (Fig. 2c). It is lowest in the two low-peak strata ($\rho = 0.04$ to 0.10) and higher in the two well-covered strata ($\rho = 0.08$ to 0.17).

Within the metadata, most of the signal comes from sample titles. On the same 2×10^6 pairs, a TF-IDF embedding of the title field alone correlated with Atacformer as strongly as PubMedBERT applied to the full metadata string ($\rho = 0.275$ for both). Within cell types, where the other fields are mostly constant, the title-only embedding exceeded every full-text model ($\rho = 0.24$ vs. 0.20 to 0.22), and controlling for title similarity reduced the within-cell-type correlations of the text embeddings with Atacformer to 0.04 to 0.06. The titles are archive sample names such as "GSM3381886: F 2 p; Homo sapiens; ATAC-seq" or "Illumina HiSeq 2500 sequencing of SAMD00123421". Many of them name only the submission or the sequencing platform, so the shared signal most likely reflects data provenance. Provenance is also tied to peak count. Controlling for depth match and mean depth reduced the title-only correlation with Atacformer from 0.275 to 0.092. Cell-type labels, by comparison, explained little of the full-dataset correlation. Controlling for shared cell type and shared cell-type class reduced PubMedBERT's correlation with Atacformer only from 0.275 to 0.254.

We therefore base our primary analysis on well-covered experiments ($\geq$5,000 peaks). The threshold is pragmatic. Experiments with 5,000 to 10,000 peaks are still promoter-rich (Fig. 2a), but experiment-level correlations computed with a 10,000-peak threshold lead to the same conclusions.

B. Text Weakly Tracks RP but Not Atacformer in Well-Covered Experiments

As a sanity check, we embedded 34 representative cell types by averaging over all of their experiments (Fig. 3). Atacformer and RP showed coherent lineage structure, with immune, neural, and cancer cell types forming distinct groups, while the text embeddings showed coarser organization.

Table I summarizes agreement in the 17,232 well-covered experiments (954 cell types). Text embeddings showed no positive agreement with Atacformer. At the cell-type level, the correlations of the full-text LMs and TF-IDF with Atacformer were zero or slightly negative ($\rho = -0.074$ to -0.023; one-sided Mantel $p > 0.98$). At the experiment level they were close to zero ($\rho = 0.011$ to 0.016), compared with 0.20 to 0.30 on the full dataset. Agreement with RP was weak but consistent. The full-text LMs and TF-IDF correlated with RP at $\rho = 0.038$ to 0.068 at the cell-type level (Mantel $p = 0.001$) and at 0.061 to 0.098 at the experiment level. Atacformer and RP agreed with each other at the cell-type level ($\rho = 0.365$) but only modestly at the experiment level ($\rho = 0.107$).

At the cell-type level, the name-only variants agreed with RP much less than the full-text models ($\rho = 0.003$ to 0.021 vs. 0.038 to 0.068), so the description and title fields add information beyond the cell-type name. At the experiment level the gap was smaller ($\rho = 0.035$ to 0.080 for the name-only variants).

C. Language Models Add Little Beyond Vocabulary Overlap

In well-covered experiments, TF-IDF fell within the range of the four LMs on every correlation in Table I. After controlling for TF-IDF, partial correlations with Atacformer were near zero for all four LMs ($\rho_{\text{partial}} = 0.000$ to 0.006; all bootstrap 95% CIs within -0.004 to 0.011). Partial correlations with RP were small for MedCPT, General, and SapBERT ($\rho_{\text{partial}} = 0.046$, 0.046, and 0.037) and near zero for PubMedBERT (0.003). LM and TF-IDF similarities were strongly correlated ($\rho = 0.52$ to 0.73), and 44 to 45% of each LM's top-5 neighbors were also TF-IDF neighbors.

On the full dataset (Figs. 4 to 7), PubMedBERT ($\rho_{\text{partial}} = 0.051$; 95% CI 0.048 to 0.059) and SapBERT (0.045; CI 0.039 to 0.049) kept positive partial correlations with Atacformer, whereas MedCPT (-0.030) and General (-0.042) did not. This difference holds up under experiment-level resampling, but it disappears in well-covered experiments and depends on corpus centering. Without centering, PubMedBERT, SapBERT, and MedCPT all have clearly positive partial correlations (0.14 to 0.26), and PubMedBERT ($\rho = 0.292$) has a higher raw correlation with Atacformer than TF-IDF does ($\rho = 0.153$). We therefore do not read the full-dataset differences among LMs as evidence about their pretraining or fine-tuning objectives.

D. Text Shares Local Structure with RP but Not Atacformer

Nearest-neighbor overlap showed the same split between the two references. In well-covered experiments, the full-text LMs shared 31 to 35% of their top-5 neighbors with RP (PubMedBERT 34.7%, SapBERT 34.2%, General 32.8%, MedCPT 30.9%), TF-IDF shared 28.2%, and the name-only variants about 12%. With Atacformer, every text embedding shared less than 0.1% of its top-5 neighbors, against 0.03% expected by chance, and Atacformer and RP shared only 0.1% with each other. On the full dataset the corresponding values were 20 to 23% for RP and 2 to 3% for Atacformer (Figs. 8 to 10).

Neighborhood purity helps explain the difference. In well-covered experiments, 76% of an experiment's top-5 RP neighbors shared its cell-type label (93 to 96% for the full-text embeddings), compared with 1.3% for Atacformer, barely above the 0.8% expected by chance. On the full dataset the values were 72% for RP and 21% for Atacformer. Within well-covered experiments, Atacformer similarity was only weakly related to depth match ($\rho = 0.06$), but RP similarity was still strongly related to it ($\rho = 0.57$). Experiments of the same cell type were also far more similar to each other under

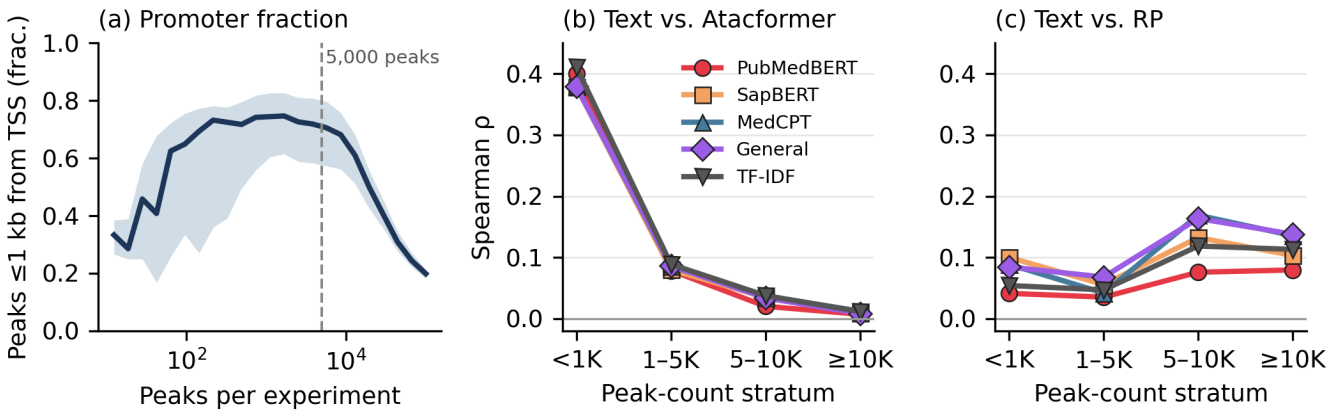


Fig. 2. Peak count and text-chromatin agreement on the full dataset. (a) Fraction of each experiment's peaks within 1 kb of an annotated TSS against its number of peaks (median and interquartile range in log-spaced bins containing at least 30 experiments). The dashed line marks the 5,000-peak threshold used for the primary analysis. (b, c) Spearman correlation between text-embedding similarity and Atacformer (b) or RP (c) similarity, computed separately for pairs in which both experiments fall in the same peak-count stratum (2×10^6 random pairs in total).

TABLE I

SPEARMAN CORRELATION (ρ) BETWEEN EACH EMBEDDING'S SIMILARITY MATRIX AND THE ATACFORMER AND RP SIMILARITY MATRICES. PRIMARY ANALYSIS: WELL-COVERED EXPERIMENTS ($\geq$5,000 PEAKS; 954 CELL TYPES AND 17,232 EXPERIMENTS), WITH 95% BOOTSTRAP CIS AT THE EXPERIMENT LEVEL (1,000 RESAMPLES OF EXPERIMENTS, 50,000 PAIRS EACH). FULL: ALL 32,245 EXPERIMENTS. SIGNIFICANCE MARKERS (ONE-SIDED MANTEL TEST FOR POSITIVE ASSOCIATION, 1,000 PERMUTATIONS) ARE GIVEN FOR THE CELL-TYPE LEVEL ONLY.

	vs. Atacformer			vs. RP		
	$\geq$5,000 peaks		Full	$\geq$5,000 peaks		Full
Embedding	Cell type	Experiment [95% CI]	Experiment	Cell type	Experiment [95% CI]	Experiment
Atacformer / RP	0.365^{***}	0.107 [0.097, 0.116]	0.216	0.365^{***}	0.107 [0.097, 0.117]	0.216
PubMedBERT (full text)	-0.030^{ns}	0.011 [0.001, 0.020]	0.276	0.038^{***}	0.061 [0.051, 0.072]	0.092
SapBERT (full text)	-0.023^{ns}	0.013 [0.004, 0.022]	0.248	0.066^{***}	0.078 [0.069, 0.088]	0.074
MedCPT (full text)	-0.074^{ns}	0.016 [0.006, 0.025]	0.229	0.062^{***}	0.098 [0.087, 0.106]	0.090
General (full text)	-0.053^{ns}	0.014 [0.005, 0.023]	0.196	0.068^{***}	0.095 [0.085, 0.104]	0.088
TF-IDF	-0.057^{ns}	0.016 [0.007, 0.025]	0.300	0.065^{***}	0.091 [0.081, 0.101]	0.089
PubMedBERT (name only)	-0.071^{ns}	0.005 [−0.004, 0.013]	0.090	0.003^{ns}	0.035 [0.026, 0.044]	0.018
SapBERT (name only)	-0.101^{ns}	0.008 [−0.001, 0.017]	0.137	0.013^{ns}	0.065 [0.056, 0.074]	0.026
MedCPT (name only)	-0.098^{ns}	0.012 [0.002, 0.020]	0.068	0.021^{*}	0.080 [0.070, 0.089]	0.022
General (name only)	-0.060^{ns}	0.006 [−0.003, 0.016]	0.090	0.015^{*}	0.039 [0.030, 0.048]	0.010
Random Gaussian	0.003^{*}	0.000 [−0.008, 0.009]	0.000	0.003^{*}	0.000 [−0.009, 0.009]	0.000

$^{***}p \leq 0.001$; $^{*}p < 0.05$; ^{ns} not significant. The small random-baseline correlation at the cell-type level likely reflects centering, because subtracting the corpus mean gives the near-zero means of large cell types a common direction.

RP than under Atacformer (median within-cell-type similarity 0.51 vs. 0.17 across 796 cell types with at least two well-covered experiments; Atacformer lower for 96.7% of cell types; Wilcoxon signed-rank $p = 1.1 \times 10^{-125}$). The full-dataset versions of this comparison are shown in Figs. 11 and 12.

RP thus reflects cell-type identity, which text metadata also encodes, although RP remains sensitive to peak count. Individual Atacformer embeddings of well-covered experiments, in contrast, carry little cell-type information. Their nearest neighbors rarely share a cell type, even though cell-type averages still agree with RP. The low agreement between text and Atacformer is therefore not evidence that Atacformer captures finer biological variation that text misses. One possible explanation, which we did not test, is that each Atacformer embedding averages at most 1,024 randomly sampled peaks (Section II-B), a small and variable fraction of the peaks in a well-covered experiment.

Tables II and III list full-dataset pairs with high chromatin similarity but low TF-IDF similarity. Many of these pairs involve low-peak experiments. Every experiment in Table III has at most 1,438 peaks (the corpus median is 6,287), and the first pair in Table II (NCI-H1299 and CD4+ T cells) has 1,181 and 1,272 peaks. The remaining Atacformer pairs vary more in peak count.

IV. DISCUSSION

Our results put quantitative bounds on how well experimental metadata can stand in for ATAC-seq chromatin similarity, and they show that these bounds depend on data quality. On the full ChIP-Atlas set, text embeddings correlated with Atacformer similarity at $\rho = 0.20$ to 0.30. Most of this

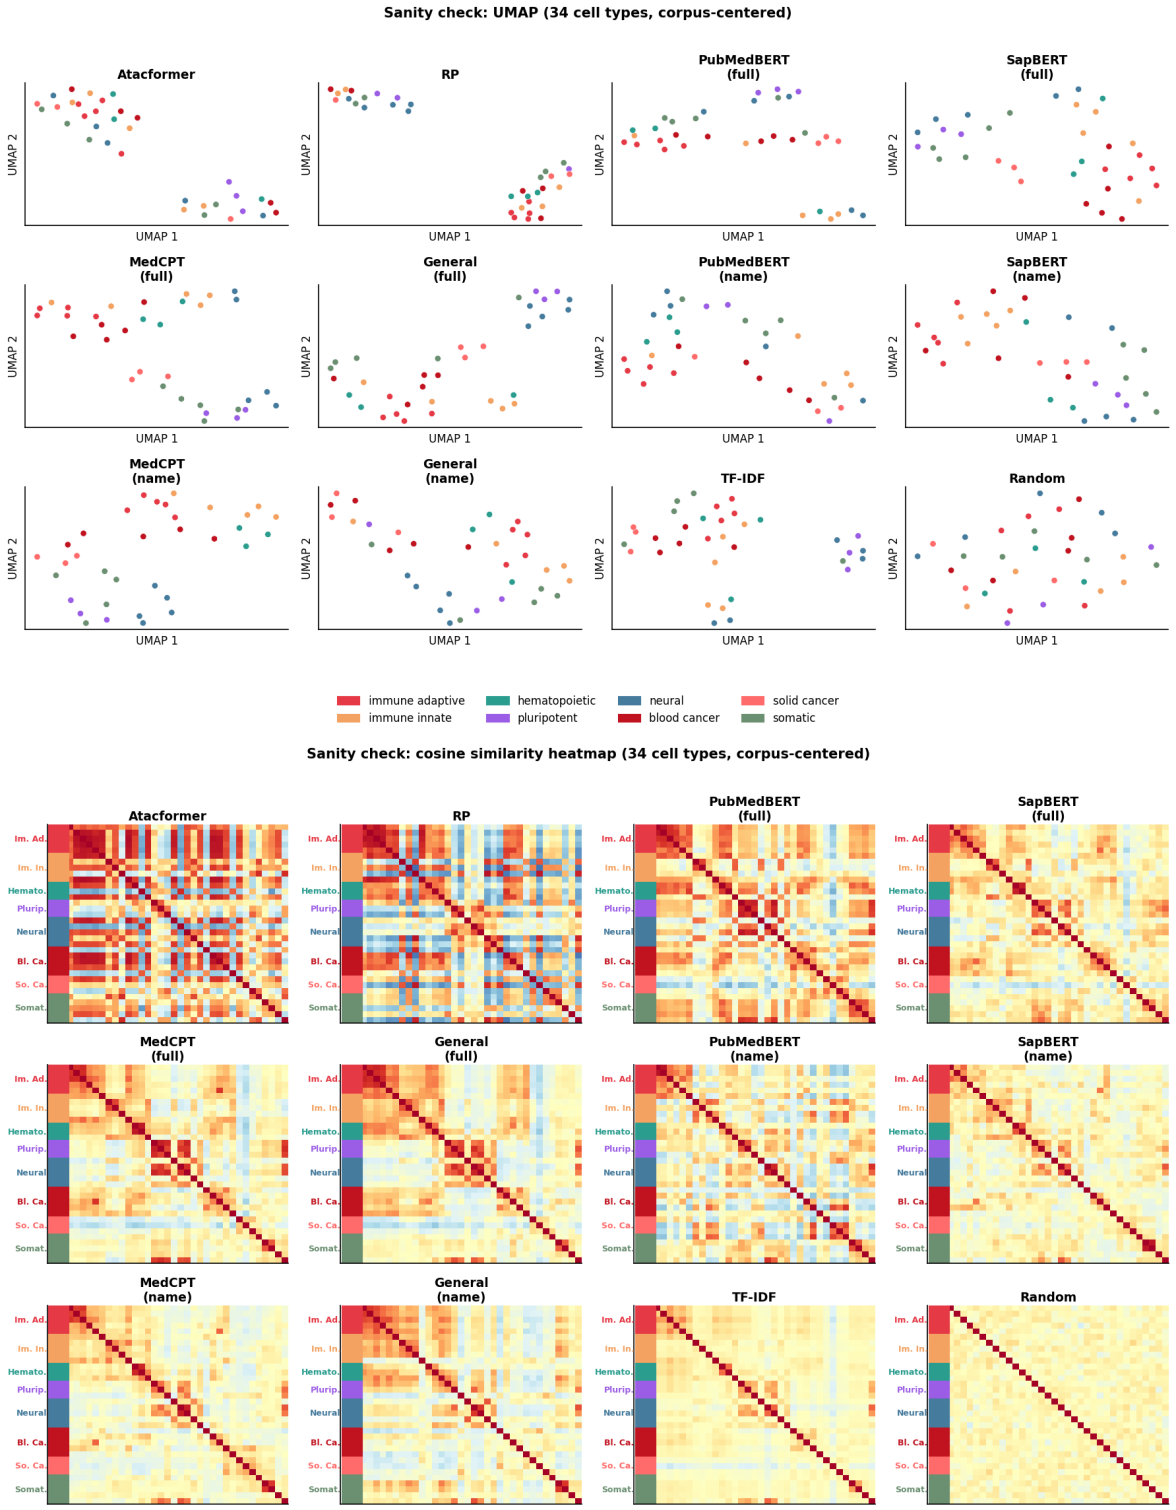


Fig. 3. Sanity check on 34 representative cell types chosen by hand to span major lineages (immune, neural, stem and progenitor, cancer, and stromal), using cell-type mean embeddings over all experiments. Top: Uniform Manifold Approximation and Projection (UMAP) projections. Bottom: cosine similarity heatmaps. All 12 embedding conditions are shown.

agreement came from low-peak experiments, whose promoter-dominated peak sets make them look alike in both chromatin representations, and from sample titles, which reflect data provenance and are tied to peak count. Among well-covered experiments, text embeddings barely tracked Atacformer similarity.

TABLE II

FULL-DATASET EXPERIMENT PAIRS WITH HIGH ATACFORMER SIMILARITY (TOP 5%) AND LOW TF-IDF SIMILARITY (BELOW THE MEDIAN). THE FIRST PAIR CONSISTS OF TWO LOW-PEAK EXPERIMENTS (1,181 AND 1,272 PEAKS). CELL-TYPE LABELS ARE GIVEN AS ANNOTATED IN CHIP-ATLAS; "(UNLABELED)" MARKS EXPERIMENTS WITHOUT A CELL-TYPE ANNOTATION. IPSC, INDUCED PLURIPOTENT STEM CELL.

Cell type A	Cell type B	Atac.	TF-IDF
NCI-H1299	CD4+ T cells	0.374	−0.196
iPSC derived cells	PC-9	0.361	−0.176
NCI-H1648	iMeLCs	0.312	−0.214
(unlabeled)	CD4+ T cells	0.398	−0.147
NCI-H1648	iPSC neural cells	0.307	−0.204
(unlabeled)	IMR-90	0.309	−0.188
(unlabeled)	MV-4-11	0.331	−0.156
(unlabeled)	Neural crest cells	0.310	−0.179
iPSC derived cells	Jurkat	0.318	−0.164
(unlabeled)	DND-41	0.316	−0.161

TABLE III

FULL-DATASET EXPERIMENT PAIRS WITH HIGH RP SIMILARITY AND LOW TF-IDF SIMILARITY, SELECTED AS IN TABLE II. EVERY EXPERIMENT IN THIS TABLE HAS AT MOST 1,438 PEAKS, AND THEIR MEDIAN PROMOTER FRACTION IS 72% (CORPUS MEDIAN 57%). PBMC, PERIPHERAL BLOOD MONONUCLEAR CELLS; ES, EMBRYONIC STEM.

Cell type A	Cell type B	RP	TF-IDF
iPSC derived cells	K-562	0.885	−0.221
NCI-H2347	PBMC	0.884	−0.181
RERF-LC-Ad1	XG-6	0.851	−0.224
(unlabeled)	PKC19	0.901	−0.171
iPSC derived cells	T-47D	0.874	−0.185
(unlabeled)	B-cell leukemia	0.891	−0.170
NCI-H1648	B cells	0.859	−0.181
NCI-H1703	CD4+ T cells	0.851	−0.186
NCI-H1299	CD4+ T cells	0.833	−0.196
(unlabeled)	ES cells	0.916	−0.154

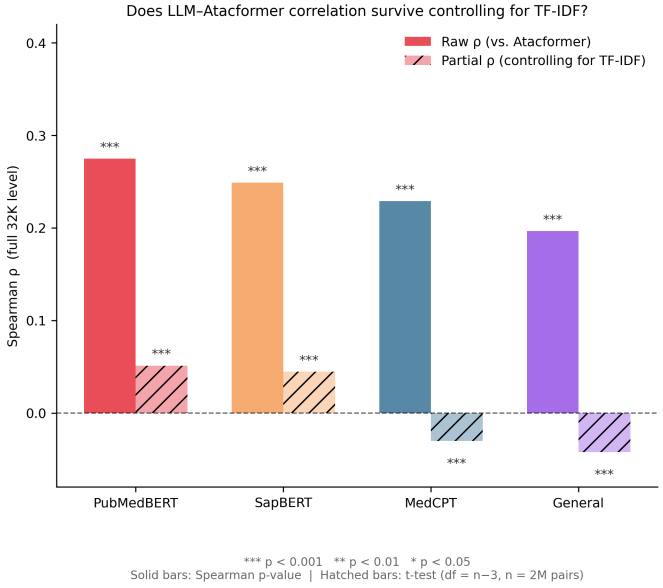


Fig. 4. Spearman correlation with Atacformer (solid bars) and partial correlation after controlling for TF-IDF (hatched bars) for each LM on the full dataset. The significance markers in the panel come from tests that treat the sampled pairs as independent; experiment-level bootstrap CIs are given in Section III-C. In well-covered experiments, all four partial correlations are at most 0.006.

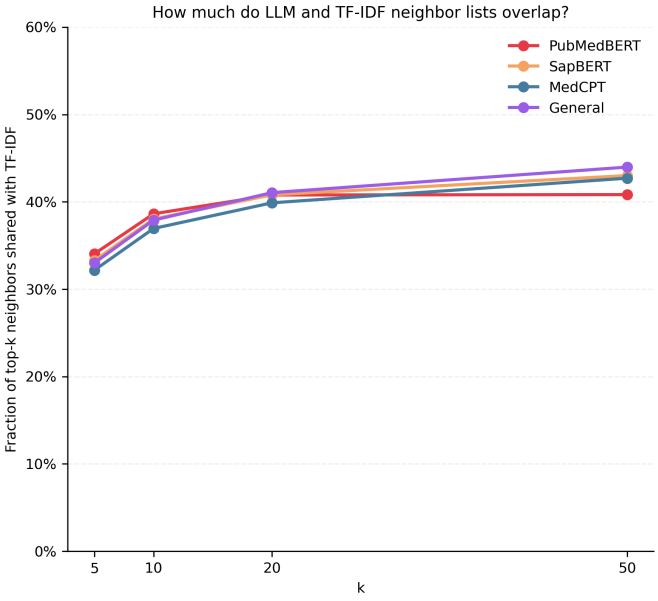


Fig. 5. Fraction of each LM's top-k nearest neighbors that are also TF-IDF neighbors on the full dataset (about 33% at $k = 5$; 44 to 45% in well-covered experiments).

The agreement that remained was between text and RP ($\rho =$ 0.06 to 0.10 at the experiment level, with 28 to 35% of top-5 neighbors shared). RP neighborhoods are organized largely by cell type, and text metadata recovers this coarse structure. Metadata may therefore be useful for coarse, cell-type-level retrieval, but it should not substitute for chromatin similarity in finer-grained applications.

Language models added little. In well-covered experiments TF-IDF matched every LM, and partial correlations beyond TF-IDF were near zero for Atacformer and small for RP. The apparent advantage of PubMedBERT and SapBERT over MedCPT and General on the full dataset did not survive restriction to well-covered experiments, and it changed with corpus centering.

The peak-count effect matters beyond text. In both chromatin representations, similarity was more strongly associated with peak count than with any other variable we examined, and controlling for peak count removed the experiment-level agreement between Atacformer and RP on the full dataset. Studies that compare chromatin embeddings across heterogeneous public repositories should stratify by peak count or control for it, along with other quality measures.

This study has several limitations. Atacformer and RP serve as proxies for chromatin biology without validation against an external ground truth. Both are derived from the same ChIP-

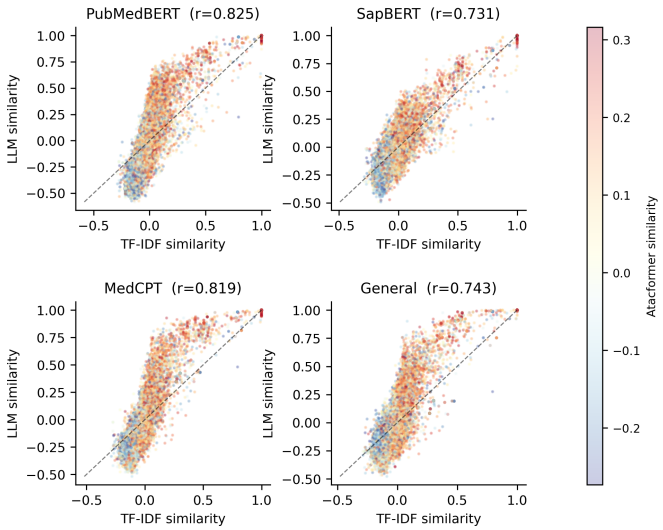


Fig. 6. TF-IDF similarity (x-axis) against LM similarity (y-axis, labeled LLM) for 25,000 random experiment pairs from the full dataset, colored by Atacformer similarity (warmer colors indicate higher similarity). Points above the diagonal are pairs that the LM scores higher than TF-IDF. Panel titles give the Spearman correlation between the two similarities.

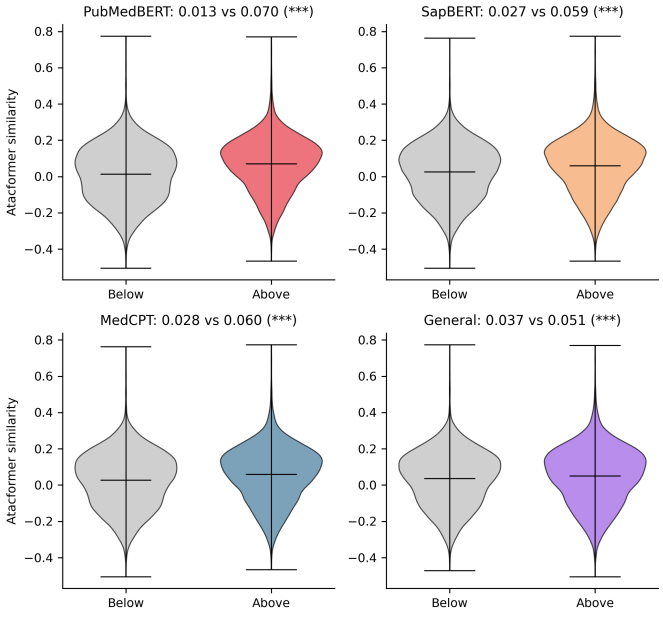


Fig. 7. Atacformer similarity for pairs below and above the diagonal in Fig. 6 (full dataset; Welch's t-test). For all four LMs, pairs above the diagonal have higher mean Atacformer similarity (PubMedBERT: 0.070 vs. 0.013; SapBERT: 0.059 vs. 0.027; MedCPT: 0.060 vs. 0.028; General: 0.051 vs. 0.037). The corresponding effect sizes (Cohen's d) are 0.38, 0.22, 0.21, and 0.09.

Atlas peak calls, both are sensitive to peak count, and the Atacformer embeddings used here carry little cell-type information for individual well-covered experiments. Our conclusions are therefore bounded by how faithfully these representations capture the biology they stand for. The metadata we used did not include sequencing depth or standard quality metrics such as

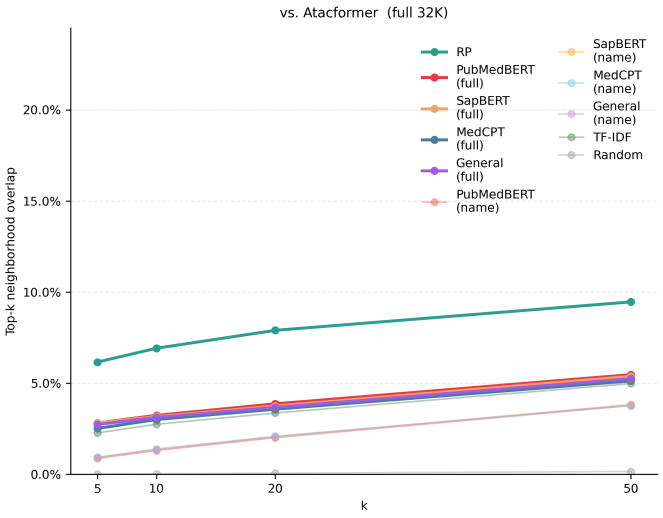


Fig. 8. Top-k neighborhood overlap with Atacformer on the full dataset. Full-text models share about 2 to 3% of nearest neighbors with Atacformer at $k = 5$ (less than 0.1% in well-covered experiments).

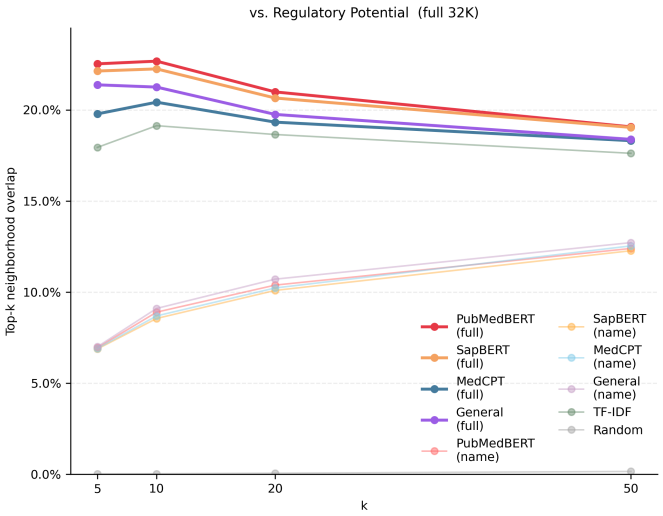


Fig. 9. Top-k neighborhood overlap with RP on the full dataset. Full-text LMs share about 20 to 23% of nearest neighbors with RP at $k = 5$ (31 to 35% in well-covered experiments).

the fraction of reads in peaks or TSS enrichment, so we relied on peak count as a quality proxy, and the 5,000-peak threshold is a pragmatic choice. We also limited the text to metadata fields available in ChIP-Atlas and did not test multimodal embeddings that combine text and chromatin signals. Future work could re-embed experiments using all of their peaks, use uniformly reprocessed and quality-controlled data, and test whether text encoders trained to predict chromatin similarity can narrow the gap.

Data and Code Availability

ATAC-seq peak calls and metadata are publicly available from ChIP-Atlas [1]. All models are public Hugging Face checkpoints, listed by identifier in Sections II-B and II-D.

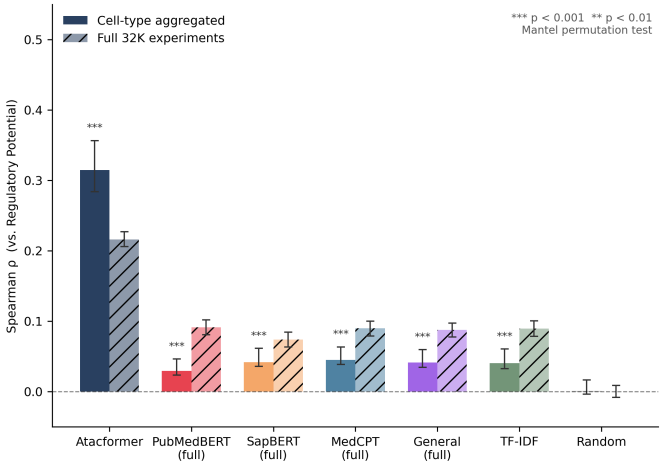


Fig. 10. Spearman correlation between each embedding and RP on the full dataset, at the cell-type level (solid bars) and the experiment level (hatched bars); name-only variants are omitted. Error bars show 95% bootstrap CIs, and significance markers (Mantel test) apply to the cell-type bars only. Well-covered results are given in Table I.

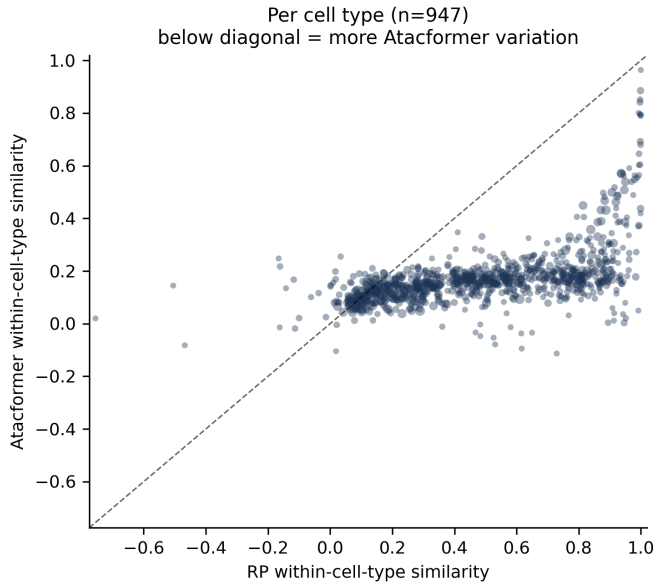


Fig. 11. Within-cell-type similarity (mean pairwise cosine similarity among experiments with the same cell-type label) for Atacformer against RP on the full dataset (947 cell types with at least two experiments). Points below the diagonal are cell types with lower within-cell-type similarity under Atacformer than under RP.

Analysis code and derived results are available at [TODO: repository URL].

Acknowledgements

This work was supported by NVIDIA Corporation through its academic grant program via the provision of an NVIDIA DGX Spark system. Claude (Anthropic) [11] was used to help write analysis code and edit the manuscript. The authors reviewed all code, results, and text and take full responsibility for the content.

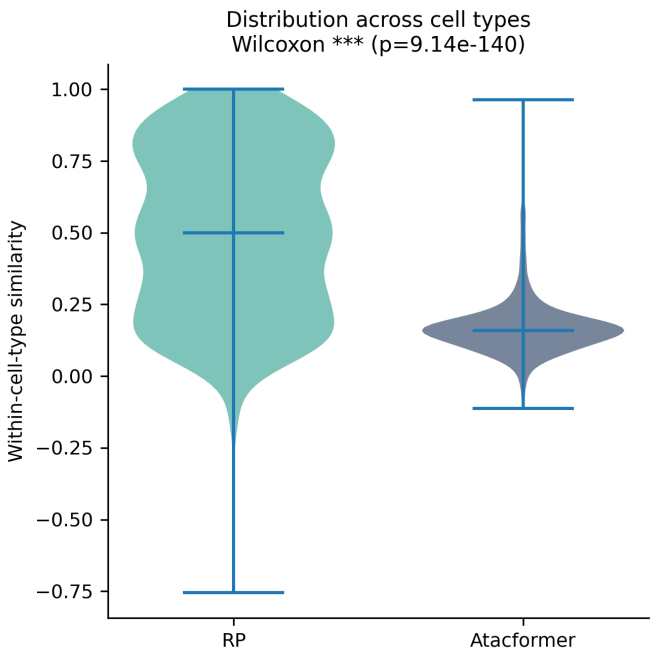


Fig. 12. Distribution of within-cell-type similarity across cell types on the full dataset (RP median 0.50, Atacformer median 0.16; Wilcoxon signed-rank test). Within-cell-type similarity tracks the spread of peak counts within each cell type (Section III-A).

References

[1] Z. Zou, T. Ohta, F. Miura, and S. Oki, "ChIP-Atlas 2021 update: a data-mining suite for exploring epigenomic landscapes by fully integrating ChIP-seq, ATAC-seq and Bisulfite-seq data," *Nucleic Acids Research*, vol. 50, no. W1, pp. W175–W182, 2022.

[2] ENCODE Project Consortium, "An integrated encyclopedia of DNA elements in the human genome," *Nature*, vol. 489, pp. 57–74, 2012.

[3] Roadmap Epigenomics Consortium, "Integrative analysis of 111 reference human epigenomes," *Nature*, vol. 518, pp. 317–330, 2015.

[4] Y. Gu, R. Tinn, H. Cheng, M. Lucas, N. Usuyama, X. Liu, T. Naumann, J. Gao, and H. Poon, "Domain-specific language model pretraining for biomedical natural language processing," *ACM Transactions on Computing for Healthcare*, vol. 3, no. 1, pp. 1–23, 2021.

[5] F. Liu, E. Shareghi, Z. Meng, M. Basaldella, and N. Collier, "Self-alignment pretraining for biomedical entity representations," in *Proc. NAACL*, 2021, pp. 4228–4238.

[6] Q. Jin, W. Kim, Q. Chen, D. C. Comeau, L. Yeganova, W. J. Wilbur, and Z. Lu, "MedCPT: Contrastive Pre-trained Transformers with large-scale PubMed search logs for zero-shot biomedical information retrieval," *Bioinformatics*, vol. 39, no. 11, p. btad651, 2023.

[7] N. J. LeRoy, G. Zheng, O. Khoroshevskyi, D. R. Campbell, A. Zhang, and N. C. Sheffield, "Atacformer: A transformer-based foundation model for analysis and interpretation of ATAC-seq data," bioRxiv, 2025.

[8] Q. Qin, J. Fan, R. Zheng, C. Wan, S. Mei, Q. Wu, H. Sun, M. Brown, J. Zhang, C. A. Meyer, and X. S. Liu, "Lisa: inferring transcriptional regulators through integrative modeling of public chromatin accessibility and ChIP-seq data," *Genome Biology*, vol. 21, p. 32, 2020.

[9] BioRender, "BioRender," https://biorender.com, 2025.

[10] K. Song, X. Tan, T. Qin, J. Lu, and T.-Y. Liu, "MPNet: Masked and permuted pre-training for language understanding," in *Advances in Neural Information Processing Systems*, vol. 33, 2020, pp. 16 857–16 867.

[11] Anthropic, "Claude Sonnet 4.6 System Card," https://www.anthropic.com/claude-sonnet-4-6-system-card, 2026.