



// GET /api/estado

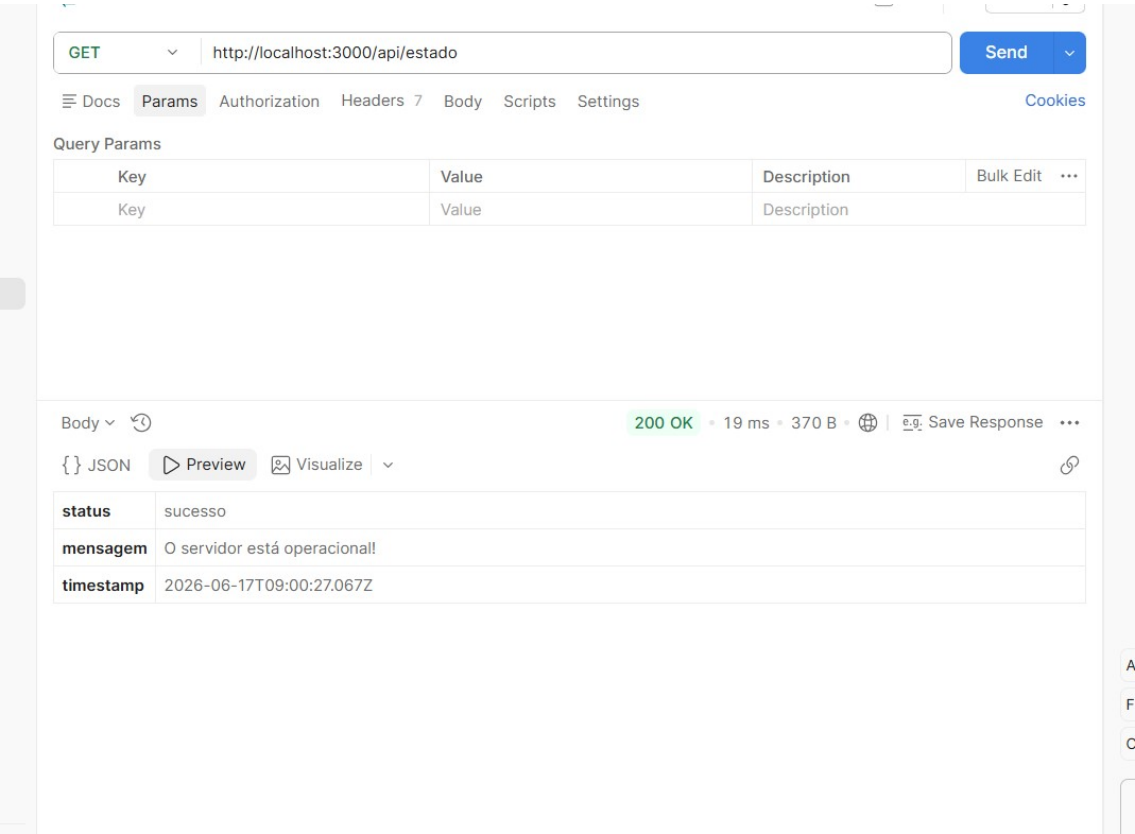

// GET /api/filmes

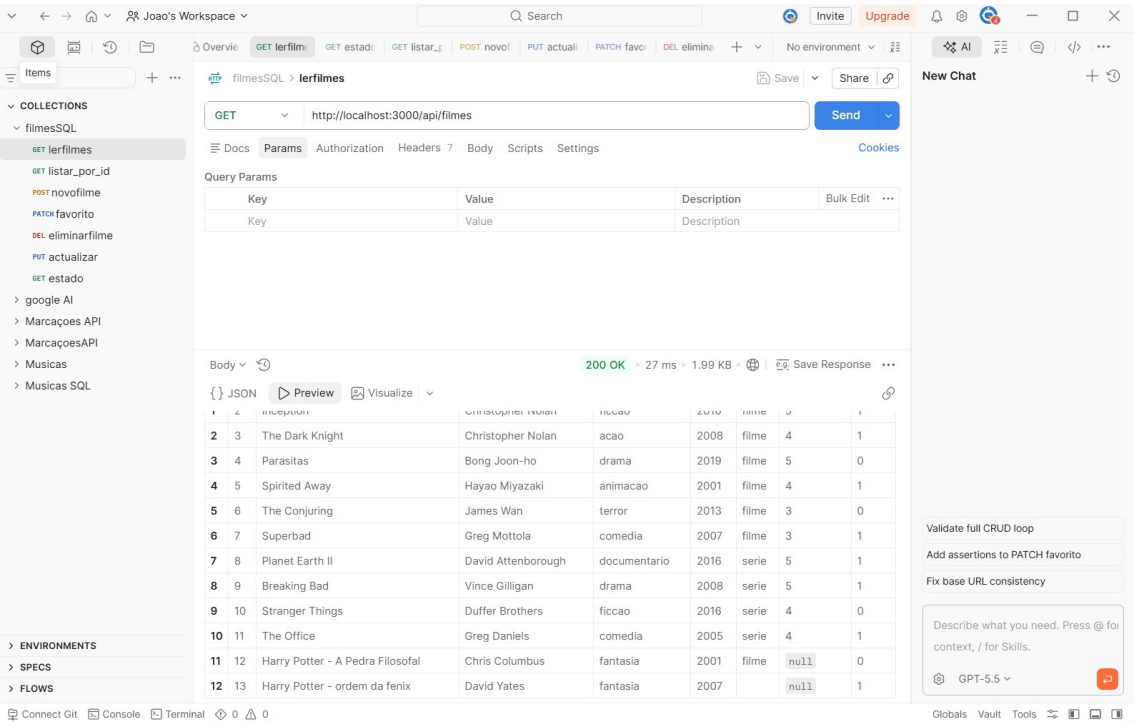

// GET /api/filmes/:id

The screenshot shows the Postman interface with a GET request to `http://localhost:3000/api/filmes/9`. The response is a 200 OK status with a JSON body containing movie details.

Key	Value	Description	Bulk Edit
id	9		
titulo	Breaking Bad		
realizador	Vince Gilligan		
genero	drama		
ano	2008		
tipo	serie		
avaliacao	5		
visto	1		

// POST /api/filmes

The screenshot shows the Postman interface with a POST request to `http://localhost:3000/api/filmes`. The request body is a JSON object. The response is a 201 Created status with a message in the body.

```
1 {
2   "titulo": "Harry Potter - Ordem da fenix",
3   "realizador": "David Yates",
4   "genero": "fantasia",
5   "ano": "2007",
6   "tipo": "filme",
7   "avaliacao": "1"
8 }
9
```

mensagem: Filme criado com sucesso!

// PUT /api/filmes/:id

The screenshot shows the Postman interface for a PUT request to `http://localhost:3000/api/filmes/12`. The request body is a JSON object:

```
1 {
2   "titulo": "Harry Potter - A Pedra Filosofal",
3   "realizador": "Chris Columbus",
4   "genero": "fantasia",
5   "ano": "2001",
6   "tipo": "filme",
7   "avaliacao": "1"
8 }
```

The response is a 200 OK status with a success message:

```
1 {
2   "mensagem": "Filme alterado com sucesso"
3 }
```

// PATCH /api/filmes/:id/visto

The screenshot shows the Postman interface for a PATCH request to `http://localhost:3000/api/filmes/12/visto`. The request body is empty. The response is a 200 OK status with a success message:

```
1 {
2   "mensagem": "Filme visto alterado com sucesso!"
3 }
```

// DELETE /api/filmes/:id

The screenshot displays the Postman API client interface. On the left, a sidebar shows a collection of API requests under the name 'filmesSQL'. The 'eliminarfilme' request is selected. The main panel shows the details of this request, which is a DELETE method targeting the URL 'http://localhost:3000/api/filmes/13'. The 'Params' tab is active, showing a table with two columns: 'Key' and 'Value'. Below this, the 'Body' tab is selected, displaying a JSON response. The response status is '200 OK' with a response time of '28 ms' and a size of '308 B'. The JSON body is as follows:

```
{
  "mensagem": "Filme apagado com sucesso!"
}
```

On the right side of the interface, there is a 'New Chat' section with a 'GPT-5.5' model selected. At the bottom of the screen, there are tabs for 'Connect Git', 'Console', and 'Terminal', along with a status bar showing '0' errors and '0' warnings.