



Open the following link in a web browser of your choice:

<https://code.visualstudio.com/docs/setup/windows>


Scroll down to the header “Install VS Code on Windows” and under the sub header “Use the Windows installer” click the highlighted section of “1. Download the Visual Studio Code installer for Windows” as shown:

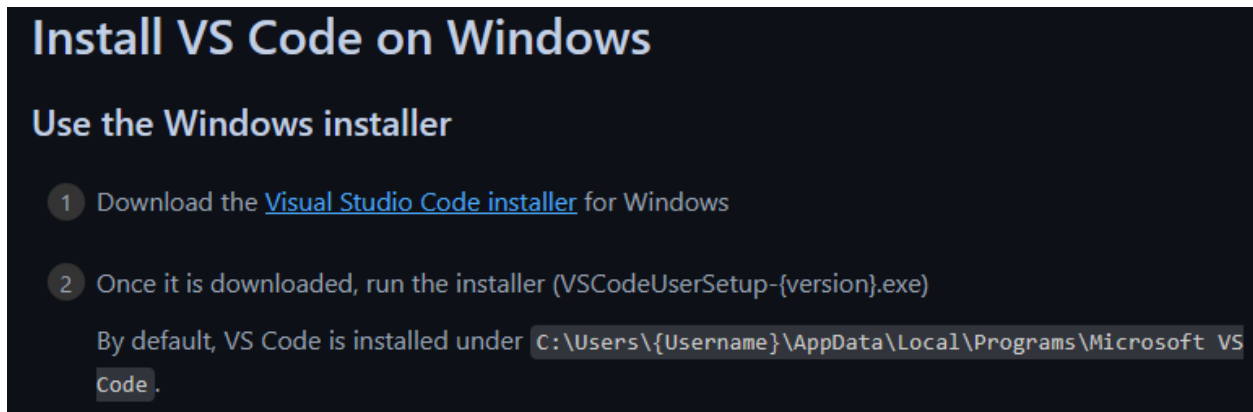

After clicking the link, a new tab should appear displaying something like the following:

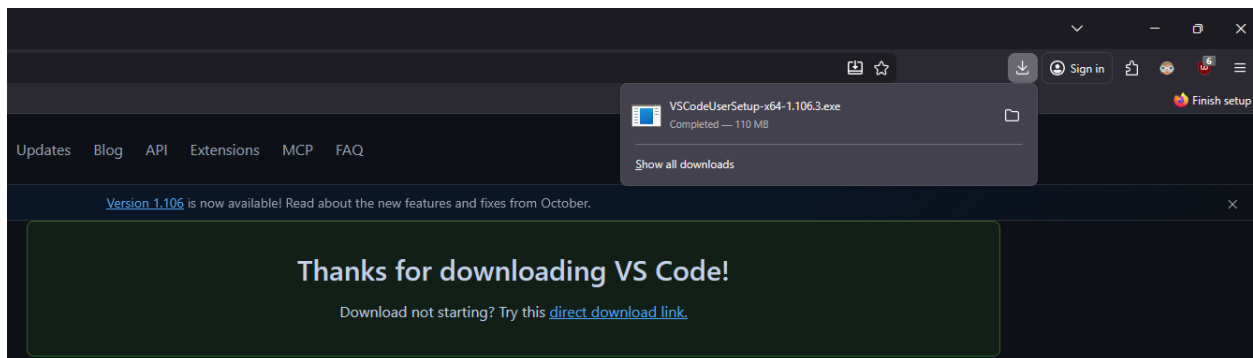

Clicking the downloaded installer should display an interface resembling the following series of windows:

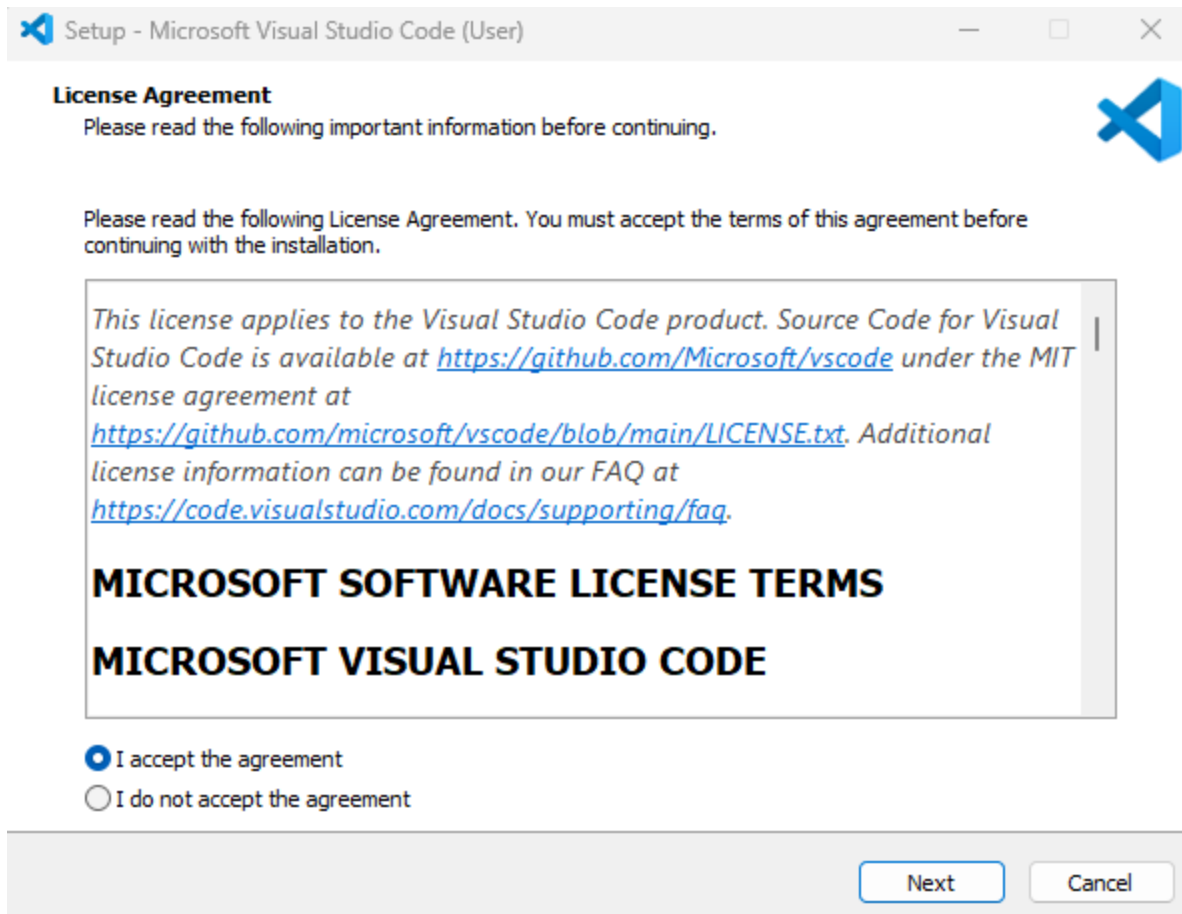

VSCode can be installed to the default directory selected automatically:

### Select Destination Location

Where should Visual Studio Code be installed?



Setup will install Visual Studio Code into the following folder.

To continue, click Next. If you would like to select a different folder, click Browse.

C:\Users\computer7\AppData\Local\Programs\Microsoft VS Code


Browse...

At least 435.8 MB of free disk space is required.

Back

Next

Cancel

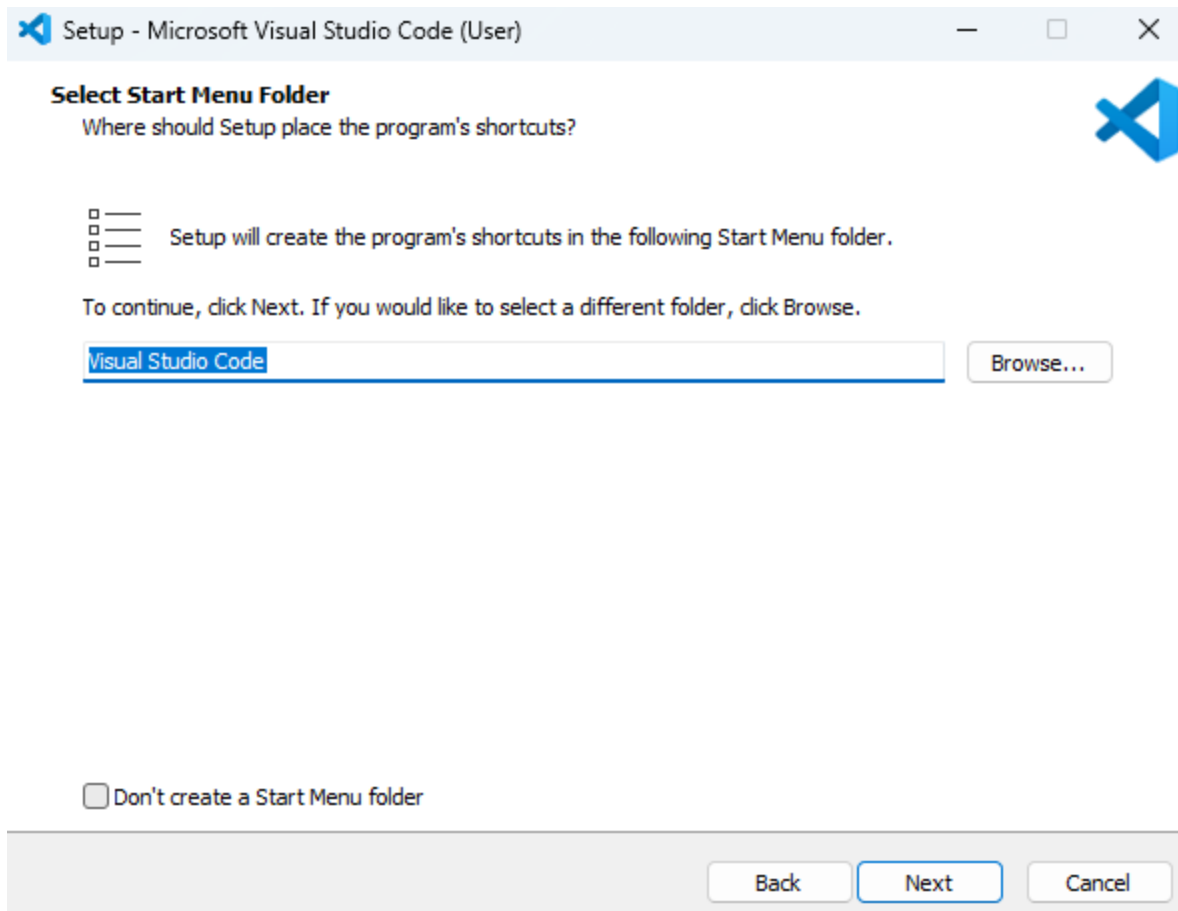

Registering Code as an editor is optional but can be very useful. Adding to PATH is recommended so that you can easily access it from your start menu and terminal.

**Select Additional Tasks**

Which additional tasks should be performed?



Select the additional tasks you would like Setup to perform while installing Visual Studio Code, then click Next.

Additional icons:

☐ Create a desktop icon

Other:

☐ Add "Open with Code" action to Windows Explorer file context menu

☐ Add "Open with Code" action to Windows Explorer directory context menu


☒ Register Code as an editor for supported file types

☒ Add to PATH (requires shell restart)


Back

Next


Cancel

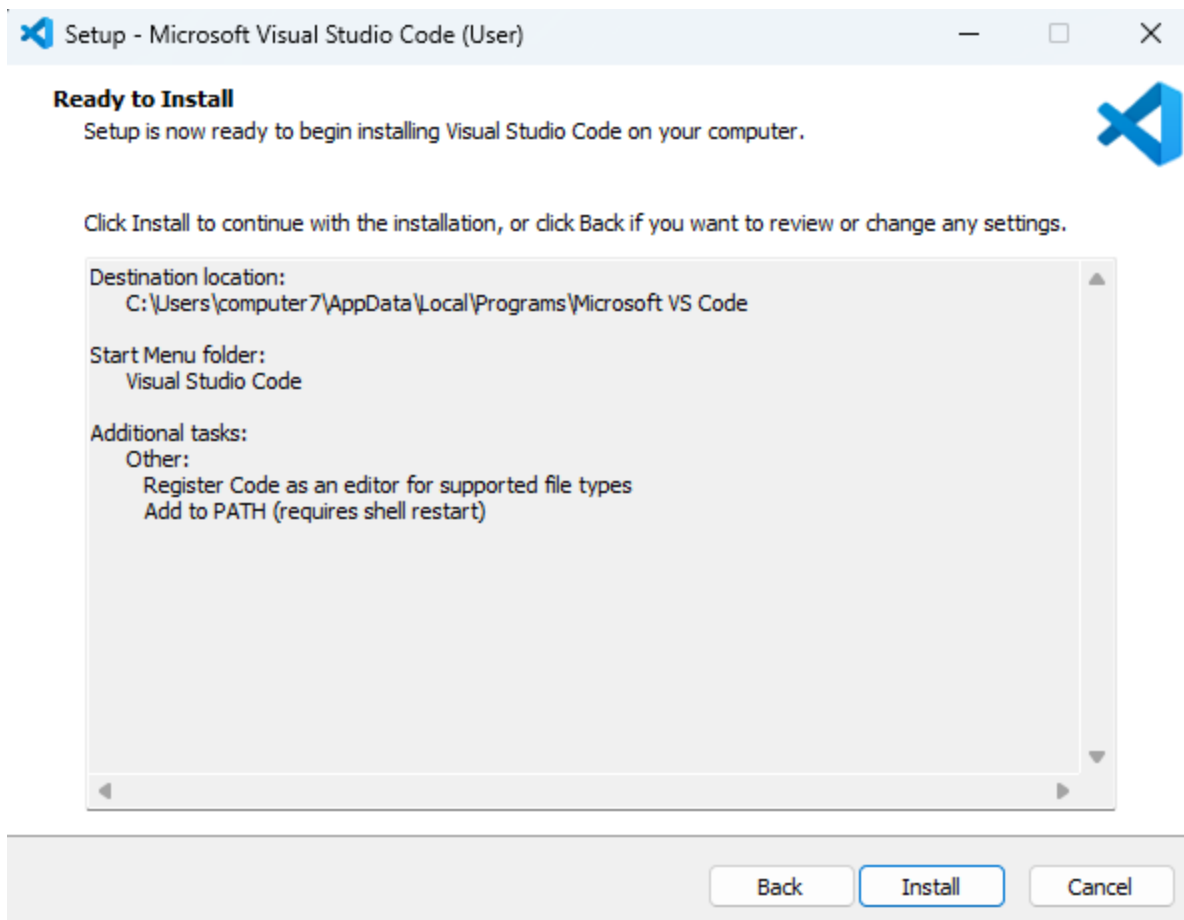

After the installation finishes, select “Finish” to open the newly installed VS Code IDE:

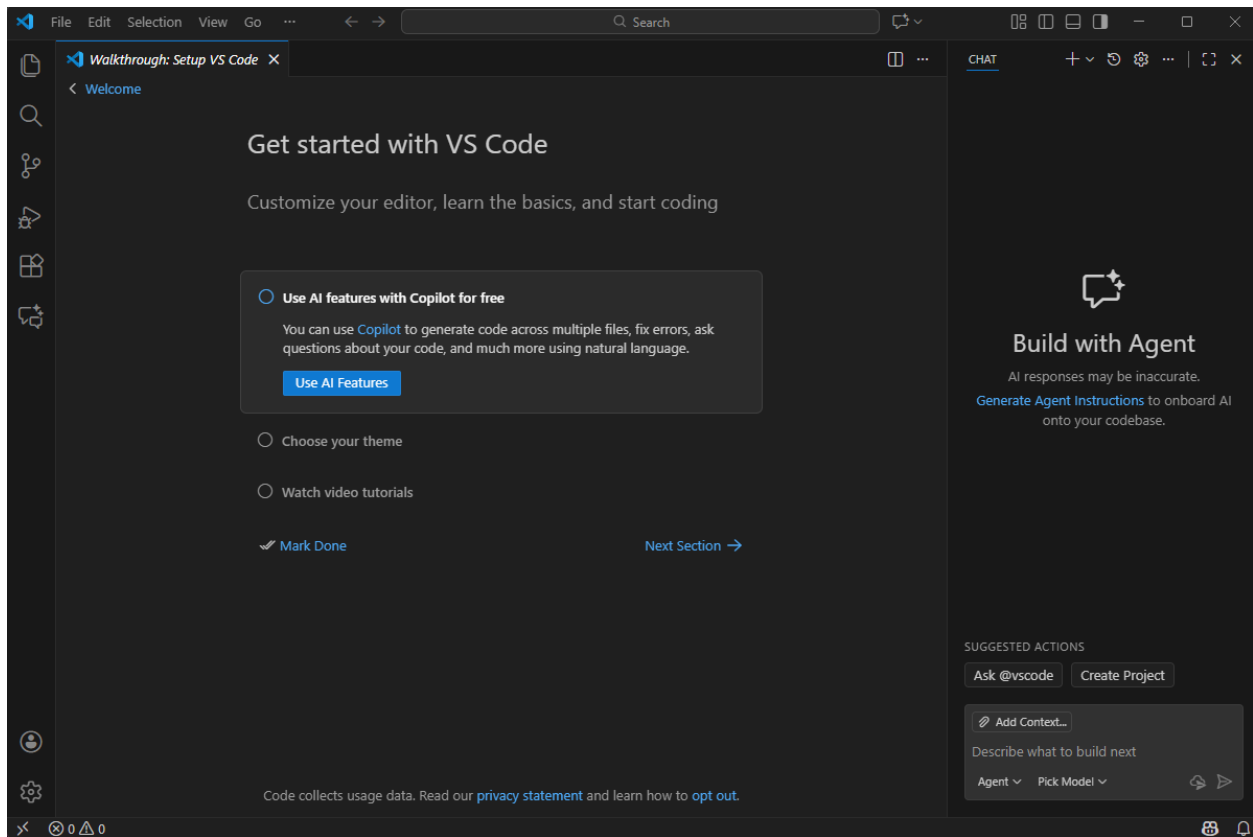

Each subsequent time you wish to open VS Code, you can simply type “code” into the windows search bar and press enter:

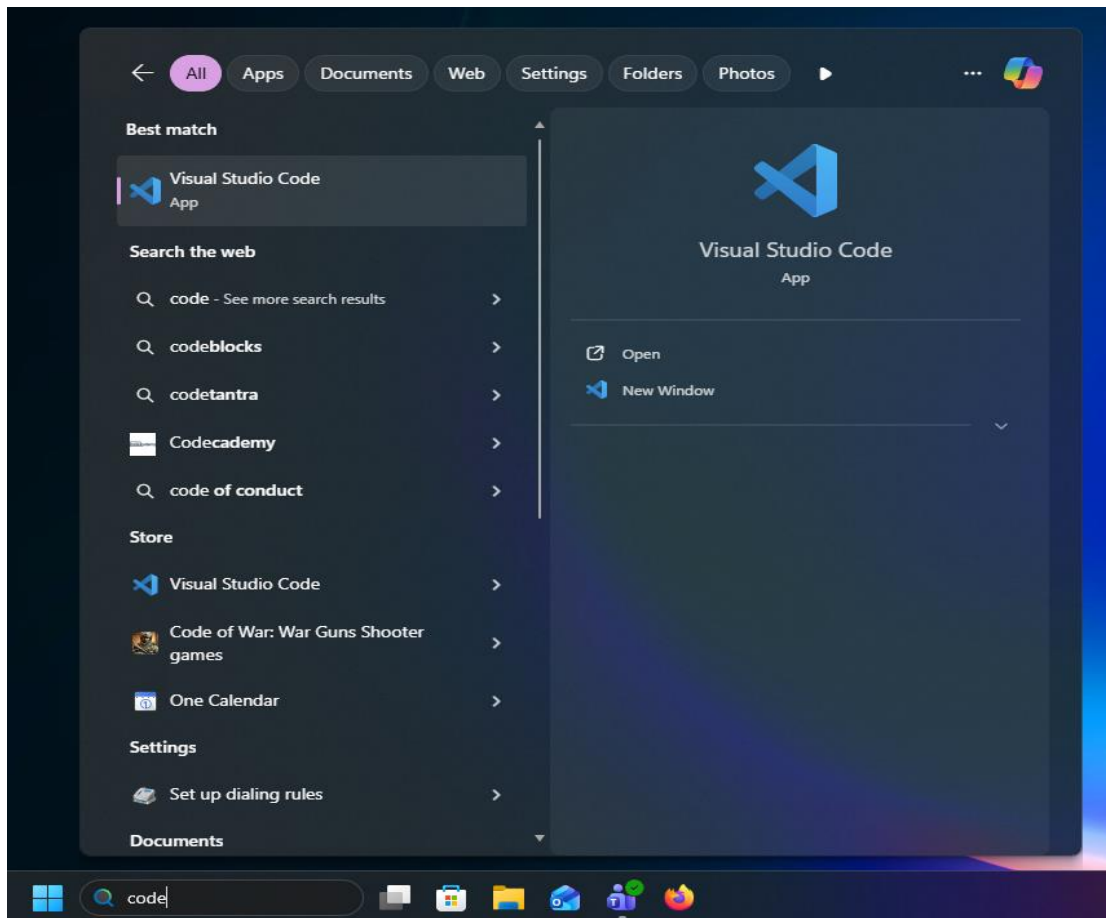

Note to self: do not use “conda init powershell” through the conda PS terminal; it almost always fails and causes the following error to appear every time you open a PS prompt:

```
. : File C:\Users\computer7\Documents\WindowsPowerShell\profile.ps1 cannot be loaded because
running scripts is disabled on this system. For more information, see about_Execution_Policies at
https://go.microsoft.com/fwlink/?LinkID=135170.
At line:1 char:3
+ . 'C:\Users\computer7\Documents\WindowsPowerShell\profile.ps1'
+ ~~~~~
+ CategoryInfo          : SecurityError: (:) [], PSSecurityException
+ FullyQualifiedErrorId : UnauthorizedAccess
PS C:\Users\computer7> |
```

## UPDATE:

Fixed: on PS v5.x, you have to modify the ExecutionPolicy parameter to allow scripts that you wrote yourself (shouldn't be a major security risk since it still only allows scripts the user wrote personally such as “conda init powershell”).

Open the Anaconda PowerShell Prompt and execute the following commands:



```
Set-ExecutionPolicy -ExecutionPolicy RemoteSigned -Scope CurrentUser  
conda init powershell
```

Now, Your native PowerShell terminal will automatically recognize your miniconda installation and all associated environments each time you open native PowerShell.