
Incident and Ticket Flow Specification

InfraTicket 3.0 (in-house) and incident.io (vendor), drawn to the same notation for comparison.
Version 1.0 · 27 October 2026 · All monetary amounts in US dollars (USD).

Contents

Figure 1	InfraTicket 3.0: process flow, end to end	2
Figure 2	InfraTicket 3.0: system architecture	3
Table 1	InfraTicket 3.0: step specification	4–5
Figure 3	incident.io: process flow, end to end	6
Figure 4	incident.io: system architecture (conceptual)	7
Table 2	incident.io: step specification	8
Table 3	Side-by-side comparison	9

Symbols

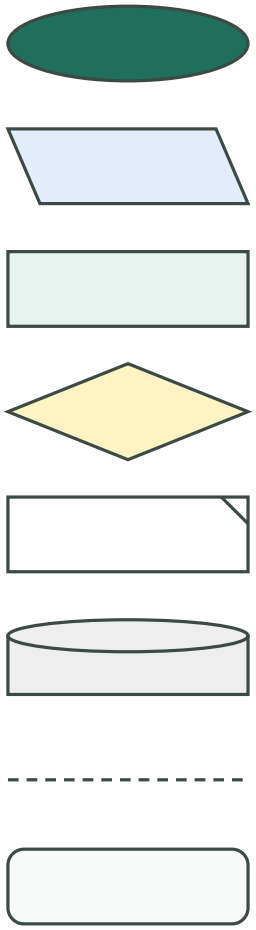

Terminator
Start or end of the flow

Input
Where work or a signal enters

Process
A step the system or a person performs

Decision
Branches labelled Yes / No (or outcomes)

Output / channel
A message or record sent outside

Data store
Database or file storage


Dashed connector
Asynchronous, delayed or optional path

Phase band
Numbered stage grouping related steps

incident.io content is drawn from its public documentation (docs.incident.io: alert sources, alert routing, escalations, lifecycle, workflows). Plan-specific features may differ.

InfraTicket 3.0 — Process flow (end to end)

Figure 1. From a request or alert arriving to closure and reporting. Amounts in USD.

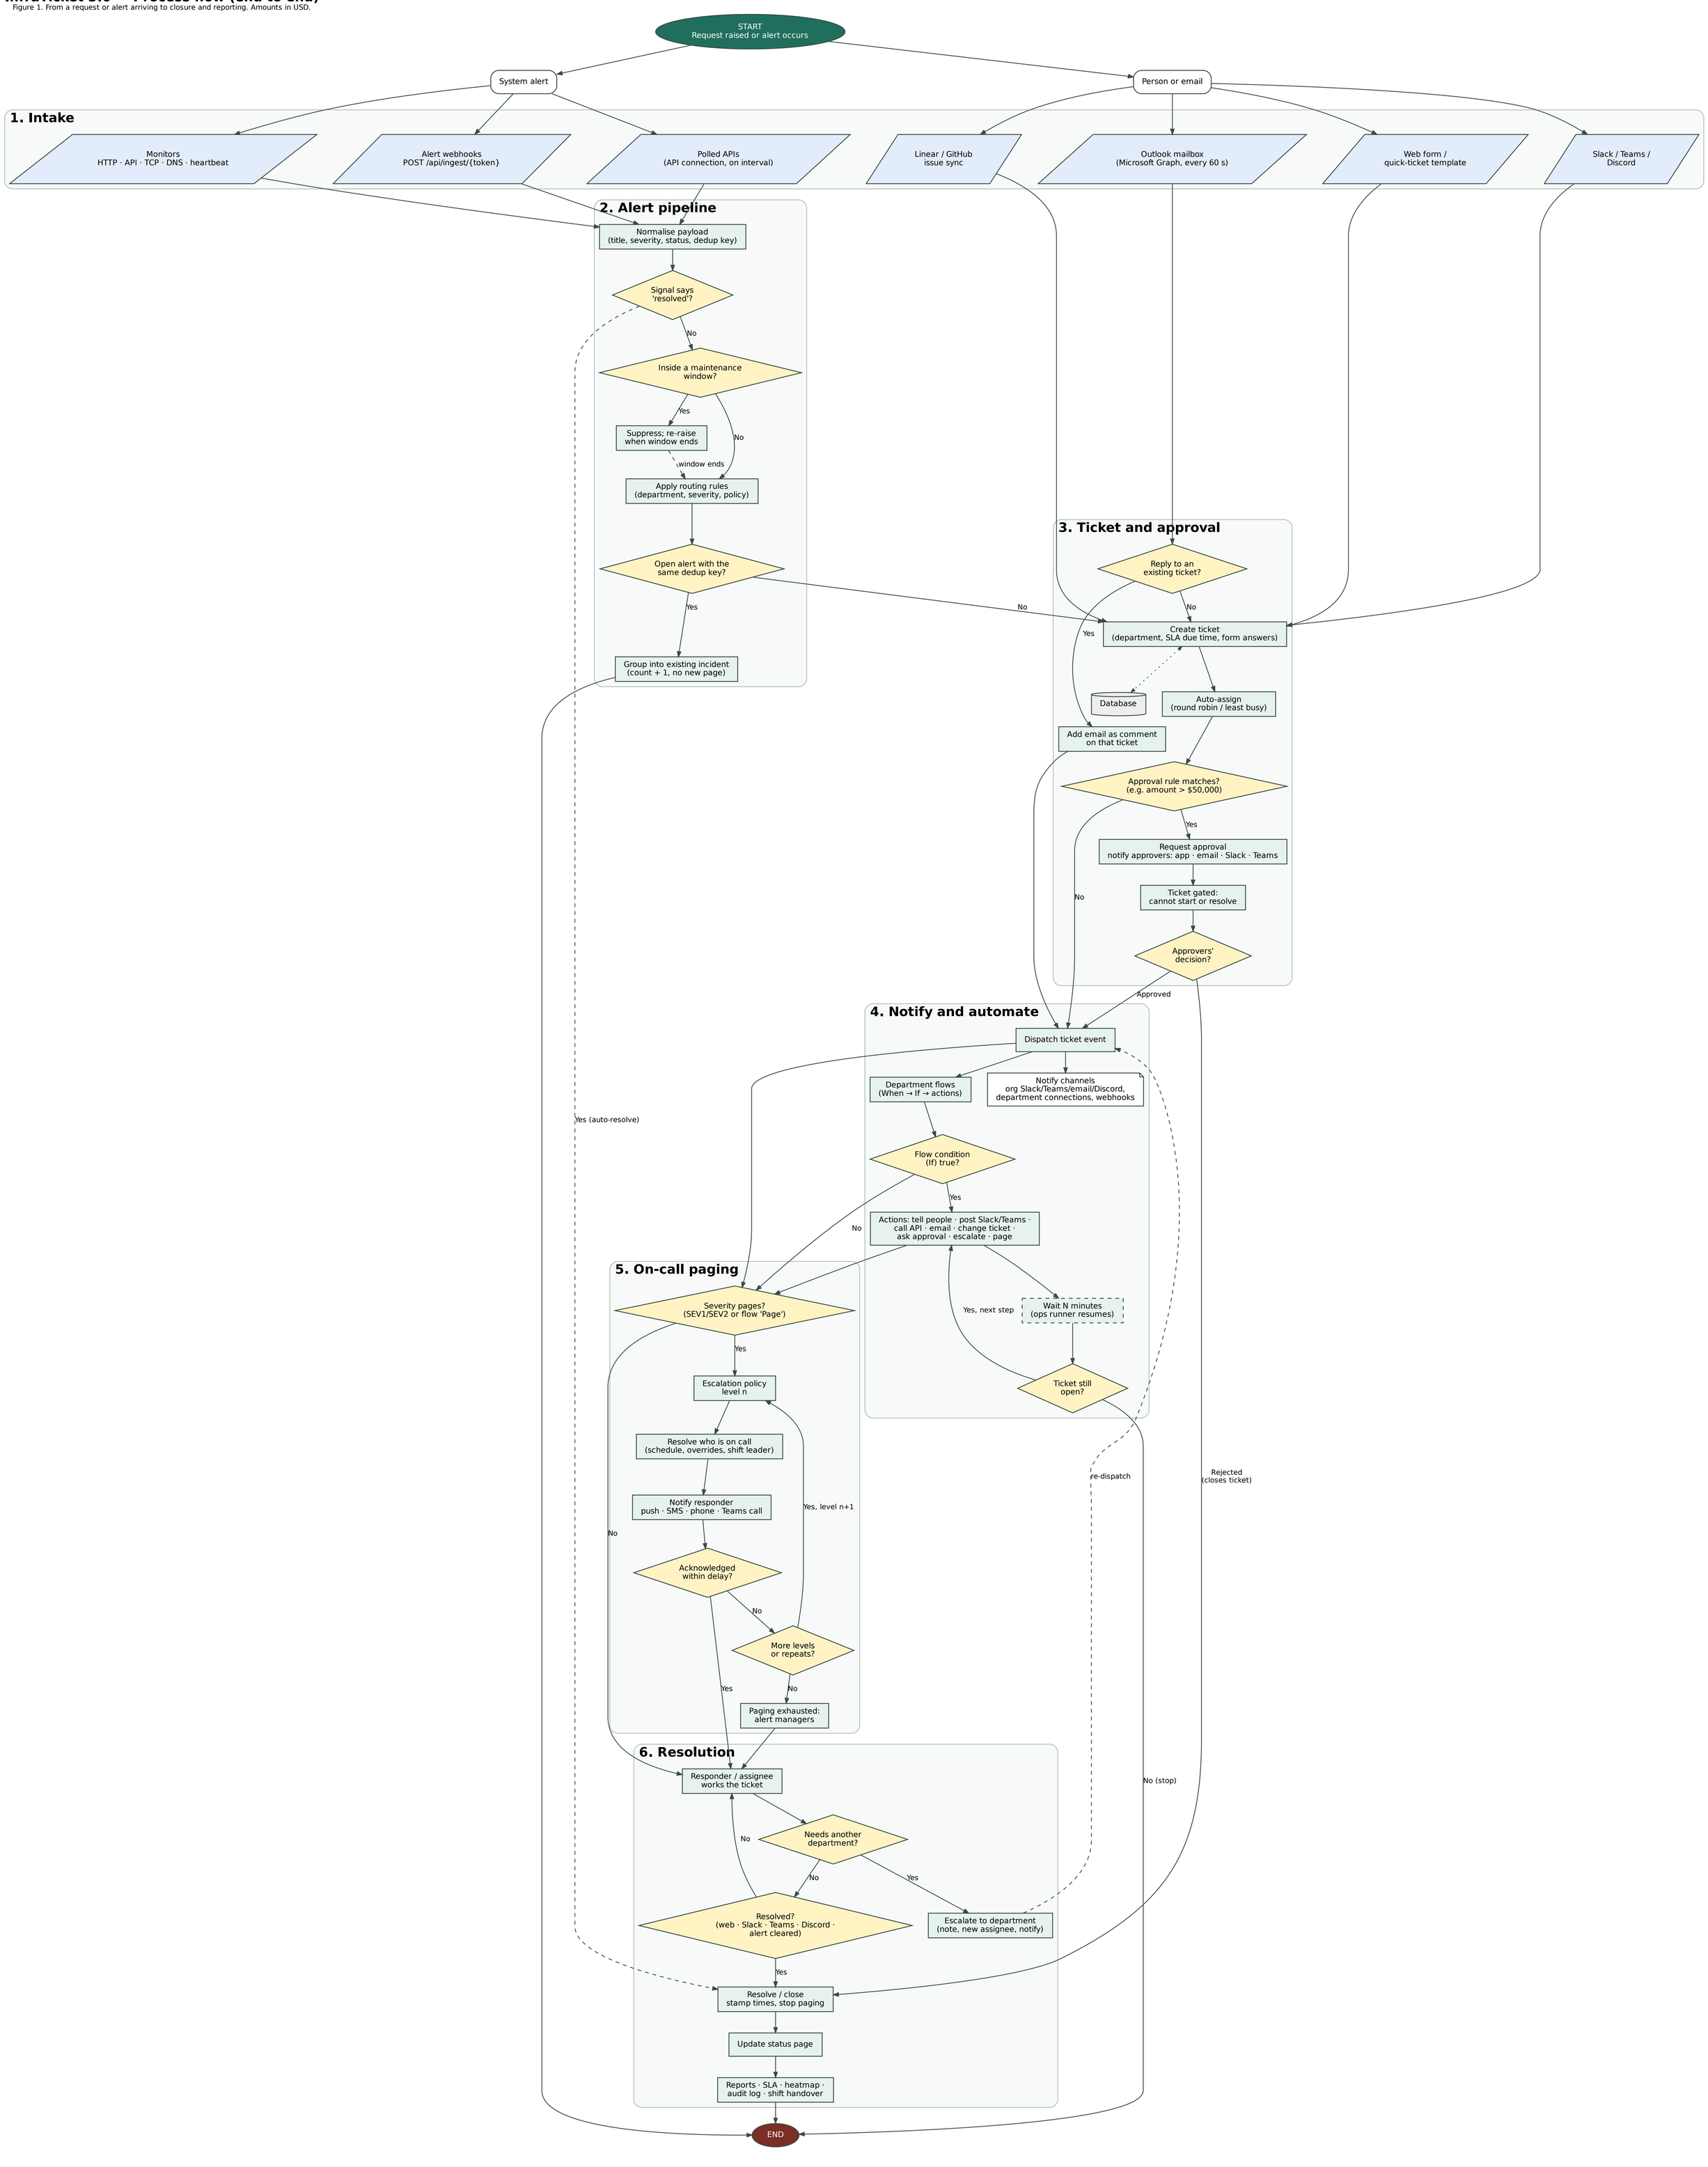

InfraTicket 3.0 — System architecture

Figure 2. Components, data stores and integrations. Self-hosted.

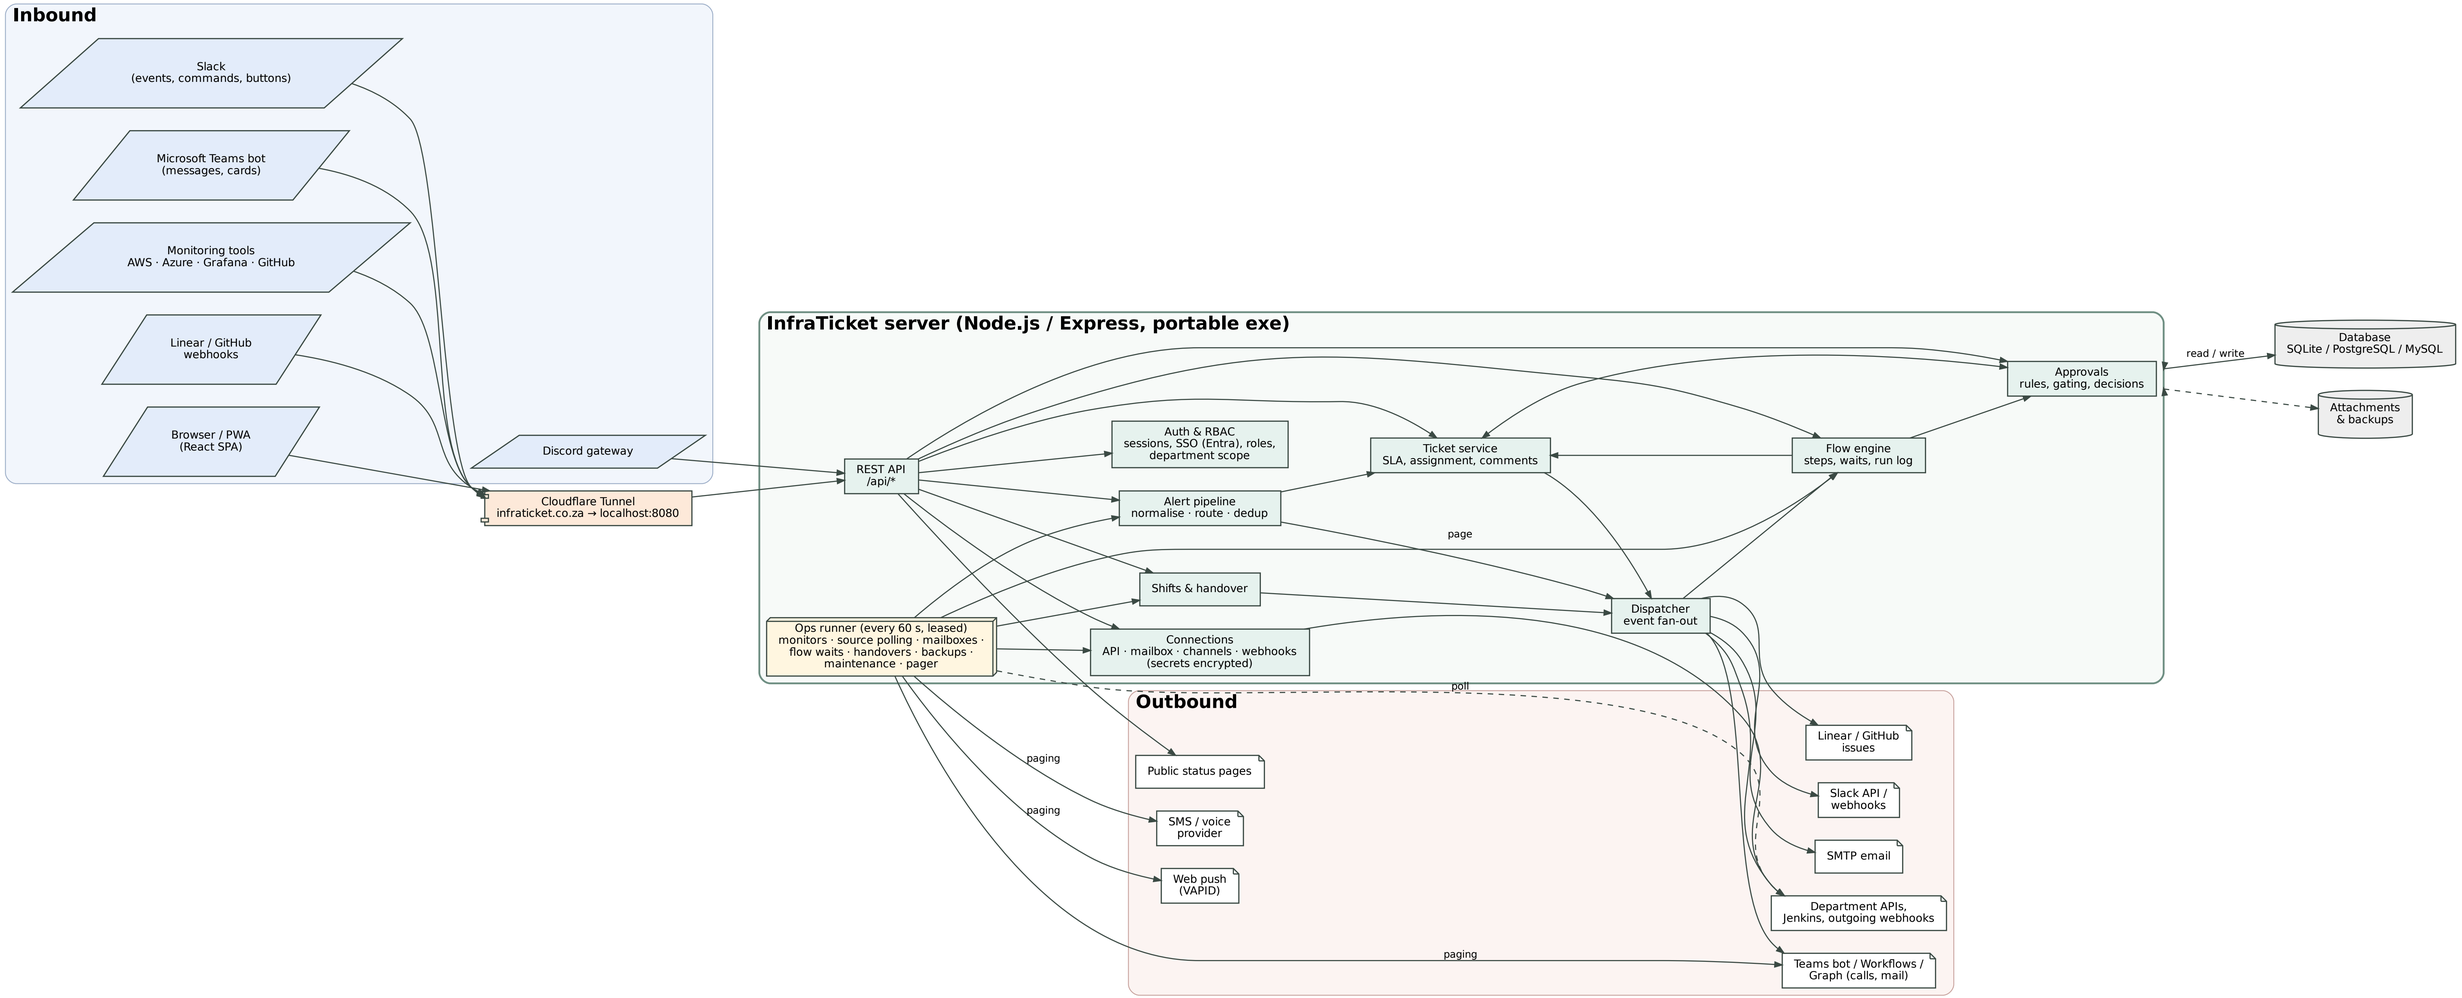


Table 1. InfraTicket 3.0 — step specification


IDs match the numbered phases in Figure 1.

ID	Step	Type	Rule / detail	Next
1.1	Request raised or alert occurs	Start	Any of the intake channels below.	1.2 / 1.3
1.2	People and email intake	Input	Web form or quick ticket; Slack, Teams, Discord; Linear/GitHub sync; department Outlook mailbox read via Microsoft Graph every 60 s.	3.0 / 3.1
1.3	System intake	Input	Monitors (HTTP, API, TCP, DNS, heartbeat); webhooks to POST /api/ingest/{token}; APIs polled through an API connection on an interval (60 s to 24 h).	2.1
2.1	Normalise payload	Process	Title, summary, severity (SEV1-SEV4), status, dedup key; source-specific readers (AWS, Azure, Grafana, Jenkins, GitHub, generic mapping).	2.2
2.2	Signal says resolved?	Decision	Yes: auto-resolve the open alert and incident when the last alert clears. No: continue.	6.4 / 2.3
2.3	Inside a maintenance window?	Decision	Yes: suppress and re-raise when the window ends. No: continue.	2.4
2.4	Apply routing rules	Process	Ordered rules set department, severity and escalation policy, or drop the alert.	2.5
2.5	Open alert with same dedup key?	Decision	Yes: group into the existing incident (count + 1, no new page). No: create ticket.	End / 3.1
3.0	Email reply to existing ticket?	Decision	Same Outlook conversation, or ticket reference in subject. Yes: added as a comment. No: new ticket.	4.1 / 3.1
3.1	Create ticket	Process	Department, SLA due time (department SLA × priority multiplier), form answers stored.	3.2
3.2	Auto-assign	Process	Department rule: none, round robin or least busy.	3.3
3.3	Approval rule matches?	Decision	Rule on type, priority, labels, words, template or form answer (e.g. amount > $50,000). Approvers: people, role, department managers or shift leader; any one or all.	3.4 / 4.1
3.4	Request approval and gate	Process	Approvers notified in app, email, Slack (buttons) and Teams (card). Ticket cannot move to In progress or Resolved from any channel.	3.5
3.5	Approvers' decision	Decision	Approved: continue. Rejected: ticket closed (or kept open if the rule says so).	4.1 / 6.4
4.1	Dispatch ticket event	Process	Org Slack/Teams/email/Discord, department connections (own channels, outgoing webhooks), custom HTTP integrations, Linear mirror.	4.2 / 5.1
4.2	Department flows	Process	Visual flows: When (event) → If (condition) → actions; Wait steps resumed by the ops runner, stopping if the ticket is closed; 100-step cap; flows never re-trigger themselves.	5.1
5.1	Severity pages?	Decision	SEV1/SEV2 alerts, a flow Page step, or a manual page. No: assignee works the ticket.	5.2 / 6.1
5.2	Escalation policy level n	Process	Targets: schedule (who is on call), team or user; shift leader for departments without standby.	5.3
5.3	Notify responder	Output	Web push, SMS, phone call, Teams call, email.	5.4
5.4	Acknowledged within delay?	Decision	Yes: paging stops. No: next level, or repeat; when exhausted, managers are alerted.	6.1 / 5.2
6.1	Work the ticket	Process	Replies, internal notes, files; push to Linear or GitHub.	6.2
6.2	Needs another department?	Decision	Yes: escalate (note, new assignee, notify) and re-dispatch.	4.1 / 6.3
6.3	Resolved?	Decision	From web, Slack, Teams, Discord, or alert cleared.	6.4 / 6.1

ID	Step	Type	Rule / detail	Next
6.4	Resolve / close	Process	Timestamps stamped for SLA; paging stopped.	6.5
6.5	Status page, reports, handover	Output	Status page updated; SLA report, activity heatmap, audit log; shift handover sent at next shift change.	End

incident.io — Process flow (end to end)

Figure 3. Drawn from incident.io's public documentation; some steps depend on plan and configuration.

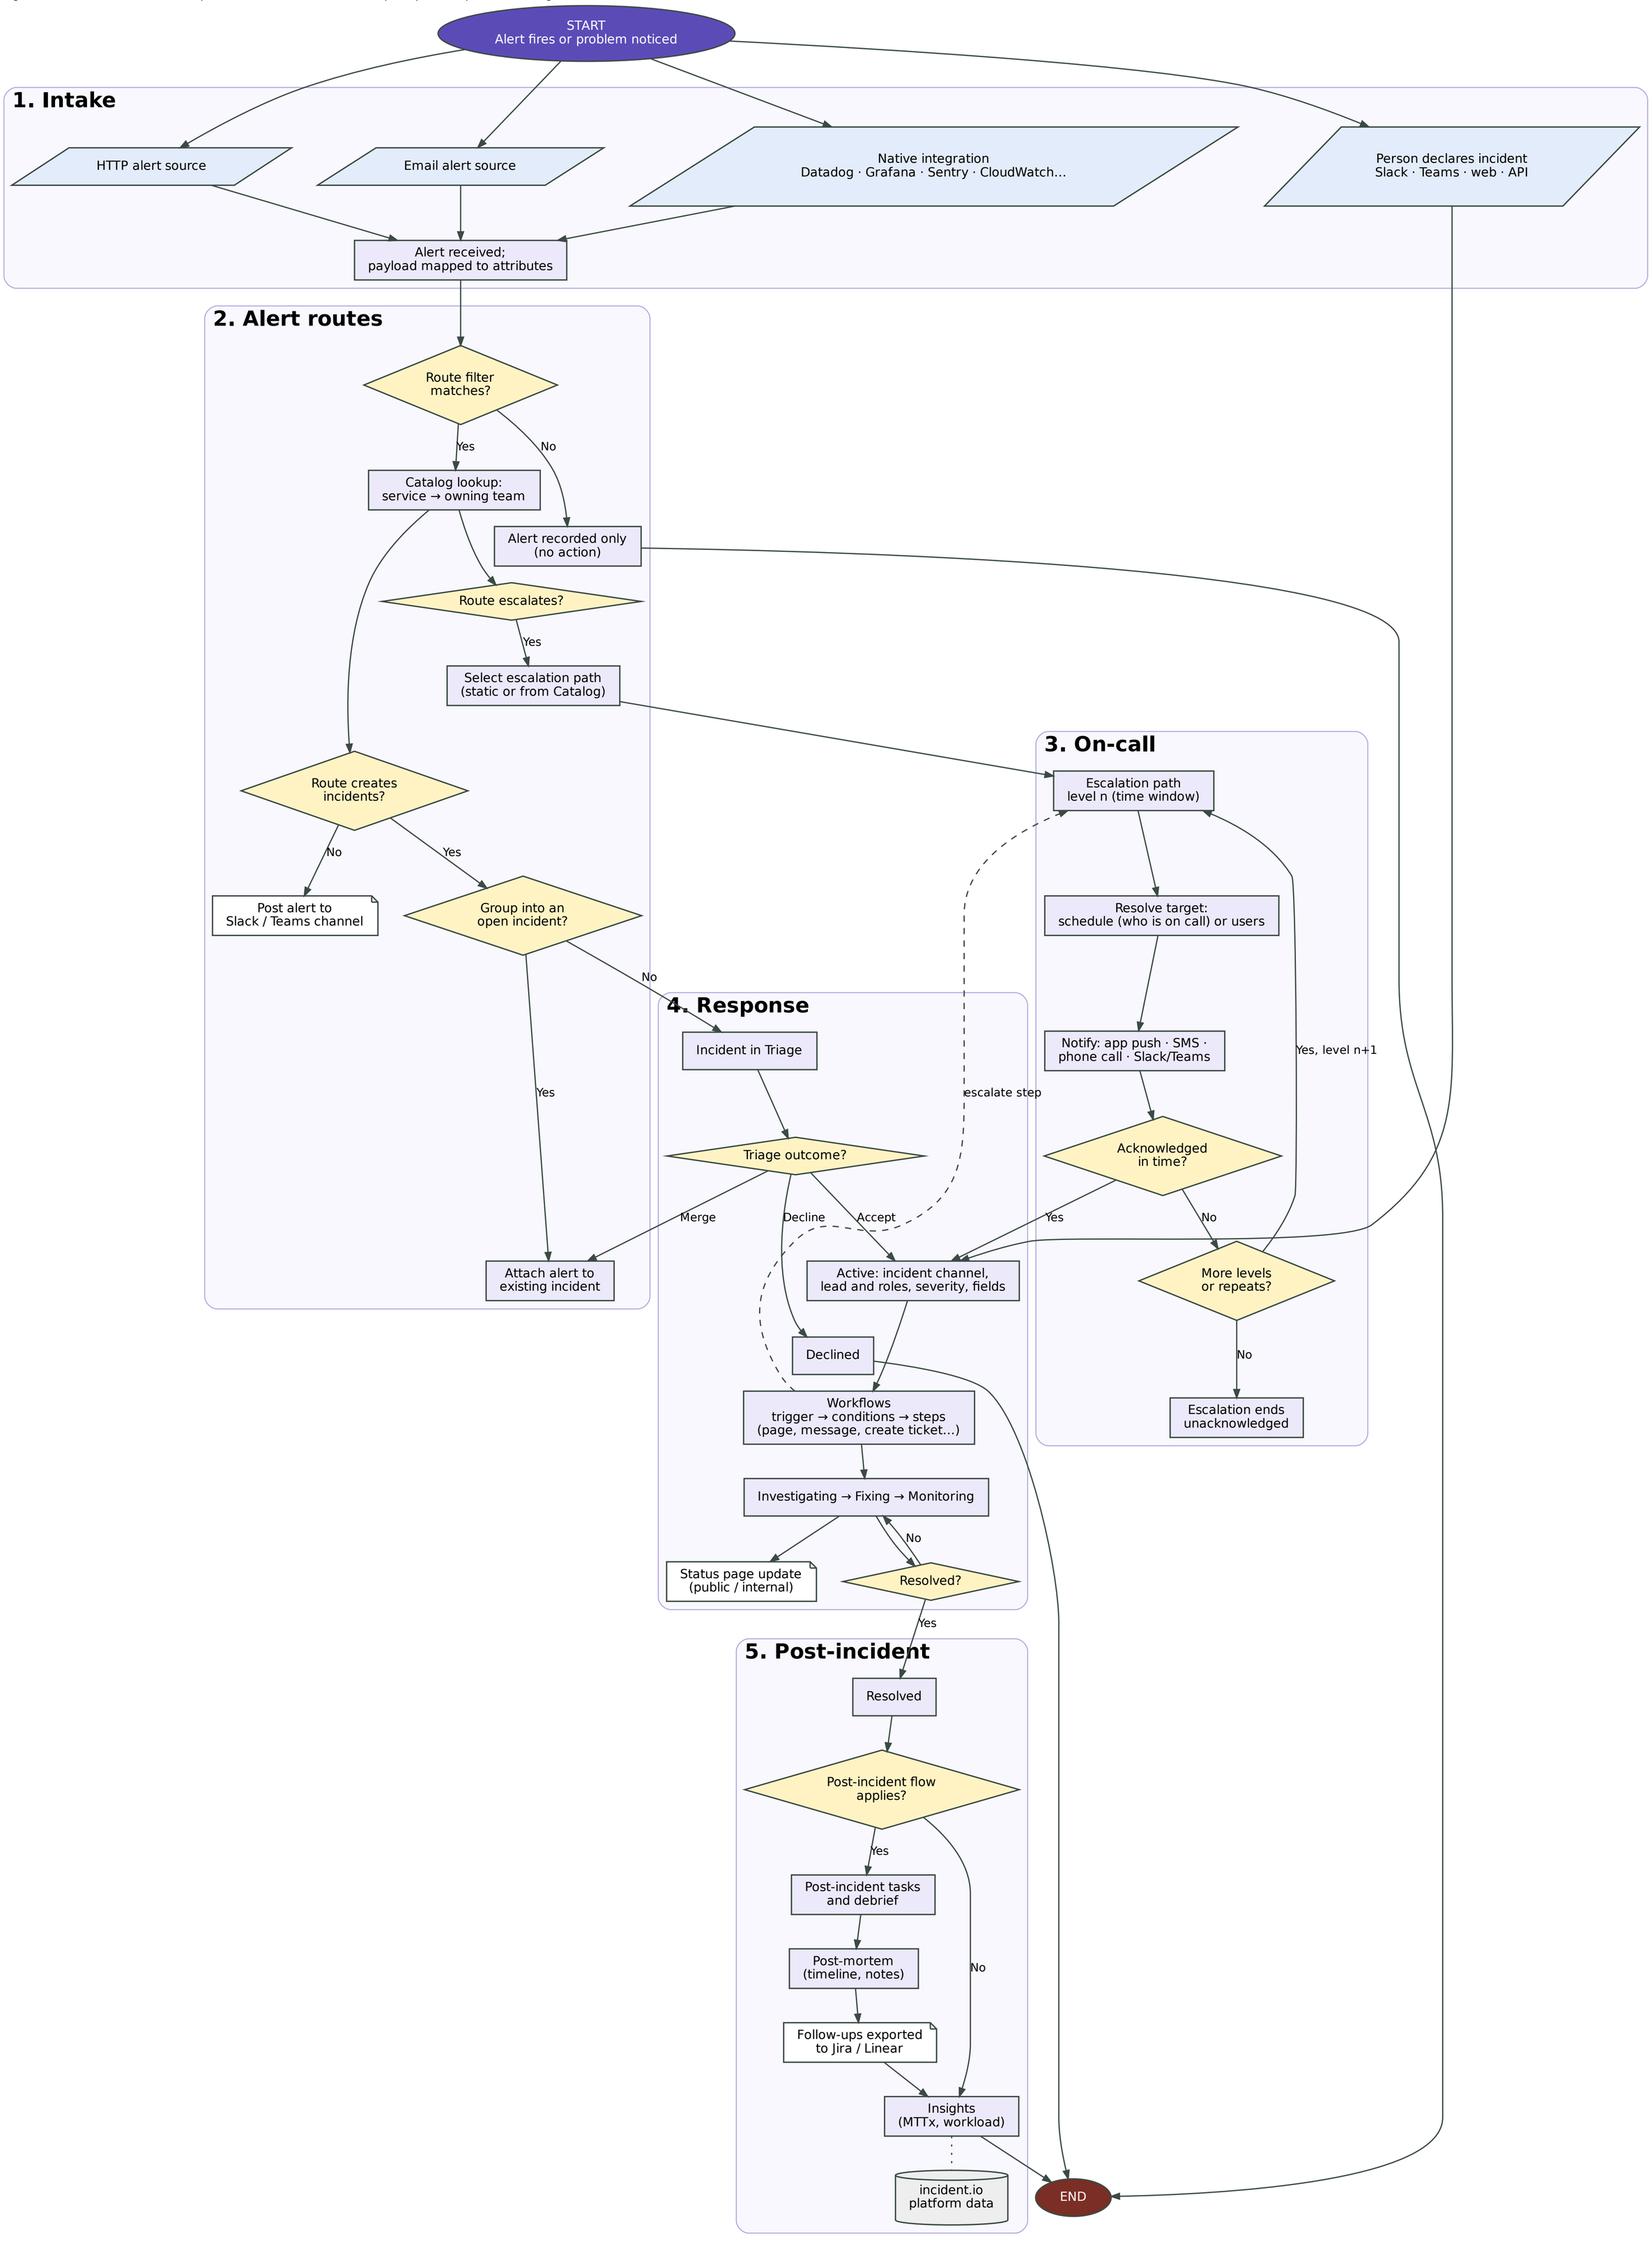

incident.io — System architecture (conceptual)

Figure 4. Vendor-hosted SaaS; components as described in public docs.

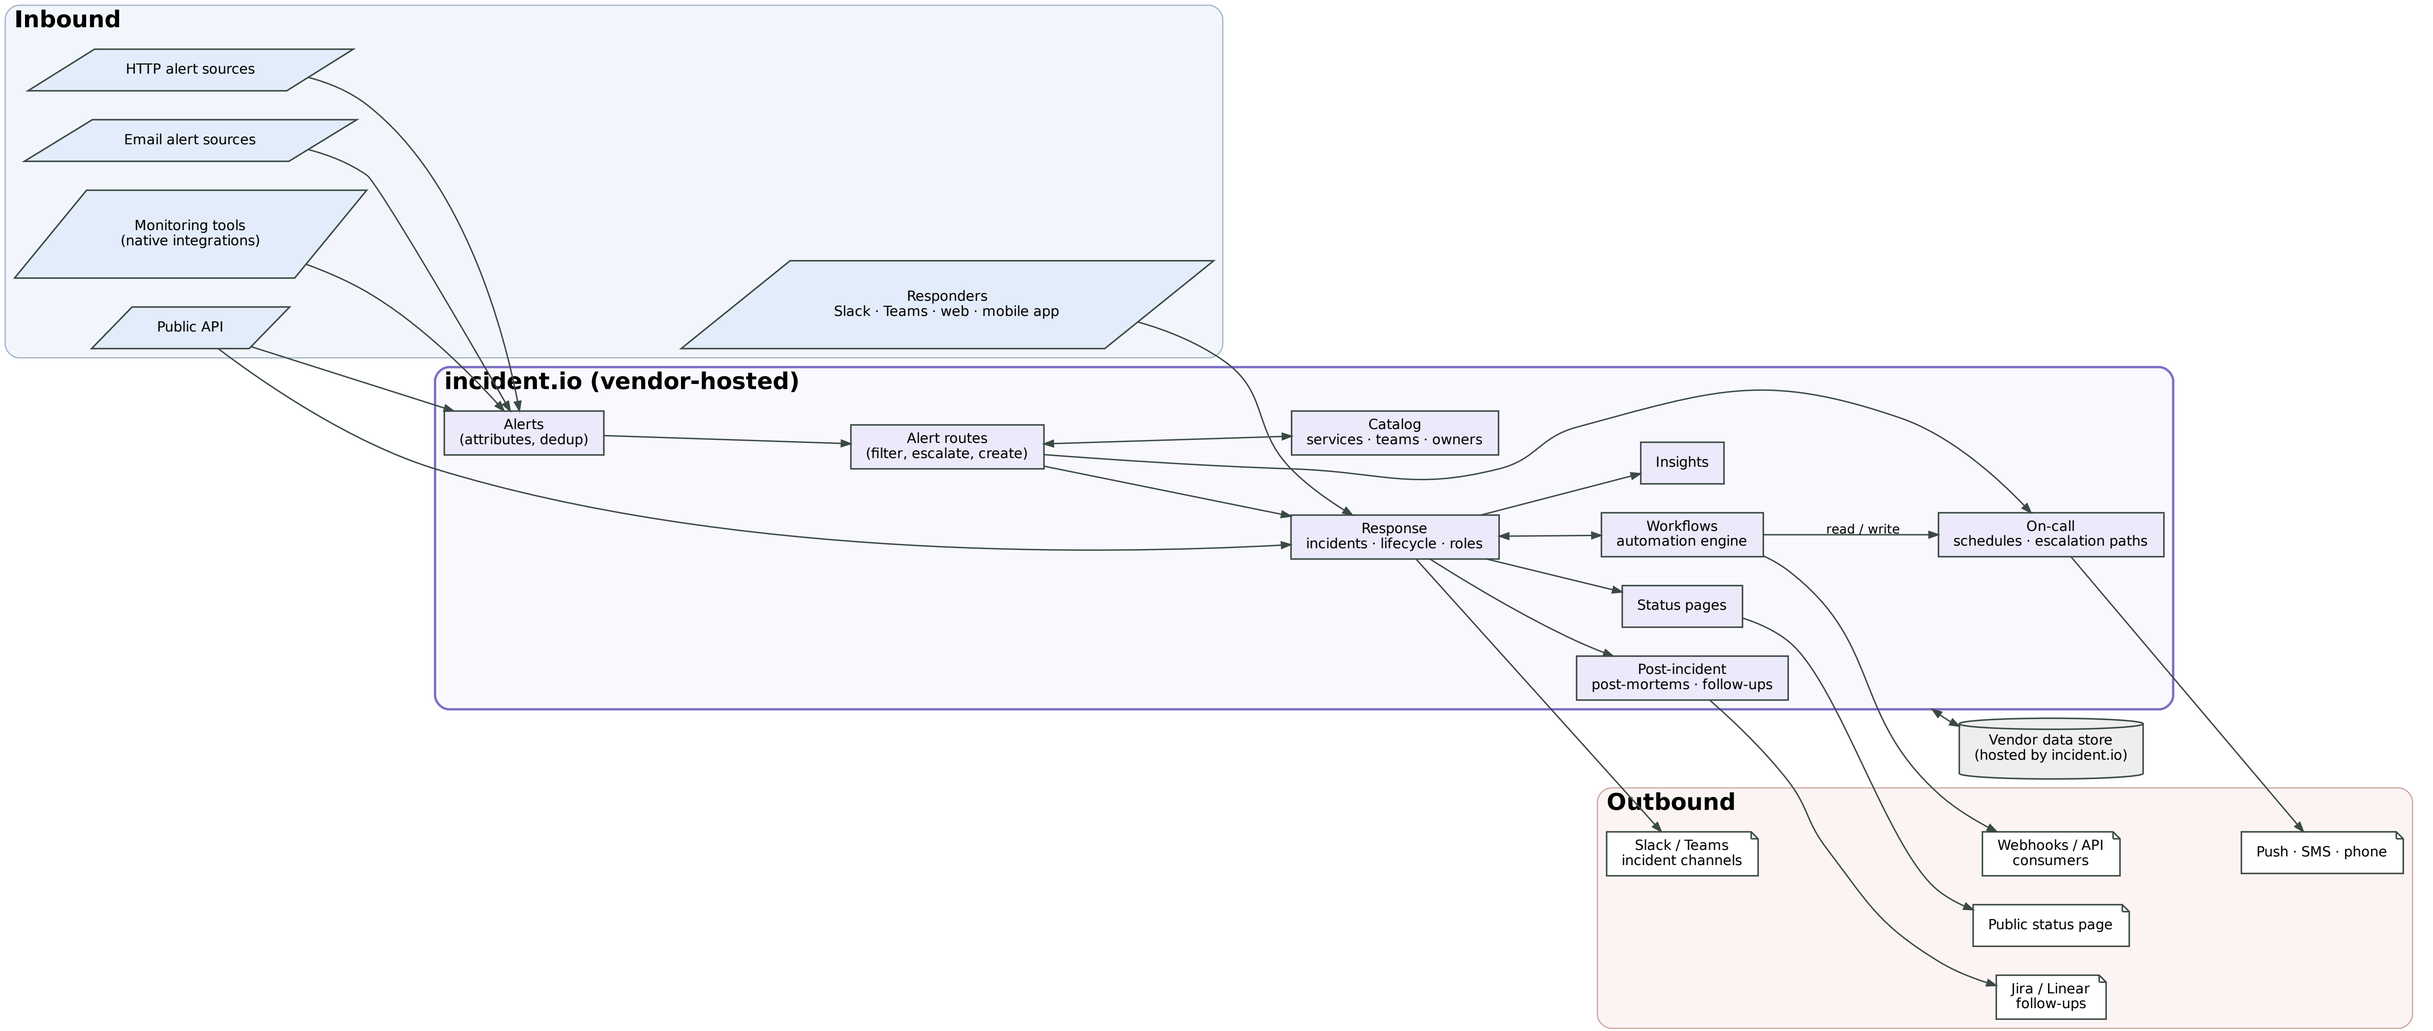


Table 2. incident.io — step specification

IDs match the numbered phases in Figure 3.

ID	Step	Type	Rule / detail	Next
1.1	Alert fires or problem noticed	Start		1.2 / 1.3
1.2	Alert sources	Input	Native integrations (e.g. Datadog, Grafana, Sentry, CloudWatch), HTTP sources, email sources.	1.4
1.3	Declare incident	Input	A person declares from Slack, Teams, web or API.	4.3
1.4	Alert received	Process	Payload mapped to alert attributes.	2.1
2.1	Route filter matches?	Decision	Alert route conditions on attributes. No: alert recorded only.	2.2 / End
2.2	Catalog lookup	Process	Affected service resolved to its owning team.	2.3 / 2.5
2.3	Route escalates?	Decision	Yes: select escalation path, static or chosen from Catalog context.	3.1
2.5	Route creates incidents?	Decision	No: alert posted to a Slack or Teams channel. Yes: group into an open incident or open a new one in Triage.	2.6 / 4.1
3.1	Escalation path level n	Process	Levels with time windows; targets a schedule (who is on call) or specific users.	3.2
3.2	Notify	Output	App push, SMS, phone call, Slack or Teams.	3.3
3.3	Acknowledged in time?	Decision	No: next level or repeat; when exhausted the escalation ends unacknowledged.	4.3 / 3.1
4.1	Triage	Process	Incidents created from alerts start in Triage.	4.2
4.2	Triage outcome	Decision	Accept: becomes active. Merge: attached to an existing incident. Decline: closed.	4.3
4.3	Active incident	Process	Dedicated Slack/Teams channel, lead and roles, severity, custom fields.	4.4
4.4	Workflows	Process	Trigger → conditions → steps (e.g. escalate, message, create ticket, status page update).	4.5
4.5	Lifecycle statuses	Process	Investigating → Fixing → Monitoring (configurable per incident type).	4.6
4.6	Resolved?	Decision	No: continue working. Yes: post-incident.	5.1
5.1	Post-incident flow applies?	Decision	Yes: tasks and debrief, post-mortem, follow-ups exported to Jira or Linear.	5.2
5.2	Insights	Output	Response metrics and team workload.	End

Table 3. Side-by-side comparison

Area	InfraTicket 3.0	incident.io
Scope	Tickets of every kind (incident, request, question, problem) plus alerting and on-call	Incidents, alerts and on-call; not a general service desk
Intake	Web, Slack, Teams, Discord, Outlook mailbox, Linear/GitHub, monitors, webhooks, polled APIs	Native integrations, HTTP and email alert sources, declare from Slack/Teams/web/API
Routing	Routing rules, department routes, flows	Alert routes with Catalog lookups
On-call	Schedules, escalation policies; push, SMS, phone, Teams call	Schedules, escalation paths; app, SMS, phone
Set-hours departments	Shifts with team leader and automatic shift handover	Schedules only
Approvals	Built in: rules (e.g. > $50,000), gating, approve from web/Slack/Teams	Through workflows; not a core gate
Automation	Visual per-department flows	Workflows (trigger, conditions, steps)
After resolution	Reports, SLA, heatmap, audit log, status pages	Post-incident flows, post-mortems, follow-ups, insights, status pages
Hosting and data	Self-hosted; data stays in our database	Vendor-hosted SaaS; data held by incident.io
Cost model	No licence; hosting and maintenance effort	Per-user subscription in USD (see vendor pricing)