

# Data Mining: Data

---

## Lecture Notes for Chapter 2

Introduction to Data Mining , 2<sup>nd</sup> Edition  
by  
Tan, Steinbach, Kumar

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

1

## Outline

---

- Attributes and Objects
- Types of Data
- Data Quality
- Similarity and Distance
- Data Preprocessing

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

2

2

## What is Data?

- Collection of **data objects** and their **attributes**
- An **attribute** is a property or characteristic of an object
  - Examples: eye color of a person, temperature, etc.
  - Attribute is also known as variable, field, characteristic, dimension, or feature
- A collection of attributes describe an **object**
  - Object is also known as record, point, case, sample, entity, or instance

Attributes					
Tid	Refund	Marital Status	Taxable Income	Cheat	
1	Yes	Single	125K	No	
2	No	Married	100K	No	
3	No	Single	70K	No	
4	Yes	Married	120K	No	
5	No	Divorced	95K	Yes	
6	No	Married	60K	No	
7	Yes	Divorced	220K	No	
8	No	Single	85K	Yes	
9	No	Married	75K	No	
10	No	Single	90K	Yes	

3


## Attribute Values

- **Attribute values** are numbers or symbols assigned to an attribute for a particular object
- Distinction between attributes and attribute values
  - Same attribute can be mapped to different attribute values
    - ◆ Example: height can be measured in feet or meters
  - Different attributes can be mapped to the same set of values
    - ◆ Example: Attribute values for ID and age are integers
  - But properties of attribute can be different than the properties of the values used to represent the attribute

4

## Measurement of Length

- The way you measure an attribute may not match the attribute's properties.

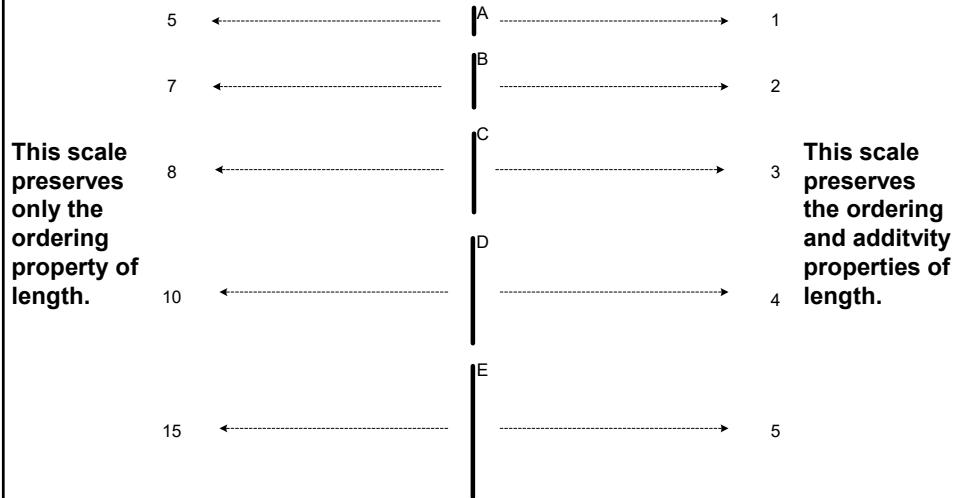

5

## Types of Attributes

- There are different types of attributes
  - Nominal**
    - Examples: ID numbers, eye color, zip codes
  - Ordinal**
    - Examples: rankings (e.g., taste of potato chips on a scale from 1-10), grades, height {tall, medium, short}
  - Interval**
    - Examples: calendar dates, temperatures in Celsius or Fahrenheit.
  - Ratio**
    - Examples: temperature in Kelvin, length, counts, elapsed time (e.g., time to run a race)

6

## Properties of Attribute Values

- The type of an attribute depends on which of the following properties/operations it possesses:
  - Distinctness:                  $= \neq$
  - Order:                           $< >$
  - Differences are meaningful :                           $+ -$
  - Ratios are meaningful                           $* /$
  - Nominal attribute: distinctness
  - Ordinal attribute: distinctness & order
  - Interval attribute: distinctness, order & meaningful differences
  - Ratio attribute: all 4 properties/operations

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

7

## Difference Between Ratio and Interval

- Is it physically meaningful to say that a temperature of  $10^{\circ}$  is twice that of  $5^{\circ}$  on
  - the Celsius scale?
  - the Fahrenheit scale?
  - the Kelvin scale?
- Consider measuring the height above average
  - If Bill's height is three inches above average and Bob's height is six inches above average, then would we say that Bob is twice as tall as Bill?
  - Is this situation analogous to that of temperature?

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

8

8

	<b>Attribute Type</b>	<b>Description</b>	<b>Examples</b>	<b>Operations</b>
Categorical Qualitative Numeric Quantitative	Nominal	Nominal attribute values only distinguish. ( $=$ , $\neq$ )	zip codes, employee ID numbers, eye color, sex: {male, female}	mode, entropy, contingency correlation, $\chi^2$ test
	Ordinal	Ordinal attribute values also order objects. ( $<$ , $>$ )	hardness of minerals, {good, better, best}, grades, street numbers	median, percentiles, rank correlation, run tests, sign tests
	Interval	For interval attributes, differences between values are meaningful. (+, -)	calendar dates, temperature in Celsius or Fahrenheit	mean, standard deviation, Pearson's correlation, $t$ and $F$ tests
	Ratio	For ratio variables, both differences and ratios are meaningful. (*, /)	temperature in Kelvin, monetary quantities, counts, age, mass, length, current	geometric mean, harmonic mean, percent variation

**This categorization of attributes is due to S. S. Stevens**

9

	<b>Attribute Type</b>	<b>Transformation</b>	<b>Comments</b>
Categorical Qualitative Numeric Quantitative	Nominal	Any permutation of values	If all employee ID numbers were reassigned, would it make any difference?
	Ordinal	An order preserving change of values, i.e., $new\_value = f(old\_value)$ where $f$ is a monotonic function	An attribute encompassing the notion of good, better best can be represented equally well by the values {1, 2, 3} or by {0.5, 1, 10}.
	Interval	$new\_value = a * old\_value + b$ where $a$ and $b$ are constants	Thus, the Fahrenheit and Celsius temperature scales differ in terms of where their zero value is and the size of a unit (degree).
	Ratio	$new\_value = a * old\_value$	Length can be measured in meters or feet.

**This categorization of attributes is due to S. S. Stevens**

10

## Discrete and Continuous Attributes

### □ Discrete Attribute

- Has only a finite or countably infinite set of values
- Examples: zip codes, counts, or the set of words in a collection of documents
- Often represented as integer variables.
- Note: **binary attributes** are a special case of discrete attributes

### □ Continuous Attribute

- Has real numbers as attribute values
- Examples: temperature, height, or weight.
- Practically, real values can only be measured and represented using a finite number of digits.
- Continuous attributes are typically represented as floating-point variables.

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

11

11

## Asymmetric Attributes

### □ Only presence (a non-zero attribute value) is regarded as important

- ◆ Words present in documents
- ◆ Items present in customer transactions

### □ If we met a friend in the grocery store would we ever say the following?

*"I see our purchases are very similar since we didn't buy most of the same things."*

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

12

12

## Critiques of the attribute categorization

- Incomplete
  - Asymmetric binary
  - Cyclical
  - Multivariate
  - Partially ordered
  - Partial membership
  - Relationships between the data
- Real data is approximate and noisy
  - This can complicate recognition of the proper attribute type
  - Treating one attribute type as another may be approximately correct

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

13

## Key Messages for Attribute Types

- The types of operations you choose should be “meaningful” for the type of data you have
  - Distinctness, order, meaningful intervals, and meaningful ratios are only four (among many possible) properties of data
  - The data type you see – often numbers or strings – may not capture all the properties or may suggest properties that are not present
  - Analysis may depend on these other properties of the data
    - ◆ Many statistical analyses depend only on the distribution
  - In the end, what is meaningful can be specific to domain

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

14

14

## Important Characteristics of Data

- Dimensionality (number of attributes)
  - ◆ High dimensional data brings a number of challenges
- Sparsity
  - ◆ Only presence counts
- Resolution
  - ◆ Patterns depend on the scale
- Size
  - ◆ Type of analysis may depend on size of data

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

15

## Types of data sets

- Record
  - Data Matrix
  - Document Data
  - Transaction Data
- Graph
  - World Wide Web
  - Molecular Structures
- Ordered
  - Spatial Data
  - Temporal Data
  - Sequential Data
  - Genetic Sequence Data

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

16

16

## Record Data

- Data that consists of a collection of records, each of which consists of a fixed set of attributes

Tid	Refund	Marital Status	Taxable Income	Cheat
1	Yes	Single	125K	No
2	No	Married	100K	No
3	No	Single	70K	No
4	Yes	Married	120K	No
5	No	Divorced	95K	Yes
6	No	Married	60K	No
7	Yes	Divorced	220K	No
8	No	Single	85K	Yes
9	No	Married	75K	No
10	No	Single	90K	Yes

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

17

17

## Data Matrix

- If data objects have the same fixed set of numeric attributes, then the data objects can be thought of as points in a multi-dimensional space, where each dimension represents a distinct attribute
- Such a data set can be represented by an  $m$  by  $n$  matrix, where there are  $m$  rows, one for each object, and  $n$  columns, one for each attribute

Projection of x Load	Projection of y load	Distance	Load	Thickness
10.23	5.27	15.22	2.7	1.2
12.65	6.25	16.22	2.2	1.1

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

18

18

## Document Data

- Each document becomes a ‘term’ vector
  - Each term is a component (attribute) of the vector
  - The value of each component is the number of times the corresponding term occurs in the document.

	team	coach	play	ball	score	game	win	lost	timeout	season
Document 1	3	0	5	0	2	6	0	2	0	2
Document 2	0	7	0	2	1	0	0	3	0	0
Document 3	0	1	0	0	1	2	2	0	3	0

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

19

19

## Transaction Data

- A special type of data, where
  - Each transaction involves a set of items.
  - For example, consider a grocery store. The set of products purchased by a customer during one shopping trip constitute a transaction, while the individual products that were purchased are the items.
  - Can represent transaction data as record data

TID	Items
1	Bread, Coke, Milk
2	Beer, Bread
3	Beer, Coke, Diaper, Milk
4	Beer, Bread, Diaper, Milk
5	Coke, Diaper, Milk

01/27/2021



Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

20

20

## Graph Data

- Examples: Generic graph, a molecule, and webpages

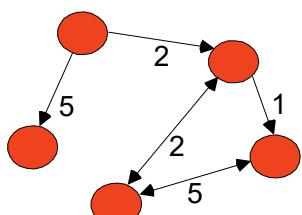

Benzene Molecule: C<sub>6</sub>H<sub>6</sub>

### Useful Links:

- [Bibliography](#)
- Other Useful Web sites
  - [ACM SIGKDD](#)
  - [KDnuggets](#)
  - [The Data Mine](#)

### Knowledge Discovery and Data Mining Bibliography

(Gets updated frequently, so visit often!)

- [Books](#)
- [General Data Mining](#)

### Book References in Data Mining and Knowledge Discovery

- Usama Fayyad, Gregory Piatetsky-Shapiro, Padhraic Smyth, and Ramasamy Iyer, "Advances in Knowledge Discovery and Data Mining", AAAI Press/The MIT Press, 1996.  
J. Ross Quinlan, "C4.5: Programs for Machine Learning", Morgan Kaufmann Publishers, 1993.  
Michael Berry and Gordon Linoff, "Data Mining Techniques (For Marketing, Sales, and Customer Support)", John Wiley & Sons, 1997.

### General Data Mining

- Usama Fayyad, "Mining Databases: Towards Algorithms for Knowledge Discovery", Bulletin of the IEEE Computer Society Technical Committee on Data Engineering, vol. 21, no. 1, March 1998.  
Christopher Matheus, Philip Chan, and Gregory Piatetsky-Shapiro, "Systems for knowledge discovery in databases", IEEE Transactions on Knowledge and Data Engineering, 5(6):903-913, December 1993.

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar


21

21

## Ordered Data

- Sequences of transactions

### Items/Events

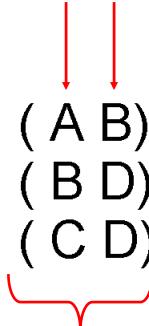

An element of  
the sequence

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

22

22

## Ordered Data

- Genomic sequence data

```
GGTTCCGCCTTCAGCCCCGCGCC  
CGCAGGGCCC GCCCGCGGCCGTC  
GAGAAGGGCCC GCGCTGGCGGGCG  
GGGGGAGGC GGGGCCGCCC GAGC  
CCAACCGAGTCCGACCAGGTGCC  
CCCTCTGCTCGGCCTAGACCTGA  
GCTCATTAGGC GGGCAGCGGACAG  
GCCAAGTAGAACACCGCGAAGCGC  
TGGGCTGCCTGCTGCGACCAGGG
```

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar


23

23

## Ordered Data

- Spatio-Temporal Data

Average Monthly  
Temperature of  
land and ocean

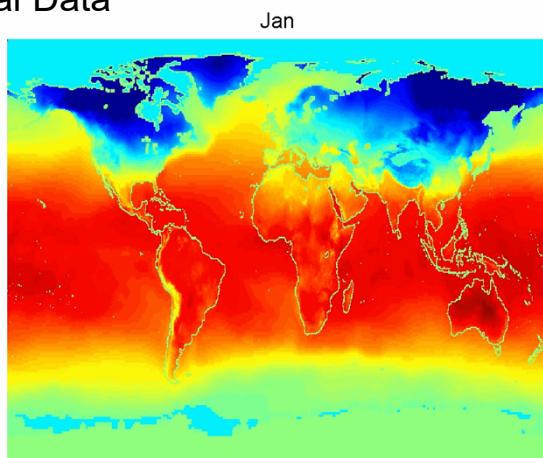

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

24

24

## Data Quality

- Poor data quality negatively affects many data processing efforts
- Data mining example: a classification model for detecting people who are loan risks is built using poor data
  - Some credit-worthy candidates are denied loans
  - More loans are given to individuals that default

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

25

25

## Data Quality ...

- What kinds of data quality problems?
- How can we detect problems with the data?
- What can we do about these problems?
- Examples of data quality problems:
  - Noise and outliers
  - Wrong data
  - Fake data
  - Missing values
  - Duplicate data

01/27/2021


Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

26

26

## Noise

- For objects, noise is an extraneous object
- For attributes, noise refers to modification of original values
  - Examples: distortion of a person's voice when talking on a poor phone and "snow" on television screen
  - The figures below show two sine waves of the same magnitude and different frequencies, the waves combined, and the two sine waves with random noise
    - ◆ The magnitude and shape of the original signal is distorted

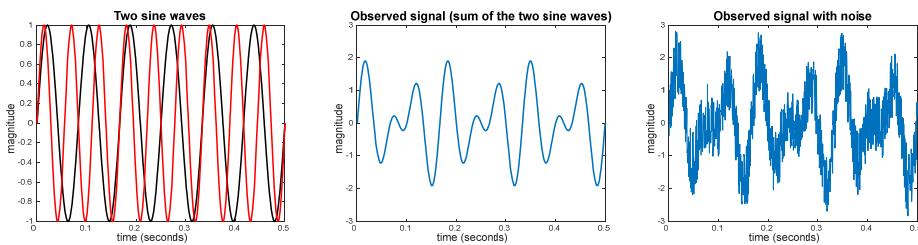

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

27

27

## Outliers

- **Outliers** are data objects with characteristics that are considerably different than most of the other data objects in the data set
  - **Case 1:** Outliers are noise that interferes with data analysis
  - **Case 2:** Outliers are the goal of our analysis
    - ◆ Credit card fraud
    - ◆ Intrusion detection
- Causes?

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

28

28

## Missing Values

- Reasons for missing values
  - Information is not collected  
(e.g., people decline to give their age and weight)
  - Attributes may not be applicable to all cases  
(e.g., annual income is not applicable to children)
- Handling missing values
  - Eliminate data objects or variables
  - Estimate missing values
    - ◆ Example: time series of temperature
    - ◆ Example: census results
  - Ignore the missing value during analysis

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

29

29

## Duplicate Data

- Data set may include data objects that are duplicates, or almost duplicates of one another
  - Major issue when merging data from heterogeneous sources
- Examples:
  - Same person with multiple email addresses
- Data cleaning
  - Process of dealing with duplicate data issues
- When should duplicate data not be removed?

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

30

30

## Similarity and Dissimilarity Measures

### □ Similarity measure

- Numerical measure of how alike two data objects are.
- Is higher when objects are more alike.
- Often falls in the range [0,1]

### □ Dissimilarity measure

- Numerical measure of how different two data objects are
- Lower when objects are more alike
- Minimum dissimilarity is often 0
- Upper limit varies

### □ Proximity refers to a similarity or dissimilarity

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

31

31

## Similarity/Dissimilarity for Simple Attributes

The following table shows the similarity and dissimilarity between two objects,  $x$  and  $y$ , with respect to a single, simple attribute.

Attribute Type	Dissimilarity	Similarity
Nominal	$d = \begin{cases} 0 & \text{if } x = y \\ 1 & \text{if } x \neq y \end{cases}$	$s = \begin{cases} 1 & \text{if } x = y \\ 0 & \text{if } x \neq y \end{cases}$
Ordinal	$d =  x - y /(n - 1)$ (values mapped to integers 0 to $n-1$ , where $n$ is the number of values)	$s = 1 - d$
Interval or Ratio	$d =  x - y $	$s = -d, s = \frac{1}{1+d}, s = e^{-d}, s = 1 - \frac{d - \min_d}{\max_d - \min_d}$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

32

32

## Euclidean Distance

- Euclidean Distance

$$d(\mathbf{x}, \mathbf{y}) = \sqrt{\sum_{k=1}^n (x_k - y_k)^2}$$

where  $n$  is the number of dimensions (attributes) and  $x_k$  and  $y_k$  are, respectively, the  $k^{th}$  attributes (components) or data objects  $\mathbf{x}$  and  $\mathbf{y}$ .

- Standardization is necessary, if scales differ.


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

33

33

## Euclidean Distance

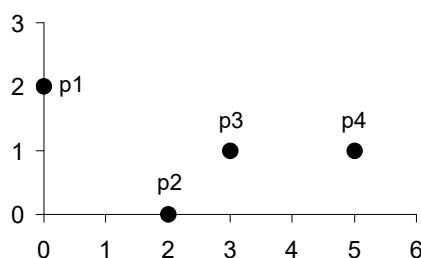

point	x	y
p1	0	2
p2	2	0
p3	3	1
p4	5	1

	p1	p2	p3	p4
p1	0	2.828	3.162	5.099
p2	2.828	0	1.414	3.162
p3	3.162	1.414	0	2
p4	5.099	3.162	2	0

Distance Matrix

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

34

34

## Minkowski Distance

- Minkowski Distance is a generalization of Euclidean Distance

$$d(\mathbf{x}, \mathbf{y}) = \left( \sum_{k=1}^n |x_k - y_k|^r \right)^{1/r}$$

Where  $r$  is a parameter,  $n$  is the number of dimensions (attributes) and  $x_k$  and  $y_k$  are, respectively, the  $k^{\text{th}}$  attributes (components) or data objects  $\mathbf{x}$  and  $\mathbf{y}$ .

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

35

35

## Minkowski Distance: Examples

- $r = 1$ . City block (Manhattan, taxicab,  $L_1$  norm) distance.
  - A common example of this for binary vectors is the Hamming distance, which is just the number of bits that are different between two binary vectors
- $r = 2$ . Euclidean distance
- $r \rightarrow \infty$ . “supremum” ( $L_{\max}$  norm,  $L_{\infty}$  norm) distance.
  - This is the maximum difference between any component of the vectors
- Do not confuse  $r$  with  $n$ , i.e., all these distances are defined for all numbers of dimensions.

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

36

36

## Minkowski Distance

point	x	y
p1	0	2
p2	2	0
p3	3	1
p4	5	1

L1	p1	p2	p3	p4
p1	0	4	4	6
p2	4	0	2	4
p3	4	2	0	2
p4	6	4	2	0

L2	p1	p2	p3	p4
p1	0	2.828	3.162	5.099
p2	2.828	0	1.414	3.162
p3	3.162	1.414	0	2
p4	5.099	3.162	2	0

L $\infty$	p1	p2	p3	p4
p1	0	2	3	5
p2	2	0	1	3
p3	3	1	0	2
p4	5	3	2	0

Distance Matrix

01/27/2021


Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

37

37

## Mahalanobis Distance

$$\text{mahalanobis}(\mathbf{x}, \mathbf{y}) = ((\mathbf{x} - \mathbf{y})^T \Sigma^{-1} (\mathbf{x} - \mathbf{y}))^{-0.5}$$

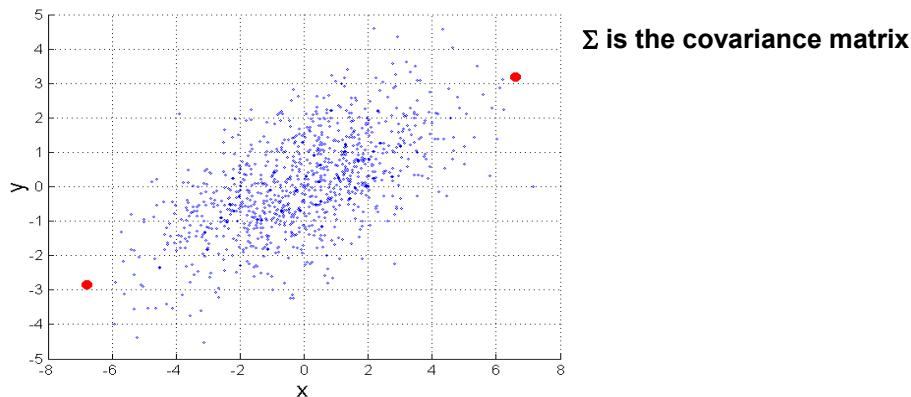

For red points, the Euclidean distance is 14.7, Mahalanobis distance is 6.


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

38

38

## Mahalanobis Distance

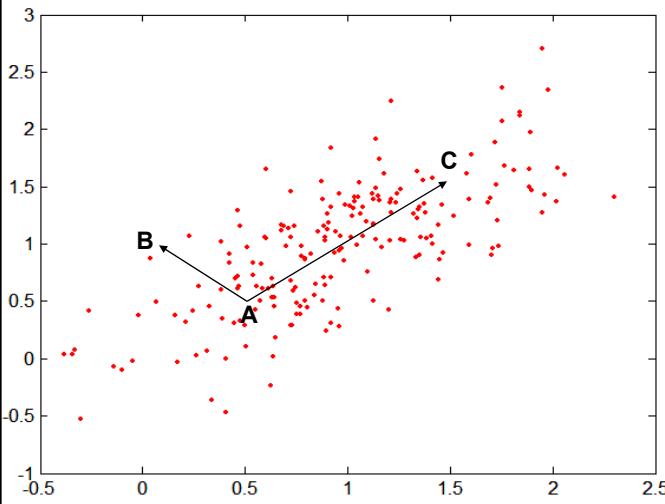

Covariance Matrix:  
 $\Sigma = \begin{bmatrix} 0.3 & 0.2 \\ 0.2 & 0.3 \end{bmatrix}$

- A: (0.5, 0.5)
- B: (0, 1)
- C: (1.5, 1.5)

$$\text{Mahal}(A,B) = 5$$
$$\text{Mahal}(A,C) = 4$$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

39

39

## Common Properties of a Distance

- Distances, such as the Euclidean distance, have some well known properties.
  1.  $d(x, y) \geq 0$  for all  $x$  and  $y$  and  $d(x, y) = 0$  if and only if  $x = y$ .
  2.  $d(x, y) = d(y, x)$  for all  $x$  and  $y$ . (Symmetry)
  3.  $d(x, z) \leq d(x, y) + d(y, z)$  for all points  $x, y$ , and  $z$ . (Triangle Inequality)

where  $d(x, y)$  is the distance (dissimilarity) between points (data objects),  $x$  and  $y$ .

- A distance that satisfies these properties is a **metric**

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

40

40

## Common Properties of a Similarity

- Similarities, also have some well known properties.
  1.  $s(x, y) = 1$  (or maximum similarity) only if  $x = y$ .  
(does not always hold, e.g., cosine)
  2.  $s(x, y) = s(y, x)$  for all  $x$  and  $y$ . (Symmetry)

where  $s(x, y)$  is the similarity between points (data objects),  $x$  and  $y$ .

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

41

41

## Similarity Between Binary Vectors

- Common situation is that objects,  $x$  and  $y$ , have only binary attributes
- Compute similarities using the following quantities
  - $f_{01}$  = the number of attributes where  $x$  was 0 and  $y$  was 1
  - $f_{10}$  = the number of attributes where  $x$  was 1 and  $y$  was 0
  - $f_{00}$  = the number of attributes where  $x$  was 0 and  $y$  was 0
  - $f_{11}$  = the number of attributes where  $x$  was 1 and  $y$  was 1
- Simple Matching and Jaccard Coefficients
  - $SMC = \text{number of matches} / \text{number of attributes}$   
 $= (f_{11} + f_{00}) / (f_{01} + f_{10} + f_{11} + f_{00})$
  - $J = \text{number of } 11 \text{ matches} / \text{number of non-zero attributes}$   
 $= (f_{11}) / (f_{01} + f_{10} + f_{11})$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

42

42

## SMC versus Jaccard: Example

$\mathbf{x} = 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0$

$\mathbf{y} = 0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 1$

$f_{01} = 2$  (the number of attributes where  $\mathbf{x}$  was 0 and  $\mathbf{y}$  was 1)

$f_{10} = 1$  (the number of attributes where  $\mathbf{x}$  was 1 and  $\mathbf{y}$  was 0)

$f_{00} = 7$  (the number of attributes where  $\mathbf{x}$  was 0 and  $\mathbf{y}$  was 0)

$f_{11} = 0$  (the number of attributes where  $\mathbf{x}$  was 1 and  $\mathbf{y}$  was 1)

$$\begin{aligned} \text{SMC} &= (f_{11} + f_{00}) / (f_{01} + f_{10} + f_{11} + f_{00}) \\ &= (0+7) / (2+1+0+7) = 0.7 \end{aligned}$$

$$J = (f_{11}) / (f_{01} + f_{10} + f_{11}) = 0 / (2 + 1 + 0) = 0$$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

43

43

## Cosine Similarity

□ If  $\mathbf{d}_1$  and  $\mathbf{d}_2$  are two document vectors, then

$$\cos(\mathbf{d}_1, \mathbf{d}_2) = \langle \mathbf{d}_1, \mathbf{d}_2 \rangle / \|\mathbf{d}_1\| \|\mathbf{d}_2\|,$$

where  $\langle \mathbf{d}_1, \mathbf{d}_2 \rangle$  indicates inner product or vector dot product of vectors,  $\mathbf{d}_1$  and  $\mathbf{d}_2$ , and  $\|\mathbf{d}\|$  is the length of vector  $\mathbf{d}$ .

□ Example:

$$\mathbf{d}_1 = 3 \ 2 \ 0 \ 5 \ 0 \ 0 \ 0 \ 2 \ 0 \ 0$$

$$\mathbf{d}_2 = 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 2$$

$$\langle \mathbf{d}_1, \mathbf{d}_2 \rangle = 3*1 + 2*0 + 0*0 + 5*0 + 0*0 + 0*0 + 0*0 + 2*1 + 0*0 + 0*2 = 5$$

$$\|\mathbf{d}_1\| = (3^2 + 2^2 + 0^2 + 5^2 + 0^2 + 0^2 + 0^2 + 2^2 + 0^2 + 0^2)^{0.5} = (42)^{0.5} = 6.481$$

$$\|\mathbf{d}_2\| = (1^2 + 0^2 + 0^2 + 0^2 + 0^2 + 0^2 + 0^2 + 1^2 + 0^2 + 2^2)^{0.5} = (6)^{0.5} = 2.449$$

$$\cos(\mathbf{d}_1, \mathbf{d}_2) = 0.3150$$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

44

44

## Correlation measures the linear relationship between objects

$$\text{corr}(\mathbf{x}, \mathbf{y}) = \frac{\text{covariance}(\mathbf{x}, \mathbf{y})}{\text{standard\_deviation}(\mathbf{x}) * \text{standard\_deviation}(\mathbf{y})} = \frac{s_{xy}}{s_x s_y}, \quad (2.11)$$

where we are using the following standard statistical notation and definitions

$$\text{covariance}(\mathbf{x}, \mathbf{y}) = s_{xy} = \frac{1}{n-1} \sum_{k=1}^n (x_k - \bar{x})(y_k - \bar{y}) \quad (2.12)$$

$$\begin{aligned} \text{standard\_deviation}(\mathbf{x}) &= s_x = \sqrt{\frac{1}{n-1} \sum_{k=1}^n (x_k - \bar{x})^2} \\ \text{standard\_deviation}(\mathbf{y}) &= s_y = \sqrt{\frac{1}{n-1} \sum_{k=1}^n (y_k - \bar{y})^2} \end{aligned}$$

$$\begin{aligned} \bar{x} &= \frac{1}{n} \sum_{k=1}^n x_k \text{ is the mean of } \mathbf{x} \\ \bar{y} &= \frac{1}{n} \sum_{k=1}^n y_k \text{ is the mean of } \mathbf{y} \end{aligned}$$


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

45

45

## Visually Evaluating Correlation

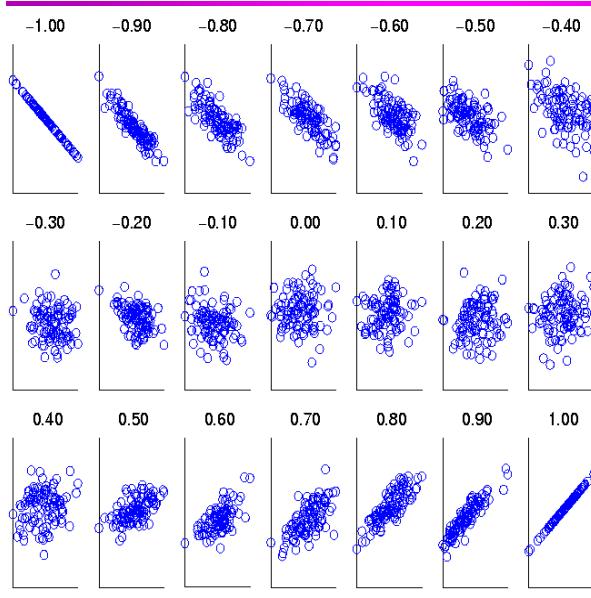

Scatter plots showing the similarity from -1 to 1.

Tan, Steinbach, Karpatne, Kumar

46


46

## Drawback of Correlation

□  $\mathbf{x} = (-3, -2, -1, 0, 1, 2, 3)$

□  $\mathbf{y} = (9, 4, 1, 0, 1, 4, 9)$

$$y_i = x_i^2$$

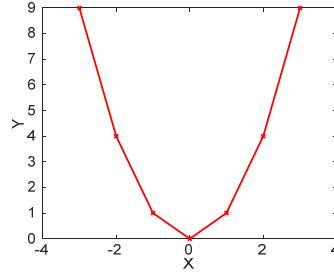

□  $\text{mean}(\mathbf{x}) = 0, \text{mean}(\mathbf{y}) = 4$

□  $\text{std}(\mathbf{x}) = 2.16, \text{std}(\mathbf{y}) = 3.74$

□  $\text{corr} = (-3)(5) + (-2)(0) + (-1)(-3) + (0)(-4) + (1)(-3) + (2)(0) + 3(5) / (6 * 2.16 * 3.74)$   
= 0

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

47

47

## Correlation vs Cosine vs Euclidean Distance

- Compare the three proximity measures according to their behavior under variable transformation
- scaling: multiplication by a value
  - translation: adding a constant

Property	Cosine	Correlation	Euclidean Distance
Invariant to scaling (multiplication)	Yes	Yes	No
Invariant to translation (addition)	No	Yes	No

- Consider the example
- $\mathbf{x} = (1, 2, 4, 3, 0, 0, 0)$ ,  $\mathbf{y} = (1, 2, 3, 4, 0, 0, 0)$
  - $\mathbf{y}_s = \mathbf{y} * 2$  (scaled version of  $\mathbf{y}$ ),  $\mathbf{y}_t = \mathbf{y} + 5$  (translated version)

Measure	$(\mathbf{x}, \mathbf{y})$	$(\mathbf{x}, \mathbf{y}_s)$	$(\mathbf{x}, \mathbf{y}_t)$
Cosine	0.9667	0.9667	0.7940
Correlation	0.9429	0.9429	0.9429
Euclidean Distance	1.4142	5.8310	14.2127

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

48

48

## Correlation vs cosine vs Euclidean distance

- Choice of the right proximity measure depends on the domain
- What is the correct choice of proximity measure for the following situations?
  - Comparing documents using the frequencies of words
    - ◆ Documents are considered similar if the word frequencies are similar
  - Comparing the temperature in Celsius of two locations
    - ◆ Two locations are considered similar if the temperatures are similar in magnitude
  - Comparing two time series of temperature measured in Celsius
    - ◆ Two time series are considered similar if their “shape” is similar, i.e., they vary in the same way over time, achieving minimums and maximums at similar times, etc.

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

49

49

## Comparison of Proximity Measures

- Domain of application
  - Similarity measures tend to be specific to the type of attribute and data
  - Record data, images, graphs, sequences, 3D-protein structure, etc. tend to have different measures
- However, one can talk about various properties that you would like a proximity measure to have
  - Symmetry is a common one
  - Tolerance to noise and outliers is another
  - Ability to find more types of patterns?
  - Many others possible
- The measure must be applicable to the data and produce results that agree with domain knowledge

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

50

50

## Information Based Measures

- Information theory is a well-developed and fundamental discipline with broad applications
- Some similarity measures are based on information theory
  - Mutual information in various versions
  - Maximal Information Coefficient (MIC) and related measures
  - General and can handle non-linear relationships
  - Can be complicated and time intensive to compute

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

51

51

## Information and Probability

- Information relates to possible outcomes of an event
  - transmission of a message, flip of a coin, or measurement of a piece of data
- The more certain an outcome, the less information that it contains and vice-versa
  - For example, if a coin has two heads, then an outcome of heads provides no information
  - More quantitatively, the information is related to the probability of an outcome
    - ◆ The smaller the probability of an outcome, the more information it provides and vice-versa
  - Entropy is the commonly used measure



01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

52

52

## Entropy

- For
  - a variable (event),  $X$ ,
  - with  $n$  possible values (outcomes),  $x_1, x_2 \dots, x_n$
  - each outcome having probability,  $p_1, p_2 \dots, p_n$
  - the entropy of  $X$ ,  $H(X)$ , is given by
$$H(X) = - \sum_{i=1}^n p_i \log_2 p_i$$
- Entropy is between 0 and  $\log_2 n$  and is measured in bits
  - Thus, entropy is a measure of how many bits it takes to represent an observation of  $X$  on average

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

53

## Entropy Examples

- For a coin with probability  $p$  of heads and probability  $q = 1 - p$  of tails

$$H = -p \log_2 p - q \log_2 q$$

- For  $p = 0.5, q = 0.5$  (fair coin)  $H = 1$
- For  $p = 1$  or  $q = 1, H = 0$

- What is the entropy of a fair four-sided die?

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

54

54

## Entropy for Sample Data: Example

Hair Color	Count	$p$	$-p \log_2 p$
Black	75	0.75	0.3113
Brown	15	0.15	0.4105
Blond	5	0.05	0.2161
Red	0	0.00	0
Other	5	0.05	0.2161
Total	100	1.0	1.1540

Maximum entropy is  $\log_2 5 = 2.3219$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

55

55

## Entropy for Sample Data

### □ Suppose we have

- a number of observations ( $m$ ) of some attribute,  $X$ ,  
e.g., the hair color of students in the class,
- where there are  $n$  different possible values
- And the number of observation in the  $i^{\text{th}}$  category is  $m_i$
- Then, for this sample

$$H(X) = - \sum_{i=1}^n \frac{m_i}{m} \log_2 \frac{m_i}{m}$$

### □ For continuous data, the calculation is harder

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

56

56

## Mutual Information

- Information one variable provides about another

Formally,  $I(X, Y) = H(X) + H(Y) - H(X, Y)$ , where

$H(X, Y)$  is the joint entropy of  $X$  and  $Y$ ,

$$H(X, Y) = - \sum_i \sum_j p_{ij} \log_2 p_{ij}$$

Where  $p_{ij}$  is the probability that the  $i^{\text{th}}$  value of  $X$  and the  $j^{\text{th}}$  value of  $Y$  occur together

- For discrete variables, this is easy to compute
- Maximum mutual information for discrete variables is  $\log_2(\min(n_X, n_Y))$ , where  $n_X$  ( $n_Y$ ) is the number of values of  $X$  ( $Y$ )

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

57

57

## Mutual Information Example

Student Status	Count	$p$	$-p \log_2 p$
Undergrad	45	0.45	0.5184
Grad	55	0.55	0.4744
Total	100	1.00	0.9928

Grade	Count	$p$	$-p \log_2 p$
A	35	0.35	0.5301
B	50	0.50	0.5000
C	15	0.15	0.4105
Total	100	1.00	1.4406

Student Status	Grade	Count	$p$	$-p \log_2 p$
Undergrad	A	5	0.05	0.2161
Undergrad	B	30	0.30	0.5211
Undergrad	C	10	0.10	0.3322
Grad	A	30	0.30	0.5211
Grad	B	20	0.20	0.4644
Grad	C	5	0.05	0.2161
Total		100	1.00	2.2710

Mutual information of Student Status and Grade =  $0.9928 + 1.4406 - 2.2710 = 0.1624$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

58

58

## Maximal Information Coefficient

□ Reshef, David N., Yakir A. Reshef, Hilary K. Finucane, Sharon R. Grossman, Gilean McVean, Peter J. Turnbaugh, Eric S. Lander, Michael Mitzenmacher, and Pardis C. Sabeti. "Detecting novel associations in large data sets." *science* 334, no. 6062 (2011): 1518-1524.

- Applies mutual information to two continuous variables
- Consider the possible binnings of the variables into discrete categories
  - $n_X \times n_Y \leq N^{0.6}$  where
    - ◆  $n_X$  is the number of values of  $X$
    - ◆  $n_Y$  is the number of values of  $Y$
    - ◆  $N$  is the number of samples (observations, data objects)
- Compute the mutual information
  - Normalized by  $\log_2(\min(n_X, n_Y))$
- Take the highest value

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

59

59

## General Approach for Combining Similarities

- Sometimes attributes are of many different types, but an overall similarity is needed.

1: For the  $k^{\text{th}}$  attribute, compute a similarity,  $s_k(\mathbf{x}, \mathbf{y})$ , in the range  $[0, 1]$ .

2: Define an indicator variable,  $\delta_k$ , for the  $k^{\text{th}}$  attribute as follows:

$\delta_k = 0$  if the  $k^{\text{th}}$  attribute is an asymmetric attribute and both objects have a value of 0, or if one of the objects has a missing value for the  $k^{\text{th}}$  attribute

$\delta_k = 1$  otherwise

3. Compute  $\text{similarity}(\mathbf{x}, \mathbf{y}) = \frac{\sum_{k=1}^n \delta_k s_k(\mathbf{x}, \mathbf{y})}{\sum_{k=1}^n \delta_k}$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

60

60

## Using Weights to Combine Similarities

- May not want to treat all attributes the same.
  - Use non-negative weights  $\omega_k$

$$\text{similarity}(\mathbf{x}, \mathbf{y}) = \frac{\sum_{k=1}^n \omega_k \delta_k s_k(\mathbf{x}, \mathbf{y})}{\sum_{k=1}^n \omega_k \delta_k}$$

- Can also define a weighted form of distance

$$d(\mathbf{x}, \mathbf{y}) = \left( \sum_{k=1}^n w_k |x_k - y_k|^r \right)^{1/r}$$

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

61

61

## Data Preprocessing

- Aggregation
- Sampling
- Discretization and Binarization
- Attribute Transformation
- Dimensionality Reduction
- Feature subset selection
- Feature creation

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

62

62

## Aggregation

- Combining two or more attributes (or objects) into a single attribute (or object)
- Purpose
  - Data reduction - reduce the number of attributes or objects
  - Change of scale
    - ◆ Cities aggregated into regions, states, countries, etc.
    - ◆ Days aggregated into weeks, months, or years
  - More "stable" data - aggregated data tends to have less variability

Table 2.4. Data set containing information about customer purchases.

Transaction ID	Item	Store Location	Date	Price	...
:	:	:	:	:	
101123	Watch	Chicago	09/06/04	\$25.99	...
101123	Battery	Chicago	09/06/04	\$5.99	...
101124	Shoes	Minneapolis	09/06/04	\$75.00	...
:	:	:	:	:	

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

63

## Example: Precipitation in Australia

- This example is based on precipitation in Australia from the period 1982 to 1993.
  - The next slide shows
    - A histogram for the standard deviation of average monthly precipitation for 3,030 0.5° by 0.5° grid cells in Australia, and
    - A histogram for the standard deviation of the average yearly precipitation for the same locations.
- The average yearly precipitation has less variability than the average monthly precipitation.
- All precipitation measurements (and their standard deviations) are in centimeters.


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

64

64

## Example: Precipitation in Australia ...

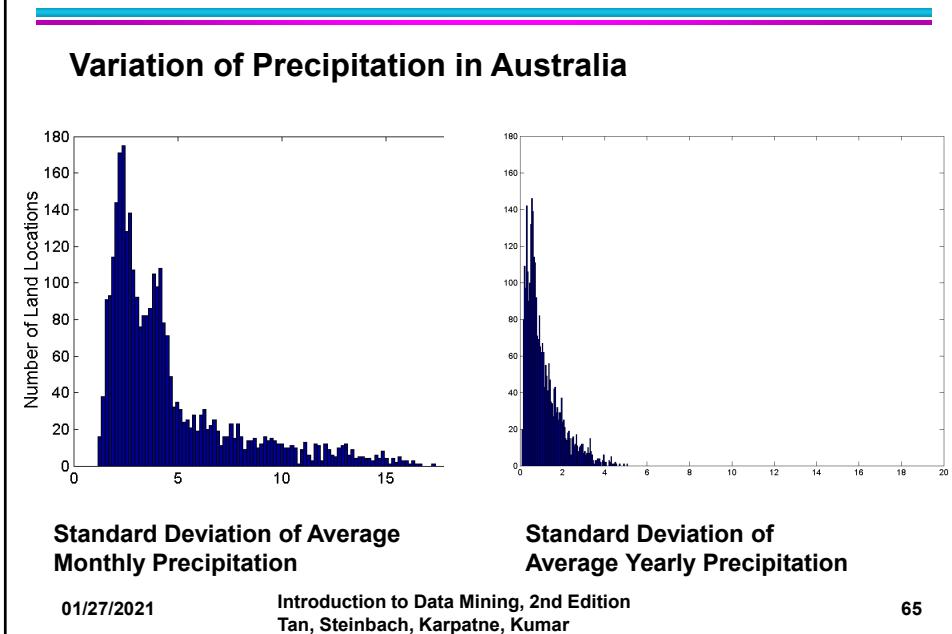

65

## Sampling

- Sampling is the main technique employed for data reduction.
  - It is often used for both the preliminary investigation of the data and the final data analysis.
- Statisticians often sample because **obtaining** the entire set of data of interest is too expensive or time consuming.
- Sampling is typically used in data mining because **processing** the entire set of data of interest is too expensive or time consuming.

66

## Sampling ...

- The key principle for effective sampling is the following:
  - Using a sample will work almost as well as using the entire data set, if the sample is **representative**
  - A sample is **representative** if it has approximately the same properties (of interest) as the original set of data


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

67

67

## Sample Size

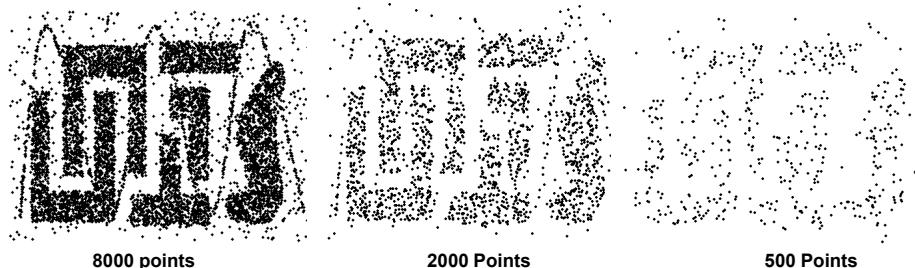

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

68

68

## Types of Sampling

### □ Simple Random Sampling

- There is an equal probability of selecting any particular item
- Sampling without replacement
  - ◆ As each item is selected, it is removed from the population
- Sampling with replacement
  - ◆ Objects are not removed from the population as they are selected for the sample.
  - ◆ In sampling with replacement, the same object can be picked up more than once

### □ Stratified sampling

- Split the data into several partitions; then draw random samples from each partition

01/27/2021


Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

69

69

## Sample Size

### □ What sample size is necessary to get at least one object from each of 10 equal-sized groups.

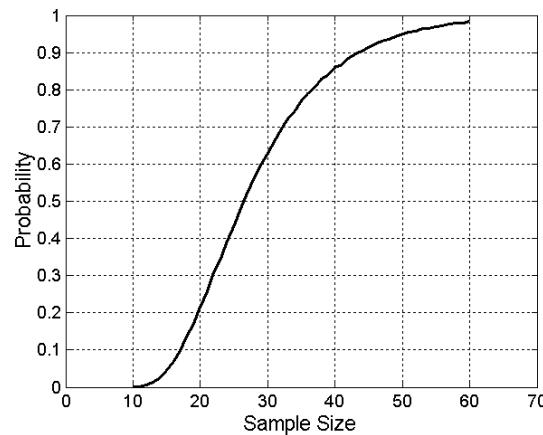

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

70

70

## Discretization

- **Discretization** is the process of converting a continuous attribute into an ordinal attribute
  - A potentially infinite number of values are mapped into a small number of categories
  - Discretization is used in both unsupervised and supervised settings


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

71

71

## Unsupervised Discretization

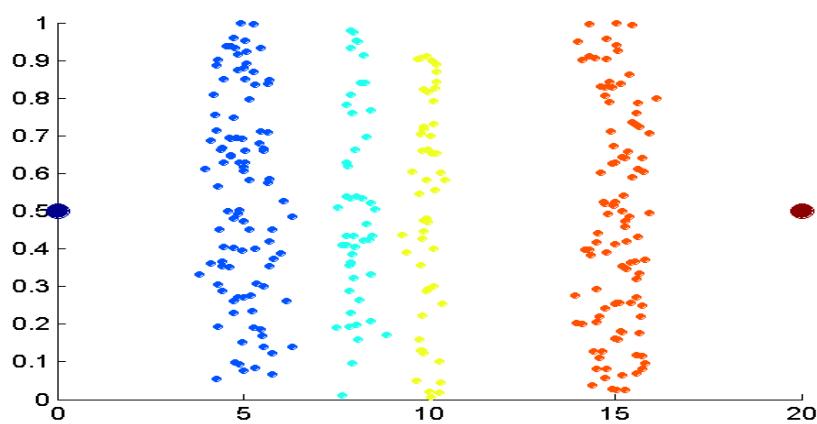

Data consists of four groups of points and two outliers. Data is one-dimensional, but a random y component is added to reduce overlap.


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

72

72

## Unsupervised Discretization

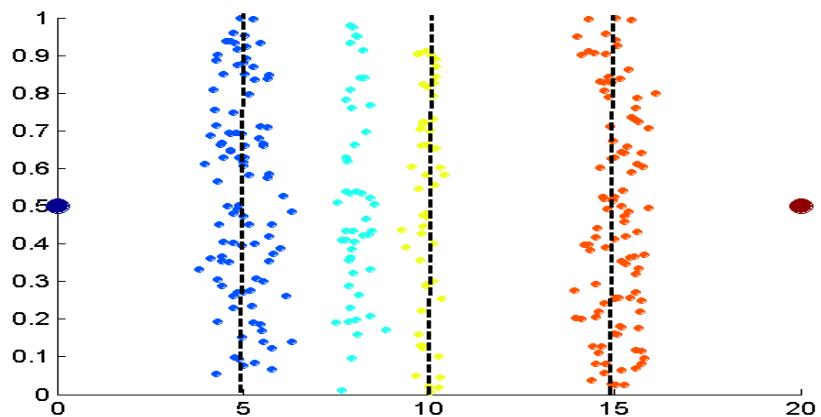

Equal interval width approach used to obtain 4 values.


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

73

73

## Unsupervised Discretization

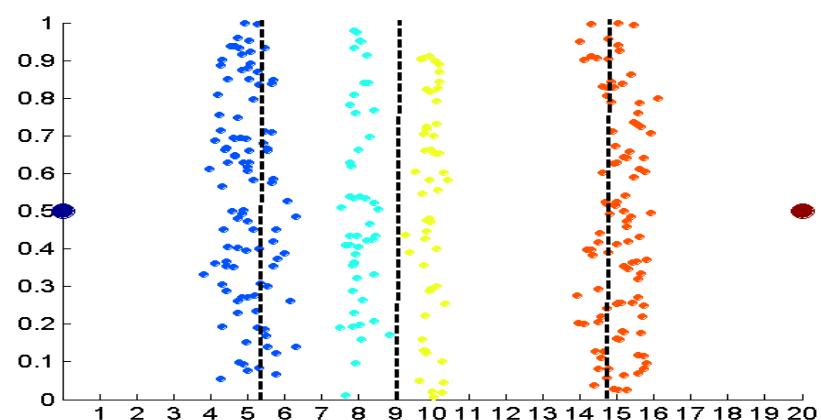

Equal frequency approach used to obtain 4 values.


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

74

74

## Unsupervised Discretization

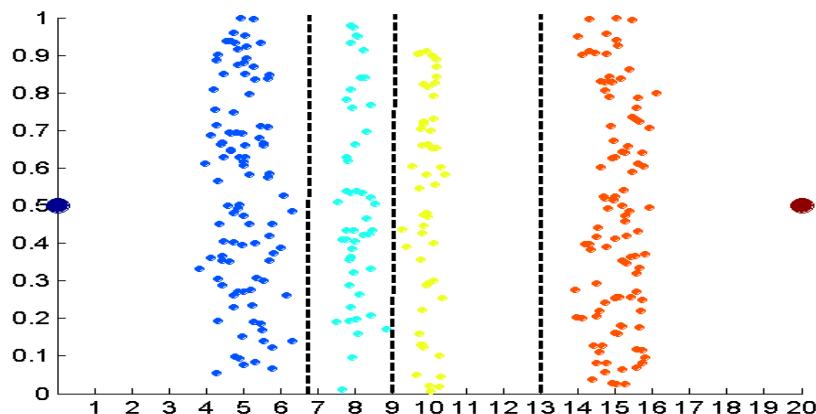

K-means approach to obtain 4 values.

01/27/2021


Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

75

75

## Discretization in Supervised Settings

- Many classification algorithms work best if both the independent and dependent variables have only a few values
- We give an illustration of the usefulness of discretization using the following example.

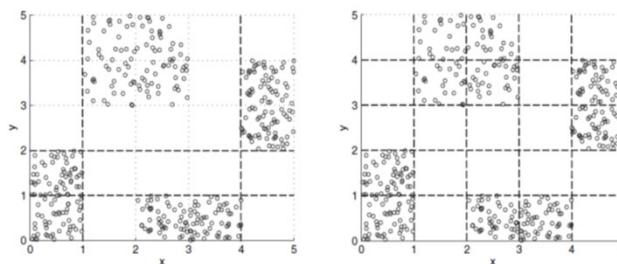

(a) Three intervals

(b) Five intervals

Figure 2.14. Discretizing  $x$  and  $y$  attributes for four groups (classes) of points.

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

76

76

## Binarization

- Binarization maps a continuous or categorical attribute into one or more binary variables

**Table 2.6.** Conversion of a categorical attribute to five asymmetric binary attributes.

Categorical Value	Integer Value	$x_1$	$x_2$	$x_3$	$x_4$	$x_5$
<i>awful</i>	0	1	0	0	0	0
<i>poor</i>	1	0	1	0	0	0
<i>OK</i>	2	0	0	1	0	0
<i>good</i>	3	0	0	0	1	0
<i>great</i>	4	0	0	0	0	1

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

77

77

## Attribute Transformation

- An **attribute transform** is a function that maps the entire set of values of a given attribute to a new set of replacement values such that each old value can be identified with one of the new values
  - Simple functions:  $x^k$ ,  $\log(x)$ ,  $e^x$ ,  $|x|$
  - **Normalization**
    - ◆ Refers to various techniques to adjust to differences among attributes in terms of frequency of occurrence, mean, variance, range
    - ◆ Take out unwanted, common signal, e.g., seasonality
  - In statistics, **standardization** refers to subtracting off the means and dividing by the standard deviation


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

78

78

## Example: Sample Time Series of Plant Growth

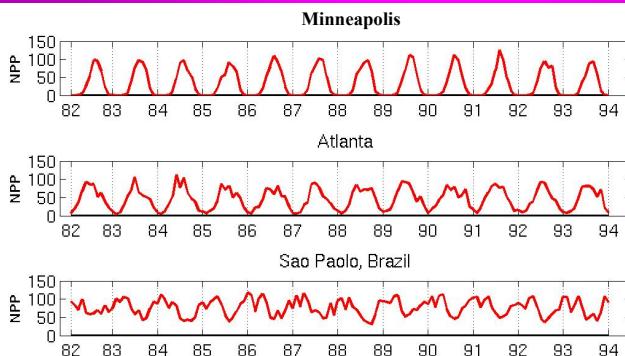

**Net Primary Production (NPP)**  
is a measure of  
plant growth used  
by ecosystem  
scientists.

### Correlations between time series

	Minneapolis	Atlanta	Sao Paolo
Minneapolis	1.0000	0.7591	-0.7581
Atlanta	0.7591	1.0000	-0.5739
Sao Paolo	-0.7581	-0.5739	1.0000


01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

79

79

## Seasonality Accounts for Much Correlation

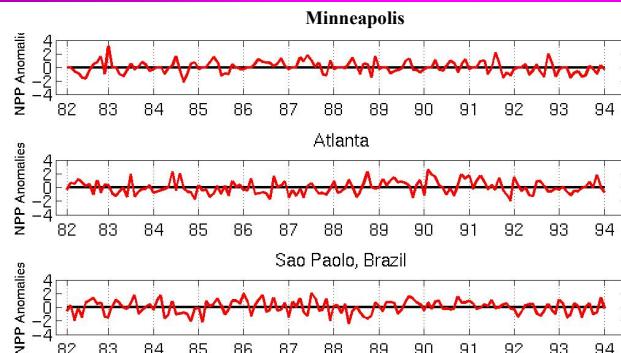

Normalized using  
monthly Z Score:  
Subtract off monthly  
mean and divide by  
monthly standard  
deviation

### Correlations between time series

	Minneapolis	Atlanta	Sao Paolo
Minneapolis	1.0000	0.0492	0.0906
Atlanta	0.0492	1.0000	-0.0154
Sao Paolo	0.0906	-0.0154	1.0000

01/27/2021


Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

80

80

## Curse of Dimensionality

- When dimensionality increases, data becomes increasingly sparse in the space that it occupies
- Definitions of density and distance between points, which are critical for clustering and outlier detection, become less meaningful

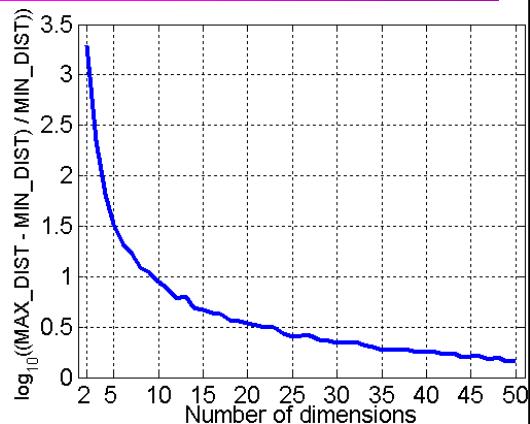

- Randomly generate 500 points
- Compute difference between max and min distance between any pair of points

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

81

81

## Dimensionality Reduction

- Purpose:
  - Avoid curse of dimensionality
  - Reduce amount of time and memory required by data mining algorithms
  - Allow data to be more easily visualized
  - May help to eliminate irrelevant features or reduce noise
- Techniques
  - Principal Components Analysis (PCA)
  - Singular Value Decomposition
  - Others: supervised and non-linear techniques

01/27/2021


Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

82

82

## Dimensionality Reduction: PCA

- Goal is to find a projection that captures the largest amount of variation in data

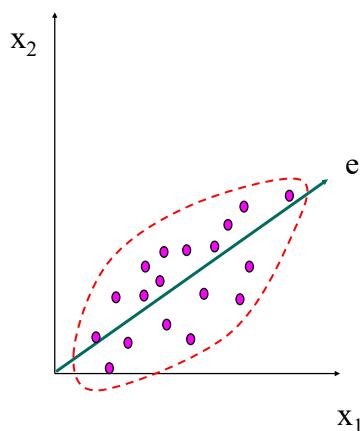

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

83

83

## Dimensionality Reduction: PCA

256



01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

84

84

## Feature Subset Selection

- Another way to reduce dimensionality of data
- Redundant features
  - Duplicate much or all of the information contained in one or more other attributes
  - Example: purchase price of a product and the amount of sales tax paid
- Irrelevant features
  - Contain no information that is useful for the data mining task at hand
  - Example: students' ID is often irrelevant to the task of predicting students' GPA
- Many techniques developed, especially for classification

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

85

85

## Feature Creation

- Create new attributes that can capture the important information in a data set much more efficiently than the original attributes
- Three general methodologies:
  - Feature extraction
    - ◆ Example: extracting edges from images
  - Feature construction
    - ◆ Example: dividing mass by volume to get density
  - Mapping data to new space
    - ◆ Example: Fourier and wavelet analysis

01/27/2021


Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

86

86

## Mapping Data to a New Space

### □ Fourier and wavelet transform

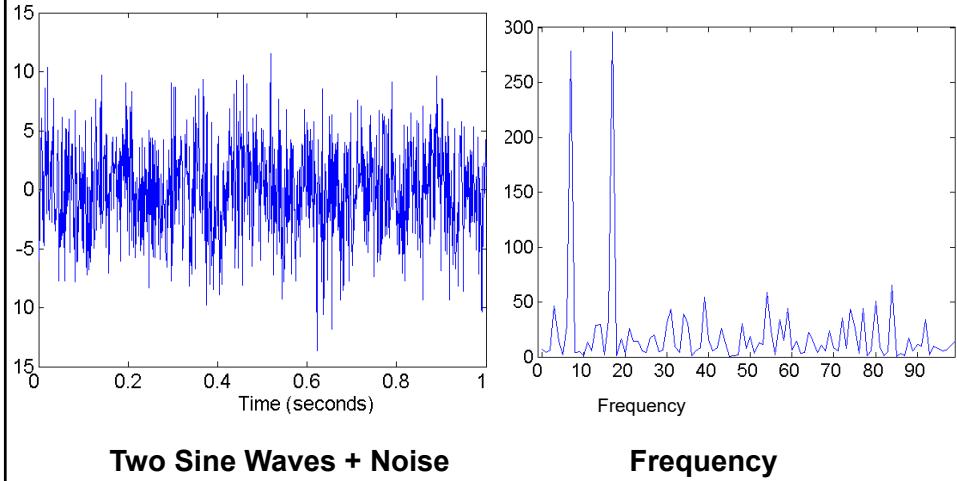

01/27/2021

Introduction to Data Mining, 2nd Edition  
Tan, Steinbach, Karpatne, Kumar

87