

# Information is Not Communicated Uniformly: Evidence from Spoken and Written Corpora

Josef Klafka

jklaafka@uchicago.edu  
Department of Psychology  
University of Chicago

Daniel Yurovsky

yurovsky@uchicago.edu  
Department of Psychology  
University of Chicago

## Abstract

We provide evidence against the popular Uniform Information Density hypothesis (Levy & Jaeger, 2007) which proposes that information is transmitted at a constant rate close to channel capacity in human communication. Using a method based on the original Genzel & Charniak (2002) entropy measure, we construct a word-level model for entropy applicable to both spoken and written corpora. We apply this model to corpora from Wikipedia in well over a hundred languages. We find that not only is the Uniform Information Density hypothesis prediction wrong, but also that the by-word entropy distribution of a language is related to the typological features of the language. We use this evidence to suggest that people do not communicate information at a uniform rate, but that information distribution varies from language to language based on phonological, morphological and syntactic features.

**Keywords:** Entropy; information; information theory; communication

## Background

Perhaps the most important reason people talk and write to one another is to give information. From Shannon (1948), we know that when information is being communicated, the rate of information transmission should be constant and as close as possible to the capacity of the communication channel to optimally transmit the information. Levy & Jaeger (2007) introduce the *uniform information density* (UID) hypothesis, arguing that people unconsciously structure their speech and writing to communicate information at a constant, optimal rate. Levy & Jaeger (2007) argue that speakers and writers should attempt to communicate information as evenly as possible and as close to the channel capacity as possible. Their evidence concerns the use or lack of use of “that”-complementizers in introducing English relative clauses. When the word preceding the relative clause or the initial word of the relative clause has high information content, then the authors argue that speakers are more likely to use the complementizer. The authors use adult-adult conversations from the Penn Treebank corpus.

UID has been applied broadly over the past decade, to determining whether linguistic alignment takes place (Jaeger & Snider, 2013), Zipfian word length distributions (Piantadosi et al., 2011), communication efficiency (Mahowald et al., 2013), dialogue and turn-taking (Xu & Reitter, 2018) and the significance of ambiguity in language (Piantadosi et al., 2012), among other research. However, other recent work has contradicted the UID hypothesis. Zhan and Levy (2018) study Mandarin Chinese classifier use for specific and general Mandarin classifiers. Specific classifiers are specific to certain nouns, and UID would predict that specific classifiers

would appear when the production of the corresponding noun is easier, to spread the information contained by the classifier and noun less densely over time. General classifiers can be applied to any noun and contain no special information content. Zhan and Levy find that speakers use specific classifiers more often in cases where the production of the corresponding noun is more difficult than when the production is easier; speakers do not avoid unexpected peaks in information content for their listeners, but instead maximize their ease of production.

Similar to the original Levy & Jaeger (2007), Zhan and Levy (2018) focuses on information distribution at particular points in a sentence. By contrast, Jain et al. (2018) examine word order across spoken sentences in Hindi, a freer word order language than English, and find that information density has no significant effect on word order. For this paper, we focus on the sentence level instead of specific points, following a method described in Yu et al. (2016).

Yu et al. (2016) challenges the UID hypothesis through examining an entropy measure across sentence positions within the text portion of the English-language British National Corpus (BNC). They partition the corpus by sentence length in number of words. For each word position  $X$  of sentences of length  $k$ , they define  $w$  as a unique word occurring in position  $X$ . They define  $p(w)$  as the number of times word  $w$  occurs in position  $X$  divided by the number of total words that occur in position  $X$  i.e. the number of sentences of length  $k$ . Then  $p(w)$  is the probability of obtaining word  $w$  by choosing a word at random in position  $X$  in sentences of length  $k$ .

$$H(X) = \sum_w p(w) \log(p(w))$$

With this measure, Yu et al. compute the unigram entropy at each position of sentences of each length within the corpus. The result of this method can be plotted for each utterance length as an *entropy curve*, which can be visually compared across utterance length to observe how the unigram entropy changes across absolute positions in each of the utterances. Genzel & Charniak (2002) similarly examine a unigram entropy measure on sentences, and found that entropy at the sentence level increases linearly with sentence index within a corpus. UID applies this uniformity of entropy rate in sentences to all levels of speech, and so the Yu et al. method, which examines text at the word level, should find an affine function at the word level.

The entropy curve is a consequence of the information-theoretic rate of information transfer in a language, where in-

formation is defined as a reduction in uncertainty. Thus the more entropy at a word position in a sentence (Yu et al., 2016) or a sentence index in a text (Genzel & Charniak, 2002), the more information is on average contained around that position. Let us assume that the UID perspective is correct. Then we expect that the entropy curve for every language should be close to an affine, linear function with some noise. Entropy should monotonically and uniformly increase at all word positions across utterances on average. We will find a contradiction with this claim through examining the average entropy at each position of a sentence for both speech and text data.

[Put in an illustration of what UID predicts?]

## Spoken data

The UID hypothesis predicts that information transmission rate will tend towards uniformity in both speech and text. We begin by examining speech to determine if we obtain the entropy curve shape we expect for spoken communication. We begin with the same source as Levy & Jaeger (2007) and Jaeger (2010), the Switchboard corpus of adult telephone conversations. We also examine child-adult conversations in the CHILDES TalkBank (Brown 1973; MacWhinney 2014) corpora database of spoken adult-child conversations in multiple languages. Children are not fully developed speakers, so we want to compare the entropy curve we obtain by computing over the utterances in the CHILDES corpora to the utterances in the adult-adult Switchboard corpus.

## Methods

Switchboard [To be put in]

We used the Brown and Providence English corpora from CHILDES. The Brown corpus contains individual recordings of conversations between three children between 1.5 and 6-years-old and their families in their homes. The Providence corpus recorded interactions between children between 1 and 3 years old and their parents in the home. We divided each corpus by speaker into child and non-child categories. We further divided the corpora by utterance length, so that all sentences of length  $k$  (e.g. 6) were grouped together. Finally, within each utterance length, we computed the unigram entropy measure for each position.

In the English CHILDES corpora. The entropy curves capture individual variation across positions in utterances of the same length. This allows us to directly observe and judge the amount of variation in words that appear in an individual position of a sentence. For speech data, which for the corpora in the CHILDES database consists of short and often disconnected utterances across hours of recordings, the unigram entropy measure is unaffected by context or lack thereof in utterances by the adults and children in the corpora. We can directly compare any two positions within utterances to determine the amount of uncertainty, and therefore information, on average contained by words within that position of utterances. We are applying the same approach as in Genzel and Charniak (2002), but within sentences instead of across sentences.

Plots for the entropy distributions are below.

We also ran this analysis on Spanish and Mandarin corpora from CHILDES. We used the Shiro corpus for Spanish (Shiro, 2000), which contains prompted narratives individually collected from over a hundred Venezuelan schoolchildren, half from high SES backgrounds and half from low SES backgrounds. We used the Zhou dinner corpus for Mandarin Chinese (Li & Zhou, 2015), which contains dinner conversations between 5 to 6-year-old children and their parents collected in Shanghai.

For each corpus, we accessed transcripts of the corpus provided through the TalkBank system and computed over Roman alphabet transcriptions or transliterations of the original transcriptions. For Mandarin, we used pinyin transliterations of the utterances in the corpus with demarcated word boundaries, and for Japanese we used romanji (Roman alphabet) transliterations of words in the corpus. The Chinese characters used for writing Mandarin do not normally demarcate word boundaries by spacing words apart, and for normal Chinese writing including spaces between word boundaries can have a negative effect on reading times (Bai et al, 2008).

## Results & Analysis

The adult and child entropy curves track one another almost identically. This is surprising because UID would predict that the young children in the corpora who are not fully developed speakers would have more noise in their distribution of information rates. This not only indicates a robustness in the unigram entropy curve across speakers, but also across ages and addressees. We also observed a robustness across corpora for the same languages, and a robustness across utterance lengths within the same corpus's entropy curve. This shows that the concept of an "entropy curve" for a specific language is well-founded when considering speech data.

We found a distinct three-step distribution for English and Spanish CHILDES corpora, with a slight dip in the penultimate position of each sentence. The final position of utterances in child-directed speech is known to be important, dating back to Aslin (1993). The Mandarin corpus entropy curve, by comparison, has a noticeably lower positional entropy values in utterance-final positions than in utterance-penultimate positions.

We attribute the penultimate dip in the English and Spanish entropy curves to the fact that most of the utterances in the CHILDES English and Spanish corpora we examined had a determiner such as "the" or "a" in the second-to-last position of utterances. The beginnings of utterances in the English and Spanish CHILDES data were usually pronouns or grammatical subjects, while the final words were grammatical objects and had a great deal of variation in the exact word that appeared in the utterance-final position.

These entropy curves are not what would be expected from UID. The robustness of the three-step distribution for English and its replication in Spanish do not resemble the affine function we would expect from UID. The Mandarin entropy curve, which does not at all resemble either the En-

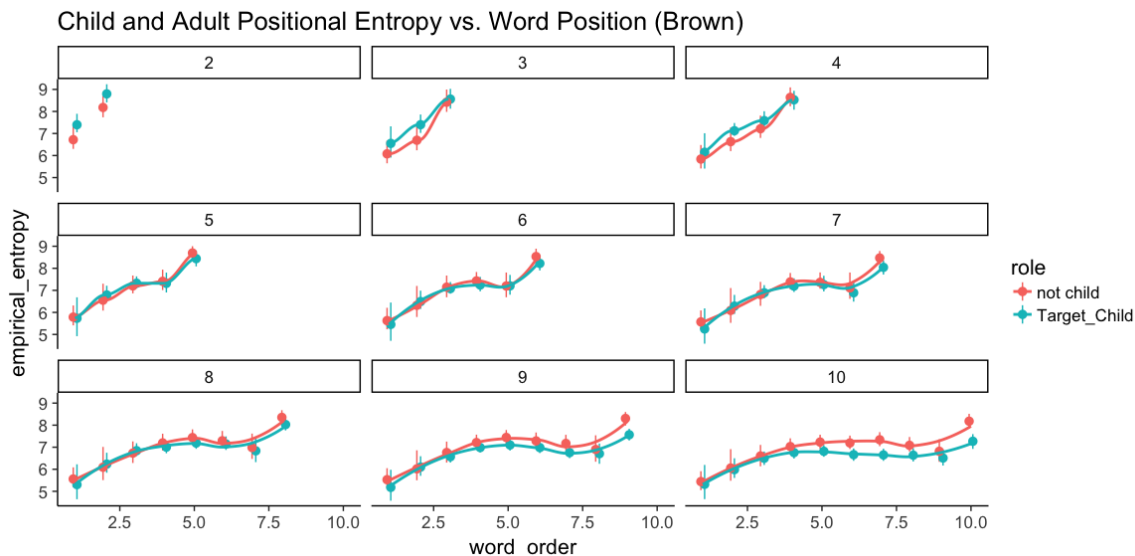


Figure 1: Brown corpus entropy

lish/Spanish distribution or the predictions of UID, suggests that the entropy curve can vary from language to language. UID predicts that each language should have a similar distribution.

## Written data

The UID hypothesis also applies to written communication: we expect people to communicate information at a uniform rate through writing as well. We use Wikipedia as a source for written data, which provides two advantages. One, the quantity of data in Wikipedia is large for each language and two, there are hundreds of languages with Wikipedias. This allows us to perform the entropy analysis on a much greater scale and to directly compare the results of the entropy analysis on each language to one another, and ultimately to predict what typological features of a language help determine its entropy curve, if any. We will describe our method of harvesting and distilling text data from each Wikipedia as well as how we compare the entropy curves from each language to one another.

## Methods

Using Giuseppe Attardi’s Wikiextractor tool <sup>1</sup>, we extracted the text corpora for 165 languages from Wikipedia by downloading a stored collection of Wikipedia entries in each language and randomly selecting several thousand articles from each Wikipedia language. Each language corpus was cleaned and limited to sentences between 6 and 50 words. Similar to our process for the Switchboard and CHILDES spoken corpora, we divided each corpus by sentence length, and then computed the unigram entropy measure on each word position within each sentence length. We wanted to directly compare and classify the unigram entropy curves of the languages

from Wikipedia. We computed three slope treatments of each curve. In the *absolute* treatment, with sentence length denoted as  $n$ , we computed the slope between positions 1 and 2, positions 2 and 3, positions 3 and  $n - 2$ , positions  $n - 2$  and  $n - 1$  and positions  $n - 1$  and  $n$ . For the short utterances appearing in the CHILDES speech corpora we examined, these appeared to be important junctions in the distributions, with a seeming plateau in the middle of the unigram entropy curve for each of the language corpora we examined in CHILDES.

However, because the portion of sentences of length greater than 10 in the Wikipedia corpora were significantly larger than the CHILDES corpora, then we also computed relative slope treatments. In the *relative 5* treatment, we computed the slopes between 0% and 20%, 20% and 40%, 40% and 60%, 60% and 80% and 80% and 100% of the relative word positions in each sentence. When one of these percentages was not a whole number, then the closest whole number position was used instead for slope calculation. In the *relative 10* treatment, we computed the slopes between every 10% of the relative word positions in each sentence. Each comparative slope within each treatment was averaged together between different sentence lengths, for example in the *relative 5* treatment then all of the 0% to 20% slopes were averaged together. This created three treatments for the entropy curve for each language in the Wikipedia database.

[Put in an illustration of the slope sections and treatments here?]

## Results and Analysis

In the *absolute* and *relative 5* treatments, each language is embedded in 5-dimensional space. In the *relative 10* treatment, each language is embedded in 10-dimensional space. This allows for direct comparison between languages on Wikipedia using cosine similarity and moreover for unsu-

<sup>1</sup><https://github.com/attardi/wikiextractor>

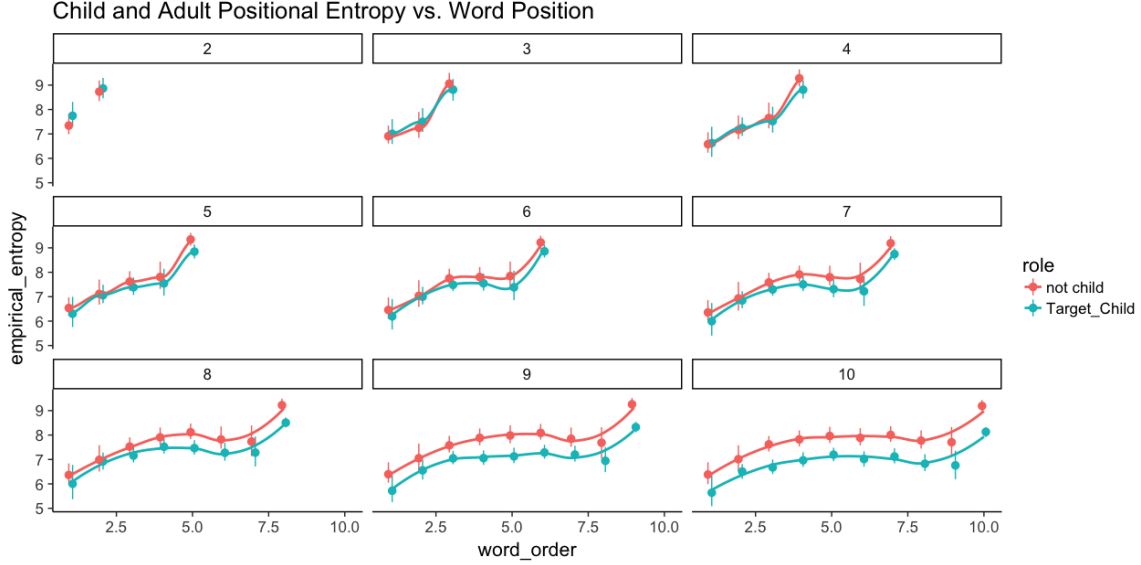


Figure 2: Providence corpus unigram entropy

pervised clustering analysis to compare the results of the Wikipedia entropy analysis to known typological features within the languages in the Wikipedia dataset. To determine which phonological, morphological and syntactic features affected the embedding of a language in the Wikipedia dataset, we looked at the list of 144 linguistic features in World Atlas of Language Structures (Dryer & Haspelmath, 2013). We limited the languages in the WALS database to only those in our Wikipedia dataset and performed missing-value imputation to obtain the features not coded in WALS for the languages from Wikipedia.

One approach is to cluster the languages used in the Wikipedia analysis on the basis of WALS features and then directly compare the WALS clustering results with the results of the hierarchical clustering on the Wikipedia slope data for each of the different treatments using clustering similarity evaluation methods such as the Rand index (Rand, 1971). However, the problem then arises of which combination of WALS features and how many features to include in the clustering analysis. This is a computationally intractable operation. Additionally, deciding how many clusters to use in an unsupervised clustering analysis is an unsolved problem in machine learning.

We instead check the effects of individual features on the embeddings of languages in the different treatments. We computed pairwise cosine similarity between each pair of language vectors within a treatment. For a subset of WALS features which had values entered for most of the languages we obtained from Wikipedia, we used a generalized linear model to see whether the cosine similarity between languages mattered in predicting if the languages shared the same value for a WALS feature. For eight features and 45 languages, we found this to be true. The table below shows the results for the generalized linear model we computed using WALS fea-

tures and the absolute treatment.

X & feature & term & estimate & std.error & statistic & p.value							
1	2	3	4	5	6	7	8
1	83A	cosine	1.84	0.01	178.22	0.00	\\
2	95A	cosine	1.90	0.01	170.98	0.00	\\
3	81A	cosine	1.51	0.01	153.70	0.00	\\
4	97A	cosine	1.58	0.01	136.81	0.00	\\
5	144A	cosine	0.88	0.01	74.43	0.00	\\
6	138A	cosine	0.40	0.01	46.12	0.00	\\
7	87A	cosine	0.33	0.01	39.91	0.00	\\
8	143A	cosine	0.37	0.01	39.74	0.00	\\
9	82A	cosine	0.03	0.01	3.23	0.00	\\

Cosine distance played some role in the feature determination. The top features were 83, 81, 95 and 97, which all characterize word order. This makes intuitive sense, and indicates that for this small subset of features and subset of languages that the embeddings in the slope space are related to the WALS features. Therefore typological features play a role in determining the positional entropy values for a language. This means that the entropy curves are in some way structured by the syntactic, morphological and phonological features of a language.

## Conclusions

In this paper, we have characterized and applied a model based on Genzel & Charniak (2002) for distinguishing en-

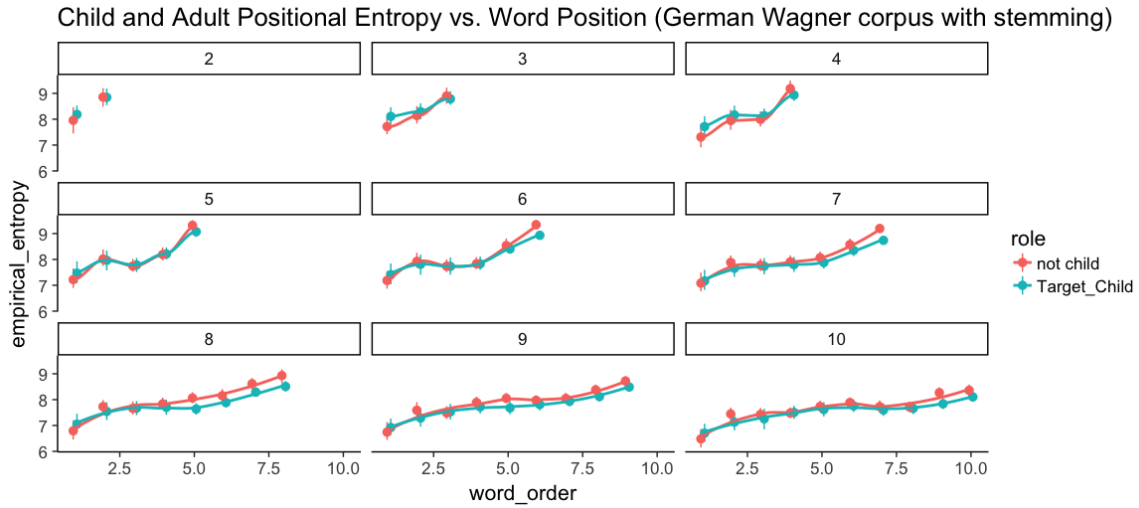


Figure 3: Shiro corpus entropy

tropy at each word position within sentences. In doing so, we have provided evidence against the Uniform Information Density hypothesis. Our work indicates that information is not distributed uniformly throughout an utterance regardless of languages, but that languages possess a characteristic information distribution determined by their syntactic, morphological and phonological features.

Our work has focused on words within sentences in both speech and text across typologically diverse languages. Other researchers have explored information rate cross-linguistically as a single number characterizing each language, most notably including Aylett & Turk (2004). That work characterizes information rate as information per unit time, and is complementary to the work we accomplish here. Languages may possess both an overall information transfer rate, showing the average amount of semantic information transmitted per syllable or word, and an entropy distribution indicative of the language’s information distribution.

Research has indicated the effects of surprisal on fixation duration during eye-tracking studies (Demberg & Keller, 2008) (Boston et al., 2008) (Smith & Levy, 2013). Higher surprisal of a word is on average predictive of higher fixation duration. The *wrap-up effect* states that when a person reads written text, he or she will process sentence-final words more slowly on average than sentence-medial or sentence-initial words, due to integrating information from the entire sentence to form a final understanding of the sentence’s meaning (Stowe et al., 2018) (Kuperman et al., 2010). The wrap-up effect is drawn from evidence in English, German and Dutch, all of which are languages with a large final increase in their entropy curve from our study. We aim to see in the future if as a consequence of our work in this paper, the wrap-up effect falls out from the final jump in the entropy curves in some languages. We would analyze eye-tracking data from languages

with low positional entropy in sentence-final positions. Since the lexical surprisal metric in eye-tracking and our positional entropy metric are both measures of log-probability surprisal, then in languages such as Hindi where the sentence-final positional entropy values are low we expect to find no wrap-up effect.

## Acknowledgements

[Not here yet.]

## References

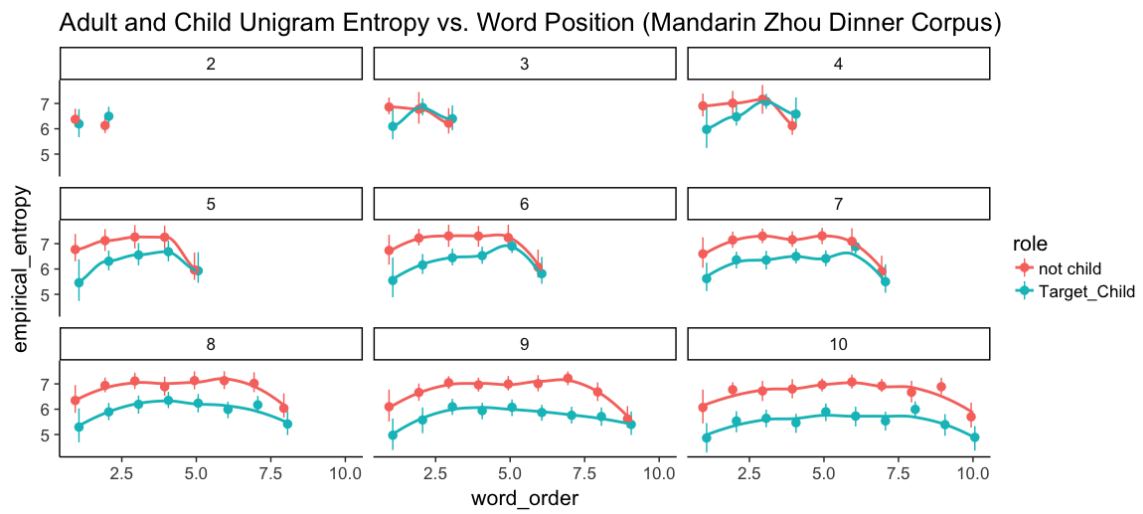


Figure 4: Zhou Dinner corpus entropy