## STAT 231: Problem Set 5B

## Jett Knight

## due by 10 PM on Friday, March 26

This homework assignment is designed to help you futher ingest, practice, and expand upon the material covered in class over the past week(s). You are encouraged to work with other students, but all code and text must be written by you, and you must indicate below who you discussed the assignment with (if anyone).

#### Steps to proceed:

- 1. In RStudio, go to File > Open Project, navigate to the folder with the course-content repo, select the course-content project (course-content.Rproj), and click "Open"
- 2. Pull the course-content repo (e.g. using the blue-ish down arrow in the Git tab in upper right window)
- 3. Copy ps5B.Rmd from the course repo to your repo (see page 6 of the GitHub Classroom Guide for Stat231 if needed)
- 4. Close the course-content repo project in RStudio
- 5. Open YOUR repo project in RStudio
- 6. In the ps5B.Rmd file in YOUR repo, replace "YOUR NAME HERE" with your name
- 7. Add in your responses, committing and pushing to YOUR repo in appropriate places along the way
- 8. Run "Knit PDF"
- 9. Upload the pdf to Gradescope. Don't forget to select which of your pages are associated with each problem. You will not get credit for work on unassigned pages (e.g., if you only selected the first page but your solution spans two pages, you would lose points for any part on the second page that the grader can't see).

| If you | discussed | this | assignment | with | any | of your | peers, | please | list |
|--------|-----------|------|------------|------|-----|---------|--------|--------|------|
| who he | ere:      |      |            |      |     |         |        |        |      |

ANSWER:

# 1. Justices of the Supreme Court of the United States

a. Confirm (using an R command) that the following Wikipedia page allows automated scraping: https://en.wikipedia.org/wiki/List\_of\_justices\_of\_the\_Supreme\_Court\_of\_the\_United\_States

```
paths_allowed("https://en.wikipedia.org/wiki/List_of_justices_of_the_Supreme_Court_of_the_United_States
```

## en.wikipedia.org

## [1] TRUE

b. Go to the List of Justices of the Supreme Court of the United States and scrape the table for the Justices. Write, test, and save your code in an R script called scrape\_justices.R, and write the data frame out to a csv file called justices.csv using the write\_csv function.

Be sure to push your .R and .csv files to your GitHub repo.

```
url <- "https://en.wikipedia.org/wiki/List_of_justices_of_the_Supreme_Court_of_the_United_States"
tables <- url %>%
  read_html() %>%
  html_nodes("table")
scrape_justices <- html_table(tables[[2]], fill = TRUE)
write_csv(scrape_justices, "justices.csv")</pre>
```


c. Load justices.csv into this file using the read\_csv function. Then, run the code given below to create the variable tenure\_length (a numeric variable containing each justice's tenure on the bench).

Create a visualization to show the distribution of tenure length of U.S. Supreme Court judges. Interpret the plot.

ANSWER: The majority of supreme court justices serve somewhere around 8 and 10 years or around 15 years. However, there is a pretty even spread showing the amount of time a justice is likely to serve is extremely variable.

```
justices <- read_csv("justices.csv")</pre>
## Warning: Duplicated column names deduplicated: 'Justice' => 'Justice_1' [2],
## 'Justice' => 'Justice_2' [3]
##
## -- Column specification -----
## cols(
##
     Justice = col_character(),
##
     Justice_1 = col_character(),
##
     Justice_2 = col_character(),
     'State[c]' = col character(),
##
##
    Position = col_character(),
     Succeeded = col_character(),
##
     'Date confirmed(Vote)' = col_character(),
##
##
     Tenure = col_character(),
##
     'Tenure length[d]' = col_character(),
     'Nominated by' = col_character()
##
## )
justices2 <- justices %>%
  clean names() %>%
  filter(justice != "Justice") %>%
  mutate(tenure_length_temp = case_when(str_detect(tenure_length_d, "year") ~
                                          tenure_length_d
                                   , TRUE ~
                                          paste0("0 years, ", tenure_length_d))) %>%
  separate(tenure_length_temp, into = c("years_char", "days_char")
           , sep = ","
           , remove = FALSE) %>%
  mutate(tenure_length = parse_number(years_char) + (parse_number(days_char)/365)) %>%
  separate(date_confirmed_vote, into = c("date_confirmed_vote", "extra")
           , sep = "\(") %>%
  mutate(date confirmed = lubridate::mdy(date confirmed vote))
justices_histogram <- ggplot(justices2, aes(x = tenure_length)) + geom_histogram()
justices_histogram
```

```
## 'stat_bin()' using 'bins = 30'. Pick better value with 'binwidth'.
```

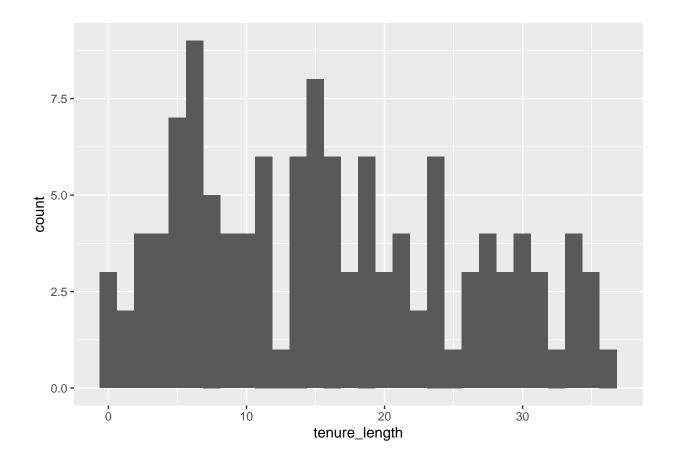

# 2. Brainy Quotes

a. Confirm (using an R command) that automated scraping of the Brainy Quote webpage (https://www.brainyquote.com/) is allowed.

```
paths_allowed("https://www.brainyquote.com/")

## www.brainyquote.com

## [1] TRUE
```

b. Life can get frustrating at times. Like when we're trying to Zoom and our internet cuts out. Or when we can't figure out why R's throwing an error when we try to clone a GitHub repo in RStudio. Or, when COVID-19 upends life as we knew it. In these times, it can't hurt to be reminded of the power of persistence, resilience and optimism.

The code in the first R code chunk below scrapes the first 40 quotes returned from a search for "resilience" on BrainyQuote.com. (Do NOT remove the "eval = FALSE" option from that code chunk; you do not want it to evaluate it, i.e. scrape the site, every time you knit this file.)

The code in the second R code chunk below randomly selects a quote and prints it. When you're feeling frustrated, run that code chunk to randomly generate a quote to lift you up (or just make you laugh at the uselessness of the quote; some of them are pretty pathetic . . .).

Note that CSS selector gadget was used to identify the key words to specify in the html\_nodes function (i.e. ".oncl\_q" and ".oncl\_a"). These key words will vary depending on what webpage and what particular objects from that webpage you're trying to scrape.

```
quotes_dat <- read_csv("http://kcorreia.people.amherst.edu/S2021/resilience_quotes.csv")

##

## -- Column specification ------

## cols(

## person = col_character(),

## quote = col_character(),

## together = col_character()

## )

quote_for_the_day <- quotes_dat[sample(1:nrow(quotes_dat), size = 1),]

cat(quote for the day$together)</pre>
```

```
## "Resilience is accepting your new reality, even if it's
less good than the one you had before." --Elizabeth Edwards
```

Go to BrainyQuote.com and search a different topic (or search an Author) that interests you. Scrape the webpage returned from your search following the same code given above. Save your code in an R script

called scrape\_quotes.R, and write the data frame out to a csv file called quotes.csv using the write\_csv function.

Be sure to push your .R and .csv files to your GitHub repo.

c. Load quotes.csv into this file using the read\_csv function. Write code to select *three* of the quotes at random and print them (i.e., set size = 3 in the sample function).

```
quotes_dat <- read_csv("quotes.csv")

##

## -- Column specification ------
## cols(

## quote = col_character(),

## person = col_character(),

## together = col_character()

## )

quote_for_the_day <- quotes_dat[sample(1:nrow(quotes_dat), size = 3),]

cat(quote_for_the_day$together)</pre>
```

## "Sometimes being a friend means mastering the art of timing. There is a time for silence. A time to let go and allow people to hurl themselves into their own destiny. And a time to prepare to pick up the pieces when it's all over." --Octavia E. Butler "Friendship multiplies the good of life and divides the evil." --Baltasar Gracian "True friendship is like sound health; the value of it is seldom known until it is lost." --Charles Caleb Colton