

Models of Reality

The Illustrative Guide

Prof. Dr. Jochen Kruppa-Scheetz

2026-01-02

Table of contents

I From science to data by models	5
References	6
1 What is science?	7
1.1 General background	8
1.2 Theoretical background	9
1.3 R packages used	9
1.4 Data	9
1.5 Alternatives	9
1.6 Glossary	9
1.7 The meaning of “Models of Reality” in this chapter.	9
1.8 Summary	9
References	9
2 What is data?	10
2.1 General background	10
2.2 Theoretical background	10
2.3 R packages used	10
2.4 Data	10
2.5 Alternatives	11
2.6 Glossary	11
2.7 The meaning of “Models of Reality” in this chapter.	11
2.8 Summary	13
References	13
3 What is a model?	14
3.1 General background	14
3.2 Theoretical background	17
3.3 R packages used	21
3.4 Data	21
3.5 Alternatives	21
3.6 Glossary	21
3.7 The meaning of “Models of Reality” in this chapter.	21
3.8 Summary	21
References	21

II Tales of data	22
References	25
4 Body weight of fleas	26
4.1 General background	26
4.2 Theoretical background	26
4.3 R packages used	26
4.4 Data	26
4.4.1 Linear	26
4.4.2 Non-linear	27
4.5 Data availability	29
4.6 Alternatives	29
4.7 Glossary	29
4.8 The meaning of “Models of Reality” in this chapter.	29
4.9 Summary	29
References	29
5 Fleas of animals	30
5.1 General background	30
5.2 Theoretical background	30
5.3 R packages used	31
5.4 Data	31
5.4.1 Jump performances of fleas	31
5.4.2 Measurements on animal fleas	34
5.4.3 Fleas in urban and rural habitats	35
5.5 Data availability	36
5.6 Alternatives	37
5.6.1 Why linear is a bad idea?	37
5.6.2 Why is a <code>tibble()</code> bad idea?	37
5.7 Glossary	37
5.8 The meaning of “Models of Reality” in this chapter.	37
5.9 Summary	37
References	37
6 Eating habits of fleas	38
6.1 General background	38
6.2 Theoretical background	39
6.3 R packages used	39
6.4 Data	39
6.4.1 Linear	39
6.4.2 Non linear	39
6.4.3 International study	40
6.5 Alternatives	43

6.6	Glossary	43
6.7	The meaning of “Models of Reality” in this chapter.	43
6.8	Summary	44
	References	44
III	Speaking to data	45
7	Programming in the 21st century	47
7.1	General background	47
7.2	Theoretical background	47
7.3	R packages used	47
7.4	Data	47
7.5	Alternatives	47
7.6	Glossary	47
7.7	The meaning of “Models of Reality” in this chapter.	48
7.8	Summary	48
	References	48
IV	Hypothesis testing	49
8	Statistical testing	51
8.1	General background	51
8.2	Theoretical background	56
8.2.1	Fisher’s approach: The ‘significance test’	56
8.2.2	Neyman-Pearson’s approach: The ‘hypothesis test’	56
8.2.3	Today’s ‘hybrid chaos’	57
8.3	R packages used	57
8.4	Data	57
8.5	Alternatives	57
8.6	Glossary	57
8.7	The meaning of “Models of Reality” in this chapter.	57
8.8	Summary	57
	References	57
V	Visualisation of data	58
9	Explorative data analysis	63
9.1	General background	63
9.2	Theoretical background	63
9.3	R packages used	64
9.4	Data	64

9.5 Mean	70
9.6 Alternatives	70
9.7 Glossary	70
9.8 The meaning of “Models of Reality” in this chapter.	70
9.9 Summary	70
References	70
10 Correlation and R^2	71
10.1 General background	71
10.2 Theoretical background	74
10.3 R packages used	74
10.4 Data	74
10.5 Alternatives	74
10.6 Glossary	74
10.7 The meaning of “Models of Reality” in this chapter.	75
10.8 Summary	75
References	75
VI Statistical modeling	76
11 Overview	78
11.1 General background	78
11.2 Theoretical background	78
11.3 R packages used	78
11.4 Data	78
11.5 Alternatives	78
11.6 Glossary	78
11.7 The meaning of “Models of Reality” in this chapter.	78
11.8 Summary	78
References	78
VII Template Preface	80
12 Template chapter	82
12.1 General background	82
12.2 Theoretical background	83
12.3 R packages used	83
12.4 Data	83
12.5 Alternatives	83
12.6 Glossary	86
12.7 The meaning of “Models of Reality” in this chapter.	86

12.8 Summary	86
References	86
Appendices	87
A Why does it look like this?	87
A.1 Used R packages	87
A.2 Used theme of the visualitations	87
A.3 Used color palettes	87
References	88

Welcome

“Life is difficult.” — M. Scott Peck’s, The Road Less Traveled

This will be a long journey... it's a hell of a time.

I need to see it. Therefore, this book is a visualization whenever it is possible or feasible. Some more complex models will be described rather than visualized.

There are better mathematical or theoretical books. I would recommend the book by Westfall and Arias (2020)¹. It is an enjoyable read and provides a wealth of information on regression models. The visuals are mediocre at best. The R code is outdated and not state of the art for the 21st century.

Some ideas are not new. I will present them in a different way. I think this is an effective approach to writing a book. The book aims to teach you and enable you to teach statistics to beginners. It may also be beneficial for more advanced classes, but my emphasis was always on the uninformed learners.

Lying to children or some angels will be hurt. Sometimes math is a shield to hide behind. Not really the math itself but the mathematical notations. If you can't speak the math language you cannot follow the train of thought. Because communication is the search for compliance, misunderstanding a language can be barrier.

Machine room of science

Bloody beginners and the curse of knowledge

“To write a book you must become the book.” — Naval Ravikant

“Ludwig Boltzmann, who spent much of his life studying statistical mechanics, died in 1906, by his own hand. Paul Ehrenfest, carrying on the work, died similarly in 1933. Now it is our turn to study statistical mechanics. Perhaps it will be wise to approach the subject cautiously.” — Opening lines of ‘States of Matter’, by D.L. Goodstein.

References

Preface

It's too early to write a preface. I started writing this book a few weeks ago. From my perspective, it will be a good one, but it will take some time. In the meantime, you are welcome to see what's happening here and what I'm writing. Sometimes things will be in the wrong place. This is a normal part of the writing process. Just so you know, I started writing on 15 November 2025.

text²

“The first principle is that you must not fool yourself — and you are the easiest person to fool. So you have to be very careful about that.” —³

“Hic sunt dracones!” — Hic Sunt Dracones on the Hunt-Lenox Globe (eng. “Here be dragons”)

⁴

References

Part I

From science to data by models

Last modified on 22. November 2025 at 19:08:33

“I’d like to solve the puzzle.” — Wheel of Fortune

In 2008, Cadiergues and his team won the Ig Nobel Prize at Harvard University in Cambridge for their work with dog and cat fleas⁵. This book tells the story of what had happened if they won the Nobel Prize in Stockholm instead. The Nobel Prize sparked extensive research in many scientific fields. Fleas became all the rage. Lots of data was collected, fleas were measured, and questions were asked that no one had ever asked before. Let’s check out this data and see what it tells us about fleas. Come along to Adventure Land and get ready to be amazed.

None of this happened in our reality. At least not in our branch of reality, if you believe Everett⁶. But since this book is also about models of reality, we can question the whole of reality and create a new one that fits.

References

1 What is science?

[conflicted] Will prefer dplyr::filter over any other package.

Last modified on 27. November 2025 at 15:18:05

“Reality is negotiable.” — Tim Ferriss

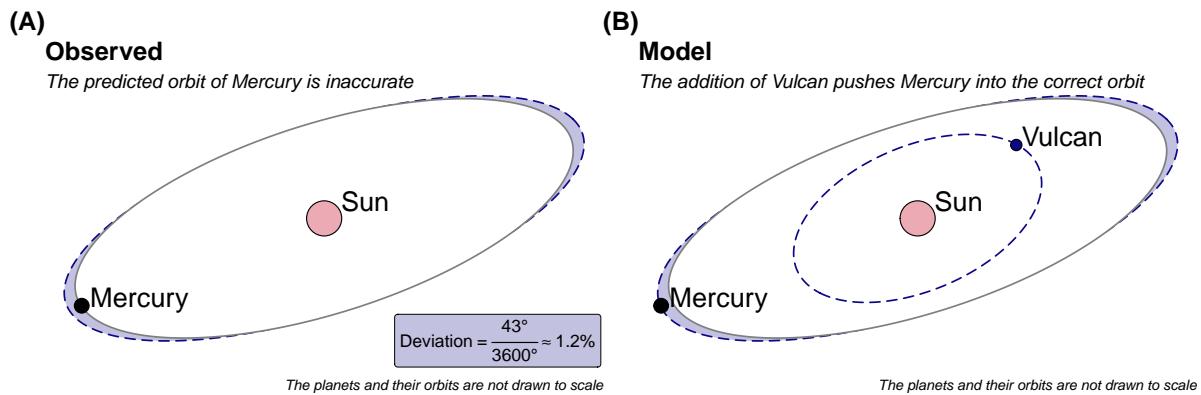


Figure 1.1: foo (A) foo (B) foo

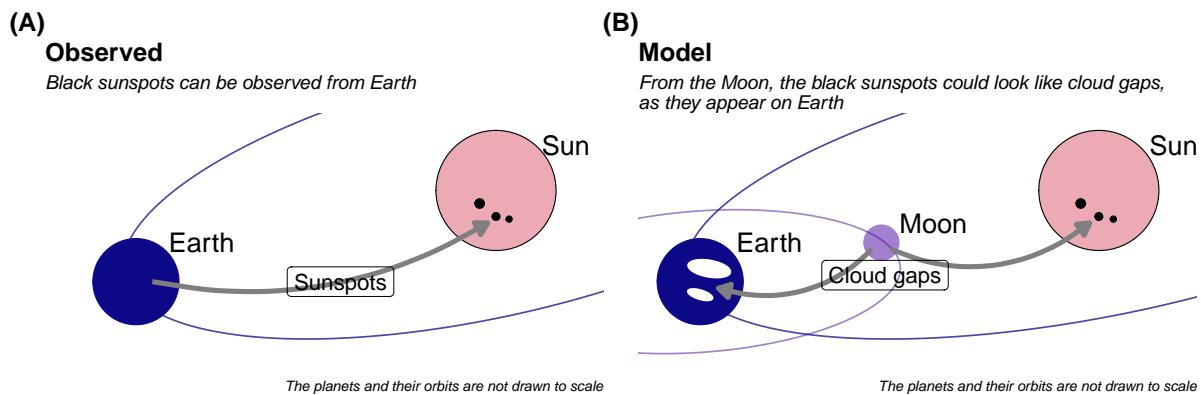


Figure 1.2: foo (A) foo (B) foo

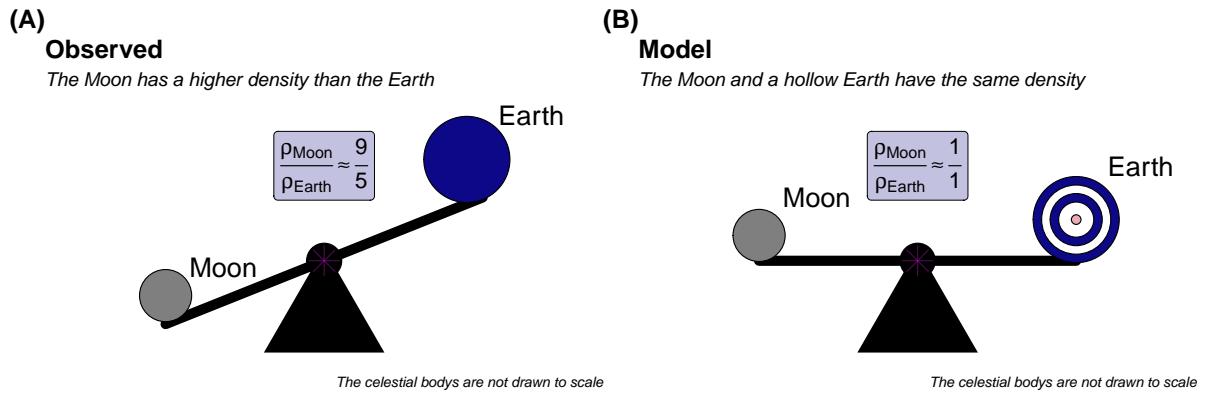


Figure 1.3: foo (A) foo (B) foo

1.1 General background

“Any sufficiently advanced technology is indistinguishable from magic.” —⁷, Clarke’s third law

Full quote

“Reality is negotiable. Outside of science and law, all rules can be bent or broken, and it doesn’t require being unethical.” — Tim Ferriss

Idea of hypotheses

Science is guessing and falsification

⁸ What is this thing called Science?

⁹ What is science

¹⁰ What is science?

¹¹ Models Demystified: A Practical Guide from Linear Regression to Deep Learning

¹² Statistical Thinking for the 21st Century

¹³ The beginning of infinity: Explanations that transform the world

David Deutsch > Quotes

1.2 Theoretical background

1.3 R packages used

1.4 Data

1.5 Alternatives

Further tutorials and R packages on XXX

1.6 Glossary

term what does it mean.

1.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

1.8 Summary

References

2 What is data?

[conflicted] Will prefer dplyr::filter over any other package.

Last modified on 18. November 2025 at 07:21:12

“The limits of my language mean the limits of my world.” — Ludwig Wittgenstein

2.1 General background

2.2 Theoretical background

2.3 R packages used

2.4 Data

```
jump_weight_tbl <- tibble(x = c(0.6, 1, 2.3, 3.5, 5.2, 7.1, 8.4, 9.2, 10),
                           y = 0.15*x^3 - 2.2*x^2 + 8.8*x + 3.2 + rnorm(9, 0, 0.5)) |>
  mutate_all(round, 1) |>
  rename(weight_mg = x, jump_length_cm = y)
```

Table 2.1: foo.

weight_mg	jump_length_cm
0.6	8.5
1.0	9.6
2.3	13.7
3.5	13.2
5.2	11.0
7.1	8.3
8.4	10.9

Table 2.1: foo.

weight_mg	jump_length_cm
9.2	14.3
10.0	21.1

Equation 2.1

$$y = 0.15 \cdot x^3 - 2.2 \cdot x^2 + 8.8 \cdot x + 3.2 \quad (2.1)$$

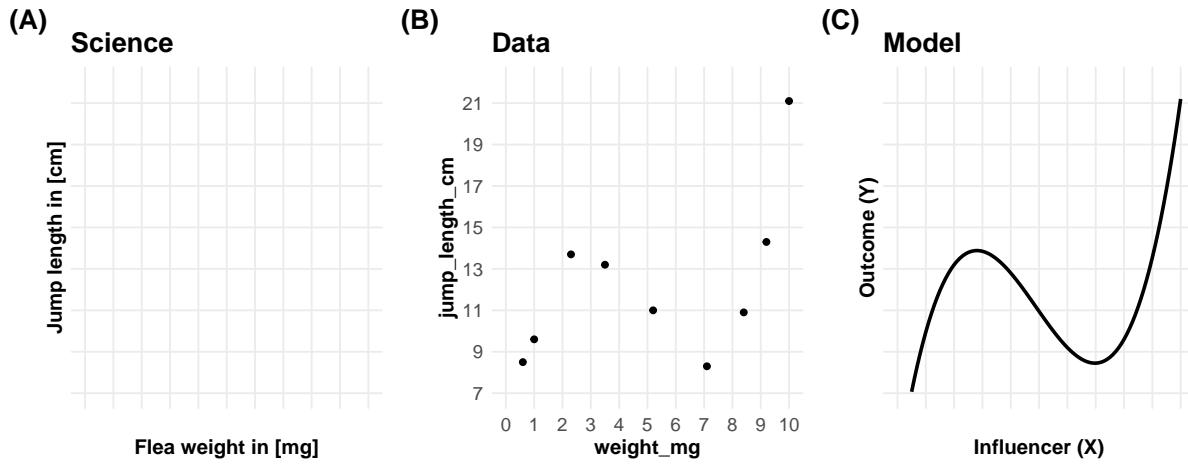


Figure 2.1: foo.

2.5 Alternatives

Further tutorials and R packages on XXX

2.6 Glossary

term what does it mean.

2.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

Science with data and model

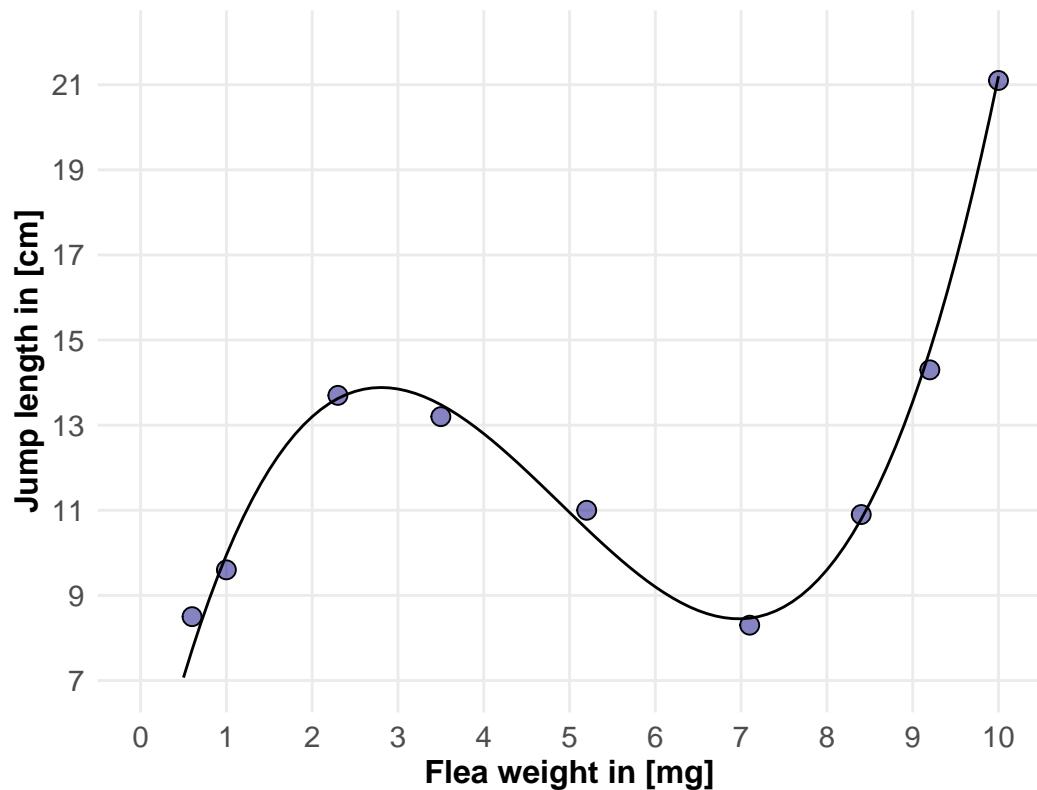


Figure 2.2: foo.

2.8 Summary

References

3 What is a model?

[conflicted] Will prefer dplyr::filter over any other package.

Last modified on 19. December 2025 at 19:29:05

“A quote.” — Dan Meyer

Imagine you are standing on a globe but still believe it is flat. You are standing on solid ground, with boiling rocks a few kilometers below you. A few kilometers above, you cannot breathe anymore. You are not moving, but the Earth is moving at speeds of up to 828,000 km/h, depending on the reference point. Your reality is a serious misinterpretation.

3.1 General background

Table 3.1: Table of terms used in the statistical modelling. The terms in bold are used here. Depending on the scientific background, the usage of these terms can vary widely.

Symbol	Name Application	Description
y	out- come, re- sponse, end- point, de- pen- dent vari- able	<i>The right-hand side (abbr. RHS) of the model. Describing the values measured in an experiment or study.</i>

Symbol	Name Application	Description
x	in- flu- encer, in- flu- en- tial vari- able, risk fac- tor, fixed ef- fect, in- de- pen- dent vari- able	<i>The left-hand side (abbr. LHS) of the model. Describing the influential variables in an experiment or study.</i>
z	ran- dom ef- fect	<i>A factor that provides a description of an grouping variable, which is not part of the controlled experimental setting.</i>
x	ex- Explanation plana- tor, ex- plana- tory vari- able	<i>The influencer is used to describe or explain the outcome.</i>
x	pre- Prediction dic- tor, pre- dic- tive vari- able	<i>The influencer is used to predict the outcome.</i>

Symbol	Name Application	Description
x	fo- Main effect cal ex- plana- tor, fo- cal pre- dic- tor, fo- cal vari- able	<i>In a model with multiple influencers, the focal variable is the variable of primary interest.</i>
c	co- Continuous x vari- ate, co- vari- able	<i>The influencer is a numeric variable with continuous values.</i>
f_A	fac- Categorical x tor A, fac- to- rial vari- able, cat- e- gori- cal vari- able	<i>The influencer is discrete, functioning as a grouping variable, such as an experimental group or a treatment.</i>
$A.1$ to $A.j$	lev- Factor f_A els, groups, treat- ment groups	<i>The discrete groups included in one factor A.</i>

A sentence why we use y and not x for mean and other stuff.

¹⁴ What is a statistical model?

¹⁵ What do we mean by a statistical model?

¹⁶ What Is the Purpose of Statistical Modeling?

¹⁷ Where do statistical models come from? Revisiting the problem of specification

¹⁸ Statistical modelling

3.2 Theoretical background

Model notation

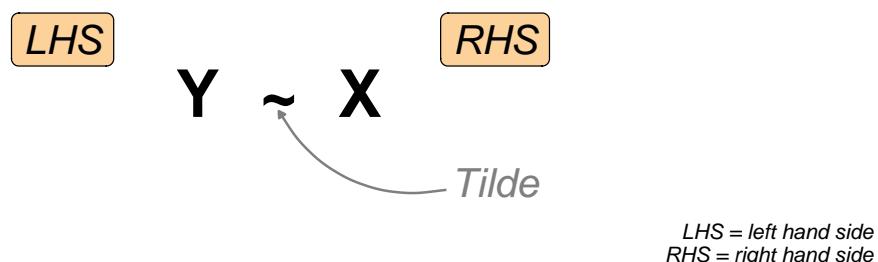


Figure 3.1: foo

Data, model, and error

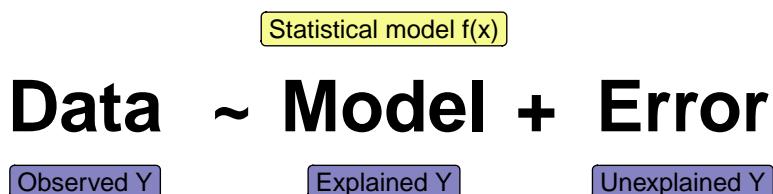


Figure 3.2: foo

```
[1] "#0D0887FF" "#6A00A8FF" "#B12A90FF" "#E16462FF" "#FCA636FF" "#F0F921FF"
```

```
[1] "#0D088780" "#6A00A880" "#B12A9080" "#E1646280" "#FCA63680" "#F0F92180"
```

Data, model, and error

Linear regression

$$\text{Data} \sim \text{Model} + \text{Error}$$

Observed Y

Coefficients: β_0, β_1

Residuals

Figure 3.3: foo

Simple linear model

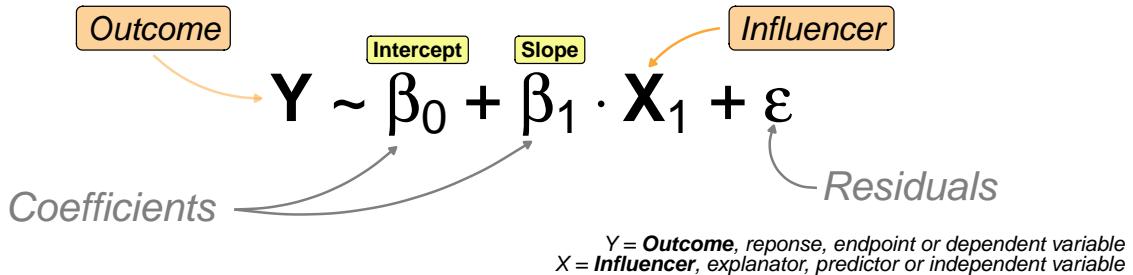


Figure 3.4: foo

Multiple linear model

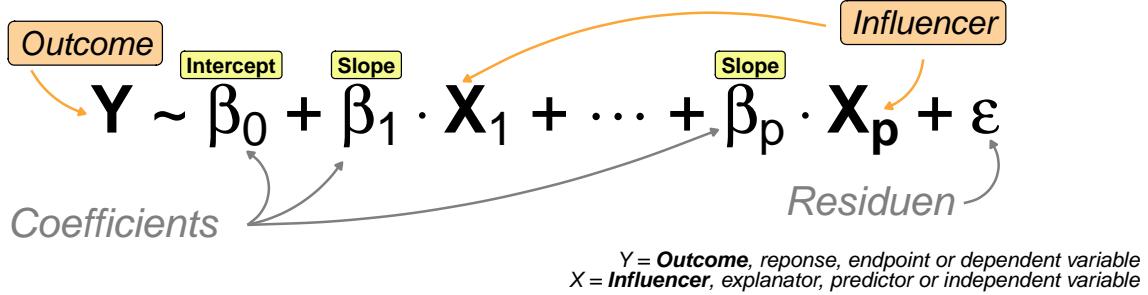


Figure 3.5: foo

Model notation in R

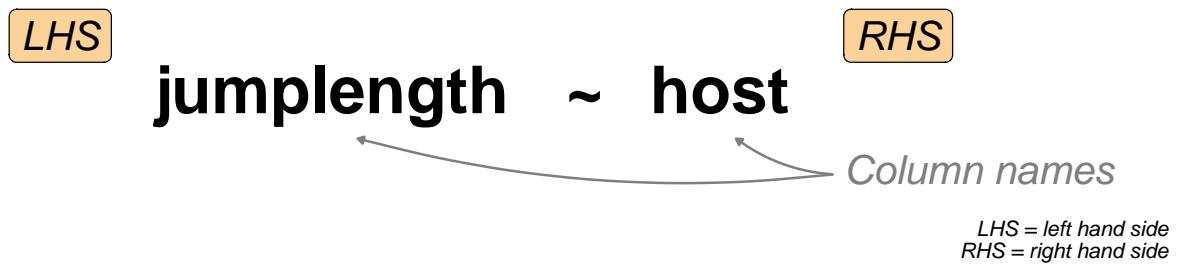


Figure 3.6: foo

Model notation in R

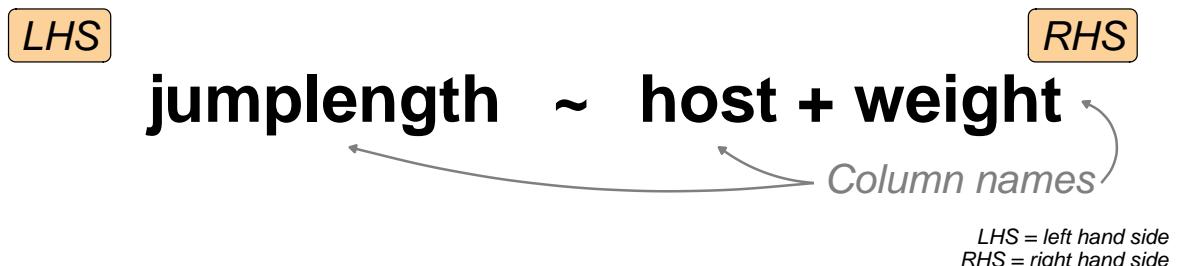


Figure 3.7: foo


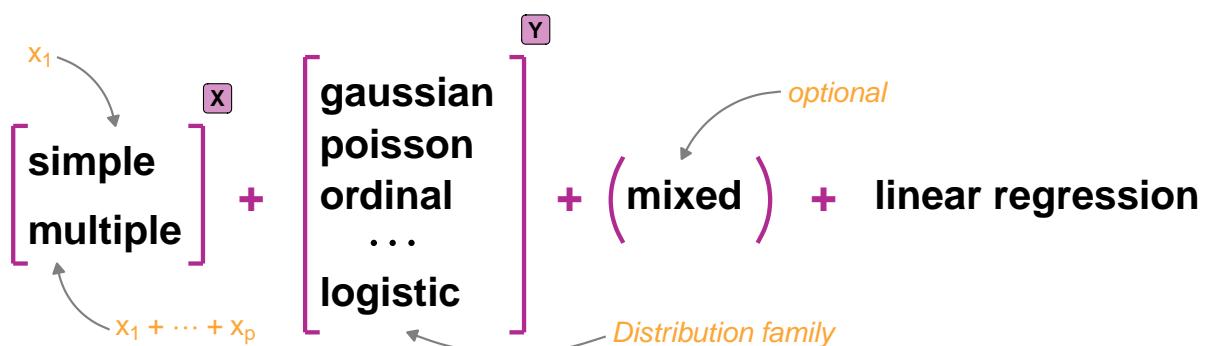


Figure 3.8: foo

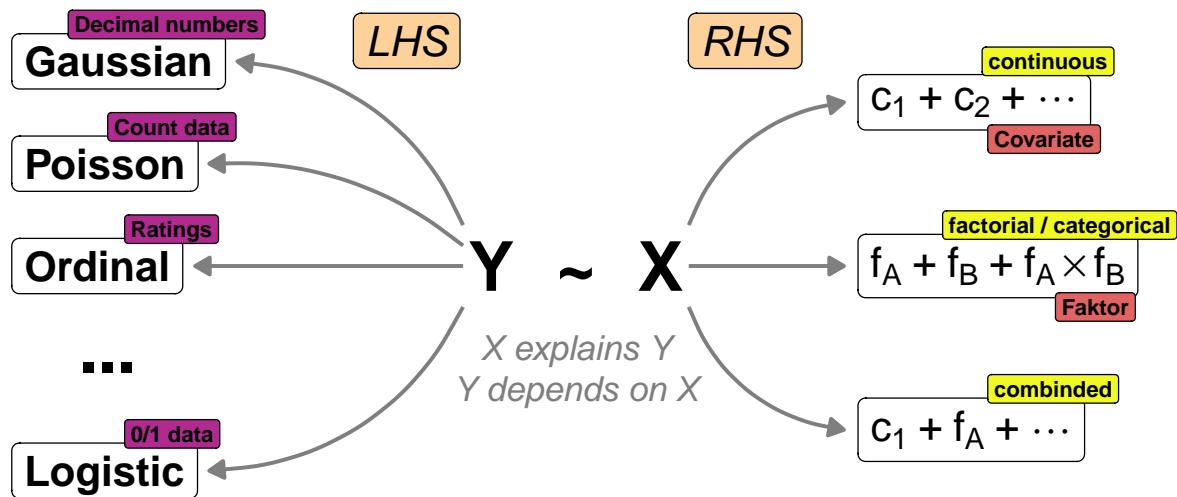

*LHS = left hand side
RHS = right hand side*

Figure 3.9: foo

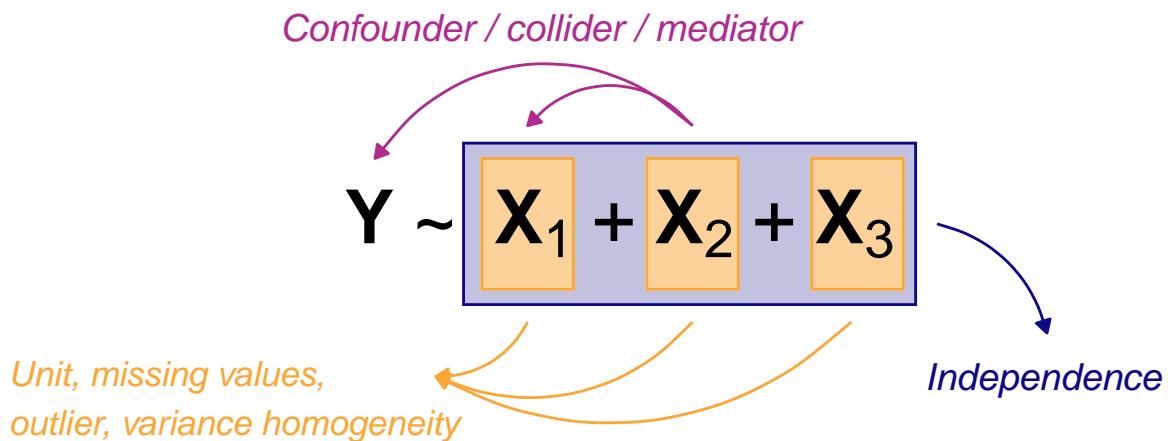


Figure 3.10: foo

*“Twistin’, shake it, shake it, shake it, baby; Hey, we gonna Loop de Loop
Shake it out, baby; Hey, we gonna Loop de La”* — *The Blues Brothers (1980) – Shake a Tail Feather*

“It started with a kiss line; [...] How could I resist?” — *Hot Chocolate – It Started With A Kiss*

3.3 R packages used

3.4 Data

3.5 Alternatives

Further tutorials and R packages on XXX

3.6 Glossary

term what does it mean.

3.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

3.8 Summary

References

Part II

Tales of data

Last modified on 02. January 2026 at 20:40:47

“X-Factor, the unfathomable. We live in a world where dreams and reality are closely intertwined, where facts often seem like figments of the imagination that we cannot explain. Can you distinguish between truth and lies? Yours, Jonathan Frakes.” — German intro of Beyond Belief: Fact or Fiction

Once upon a time Cadiergues and his team won the Nobel Prize in Stockholm for their work with dog and cat fleas⁵. This sparked a time of increased scientific research on fleas of all types of hosts, with scientists studying them in great detail. A wealth of research questions remained to be addressed, while funding opportunities lay in wait. We now have the great opportunity to use open-source data to revisit all the exciting findings in flea research. What are our main research topics and questions that we want to cover?

Unfortunately, none of this ever happened in our branch of reality. But it might happen in countless other branches⁶.

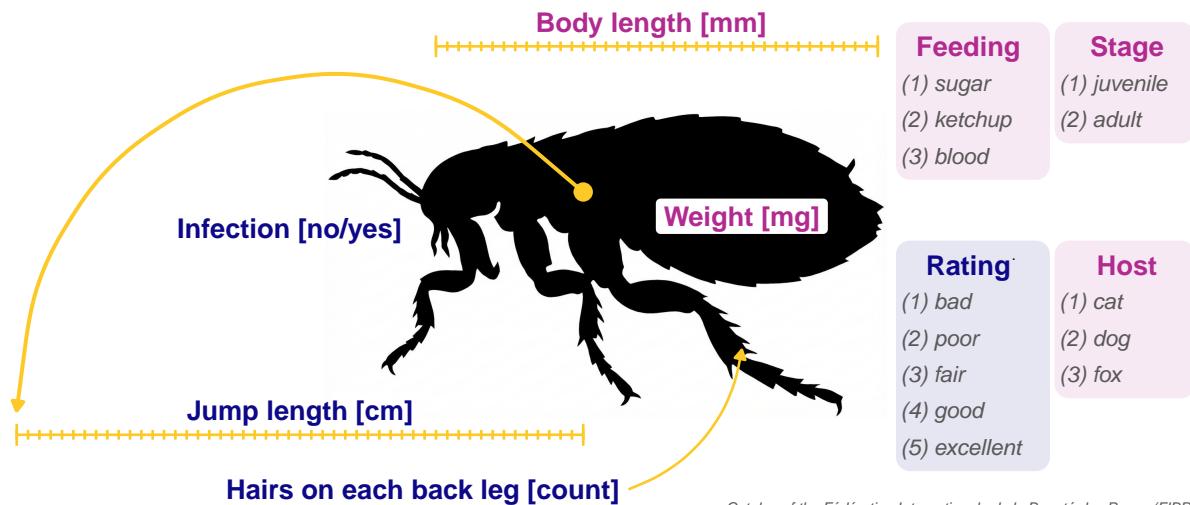


Figure 3.11: Presentation of all measured and experimental values for a given flea. The dark blue variables represent outcomes (Y) with the jump distance in [cm], the number of hairs on the hind legs, the grade and the infection status with flea cold. The purple variables represent the influencing variables (X) with the covariates body weight in [mg] and body length in [mm], as well as the factors of feeding, stage of development and host of the flea.

Quality Rating (ACR): 1-Bad, 2-Poor, 3-Fair, 4-Good, 5-Excellent.

How large is the sample size?

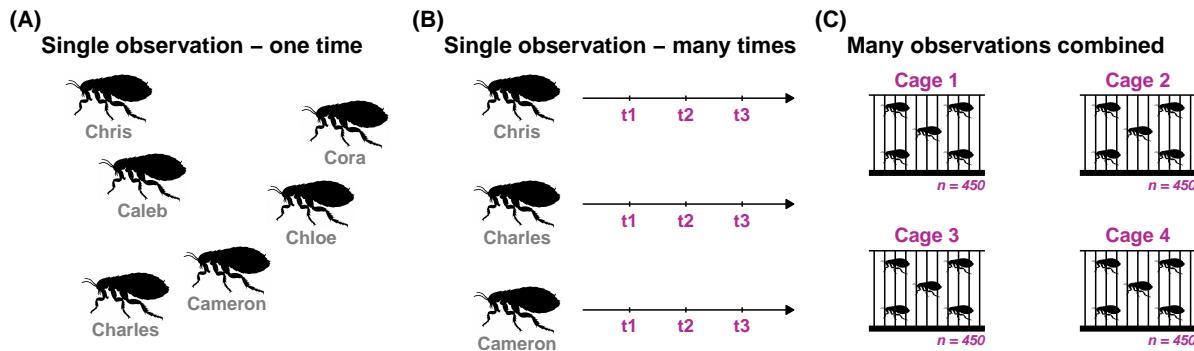


Figure 3.12: Different types of measurement of fleas as a biological unit. **(A)** Individual fleas are observed and measured. Each flea represents a single observation. **(B)** Individual fleas are observed and measured at different points in time. Each flea is measured multiple times. **(C)** Many fleas are placed in cages to obtain an average measurement. Individual observations are grouped into one block.

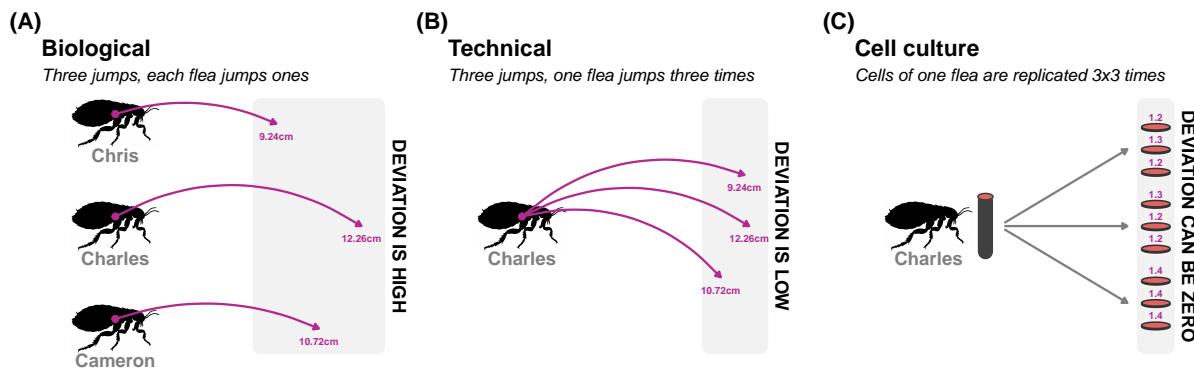


Figure 3.13: Different types of replication in an experiment. **(A)** Biological replication. Three fleas jump, each one individually. Each jump length measurement is connected to an individual flea. The deviation is high between the measurements. **(B)** Technical replication. One flea jumps three times. The measurements of the three jumps are connected to one flea. The deviation is low between the measurements. **(C)** Cell culture replication. A laboratory probe is taken from one flea. The number of cells in the tube is increased threefold. The deviation can be zero between the measurements.

References

4 Body weight of fleas

Last modified on 02. January 2026 at 20:40:36

“A quote.” — Dan Meyer

4.1 General background

4.2 Theoretical background

4.3 R packages used

4.4 Data

4.4.1 Linear

```
jump_weight_tbl <- tibble(x = abs(rnorm(21, 3, 4)),
                           y = 10 + 1.2 * x + rnorm(21, 0, 2)) |>
  mutate_all(round, 1) |>
  rename(weight = x, jumplength = y)
```

```
library(mvtnorm)

sigma <- matrix(c(4,2,2,3), ncol=2)
x <- rmvnorm(n = 21, mean=c(1,2), sigma=sigma) |>
  as_tibble() |>
  rename(weight = V1, bodylength = V2)
```

Warning: The `x` argument of `as_tibble.matrix()` must have unique column names if
`.name_repair` is omitted as of tibble 2.0.0.
i Using compatibility ` `.name_repair` .

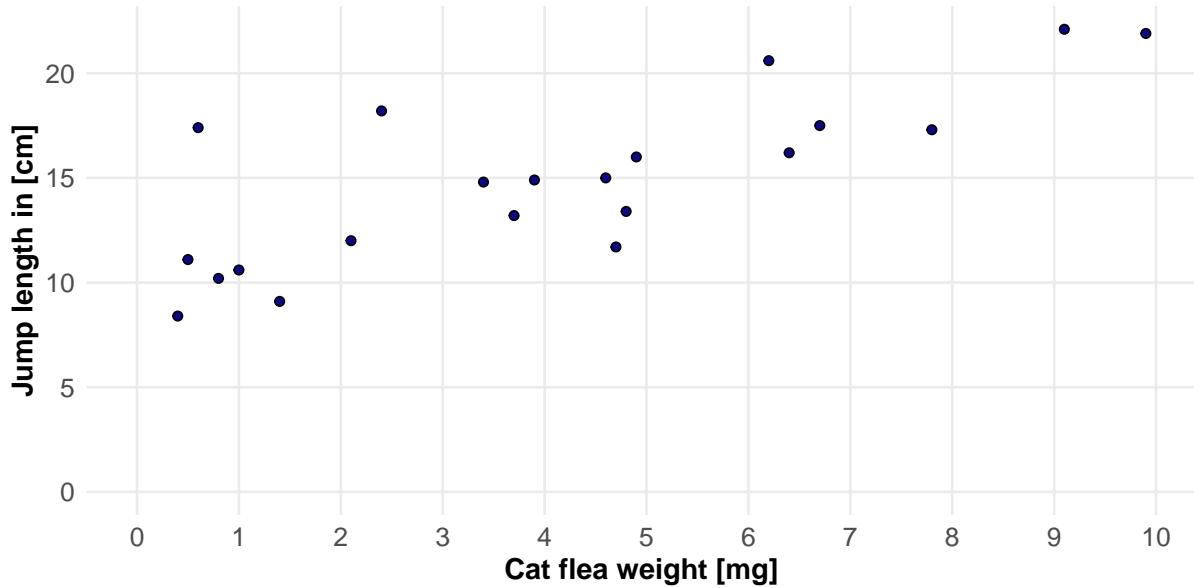


Figure 4.1: foo (A) foo (B) foo

```
colMeans(x)
```

```
  weight bodylength
0.6086656 1.5456209
```

```
var(x)
```

```
  weight bodylength
weight      4.081841   1.308154
bodylength  1.308154   2.970152
```

4.4.2 Non-linear

```
jump_weight_non_linear_tbl <- tibble(x = abs(rnorm(32, 3, 4)),
                                      y = 0.15*x^3 - 2.2*x^2 + 8.8*x + 3.2 + rnorm(32, 0, 1))
  rename(weight = x, jumplength = y)
```

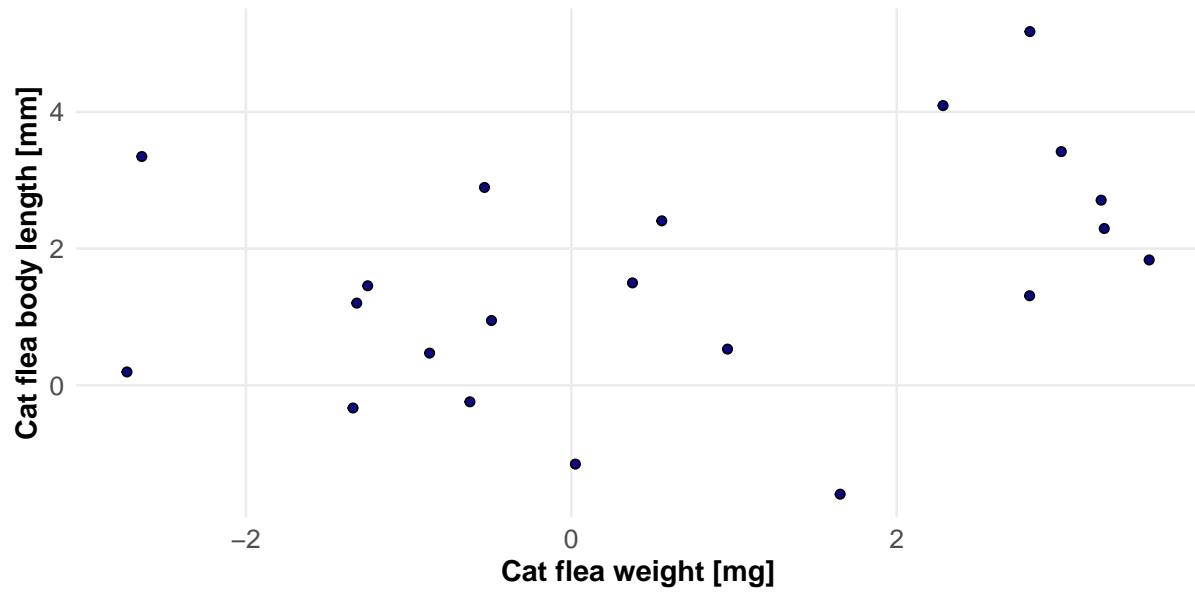


Figure 4.2: foo (A) foo (B) foo

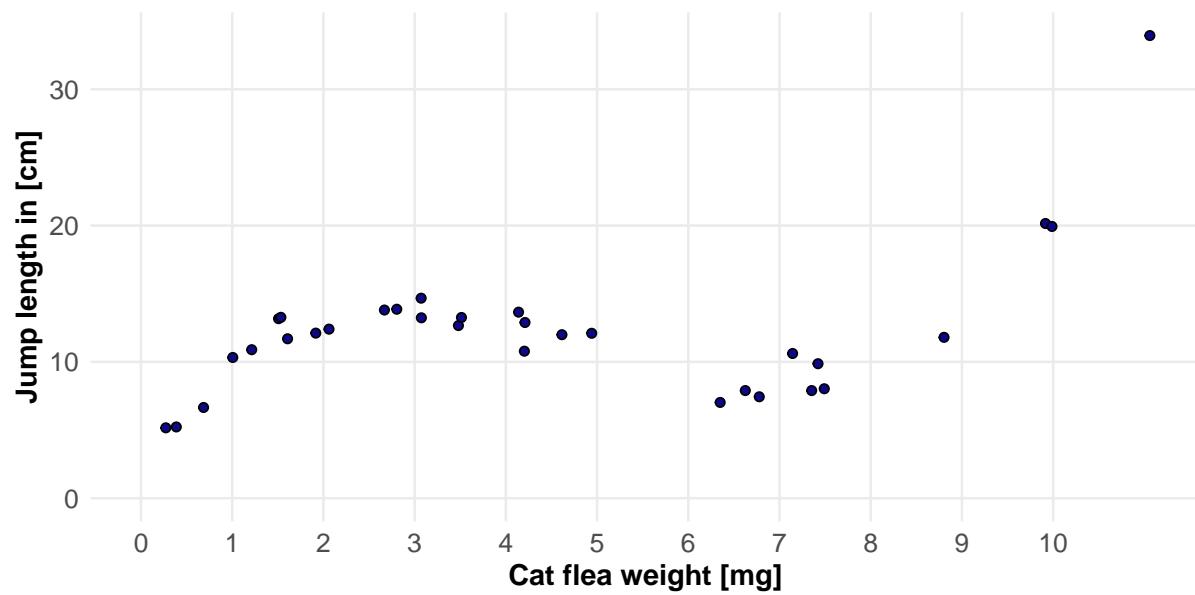


Figure 4.3: foo (A) foo (B) foo

4.5 Data availability

The data is available as txt-Files under <https://github.com/jkruppa/biodatascience>.

4.6 Alternatives

Further tutorials and R packages on XXX

4.7 Glossary

term what does it mean.

4.8 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

4.9 Summary

References

5 Fleas of animals

Last modified on 02. January 2026 at 20:35:10

“A quote.” — Dan Meyer

5.1 General background

What is a data grid?

5.2 Theoretical background

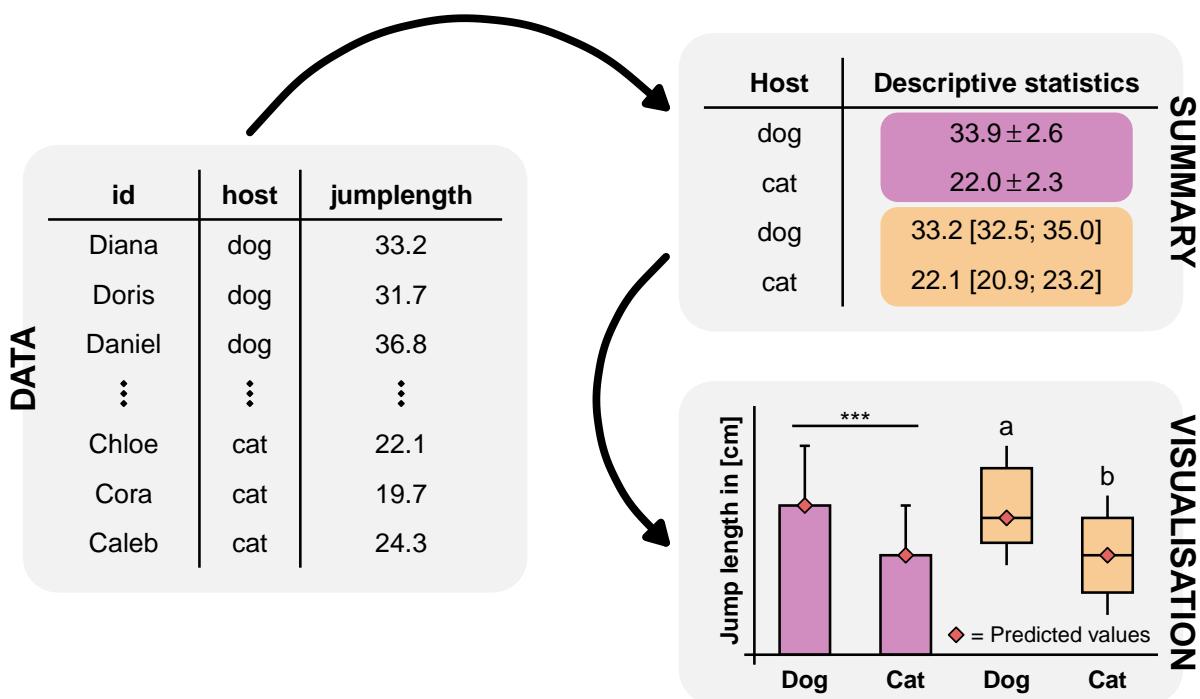


Figure 5.1: foo

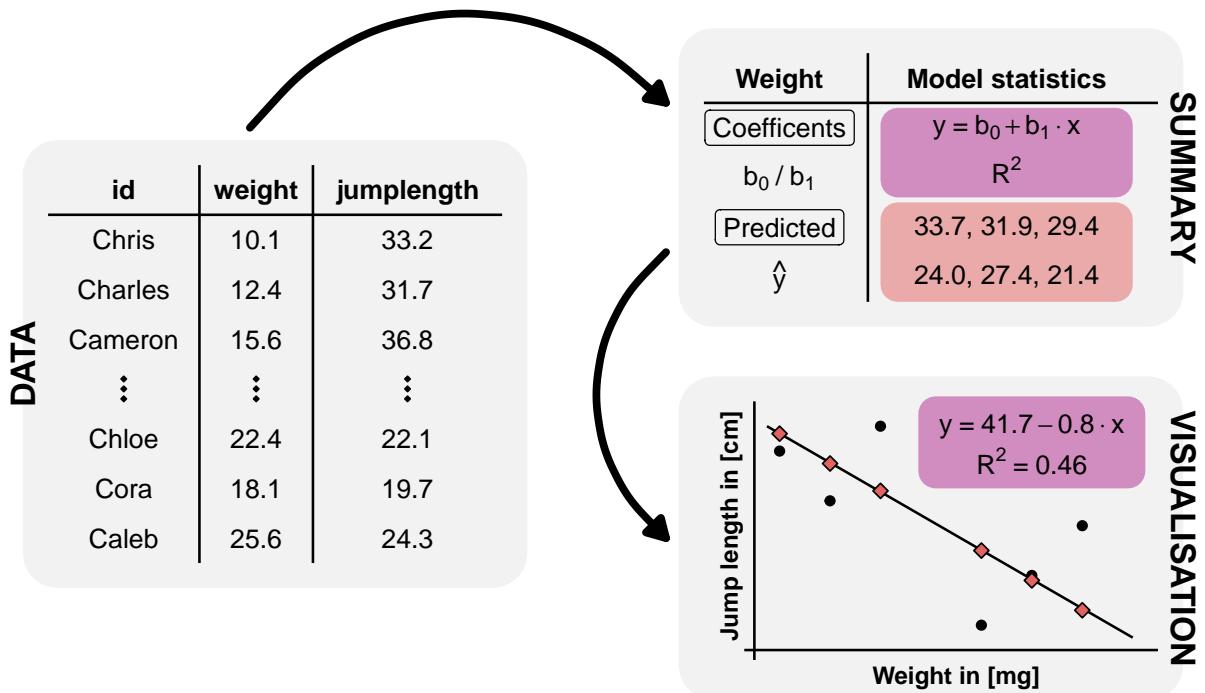


Figure 5.2: foo

5.3 R packages used

```
pacman::p_load(tidyverse, conflicted)
```

19

5.4 Data

Small data and grid

5.4.1 Jump performances of fleas

5

C. felis jump was $19.9 \pm 9.1\text{cm}$ with a range from 2 to 48cm

C. canis jump was longer $30.4 \pm 9.1\text{cm}$ with a range from 3 to 50cm

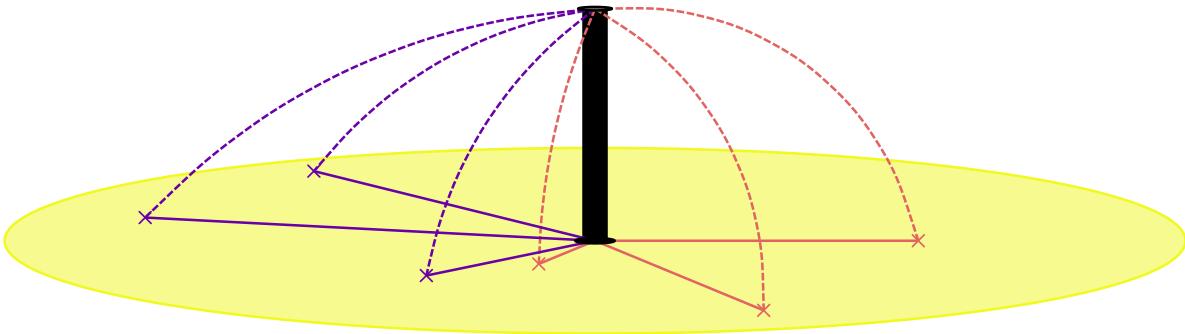


Figure 5.3: foo (A) foo (B) foo

```
jump_flea_grid <- expand_grid(host = c("cat", "dog")) |>
  mutate(mean = c(19.9, 30.4),
        sd = c(9.1))
```

```
jump_flea_tbl <- jump_flea_grid |>
  rowwise() |>
  mutate(jumplength = lst(rnorm(7, mean, sd))) |>
  unnest(cols = jumplength) |>
  mutate(host = as_factor(host))
```

```
jump_flea_tbl |>
  group_by(host) |>
  summarise(mean(jumplength),
            sd(jumplength)) |>
  mutate_if(is.numeric, round, 2)
```

```
# A tibble: 2 x 3
  host `mean(jumplength)` `sd(jumplength)`
  <fct>          <dbl>         <dbl>
1 cat             21.2          7.3
2 dog             33.0          6.57
```

```
jump_animals_grid <- expand_grid(host = c("cat", "fox", "rat", "dog")) |>
  mutate(mean = c(19.9, 35.2, 15.2, 30.4),
        sd = c(9.1, 10.3, 4.6, 9.1))
```

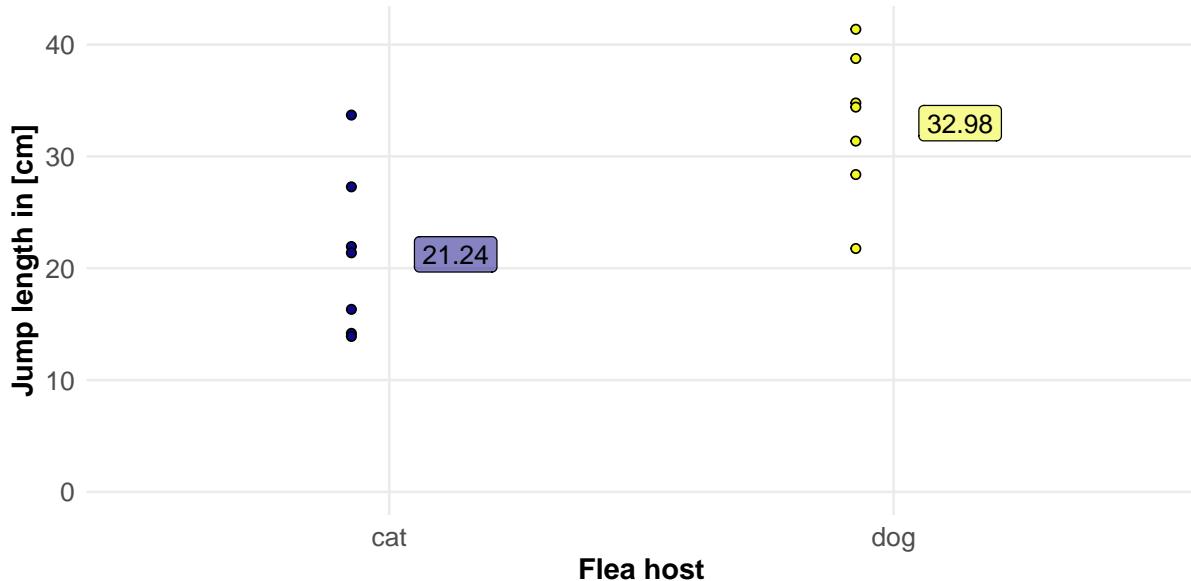


Figure 5.4: foo (A) foo (B) foo

```
jump_animals_tbl <- jump_animals_grid |>
  rowwise() |>
  mutate(jumplength = lst(rnorm(7, mean, sd))) |>
  unnest(cols = jumplength) |>
  mutate(host = as_factor(host))
```

```
jump_animals_tbl |>
  group_by(host) |>
  summarise(mean(jumplength),
            sd(jumplength)) |>
  mutate_if(is.numeric, round, 2)
```

```
# A tibble: 4 x 3
  host `mean(jumplength)` `sd(jumplength)`
  <fct>      <dbl>        <dbl>
1 cat        21.2         9.36
2 fox        34.6        10.2 
3 rat        13.4         2.51
4 dog        34.0        17.4
```

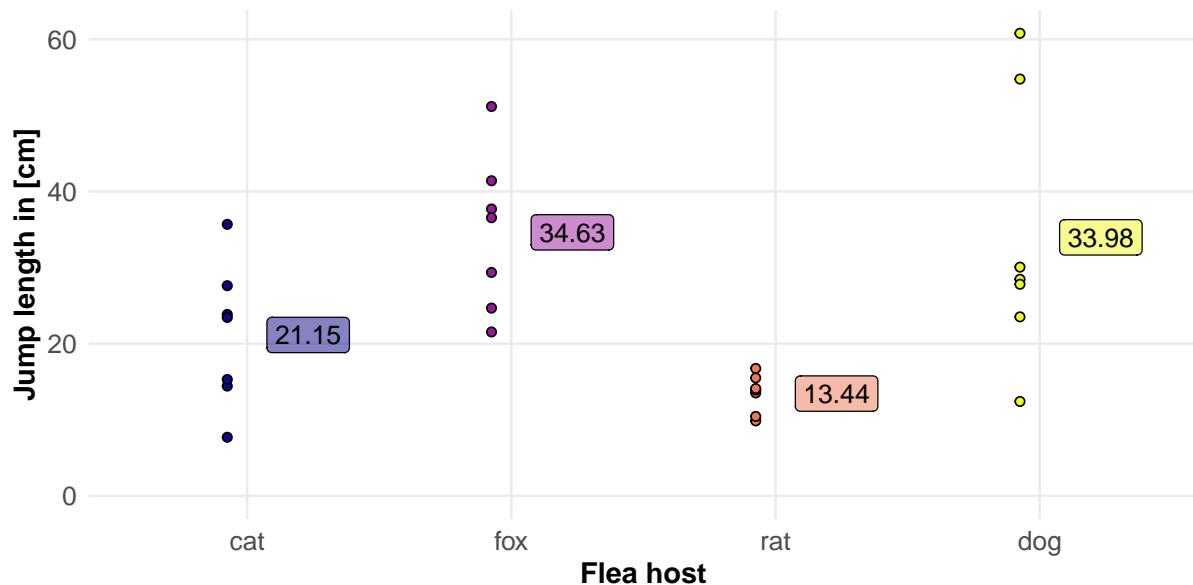


Figure 5.5: foo (A) foo (B) foo

5.4.2 Measurements on animal fleas

- Jump length in [cm] called `jump_length`
- Number of hairs on each leg called `count_leg_left` and `count_leg_right`
- Ratings of each flea, as listed in the catalog of the Fédération Internationale de la Beauté des Puces (FIBP) called `rating` on a Likert scale from 1 to 5, with 5 being the strongest expression.
- The infection status with the flea cold is called `infected`, with a value of 0/1 for no/yes.

```
tibble(jumplength = rnorm(7, 5, 1),
       counthairleg_left = rpois(7, 4),
       counthairleg_right = rpois(7, 4),
       counthairleg = (counthairleg_left + counthairleg_right)/2,
       rating = sample(1:5, 7, replace = TRUE, prob = c(0.1, 0.2, 0.4, 0.2, 0.1)),
       infectd = rbinom(7, prob = 0.5, size = 1))
```

```
# A tibble: 7 x 6
  jumplength counthairleg_left counthairleg_right counthairleg rating infectd
    <dbl>           <int>            <int>        <dbl>   <int>     <int>
1     6.17             4                 8          6       3       1
2     5.03             5                 5          5       4       0
3     6.51             6                 1          3.5      3       0
4     4.38             2                 1          1.5      3       1
```

5	2.62	0	3	1.5	3	0
6	6.64	3	3	3	2	0
7	3.82	3	3	3	3	0

5.4.3 Fleas in urban and rural habitats

Why so complex?

20

```
jump_habitat_grid <- expand_grid(host = 1:3, site = 1:2) |>
  mutate(mean_host = c(19.9, 19.9, 30.4, 30.4, 15.2, 15.2),
        mean_site = c(5, 0, 5, 0, 5, -5),
        mean = mean_host + mean_site,
        sd = c(9.1, 9.1, 9.1, 9.1, 4.6, 4.6))
jump_habitat_grid
```

```
# A tibble: 6 x 6
  host   site mean_host mean_site   mean     sd
  <int> <int>    <dbl>    <dbl> <dbl> <dbl>
1     1     1      19.9      5  24.9  9.1
2     1     2      19.9      0  19.9  9.1
3     2     1      30.4      5  35.4  9.1
4     2     2      30.4      0  30.4  9.1
5     3     1      15.2      5  20.2  4.6
6     3     2      15.2     -5  10.2  4.6
```

```
jump_habitat_raw_tbl <- jump_habitat_grid |>
  rowwise() |>
  mutate(jumplength = lst(rnorm(7, mean, sd))) |>
  unnest(cols = jumplength)
```

```
jump_habitat_tbl <- jump_habitat_raw_tbl |>
  select(host, site, jumplength) |>
  mutate(host = factor(host, labels = c("cat", "dog", "rat")),
        site = factor(site, labels = c("urban", "rural"))) |>
  mutate_if(is.numeric, round, 2)
```

```

jump_habitat_tbl |>
  group_by(host, site) |>
  summarise(mean(jumplength),
            sd(jumplength)) |>
  mutate_if(is.numeric, round, 2)

```

```

# A tibble: 6 x 4
# Groups:   host [3]
  host   site `mean(jumplength)` `sd(jumplength)`
  <fct> <fct>           <dbl>             <dbl>
1 cat    urban          21.8              9.26
2 cat    rural          23.6              7.23
3 dog    urban          35.2              9.1 
4 dog    rural          27.9              12.8 
5 rat    urban          19.2              1.85
6 rat    rural          12.8              3.74

```

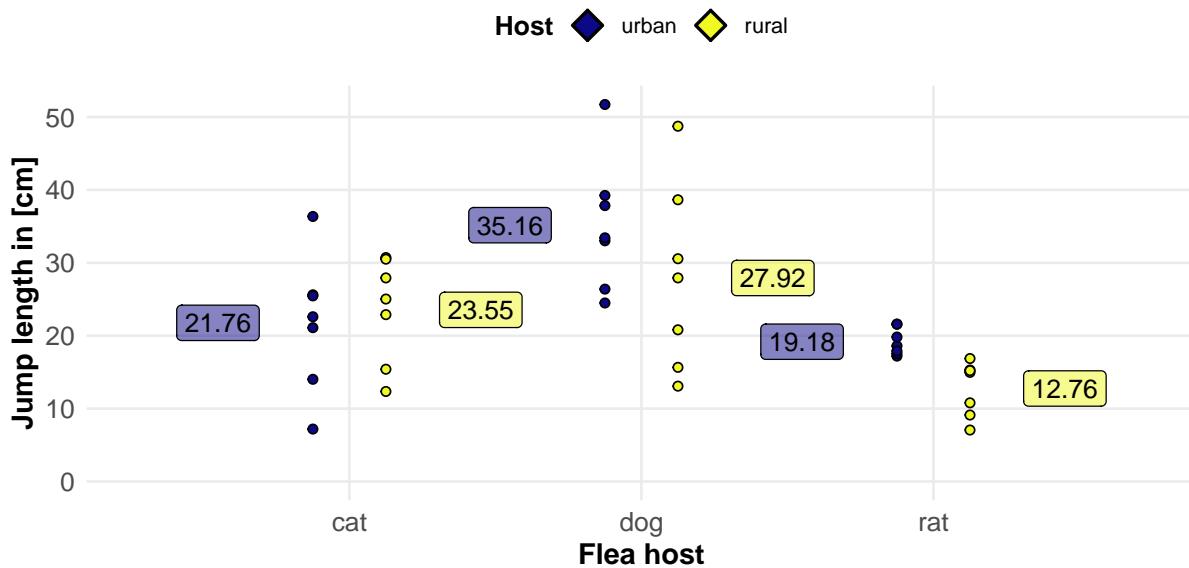


Figure 5.6: foo (A) foo (B) foo

5.5 Data availability

The data is available as txt-Files under <https://github.com/jkruppa/biodatascience>.

5.6 Alternatives

Further tutorials and R packages on XXX

5.6.1 Why linear is a bad idea?

```
jump_flea_tbl <- tibble(host = rep(0:1, each = 7),  
                         jump_length = 19.9 + 10.5 * host + rnorm(14, 0, 9.1)) |>  
  mutate(host = factor(host, labels = c("cat", "dog")))
```

5.6.2 Why is a tibble() bad idea?

```
jump_animals_tbl <- tibble(cat = rnorm(n = 7, mean = 19.9, sd = 9.1),  
                           fox = rnorm(n = 7, mean = 35.2, sd = 10.3),  
                           rat = rnorm(n = 7, mean = 15.2, sd = 4.6),  
                           dog = rnorm(n = 7, mean = 30.4, sd = 9.1)) |>  
  pivot_longer(cols = cat:dog, values_to = "jump_length", names_to = "host") |>  
  mutate(host = as_factor(host))
```

5.7 Glossary

term what does it mean.

5.8 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

5.9 Summary

References

6 Eating habits of fleas

[conflicted] Will prefer dplyr::filter over any other package.

Last modified on 25. November 2025 at 20:10:00

“A quote.” — Dan Meyer

6.1 General background

Based on standard methods in flea research and experimental entomology, as well as a similar published experiment, the following three types of food for adult cat fleas are possible, representing different nutritional conditions:

Blood: This is the natural and optimal food source for adult fleas. Often, defibrinated or anticoagulated animal blood (e.g. bovine blood, rabbit blood) is used for this purpose, which is offered in special in vitro feeding systems (e.g. through a membrane). Expectation: Fleas that are optimally nourished should show the greatest jumping distance.

Sugar water: Often serves as a ‘control feed’ or as a feed that provides energy (sugar) but lacks essential nutrients (such as proteins from blood). Expectation: Jumping distance could be reduced due to the lack of blood and thus the proteins important for reproduction, which could impair physiological fitness.

Ketchup - a nutrient-poor or unsuitable food: This option is used to simulate poor, incomplete or stressful nutritional conditions. In a similar documented experiment, ketchup (a combination of sugar, vinegar and minimal other substances, but no blood) was used as the third feed. Expectation: It can be assumed that fleas will show the shortest jumping distance under these conditions, as they lack both essential nutrients and the necessary energy.

6.2 Theoretical background

6.3 R packages used

6.4 Data

6.4.1 Linear

```
jump_weight_feeding_tbl <- expand_grid(f = c(0, 1),
                                         x = abs(rnorm(21, 5, 4))) |>
  mutate(y = 10 + 1.2 * x + 10 * f + rnorm(42, 0, 2),
         f = factor(f, labels = c("sugar_water", "blood"))) |>
  mutate_if(is.numeric, round, 1) |>
  rename(weight = x, jumplength = y, feeding = f)
```

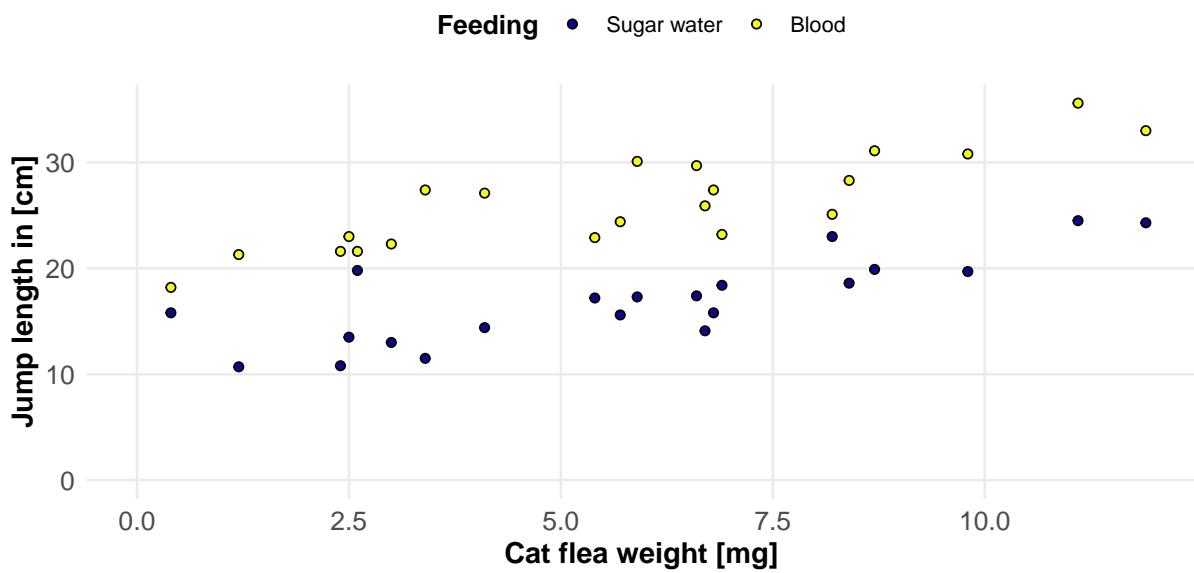


Figure 6.1: foo (A) foo (B) foo

6.4.2 Non linear

```

jump_weight_non_linear_tbl <- expand_grid(f = c(0, 1),
                                         x = abs(rnorm(42, 2.5, 2.5))) |>
  mutate(y = 25 - 4*f - 21 * exp(-0.2 * x^2 - 1.1 * f) + rnorm(84, 0, 1),
         f = factor(f, labels = c("sugar_water", "blood"))) |>
  mutate_if(is.numeric, round, 1) |>
  rename(weight = x, jumplength = y, feeding = f)

```

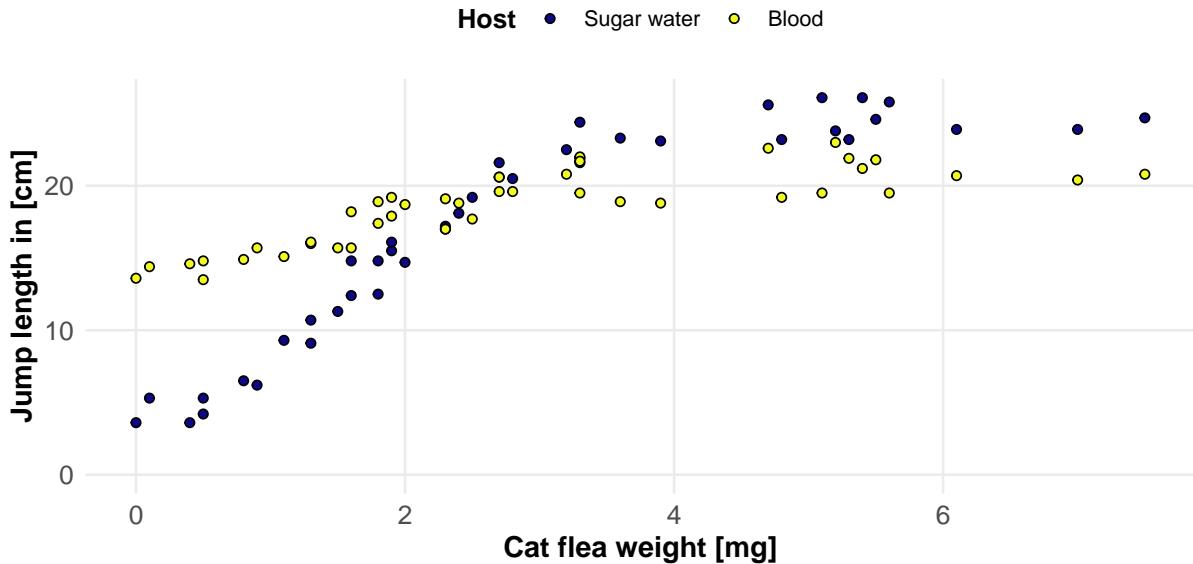


Figure 6.2: foo (A) foo (B) foo

6.4.3 International study

Degree of Urbanization of the United nations (rural as low-dense areas, town as semi-dense areas, cities as high-dense areas)

ODer das ganze mal mit Bodylength?

```

n_obs <- 41
jump_international_grid <- expand_grid(country = 1:9) |>
  mutate(mean_country = rnorm(9, 0, 4)) |>
  expand_grid(site = 1:3) |>
  mutate(mean_site = rnorm(27, 0, 4)) |>
  expand_grid(rep = 1:n_obs) |>
  mutate(bodyweight = abs(rnorm(n = (9*3*n_obs), 2.5, 2.5)),
         jumplength = 10 + 1.5 * bodyweight + mean_country + mean_site + rnorm(n = (9*3*n_obs),

```

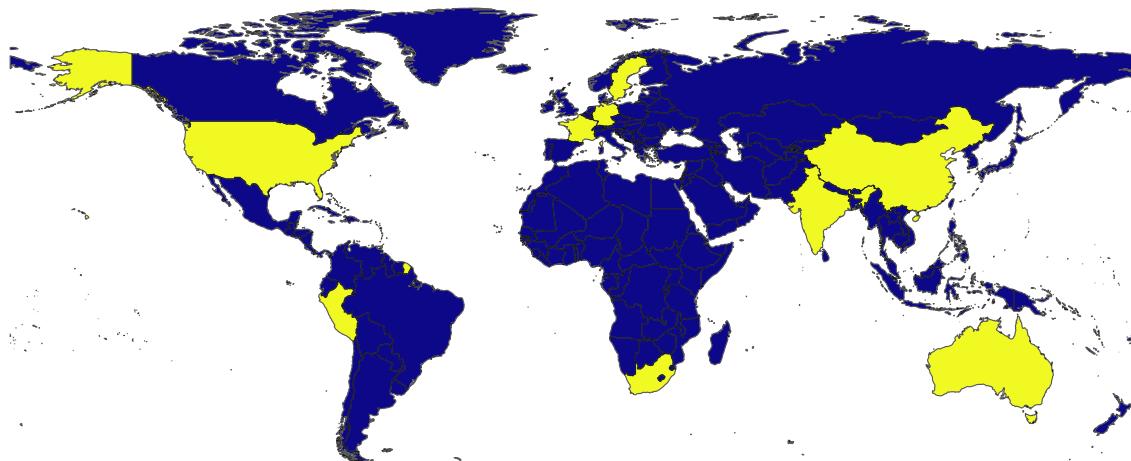


Figure 6.3: foo (A) foo (B) foo

DE = Germany FR = France IN = India US = United States CN = China AU = Australia
PE = Peru SE = Sweden ZA = South Africa

```
jump_international_tbl <- jump_international_grid |>
  select(bodyweight, country, site, jumplength) |>
  mutate(country = factor(country, labels = c("DE", "FR", "AU",
                                              "IN", "US", "CN",
                                              "PE", "SE", "ZA")),
         site = factor(site, labels = c("rural", "semi-dense", "city"))) |>
  mutate_if(is.numeric, round, 2)
```

```
library(lme4)

lmer(jumplength ~ bodyweight + (site|country), data = jump_international_tbl)
```

```
Linear mixed model fit by REML ['lmerMod']
Formula: jumplength ~ bodyweight + (site | country)
Data: jump_international_tbl
REML criterion at convergence: 5640.55
Random effects:
Groups   Name        Std.Dev. Corr
country (Intercept) 5.320
          sitesemi-dense 4.307    -0.34
          sitecity       4.251    -0.35  0.36
Residual           2.926
```

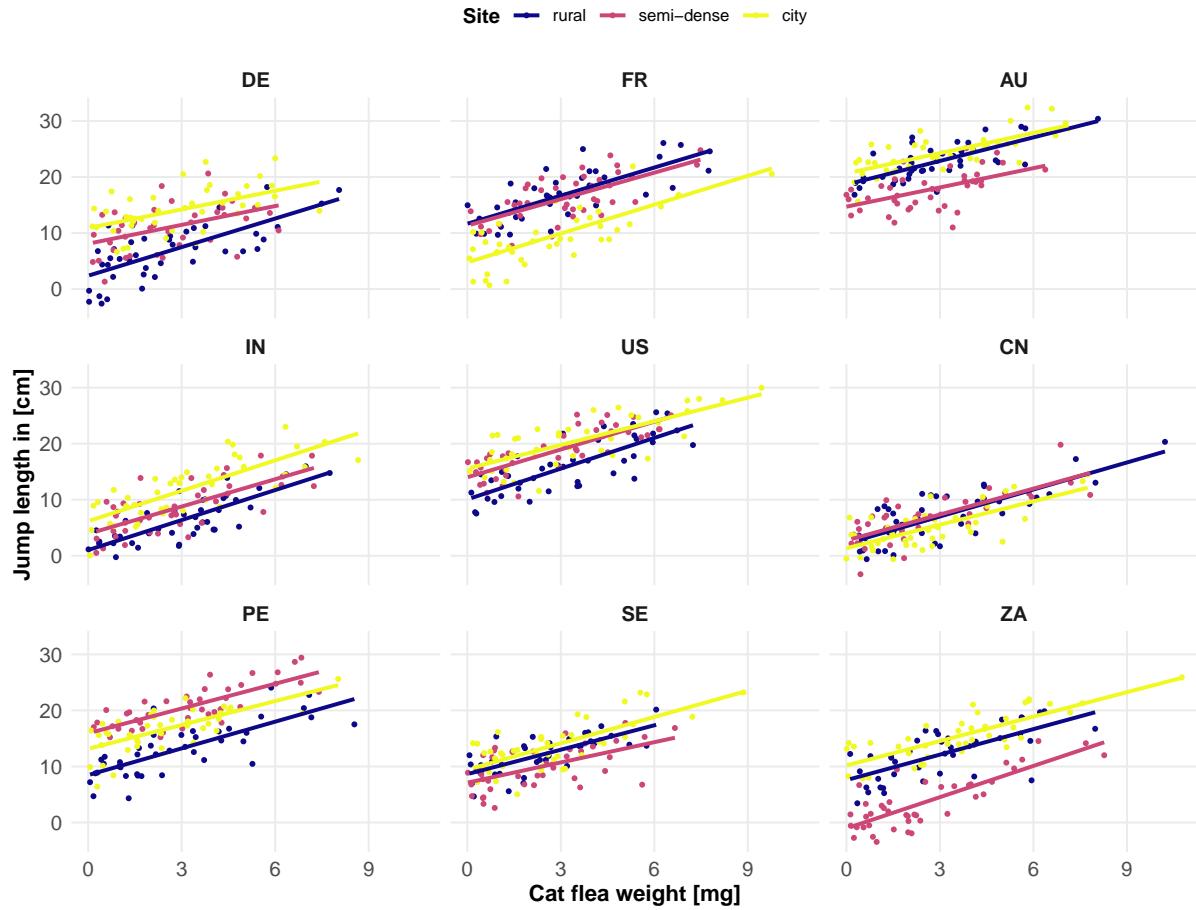


Figure 6.4: foo (A) foo (B) foo

```

Number of obs: 1107, groups: country, 9
Fixed Effects:
(Intercept) bodyweight
     8.811       1.532

c("#OD0887FF", "#5402A3FF", "#B0AA5FF", "#B93289FF",
  "#DB5C68FF", "#F48849FF", "#FEBC2AFF", "#F0F921FF")

[1] "#OD0887FF" "#5402A3FF" "#B0AA5FF" "#B93289FF" "#DB5C68FF" "#F48849FF"
[7] "#FEBC2AFF" "#F0F921FF"

```

6.5 Alternatives

Further tutorials and R packages on XXX

```

expand_grid(obs = c(1, 3, 2)) |>
  rowwise() |>
  mutate(foo = list(expand_grid(1:obs))) |>
  unnest(cols = c(foo))

```

```

# A tibble: 6 x 2
  obs `1:obs`
  <dbl>   <int>
1     1       1
2     3       1
3     3       2
4     3       3
5     2       1
6     2       2

```

6.6 Glossary

term what does it mean.

6.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

6.8 Summary

References

Part III

Speaking to data

Last modified on 09. December 2025 at 10:28:21

“What problem have you solved, ever, that was worth solving where you knew all the given information in advance? No problem worth solving is like that. In the real world, you have a surplus of information and you have to filter it, or you don’t have sufficient information and you have to go find some.” — [Dan Meyer in Math class needs a makeover](#)

Here comes the preface text

7 Programming in the 21st century

[conflicted] Will prefer dplyr::filter over any other package.

Last modified on 20. November 2025 at 14:02:31

“A quote.” — Dan Meyer

7.1 General background

21

19

22

23

7.2 Theoretical background

7.3 R packages used

7.4 Data

7.5 Alternatives

Further tutorials and R packages on XXX

7.6 Glossary

term what does it mean.

7.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

7.8 Summary

References

Part IV

Hypothesis testing

Last modified on 09. December 2025 at 10:28:06

“What problem have you solved, ever, that was worth solving where you knew all the given information in advance? No problem worth solving is like that. In the real world, you have a surplus of information and you have to filter it, or you don’t have sufficient information and you have to go find some.” — [Dan Meyer in Math class needs a makeover](#)

Here comes the preface text

8 Statistical testing

Last modified on 11. December 2025 at 20:23:05

“A quote.” — Dan Meyer

8.1 General background

“Statistik ist: Wenn der Jäger am Hasen einmal links und einmal rechts vorbeischießt, dann ist der Hase im Durchschnitt tot.” — Mike Krüger, German comedian

Statistics is: When the hunter misses the rabbit once to the left and once to the right, on average the rabbit is dead.

Statistics means: If the hunter misses the rabbit once to the left and once to the right, then on average, the rabbit's a goner.

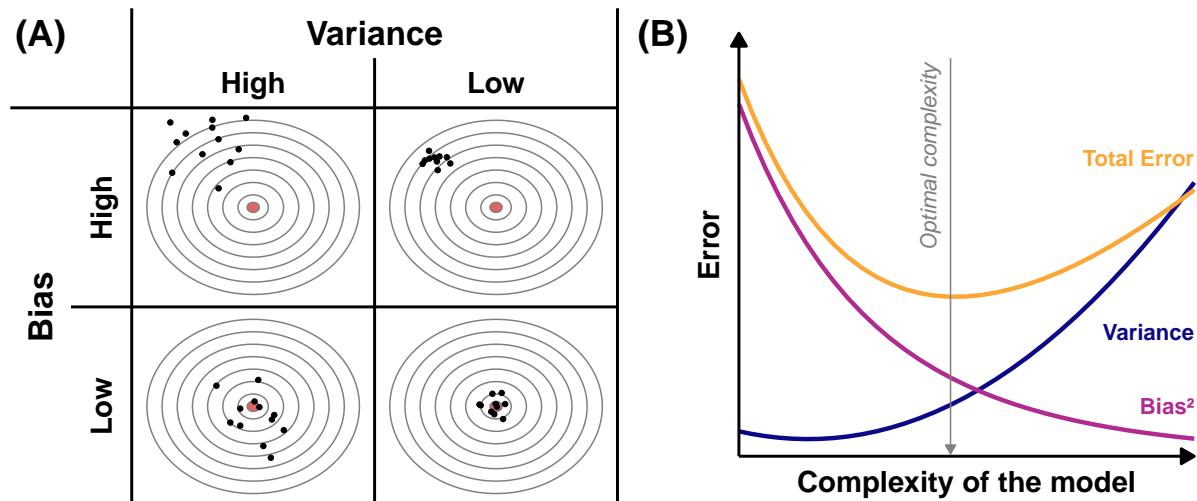


Figure 8.1: foo

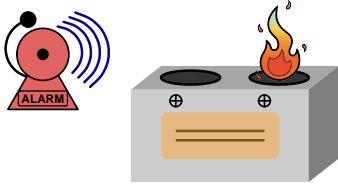
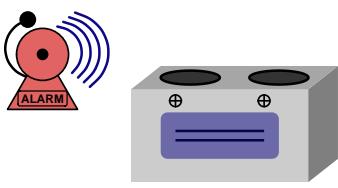
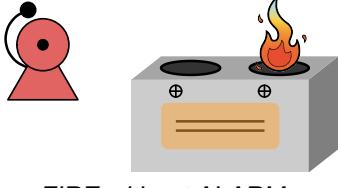
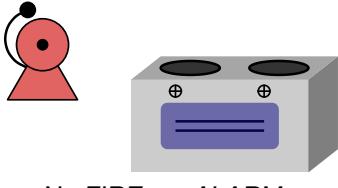
		Unknown truth in the population	
		Null is false / effect	Null is true / no effect
Decision by a statistical test	Reject Null / effect	 <p>ALARM with FIRE Power / True positive $1 - \beta = 80\%$ <i>We believe in this to be high.</i></p>	 <p>ALARM without FIRE Type I error / False positive $\alpha = 5\%$ <i>We control this in our testing.</i></p>
	Keep Null / no effect	 <p>FIRE without ALARM Type II error / False negative $\beta = 20\%$ <i>We cannot control this in our testing.</i></p>	 <p>No FIRE, no ALARM True negative $1 - \alpha = 95\%$ <i>We are rarely interested in.</i></p>

Figure 8.2: foo

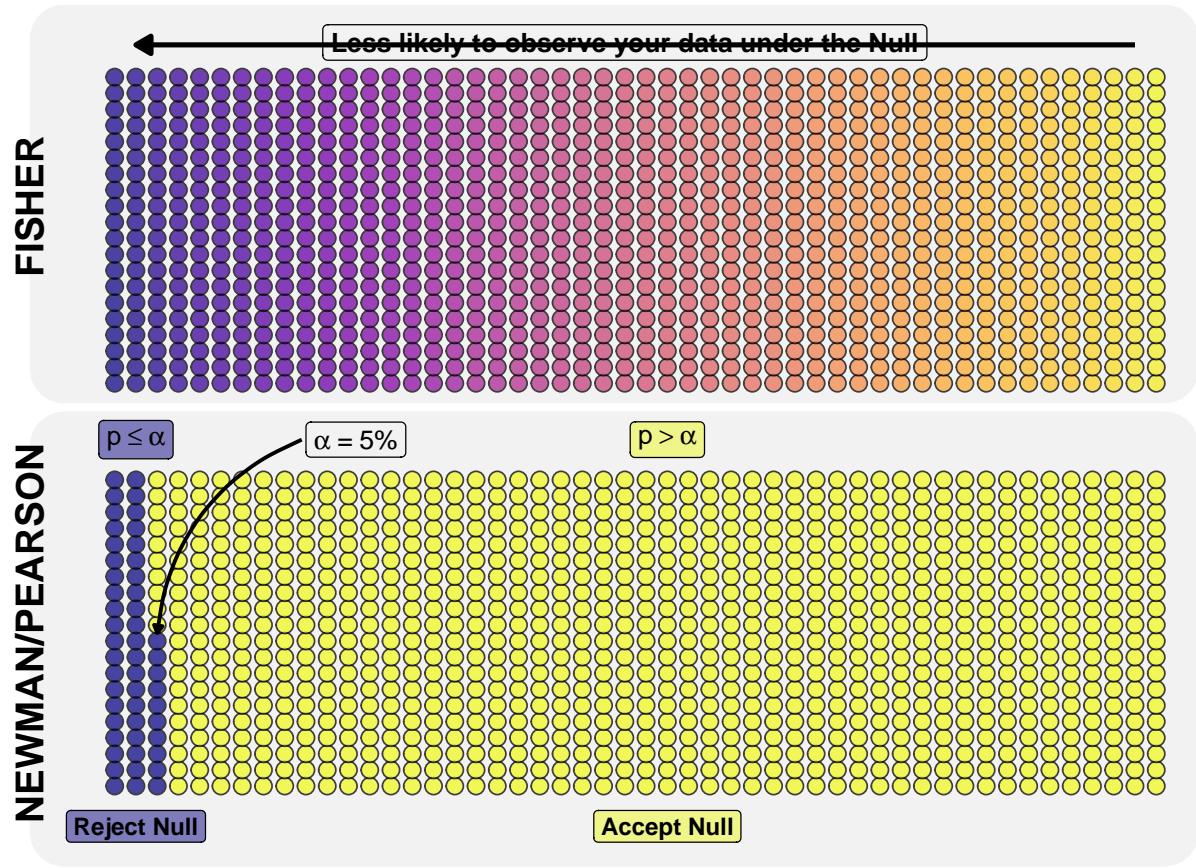


Figure 8.3: foo

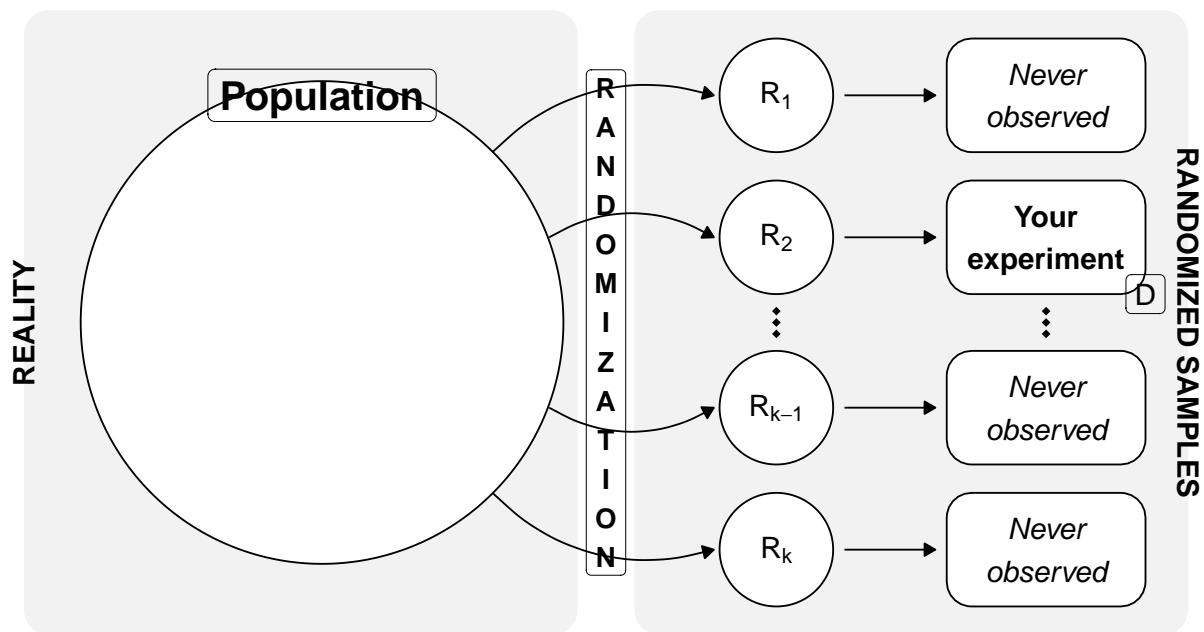


Figure 8.4: foo

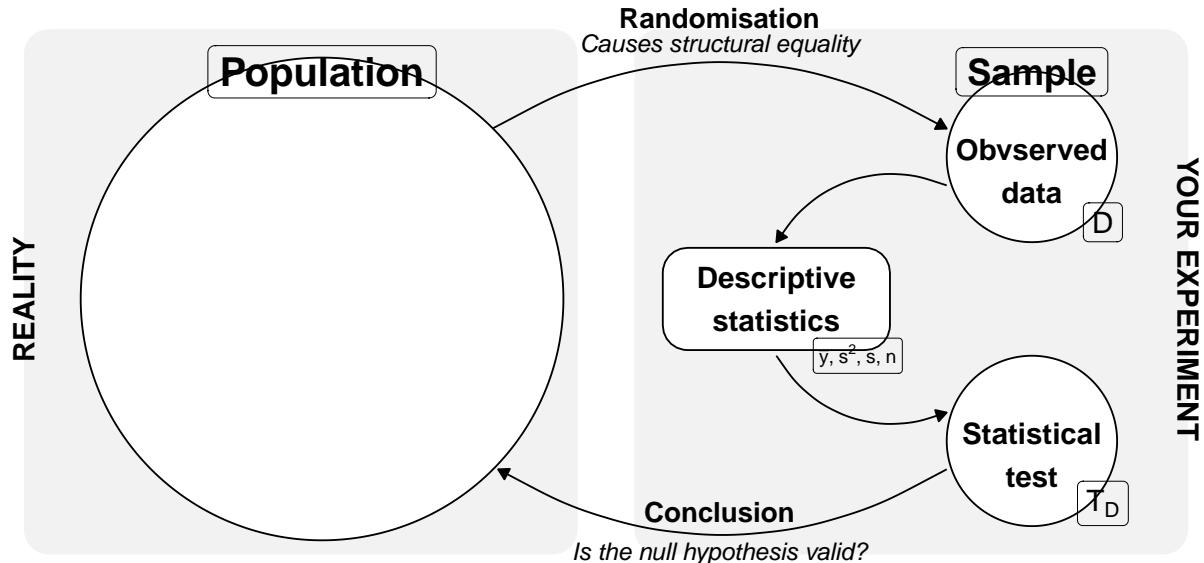


Figure 8.5: foo

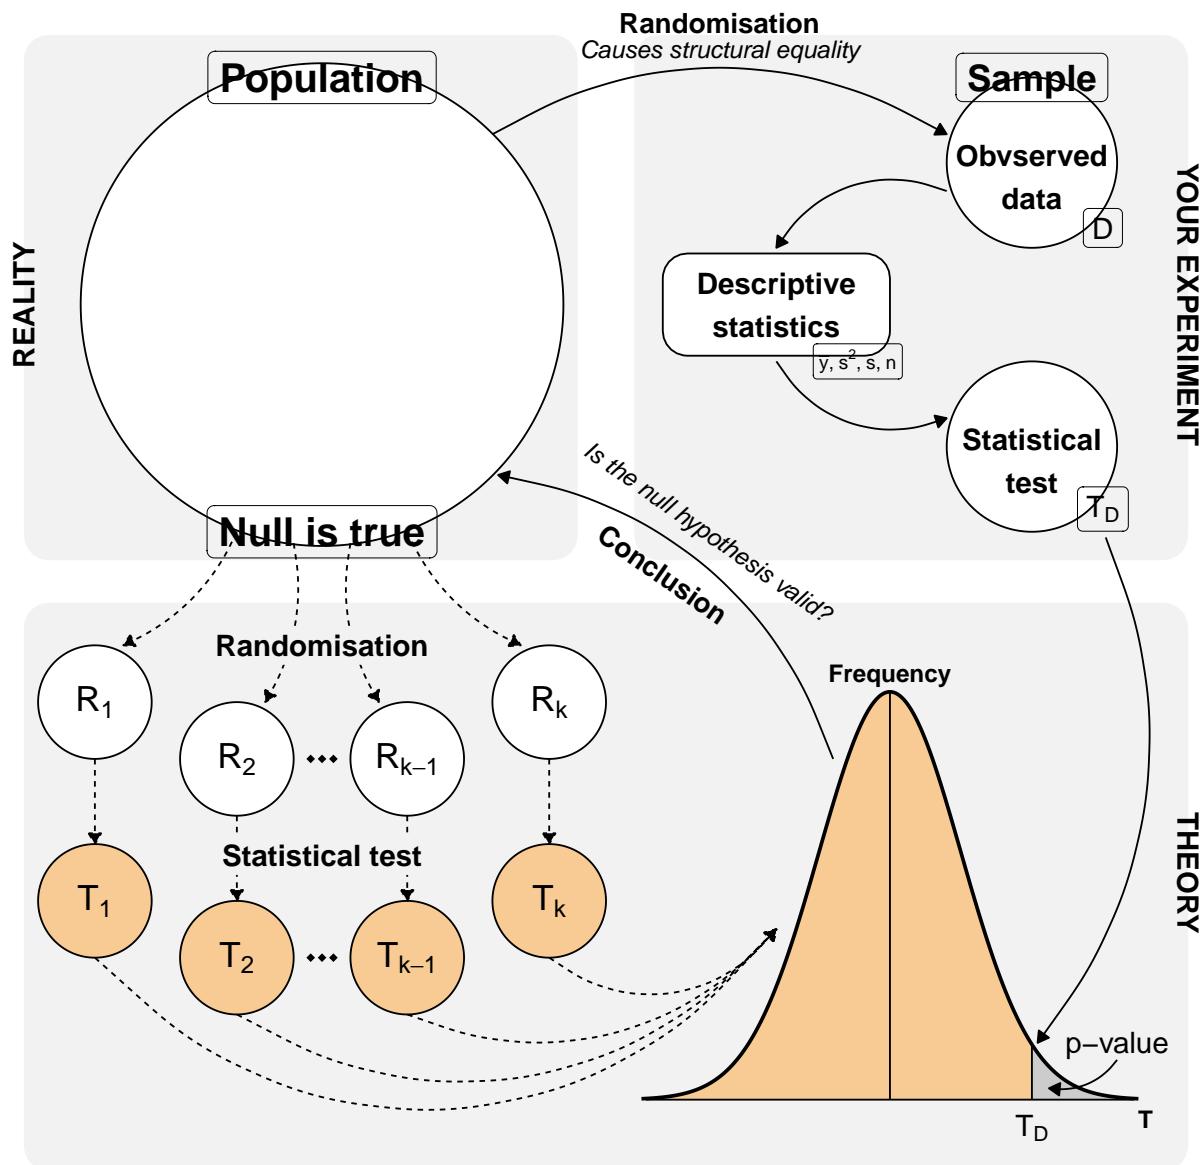


Figure 8.6: foo

8.2 Theoretical background

8.2.1 Fisher's approach: The 'significance test'

Fisher saw statistics as a tool for inductive reasoning (learning from data for science).

- Only ONE hypothesis: There is only the null hypothesis (H_0 e.g., 'no effect'). An alternative does not formally exist.
- The measure (p-value): The p-value is a continuous measure of the strength of evidence against the null hypothesis H_0 .
 - $p = 0.01$ Strong evidence against the null hypothesis.
 - $p = 0.20$ No evidence against the null hypothesis.
- The result: One rejects the null hypothesis H_0 or one does not make a judgement. One never 'accepts' the null hypothesis (one simply has not found enough evidence to reject it).
- Objective: Gain knowledge through individual experiments.

8.2.2 Neyman-Pearson's approach: The 'hypothesis test'

Neyman and Pearson sharply criticised Fisher. They said, 'You can't reject anything if you don't know what to accept instead.' They saw statistics as a decision-making process (behaviourism).

- TWO hypotheses: There is the null hypothesis (H_0) AND a specific alternative hypothesis (H_A).
- Type 1 and 2 errors: Before the experiment begins, the following is determined:
 - α (alpha): How often am I allowed to incorrectly find an effect? (e.g. 5%)
 - β (Beta): How often am I allowed to mistakenly overlook a real effect? (Power/test strength).
- The result: A tough decision. 'Accept H_0 ' or 'Reject H_0 ' (or Accept H_A).
- Goal: Minimisation of losses over many repeated experiments (as in industrial production).

Neymans philosophy: We are not looking for the 'truth' in individual cases, but rather we behave in such a way that we are wrong as rarely as possible in 1000 decisions.

8.2.3 Today's 'hybrid chaos'

Modern textbooks and software (such as SPSS or R) often use a hybrid that historically makes no sense:

- We define $\alpha = 5\%$ (Neyman-Pearson).
- We calculate an exact p-value (Fisher).
- We report the p-value as evidence (Fisher), but use it for a hard yes/no decision (Neyman-Pearson).
- We talk about 'power' (Neyman-Pearson), but often only test against a non-specific alternative.

This mishmash often leads to misunderstandings, such as that a $p = 0.001$ indicates a 'stronger effect' than $p = 0.049$ (Fisher thinking), even though in Neyman-Pearson logic at $\alpha = 5\%$, one would have to make exactly the same decision in both cases ('Reject H_0 ').

8.3 R packages used

8.4 Data

8.5 Alternatives

Further tutorials and R packages on XXX

8.6 Glossary

term what does it mean.

8.7 The meaning of "Models of Reality" in this chapter.

- itemize with max. 5-6 words

8.8 Summary

References

Part V

Visualisation of data

Last modified on 20. December 2025 at 20:24:43

“What problem have you solved, ever, that was worth solving where you knew all the given information in advance? No problem worth solving is like that. In the real world, you have a surplus of information and you have to filter it, or you don’t have sufficient information and you have to go find some.” — [Dan Meyer in Math class needs a makeover](#)

Here comes the preface text

```
pacman::p_load(emmeans, parameters, nlme, broom)
```

```
foo <- tibble(A = rnorm(10000, 5, 4),  
               B = rnorm(10000, 8, 2)) |>  
  gather()
```

```
foo |>  
  group_by(key) |>  
  summarise(mean(value), var(value), sd(value))
```

```
# A tibble: 2 x 4  
  key    `mean(value)` `var(value)` `sd(value)`  
  <chr>      <dbl>        <dbl>       <dbl>  
1 A          4.99        16.1        4.02  
2 B          8.01        4.03        2.01
```

```
sqrt((16.77840 + 3.94372)/2)
```

```
[1] 3.21886
```

```
fit <- lm(value ~ 0+key, foo)
```

```
fit |> parameters()
```

Parameter	Coefficient	SE	95% CI	t(19998)	p
key [A]	4.99	0.03	[4.92, 5.05]	157.01	< .001
key [B]	8.01	0.03	[7.95, 8.07]	252.19	< .001

Uncertainty intervals (equal-tailed) and p-values (two-tailed) computed using a Wald t-distribution approximation.

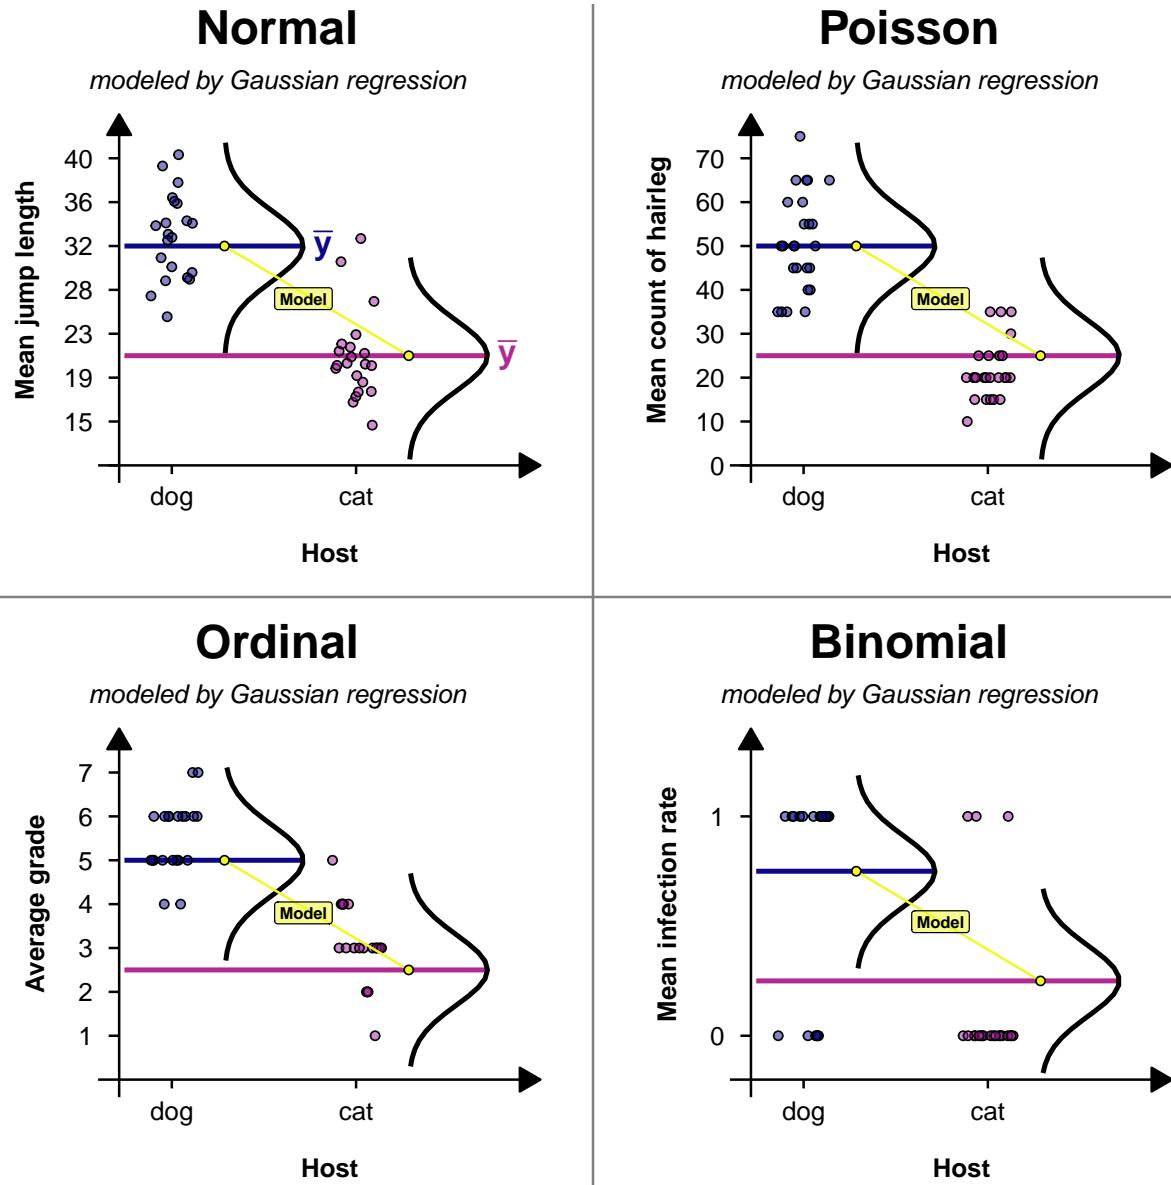


Figure 8.7: foo

```
fit |> glance()

# A tibble: 1 x 12
  r.squared adj.r.squared sigma statistic p.value    df  logLik      AIC      BIC
      <dbl>         <dbl>   <dbl>     <dbl>    <dbl>    <dbl>    <dbl>    <dbl>
1     0.815        0.815   3.18     44126.      0      2 -51486. 102979. 103002.
# i 3 more variables: deviance <dbl>, df.residual <int>, nobs <int>
```

```
0.02012848 * sqrt(10000)
```

```
[1] 2.012848
```

```
sqrt(diag(vcov(fit)))
```

```
keyA       keyB
0.03175371 0.03175371
```

```
model_parameters(fit, vcov = "HC3")
```

Parameter	Coefficient	SE	95% CI	t(19998)	p
key [A]	4.99	0.04	[4.91, 5.06]	124.10	< .001
key [B]	8.01	0.02	[7.97, 8.05]	399.10	< .001

Uncertainty intervals (equal-tailed) and p-values (two-tailed) computed using a Wald t-distribution approximation.

```
gls(value ~ 0 + key, weights = varIdent(form = ~ 1 | key), foo) |>
  parameters()
```

```
# Fixed Effects
```

Parameter	Coefficient	SE	95% CI	t(19998)	p
key [A]	4.99	0.04	[4.91, 5.06]	124.10	< .001
key [B]	8.01	0.02	[7.97, 8.05]	399.12	< .001

Uncertainty intervals (equal-tailed) and p-values (two-tailed) computed using a Wald t-distribution approximation.

```
emm <- emmeans(fit, "key", vcov = sandwich::vcovHAC)
summary_emm <- summary(emm)
# Calculate SD from SE and sample size (n)
summary_emm$SE * sqrt(summary_emm$df/2)
```

```
[1] 4.015578 2.002160
```

9 Explorative data analysis

Last modified on 26. December 2025 at 19:09:05

“A quote.” — Dan Meyer

9.1 General background

9.2 Theoretical background

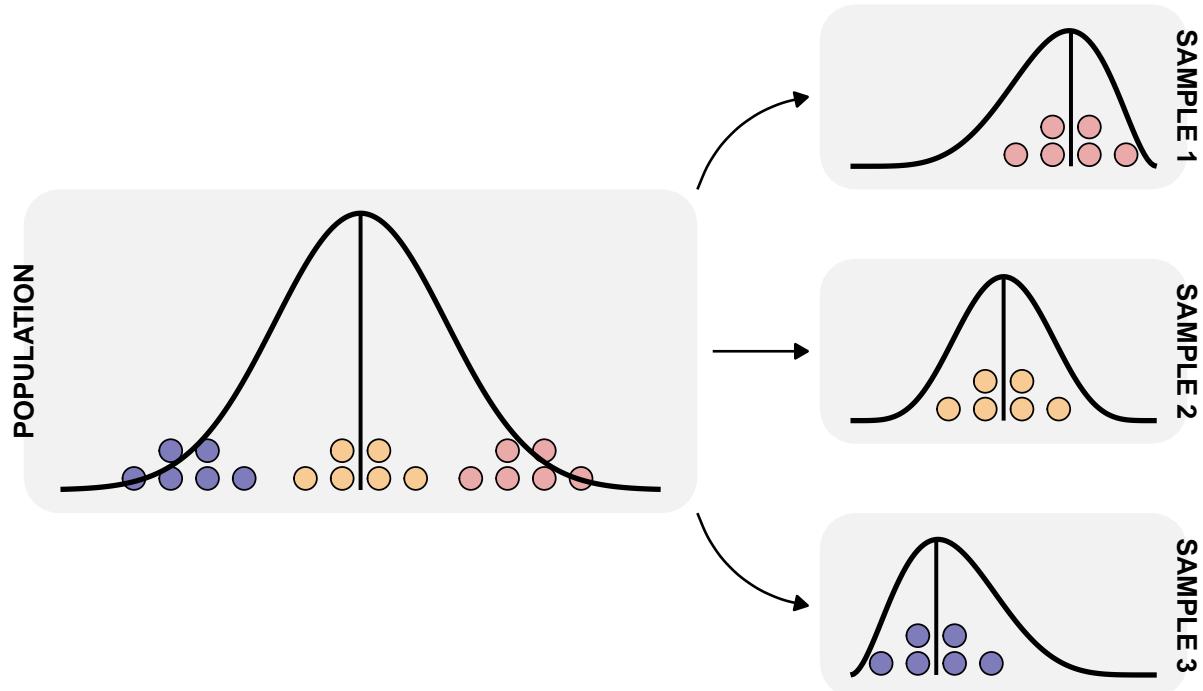


Figure 9.1: foo

9.3 R packages used

9.4 Data

```
jump_dog_tbl <- read_delim("data/jump_fleas.txt") |>  
  select(host, jumplength) |>  
  filter(host == "dog")
```

```
jump_dog_tbl
```

```
# A tibble: 7 x 2  
  host   jumplength  
  <chr>     <dbl>  
1 dog        21.8  
2 dog        28.4  
3 dog        34.8  
4 dog        34.4  
5 dog        38.8  
6 dog        31.4  
7 dog        41.4
```

```
sem <- \((x) sd(x)/sqrt(length(x))  
  
sem(jump_dog_tbl$jumplength)
```

```
[1] 2.480887
```

```
sem <- \((x) sqrt(var(x)/length(x))  
  
sem(jump_dog_tbl$jumplength)
```

```
[1] 2.480887
```

```
sem <- \((x) sqrt(sum((x-mean(x))^2)/(length(x)*(length(x)-1)))  
  
sem(jump_dog_tbl$jumplength)
```

```
[1] 2.480887
```

```

sem <- \((x) sqrt(sum((x-mean(x))^2))/sqrt(length(x)*(length(x)-1))

sem(jump_dog_tbl$jumplength)

```

[1] 2.480887

$$SE = \frac{s}{\sqrt{n}}$$

$$SE = \sqrt{\frac{s^2}{n}}$$

$$SE = \frac{\sqrt{SS}}{n}; \text{ for large n}$$

$$SE = \sqrt{\frac{\sum_{i=1}^n \frac{(y_i - \bar{y})^2}{n-1}}{n}} = \sqrt{\frac{\sum_{i=1}^n (y_i - \bar{y})^2}{n \cdot (n-1)}} = \frac{\sqrt{SS}}{\sqrt{n \cdot (n-1)}}$$

With n is large

$$SE = \frac{\sqrt{\sum_{i=1}^n (y_i - \bar{y})^2}}{\sqrt{n^2}} = \frac{\sqrt{\sum_{i=1}^n (y_i - \bar{y})^2}}{n} = \frac{\sqrt{SS}}{n}$$

```

jump_dog_tbl |>
  group_by(host) |>
  summarise(mean(jumplength), var(jumplength), sd(jumplength), sem(jumplength)) |>
  mutate_if(is.numeric, round, 2)

```

	# A tibble: 1 x 5	host	`mean(jumplength)`	`var(jumplength)`	`sd(jumplength)`	`sem(jumplength)`
1	dog	<chr>	<dbl>	<dbl>	<dbl>	<dbl>
		dog	33.0	43.1	6.56	2.48

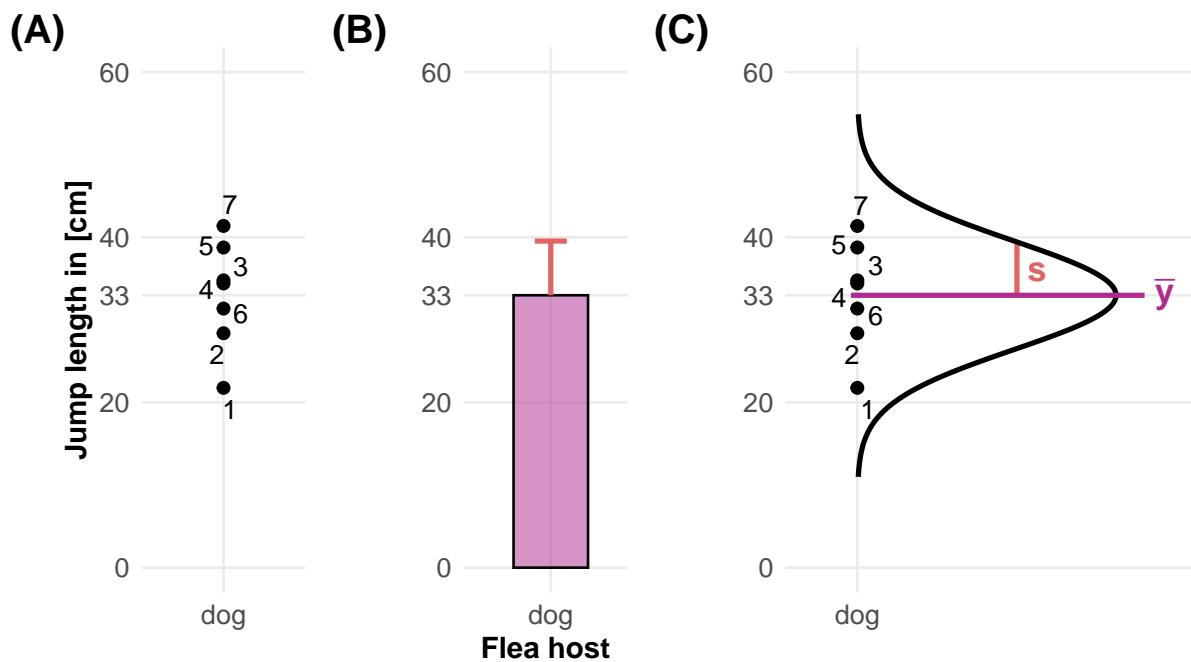


Figure 9.2: foo

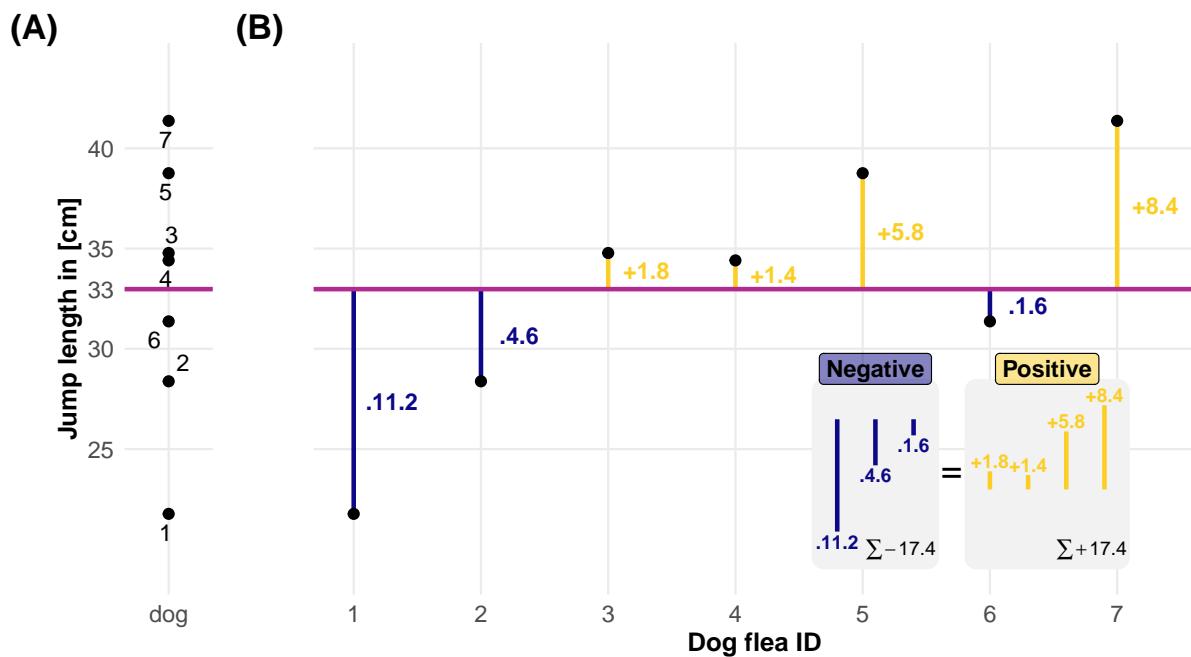


Figure 9.3: foo

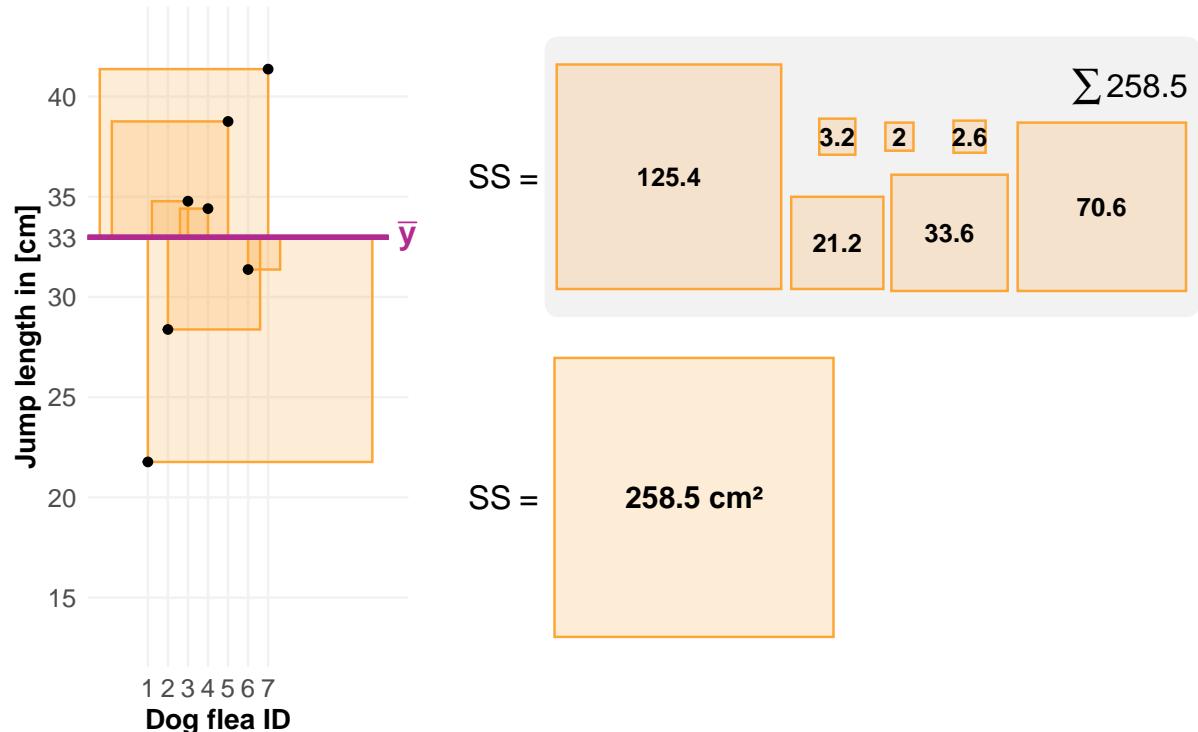


Figure 9.4: foo

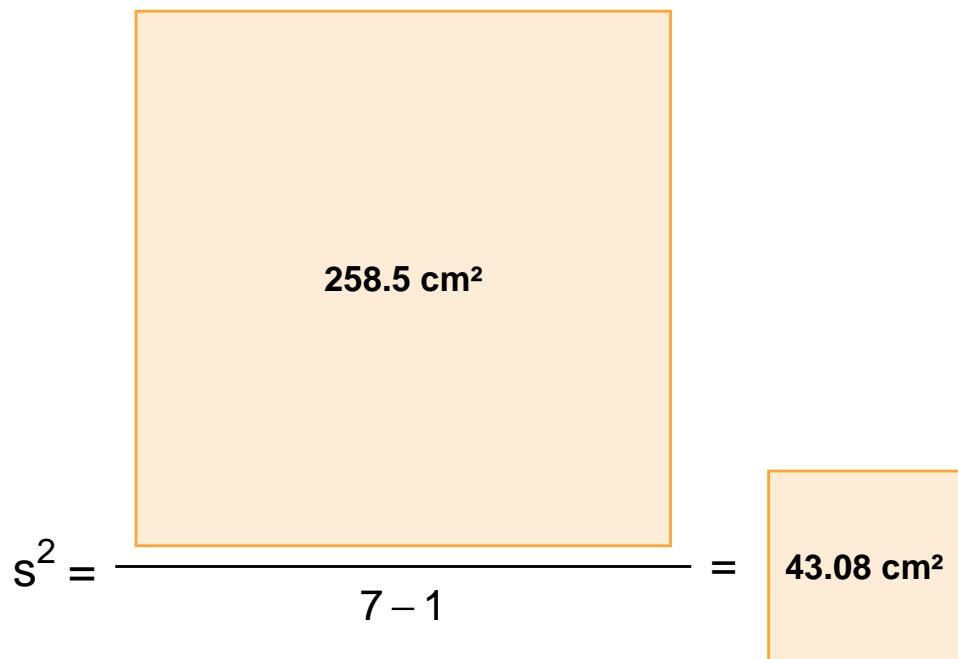


Figure 9.5: foo

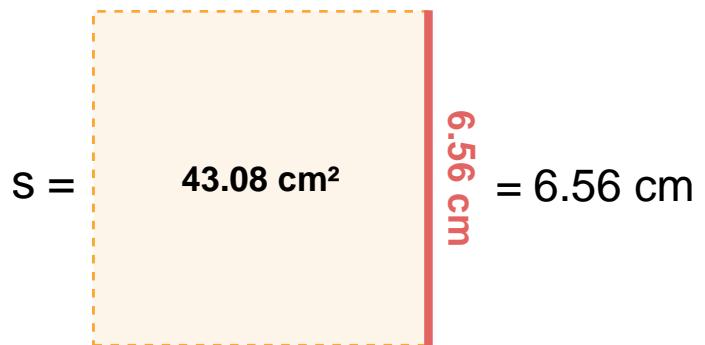


Figure 9.6: foo

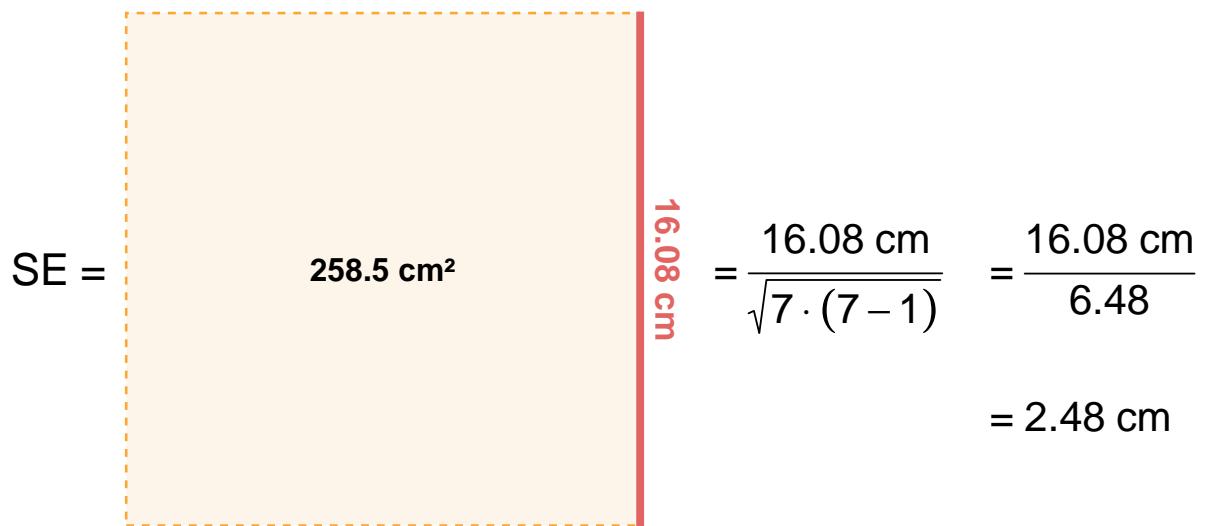


Figure 9.7: foo

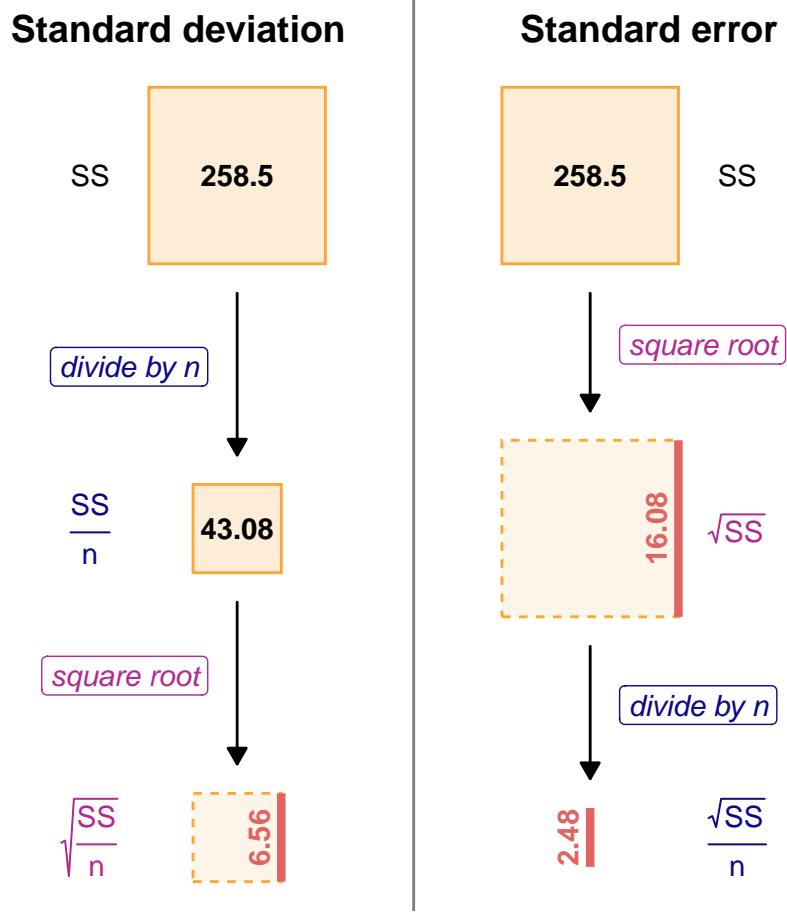


Figure 9.8: foo

9.5 Mean

9.6 Alternatives

Further tutorials and R packages on XXX

9.7 Glossary

term what does it mean.

9.8 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

9.9 Summary

References

10 Correlation and R^2

Last modified on 26. December 2025 at 19:12:18

“A quote.” — Dan Meyer

10.1 General background

```
r2_good_tbl <- tibble(weight = abs(rnorm(5, 3, 4)),
                      jumplength = 10 + 1.2 * weight + rnorm(5, 0, 3))

r2_good_fit <- lm(jumplength ~ weight, data = r2_good_tbl)

mean_good_cat_jump <- mean(r2_good_tbl$jumplength)

r2_good_plot_tbl <- r2_good_tbl |>
  mutate(sy = jumplength - mean(jumplength),
        e = residuals(r2_good_fit))

sum_good_sy <- (r2_good_plot_tbl$sy)^2 |> abs() |> sum() |> round(2)
sum_good_e <- (r2_good_plot_tbl$e)^2 |> abs() |> sum() |> round(2)
r2_good <- 1-(sum_good_e/sum_good_sy)

r2_bad_tbl <- tibble(weight = r2_good_tbl$weight,
                      jumplength = 9 + 0.5 * weight + rnorm(5, 0, 4))

r2_bad_fit <- lm(jumplength ~ weight, data = r2_bad_tbl)

mean_bad_cat_jump <- mean(r2_bad_tbl$jumplength)

r2_bad_plot_tbl <- r2_bad_tbl |>
  mutate(sy = jumplength - mean(jumplength),
        e = residuals(r2_bad_fit),
        e2 = e^2)
```


```

sum_bad_sy <- (r2_bad_plot_tbl$sy)^2 |> abs() |> sum() |> round(2)
sum_bad_e <- (r2_bad_plot_tbl$e)^2 |> abs() |> sum() |> round(2)
r2_bad <- 1-(sum_bad_e/sum_bad_sy)

```

$$R^2 = 1 - \frac{SS_{res}}{SS_{total}}$$

(A)

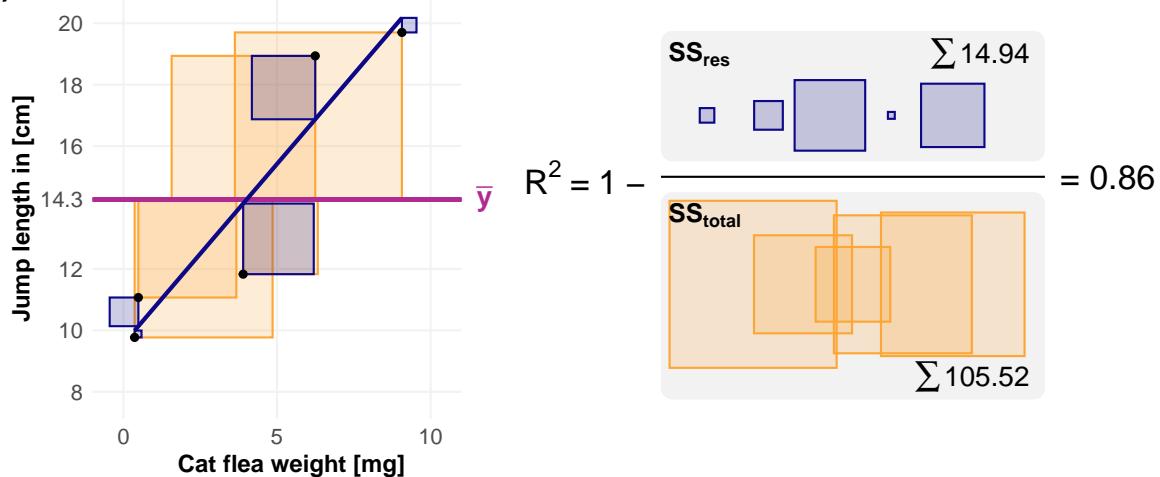

(B)

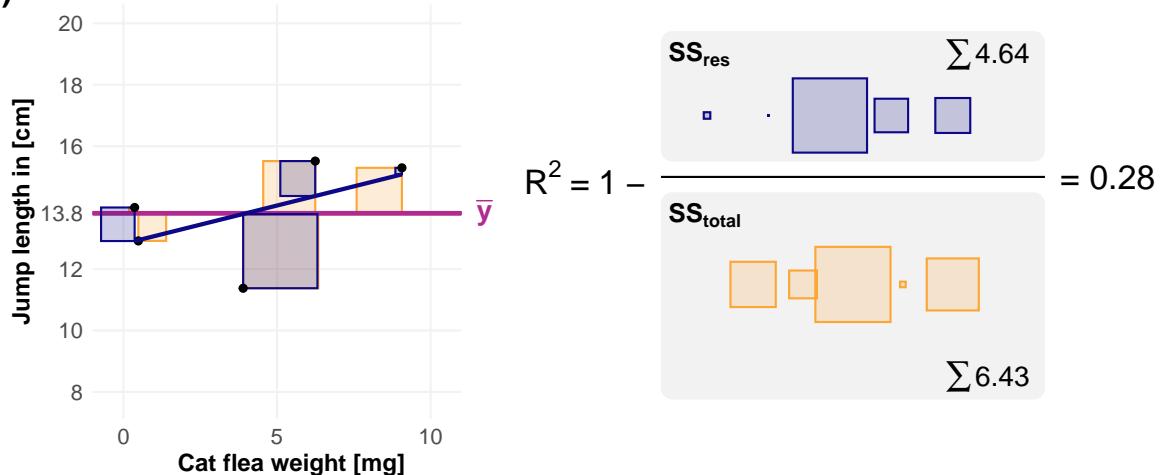


Figure 10.1: foo

```

set.seed(20251226) #20251226
cor_high_tbl <- tibble(weight = abs(rnorm(5, 3, 4)),
                      jumplength = 10 + 1 * weight + rnorm(5, 0, 4)) |>
  mutate(sweight = weight - mean(weight),
         sjump = jumplength - mean(jumplength),
         ss_xy = sweight * sjump,
         ss_x = sweight^2,
         ss_y = sjump^2,
         sign_xy = ifelse(sign(ss_xy) == -1, "\U2012", "+"))
set.seed(202511)

sum(cor_high_tbl$ss_x)

```

[1] 33.95848

```
sum(cor_high_tbl$ss_x) |> sqrt()
```

[1] 5.82739

```
sum(cor_high_tbl$ss_y)
```

[1] 47.94158

```
sum(cor_high_tbl$ss_y) |> sqrt()
```

[1] 6.923986

```
sum(cor_high_tbl$ss_xy)
```

[1] 33.21142

```
cor(cor_high_tbl$weight, cor_high_tbl$jumplength)
```

[1] 0.8231087

$$r = \frac{SS_{xy}}{\sqrt{SS_x} \cdot \sqrt{SS_y}}$$

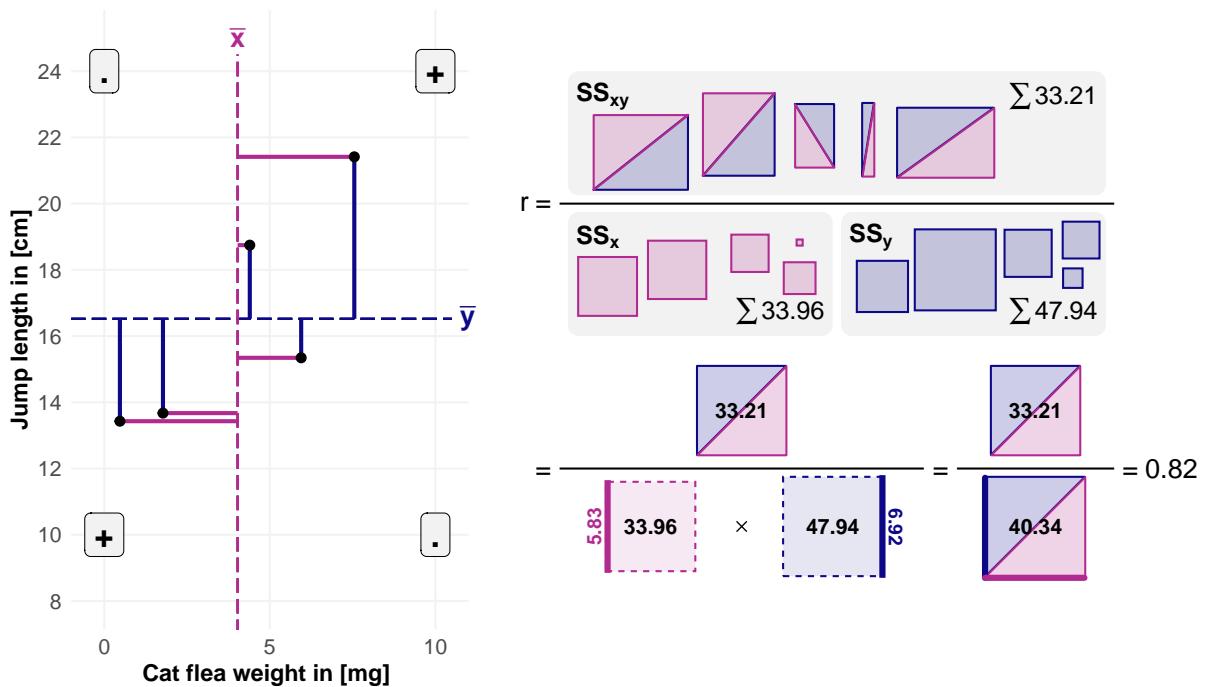


Figure 10.2: foo

10.2 Theoretical background

10.3 R packages used

10.4 Data

10.5 Alternatives

Further tutorials and R packages on XXX

10.6 Glossary

term what does it mean.

10.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

10.8 Summary

References

Part VI

Statistical modeling

Last modified on 18. December 2025 at 19:09:01

“What problem have you solved, ever, that was worth solving where you knew all the given information in advance? No problem worth solving is like that. In the real world, you have a surplus of information and you have to filter it, or you don’t have sufficient information and you have to go find some.” — [Dan Meyer in Math class needs a makeover](#)

Here comes the preface text

11 Overview

Last modified on 02. January 2026 at 20:42:12

“A quote.” — Dan Meyer

11.1 General background

11.2 Theoretical background

11.3 R packages used

11.4 Data

11.5 Alternatives

Further tutorials and R packages on XXX

11.6 Glossary

term what does it mean.

11.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

11.8 Summary

References

Characteristic of the influencer (X)

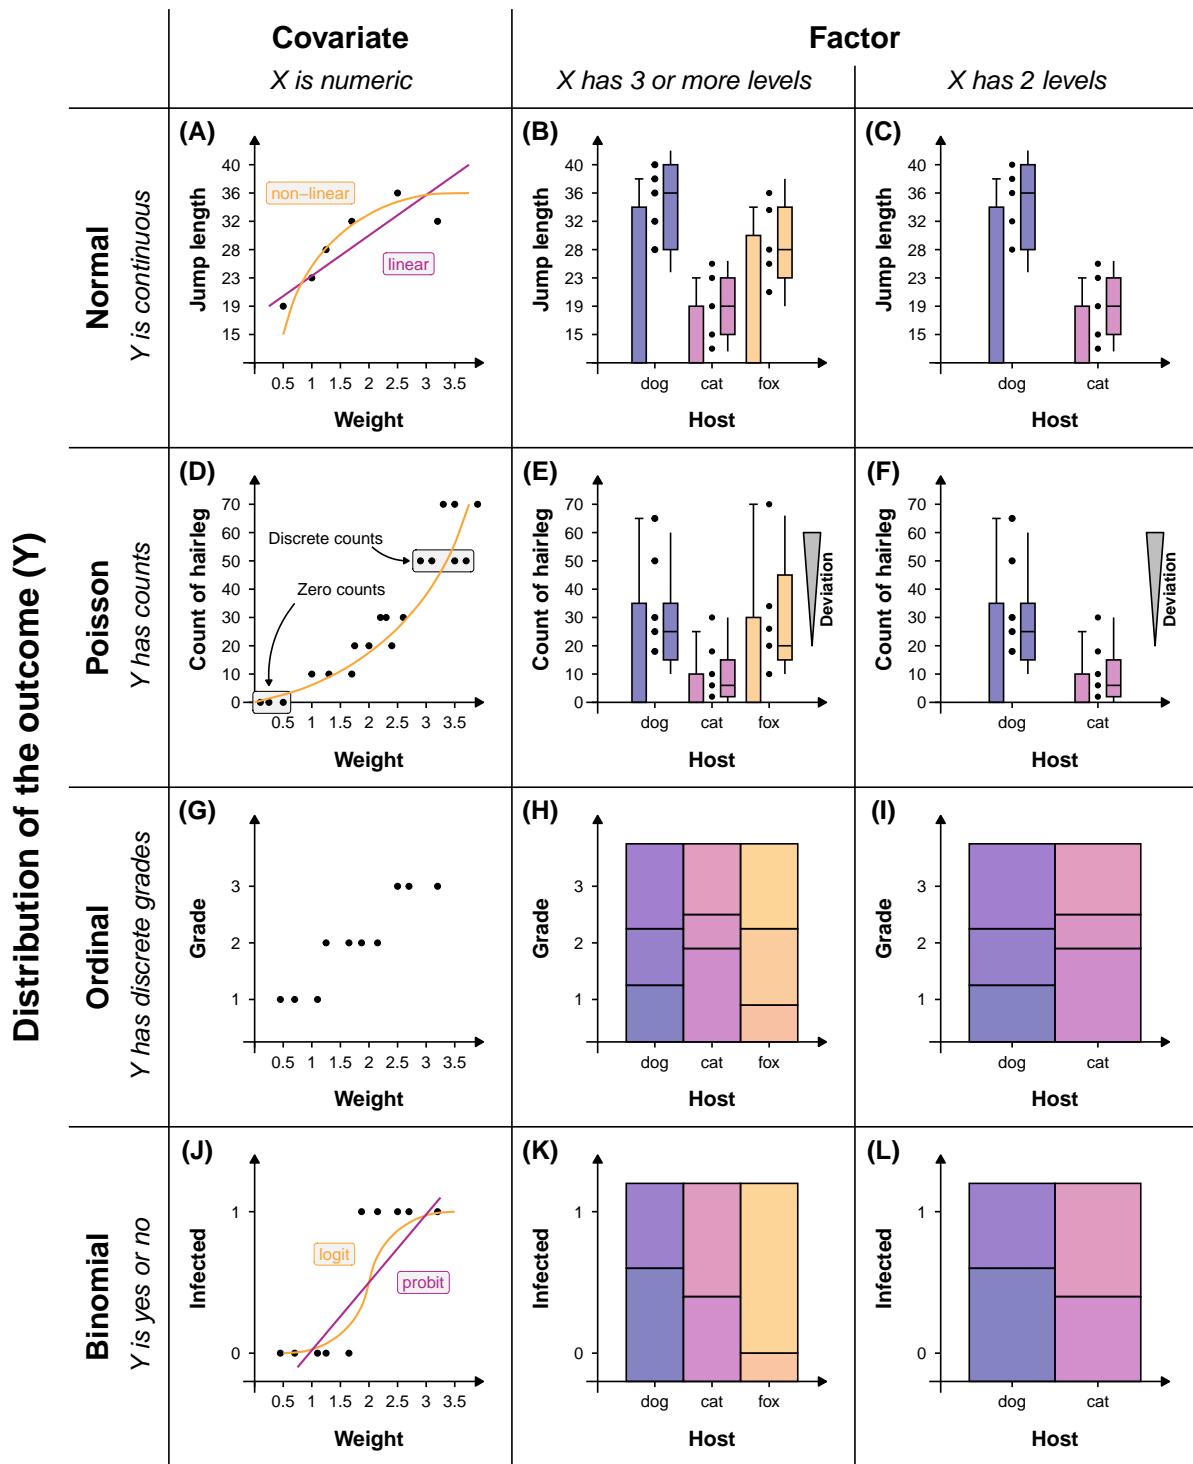


Figure 11.1: foo

Part VII

Template Preface

Last modified on 09. December 2025 at 10:27:51

“What problem have you solved, ever, that was worth solving where you knew all the given information in advance? No problem worth solving is like that. In the real world, you have a surplus of information and you have to filter it, or you don’t have sufficient information and you have to go find some.” — [Dan Meyer in Math class needs a makeover](#)

Here comes the preface text

12 Template chapter

Last modified on 28. December 2025 at 17:34:59

“A quote.” — Dan Meyer

12.1 General background

```
set.seed(20251226) #20251226
cor_high_tbl <- tibble(weight = abs(rnorm(5, 3, 4)),
                        jumplength = 10 + 1 * weight + rnorm(5, 0, 4)) |>
  mutate(sweight = weight - mean(weight),
         sjump = jumplength - mean(jumplength),
         ss_xy = sweight * sjump,
         ss_x = sweight^2,
         ss_y = sjump^2,
         sign_xy = ifelse(sign(ss_xy) == -1, "\U2012", "+"))
set.seed(202511)

sum(cor_high_tbl$ss_x)
```

[1] 33.95848

```
sum(cor_high_tbl$ss_x) |> sqrt()
```

[1] 5.82739

```
sum(cor_high_tbl$ss_y)
```

[1] 47.94158

```

sum(cor_high_tbl$ss_y) |> sqrt()

[1] 6.923986

sum(cor_high_tbl$ss_xy)

[1] 33.21142

cor(cor_high_tbl$weight, cor_high_tbl$jumplength)

[1] 0.8231087

cov(cor_high_tbl$weight, cor_high_tbl$jumplength)

[1] 8.302855

lm_fit <- lm(jumplength ~ weight, data = cor_high_tbl)

vcov(lm_fit)

            (Intercept)      weight
(Intercept)  3.4921715 -0.6111907
weight       -0.6111907  0.1517616

```

12.2 Theoretical background

12.3 R packages used

12.4 Data

12.5 Alternatives

Further tutorials and R packages on XXX

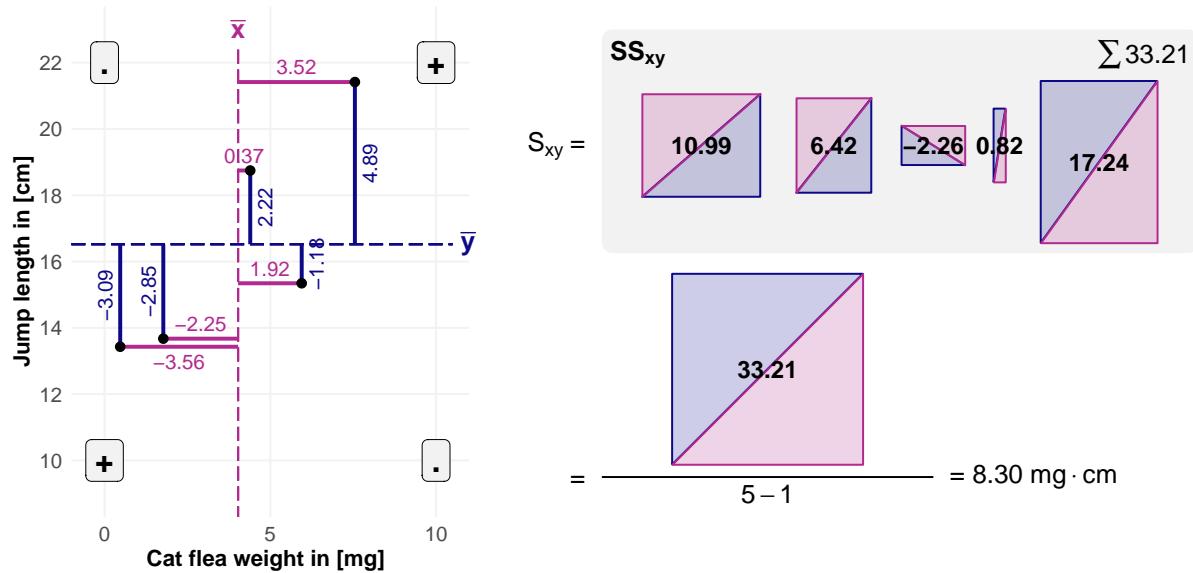


Figure 12.1: foo

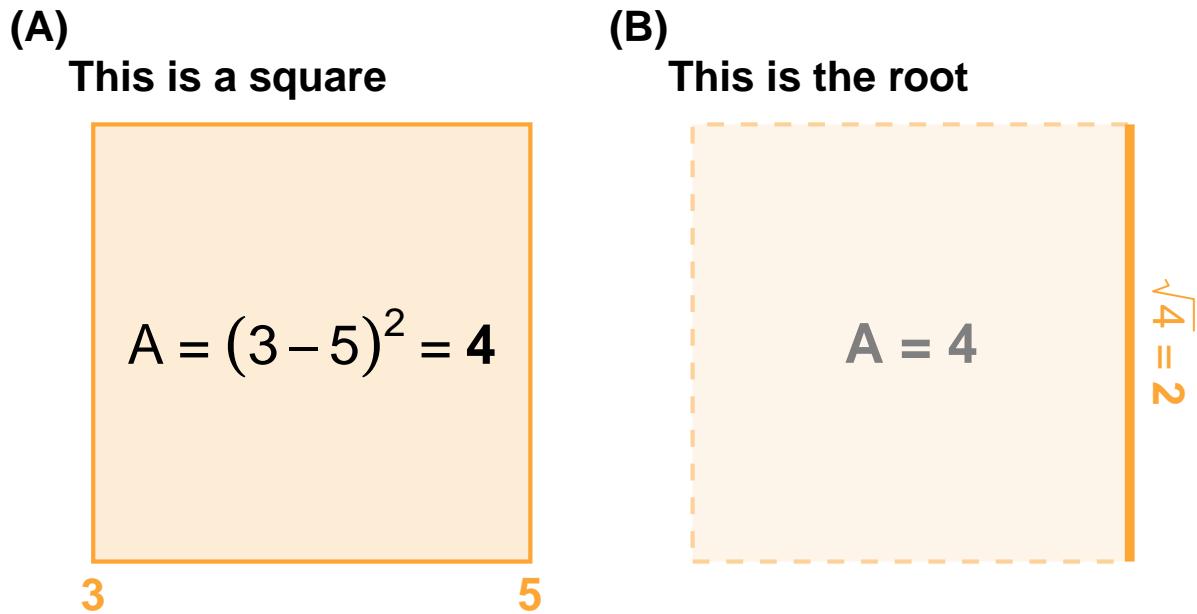


Figure 12.2: foo

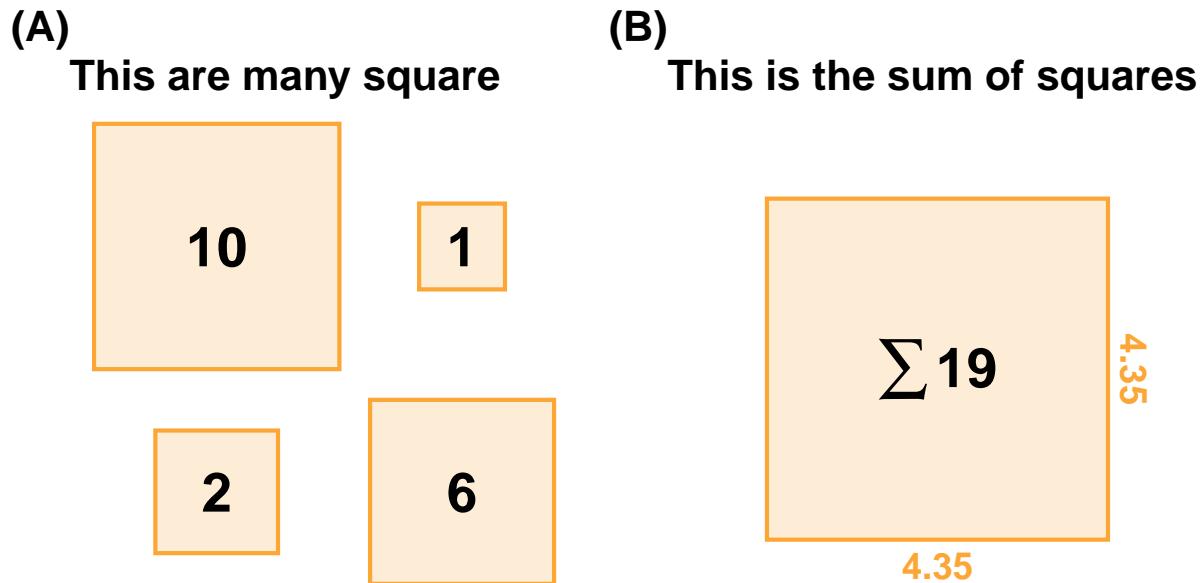


Figure 12.3: foo

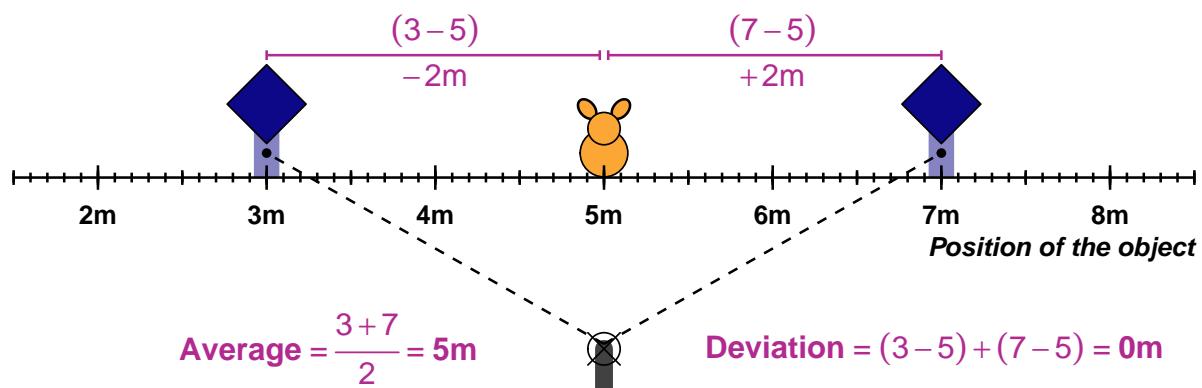


Figure 12.4: foo

12.6 Glossary

term what does it mean.

12.7 The meaning of “Models of Reality” in this chapter.

- itemize with max. 5-6 words

12.8 Summary

References

A Why does it look like this?

[conflicted] Will prefer dplyr::filter over any other package.

Last modified on 20. November 2025 at 10:01:22

“A quote.” — Dan Meyer

A.1 Used R packages

This is a printout of the `init.R` file, which can be found on GitHub

```
pacman::p_load(tidyverse, ggforce, viridis, knitr, patchwork)
```

A.2 Used theme of the visualizations

```
theme_book <- function() {
  theme_minimal() +
  theme(panel.grid.minor = element_blank(),
    plot.title = element_text(size = 16, face = "bold"),
    plot.subtitle = element_text(size = 12, face = "italic"),
    plot.caption = element_text(face = "italic"),
    axis.title = element_text(size = 12, face = "bold"),
    axis.text = element_text(size = 11),
    legend.title = element_text(face = "bold"))
}
```

A.3 Used color palettes

```
col_pal <- \n, alpha) plasma(n = n, alpha = alpha)
c6_pal <- col_pal(6, 1)
```

References

- [1] Westfall PH, Arias AL. *Understanding Regression Analysis: A Conditional Distribution Approach*. Chapman; Hall/CRC; 2020.
- [2] Smolin L. *Einstein's Unfinished Revolution: The Search for What Lies Beyond the Quantum*. Penguin; 2019.
- [3] Feynman RP, Leighton R. "Surely You're Joking, Mr. Feynman!": Adventures of a Curious Character. Random House; 1992.
- [4] Feynman RP. Cargo cult science. In: *The Art and Science of Analog Circuit Design*. Elsevier; 1998:55-61.
- [5] Cadiergues MC, Joubert C, Franc M. A comparison of jump performances of the dog flea, ctenocephalides canis (curtis, 1826) and the cat flea, ctenocephalides felis felis (bouché, 1835). *Veterinary parasitology*. 2000;92(3):239-241.
- [6] Everett III H. 'Relative state' formulation of quantum mechanics. *Reviews of modern physics*. 1957;29(3):454.
- [7] Clarke AC. Clarke's third law on UFO's. *Science*. 1968;159(3812):255-255.
- [8] Chalmers AF. *What Is This Thing Called Science?* Hackett Publishing; 2013.
- [9] Feynman R. What is science. Published online 1966.
- [10] Campbell NR. What is science? Published online 1952.
- [11] Clark M, Berry S. *Models Demystified: A Practical Guide from Linear Regression to Deep Learning*. CRC Press; 2025.
- [12] Cox D, Efron B. Statistical thinking for 21st century scientists. *Science advances*. 2017;3(6):e1700768.
- [13] Deutsch D. *The Beginning of Infinity: Explanations That Transform the World*. penguin uK; 2011.

- [14] McCullagh P. What is a statistical model? *The Annals of Statistics*. 2002;30(5):1225-1310.
- [15] Appleton DR. What do we mean by a statistical model? *Statistics in medicine*. 1995;14(2):185-197.
- [16] Hand D. What is the purpose of statistical modeling? *Harvard Data Science Review*. 2019;1(1).
- [17] Spanos A. Where do statistical models come from? Revisiting the problem of specification. *Lecture Notes-Monograph Series*. Published online 2006:98-119.
- [18] Gilchrist W. *Statistical Modelling*. Wiley Chichester; 1984.
- [19] Wickham H, Çetinkaya-Rundel M, Grolemund G. *R for Data Science: Import, Tidy, Transform, Visualize, and Model Data.* ” O'Reilly Media, Inc.”; 2023.
- [20] Wickham H, Henry L. *Purrr: Functional Programming Tools.*; 2025. <https://purrr.tidyverse.org/>
- [21] Dormann CF, Ellison AM. *Statistics by Simulation: A Synthetic Data Approach*. Princeton University Press; 2025.
- [22] Wickham H. *Conflicted: An Alternative Conflict Resolution Strategy.*; 2023. <https://conflicted.r-lib.org/>
- [23] Rinker T, Kurkiewicz D. *Pacman: Package Management Tool.*; 2012. <https://github.com/trinker/pacman>